

# Mitigating Algorithmic Bias in Multiclass CNN Classifications Using Causal Modeling

1<sup>st</sup> Min Sik Byun

*InfoComm Custer*

*Singapore Institute of Technology*  
Singapore

2102150@sit.singaporetech.edu.sg

2<sup>nd</sup> Wendy Wan Yee Hui

*InfoComm Custer*

*Singapore Institute of Technology*  
Singapore

wendy.hui@singaporetech.edu.sg

3<sup>rd</sup> Wai Kwong Lau

*Sch. of Physics, Mathematics and Computing*

*University of Western Australia*  
Australia

john.lau@uwa.edu.au

**Abstract**—This study describes a procedure for applying causal modeling to detect and mitigate algorithmic bias in a multiclass classification problem. The dataset was derived from the FairFace dataset, supplemented with emotional labels generated by the DeepFace pre-trained model. A custom Convolutional Neural Network (CNN) was developed, consisting of four convolutional blocks, followed by fully connected layers and dropout layers to mitigate overfitting. Gender bias was identified in the CNN model’s classifications: Females were more likely to be classified as “happy” or “sad,” while males were more likely to be classified as “neutral.” To address this, the one-vs-all (OvA) technique was applied. A causal model was constructed for each emotion class to adjust the CNN model’s predicted class probabilities. The adjusted probabilities for the various classes were then aggregated by selecting the class with the highest probability. The resulting debiased classifications demonstrated enhanced gender fairness across all classes, with negligible impact—or even a slight improvement—on overall accuracy. This study highlights that algorithmic fairness and accuracy are not necessarily trade-offs. All data and code for this study are publicly available for download.

**Index Terms**—AI Fairness, Casual Modeling, Bias Detection, Bias Mitigation, Convolutional Neural Network

## I. INTRODUCTION

Artificial Intelligence (AI) has transformed decision-making in various domains such as healthcare, finance, and law enforcement. While AI enhances efficiency, a growing concern revolves around its fairness and ethical implications [1], [2]. Central to this concern is the question: Is AI truly fair? The answer to this question depends on one’s worldview. According to [3], the “We’re All Equal” (WAE) worldview posits that bias may exist in the dataset, whereas the “What You See Is What You Get” (WYSIWYG) worldview assumes that observations reflect the truth. For example, a researcher holding the WAE worldview would argue that performance differences observed across groups are attributable to structural biases in society. In contrast, a researcher holding the WYSIWYG worldview might contend that it is reasonable for factors affecting performance (e.g., physical strength) to correlate with demographic characteristics. It is also arguable that one may adopt different worldviews depending on the circumstances.

In the context of AI fairness, sensitive data, such as gender, race, age and religion, are referred to as protected

attributes [1]. A commonly used metric to evaluate AI fairness is demographic parity, which requires the AI output to maintain an acceptable level of disparity between protected and non-protected groups. While this aligns closely with the WAE worldview, demographic parity does not account for potential correlations between protected attributes and unprotected attributes. This limitation can lead to outcomes that some might perceive as “reverse discrimination” from the WYSIWYG perspective. For example, in the context of job hiring, demographic parity could result in the acceptance of unqualified individuals from protected groups to ensure demographic parity [4]. Mathematically, achieving fairness from the WYSIWYG perspective is a more complex challenge, and it is the primary focus of this study.

[5] demonstrated the use of causal modeling as a simple tool for detecting and mitigating algorithmic bias. However, their work focused solely on binary classification. In real-life scenarios, many classification problems involve multiple classes. This paper aims to extend their work by applying causal modeling to a multiclass problem. Similar to [4], [5], and [6], we adopt a black-box, post-processing approach for algorithmic bias mitigation. While studies on algorithmic biases have predominantly focused on traditional regression-based algorithms [5], [7], leaving gaps in understanding the applicability of causal modeling to deep learning models, this paper applies causal modeling to the outputs of convolutional neural networks (CNNs), which have recently gained popularity in image recognition and classification tasks.

In the rest of this paper, we will review related studies, present our methodology and analysis, discuss the findings, and identify some future research directions.

## II. RELATED WORK

The three general approaches to mitigating algorithmic bias are: (1) pre-processing, (2) in-processing, and (3) post-processing. Pre-processing involves manipulating data before training the AI model. Techniques for pre-processing include re-sampling, re-weighting, altering data representations to balance demographic distributions, and domain adaptation. For example, [8] proposed data augmentation methods to generate synthetic samples, addressing demographic imbalances and mitigating bias while preserving model accuracy. [9] applied

data augmentation and domain adaptation techniques to improve fairness in detecting age-related macular degeneration (AMD), leading to more accurate and equitable outcomes.

In-processing approaches integrate fairness into the model training process by directly modifying the learning algorithm. For example, [10] incorporated fairness constraints into their machine learning algorithm. [11] adopted adversarial training to reduce gender bias in a binary classification problem and demonstrated that a large amount of data is not always necessary to enhance fairness. Hybrid methods that combine pre-processing and in-processing techniques have also shown promise. For instance, generative models have been used to address data imbalances while simultaneously minimizing dependencies between protected attributes and model predictions [12]. While in-processing methods often yield promising fairness outcomes, they tend to be more computationally intensive and require significant modifications to standard training procedures.

Post-processing focuses on mitigating bias after the model has been trained, treating the model as a black box. This approach involves adjusting the model’s outputs to align with fairness metrics, such as equalized odds or equal opportunity. While [4] ensured equitable predictive outcomes across demographic groups in binary classification, [6] extended the post-processing techniques to multiclass classification tasks. Although post-processing is flexible and computationally efficient, it cannot be applied in cases where protected attributes are unavailable at inference time [11].

Different approaches to bias mitigation have their own strengths and weaknesses, and this study focuses on post-processing. Our method utilizes causal modeling [13], [14], which is relatively new in the study of AI fairness. Causal models provide a structured framework for identifying and addressing bias by examining the relationships between features, protected attributes, and predictions. Additionally, causal models allow us to evaluate counterfactual fairness [15], which requires a decision to remain the same in a counterfactual world where the individual in question belongs to a different demographic group. [16] demonstrated the potential of causal modeling to improve prediction accuracy in the presence of confounding factors using health datasets. Similarly, [17] used causal models to identify and quantify biases in both synthetic and real-world datasets. These studies highlight the potential of causal models for algorithmic bias detection. [5] and [7] extended the application of causal models to both bias detection and mitigation, with a focus on traditional regression algorithms. However, the effectiveness of the causal modeling approach has not yet been demonstrated in complex architectures such as CNNs. Nor has the approach been applied to multiclass classification problems. To address these gaps, we apply causal modeling to mitigate bias in a multiclass classification CNN model. We aim to address biases in neural network predictions without sacrificing performance.

### III. METHODOLOGY

The dataset and the CNN model described in Sections III-A and III-B were prepared using Python, and the code is available on Google Colab<sup>1</sup>. The causal model for bias detection and mitigation described in Section III-C was implemented using R, and the code is also available on Google Colab<sup>2</sup>.

#### A. Data

The FairFace dataset [18] was selected due to its balanced representation of race, gender, and age attributes. FairFace contains 97,698 images, each labeled with demographic attributes such as race, gender, and age. Its equitable representation of diverse demographic groups makes it an ideal choice for fairness studies in machine learning. The DeepFace pre-trained model [19] was used to generate emotion labels for the images. The emotion classes are: angry, happy, sad, fear, neutral, surprise, and disgust. This automated labelling process was applied to the entire dataset, ensuring consistent emotion annotations across training, validation, and test sets. Fig. 1 presents some sample images from the labelled dataset.



Fig. 1. A Sample of the Labelled Data.

#### B. The CNN Classification Model

The FairFace dataset supplemented with emotion labels from DeepFace was split into training, validation, and test sets, as shown in Table I. The splitting was performed in a stratified manner to maintain the proportion of gender and

<sup>1</sup>[https://colab.research.google.com/drive/1CxRZ7QxX2b09ee0pF3GbwA0lZ\\_syooeQ?usp=sharing](https://colab.research.google.com/drive/1CxRZ7QxX2b09ee0pF3GbwA0lZ_syooeQ?usp=sharing)

<sup>2</sup><https://colab.research.google.com/drive/1waP5buBpaMPB2Ne5WC9yKTzrMuM0WWkn?usp=sharing>

emotion classes in each subset. The overall gender distribution in the combined dataset is 53% male and 47% female.

A custom CNN model was developed for emotion classification. The architecture consists of four convolutional layers, progressively increasing filters (32, 64, 128, 256) for hierarchical feature extraction, each followed by batch normalization and max-pooling for stabilization and dimensionality reduction. The extracted 3D feature maps are flattened into a 1D vector, passed through two dense layers (256 and 128 units) with dropout for regularization, and finally outputted through a dense layer with 7 units for classification. It has 2.78M trainable parameters, efficiently balancing feature learning and prediction. Table II provides the details of the CNN architecture.

TABLE I  
DATA SPLITTING

Data Subsets	Size (rows)	Description
Training	86,744	Used to train the emotion classifier
Validation	5,477	Used for validation
Test	5,477	Used to evaluate emotion classification
Total	97,698	

TABLE II  
DETAILED CNN ARCHITECTURE

Layer (type)	Output Shape	Param #
Conv2d_9 (Conv2D)	(None, 126, 126, 32)	896
batch_normalization_6 (BatchNormalization)	(None, 126, 126, 32)	128
conv2d_10 (Conv2D)	(None, 61, 61, 64)	18,496
batch_normalization_7 (BatchNormalization)	(None, 61, 61, 64)	256
max_pooling2d_6 (MaxPooling2D)	(None, 30, 30, 64)	0
conv2d_11 (Conv2D)	(None, 28, 28, 128)	73,856
batch_normalization_8 (BatchNormalization)	(None, 28, 28, 128)	512
max_pooling2d_7 (MaxPooling2D)	(None, 14, 14, 128)	0
conv2d_12 (Conv2D)	(None, 12, 12, 256)	295,168
batch_normalization_9 (BatchNormalization)	(None, 12, 12, 256)	1,024
max_pooling2d_8 (MaxPooling2D)	(None, 6, 6, 256)	0
flatten_2 (Flatten)	(None, 9216)	0
dense_6 (Dense)	(None, 256)	2,359,552
batch_normalization_10 (BatchNormalization)	(None, 256)	1,024
dropout_4 (Dropout)	(None, 256)	0
dense_7 (Dense)	(None, 128)	32,896
batch_normalization_11 (BatchNormalization)	(None, 128)	512
dropout_5 (Dropout)	(None, 128)	0
dense_8 (Dense)	(None, 7)	903
Total params: 2,785,223 (10.62 MB) Trainable params: 2,783,495 (10.62 MB) Non-trainable params: 1,728 (6.75 KB)		

The model was trained using the Adam optimizer with a learning rate of 0.0001 and a categorical cross-entropy loss function. An early stopping mechanism was implemented, monitoring the validation loss with a patience of five epochs

to prevent overfitting. The model was trained for a maximum of 10 epochs, balancing computational efficiency and performance. After training, the model’s performance was evaluated on the test set. For each test sample, the model produced probabilities for the seven emotion classes, and the emotion with the highest probability was selected as the predicted label. Table III shows the cross tabulation for the true emotion and the predicted emotion. The correct classifications are in boldface. The overall accuracy of the test set is 58.3%. The test set, together with its predicted labels, will be used in the following subsection to evaluate the fairness of the CNN model.

### C. Bias Detection and Mitigation

a) *Data Preparation:* Since “fear”, “angry”, “surprise” and “disgust” are small classes compared to “happy”, “neutral” and “sad”, they are group together under the label “others.” This is to ensure that there is sufficient data in each class for training the causal model for bias detection and mitigation. The test set ( $n = 5,477$ ) is further split into a training set (80%,  $n = 4,381$ ) for causal model development and a test set (20%,  $n = 1,096$ ) for the evaluation of subsequent bias mitigation. To avoid confusion, these data subsets are called the CM training set and the CM test set, respectively. “CM” here stands for “causal model.”

To improve multiclass predicted probabilities and to establish a baseline for comparison with subsequent debiased classifications, the one-vs-all (OvA) technique [20] is applied to both the CM training set and the CM test set to calibrate the probabilities generated from the CNN model. Tables IV and V, respectively, show the cross tabulation for the true emotion and the predicted emotion per gender for the CM training and test sets. The overall accuracies for the CM training and test sets are now, respectively, 60.6% and 60.4%, respectively, a slight improvement compared to 58.3% before calibration.

b) *Evaluation of Fairness of the CNN Model:* For female images, the accuracies are 62.8% and 61.8% for the CM training and test sets, respectively. For male images, the accuracies are 58.5% and 59.2% for the CM training and test sets, respectively. Graphically, Figs. 2 and 3 provide a more detailed comparison of the CNN model’s algorithmic fairness. Both the CM training and test sets reveal the same pattern: females are more likely to be correctly classified as “happy” or “sad,” while males are more likely to be correctly classified as “neutral.” This suggests the model may find females as more emotionally expressive.

c) *Causal Model for Bias Detection:* Suppose we aim to reduce the accuracy difference between genders. We can apply causal modeling as proposed in [5]. Following the drawing convention in [21], Fig. 4 presents the causal model for binary classification. Here,  $\hat{y}$  represents the predicted probability of the binary class of interest,  $y$  is the dummy variable for that class, and  $a$  is the protected attribute (i.e., gender in this case).  $e_{\hat{y}}$  and  $e_y$  are simply the error terms. The  $\beta$  terms are known as path coefficients and they indicate how much the dependent variables are affected by the associated predictor variables.

TABLE III  
CROSS TABULATING TRUE EMOTION AND PREDICTED EMOTION

		Predicted Emotion from CNN Model							Total
		happy	neutral	sad	fear	angry	surprise	disgust	
True Emotion	happy	<b>1,365</b>	187	81	24	9	0	0	1,666
	neutral	199	<b>1,163</b>	197	41	17	0	0	1,617
	sad	134	331	<b>507</b>	59	24	0	0	1,055
	fear	85	170	192	<b>103</b>	11	1	0	562
	angry	75	176	139	41	<b>51</b>	0	0	482
	surprise	23	24	13	18	1	<b>3</b>	0	82
	disgust	8	2	2	0	1	0	<b>0</b>	13

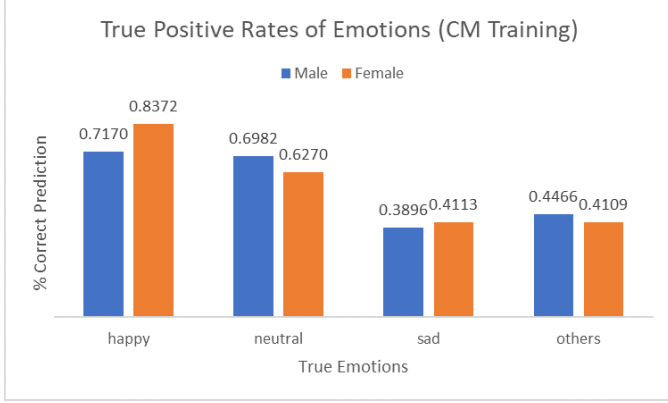


Fig. 2. Gender Fairness of the CNN Model (CM Training).

TABLE IV  
CROSS TABULATING TRUE EMOTION AND PREDICTED EMOTION (CM TRAINING)

		Predicted Emotion from CNN Model (Female, CM Training)				
		happy	neutral	sad	others	Total
True Emotion	happy	<b>679</b>	75	13	44	811
	neutral	62	<b>316</b>	58	68	504
	sad	50	91	<b>160</b>	88	389
	others	67	84	77	<b>159</b>	387
		Predicted Emotion from CNN Model (Male, CM Training)				
		happy	neutral	sad	others	Total
True Emotion	happy	<b>380</b>	72	30	48	530
	neutral	80	<b>553</b>	71	88	792
	sad	42	126	<b>180</b>	114	462
	others	52	140	88	<b>226</b>	506

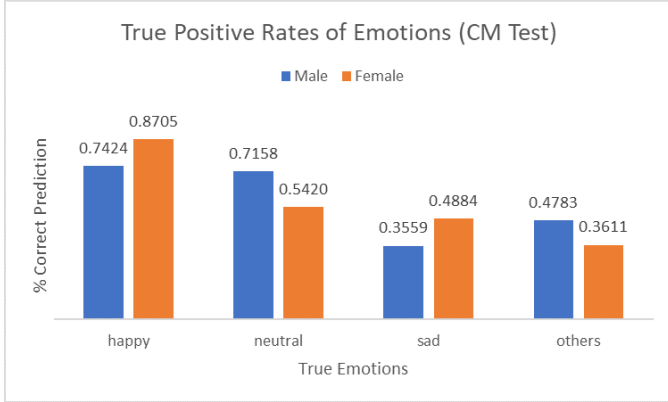


Fig. 3. Gender Fairness of the CNN Model (CM Test).

TABLE V  
CROSS TABULATING TRUE EMOTION AND PREDICTED EMOTION (CM TEST)

		Predicted Emotion from CNN Model (Female, CM Test)				
		happy	neutral	sad	others	Total
True Emotion	happy	<b>168</b>	10	5	10	193
	neutral	25	<b>71</b>	14	21	131
	sad	6	22	<b>42</b>	16	86
	others	20	27	22	<b>39</b>	108
		Predicted Emotion from CNN Model (Male, CM Test)				
		happy	neutral	sad	others	Total
True Emotion	happy	<b>98</b>	17	9	8	132
	neutral	9	<b>136</b>	22	23	190
	sad	16	40	<b>42</b>	20	118
	others	12	31	29	<b>66</b>	138

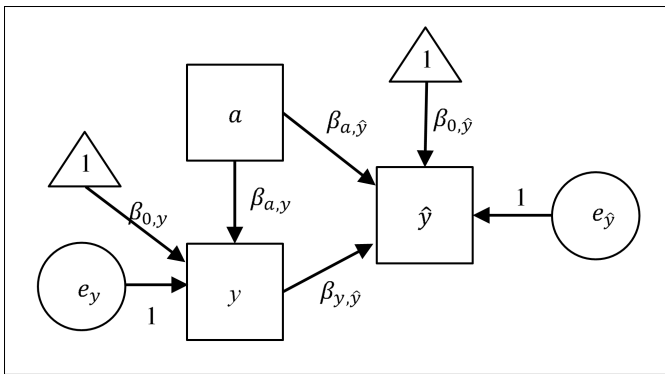


Fig. 4. Causal Model for Binary Classification. [5]

The causal model can be translated to the following set of equations,

$$\hat{y} = \beta_{0,\hat{y}} + \beta_{a,\hat{y}}a + \beta_{y,\hat{y}}y + e_{\hat{y}} \quad (1)$$

$$y = \beta_{0,y} + \beta_{a,y}a + e_y \quad (2)$$

Since we are interested only in developing a mitigation model for the predicted probabilities, we will focus only on (1). To extend the method to multiclass problems, we apply the OvA technique. We build one causal model for each class, i.e.,

$$\hat{y}_{happy} = \beta_{0,\hat{y}_{happy}} + \beta_{a,\hat{y}_{happy}}a + \beta_{y,\hat{y}_{happy}}y + e_{\hat{y}_{happy}}$$

$$\hat{y}_{neutral} = \beta_{0,\hat{y}_{neutral}} + \beta_{a,\hat{y}_{neutral}}a + \beta_{y,\hat{y}_{neutral}}y + e_{\hat{y}_{neutral}}$$

$$\hat{y}_{sad} = \beta_{0,\hat{y}_{sad}} + \beta_{a,\hat{y}_{sad}}a + \beta_{y,\hat{y}_{sad}}y + e_{\hat{y}_{sad}}$$

$$\hat{y}_{others} = \beta_{0,\hat{y}_{others}} + \beta_{a,\hat{y}_{others}}a + \beta_{y,\hat{y}_{others}}y + e_{\hat{y}_{others}}$$

Since we only need to deal with one equation per emotion, we can simply use linear regression to come up with the coefficient estimates. The results are shown in Tables VI to IX. All  $p$ -values associated with “Male” are small, suggesting statistically significant gender bias.

TABLE VI  
REGRESSION RESULTS FOR “HAPPY”

Coefficient		Est.	$t$	$p$
Intercept	$\beta_{0,\hat{y}_{happy}}$	0.183	30.39	<0.001
Male ( $a$ )	$\beta_{a,\hat{y}_{happy}}$	-0.058	-8.013	<0.001
happy ( $y_{happy}$ )	$\beta_{y_{happy},\hat{y}_{happy}}$	0.522	66.29	<0.001

TABLE VII  
REGRESSION RESULTS FOR “NEUTRAL”

Coefficient		Est.	$t$	$p$
Intercept	$\beta_{0,\hat{y}_{neutral}}$	0.195	41.64	<0.001
Male ( $a$ )	$\beta_{a,\hat{y}_{neutral}}$	0.052	8.54	<0.001
happy ( $y_{neutral}$ )	$\beta_{y_{neutral},\hat{y}_{neutral}}$	0.279	41.7	<0.001

TABLE VIII  
REGRESSION RESULTS FOR “SAD”

Coefficient		Est.	$t$	$p$
Intercept	$\beta_{0,\hat{y}_{sad}}$	0.142	41.08	<0.001
Male ( $a$ )	$\beta_{a,\hat{y}_{sad}}$	0.025	5.405	<0.001
happy ( $y_{sad}$ )	$\beta_{y_{sad},\hat{y}_{sad}}$	0.180	31.314	<0.001

TABLE IX  
REGRESSION RESULTS FOR “OTHERS”

Coefficient		Est.	$t$	$p$
Intercept	$\beta_{0,\hat{y}_{others}}$	0.148	45.995	<0.001
Male ( $a$ )	$\beta_{a,\hat{y}_{others}}$	0.026	5.999	<0.001
happy ( $y_{others}$ )	$\beta_{y_{others},\hat{y}_{others}}$	0.152	28.886	<0.001

*d) Bias Mitigation:* Following [5], we compute the debiased probability estimates for each emotion class  $\tilde{y}$  by removing the effects of gender, i.e.,

$$\tilde{y}_{happy} = y_{happy} + 0.058a \quad (3)$$

$$\tilde{y}_{neutral} = y_{neutral} - 0.052a \quad (4)$$

$$\tilde{y}_{sad} = y_{sad} - 0.025a \quad (5)$$

$$\tilde{y}_{others} = y_{others} - 0.026a \quad (6)$$

The emotion class associated with the highest debiased probability is then chosen as the predicted class. These mitigation efforts result in reduced gender gap as shown in Fig.

5. Compared to Fig. 2, we can see that the gender gaps are narrowed for all emotions.

As noted previously, the beta coefficients for “Male” are statistically significant across all emotions. This is likely due to the large sample size in the training set ( $n = 4,381$ ). To provide a more meaningful assessment of the effectiveness of bias detection and mitigation using causal modeling, we turn to cross-validation. We again apply the mitigation models in (3) to (6) to compute the debiased probabilities and determine the predicted class using maximum probability. Fig. 6 compares the true positive rates based on the debiased classifications for males vs females. Compared to Fig. 3, we again observe that the gender gaps are reduced across all emotions.

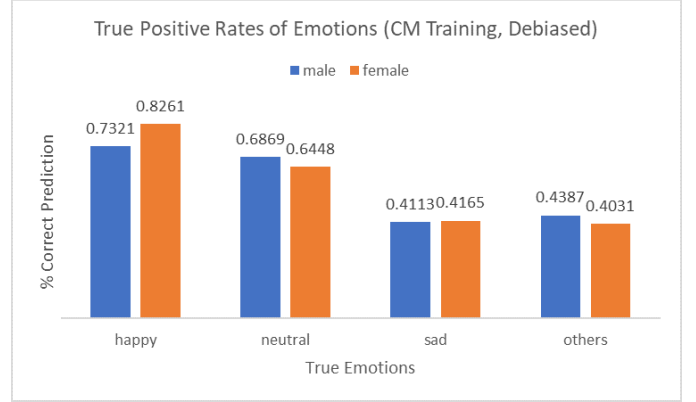


Fig. 5. Gender Fairness of the CNN Model (CM Training, Debiased).

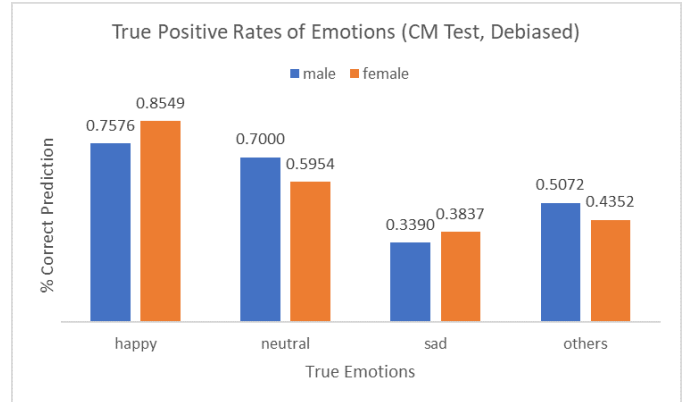


Fig. 6. Gender Fairness of the CNN Model (CM Test, Debiased).

The true positive rates for some gender and emotion combinations increased, while others decreased. Overall, accuracy for the CM training set remained roughly the same, while accuracy for the CM test set improved slightly from 60.4% to 60.8%. For female images, the accuracies are 62.8% and 62.4% for the CM training set and CM test set, respectively. For male images, the accuracies are 58.7% and 59.3% for the CM training set and CM test set, respectively. These changes are negligible, as summarized in Table X. Table XI compares the true positive rates for males vs. females before and after bias mitigation.

TABLE X  
ACCURACY BEFORE AND AFTER BIAS MITIGATION

	CM Training			CM Test		
	Before Mitigation	After Mitigation	Gender Gap Reduced?	Before Mitigation	After Mitigation	Gender Gap Reduced?
Female	62.8%	62.8%	No	61.8%	62.4%	Yes
Male	58.5%	58.7%	Yes	59.1%	59.3%	Yes
Overall	60.6%	60.6%	No	60.4%	60.8%	Yes

TABLE XI  
COMPARING GENDER BIAS BEFORE AND AFTER BIAS MITIGATION

		Before Mitigation			After Mitigation			Gender Gap Reduced?
		Female	Male	Gender Gap	Female	Male	Gender Gap	
CM Training	happy	0.8372	0.7170	0.1203	0.8261	0.7321	0.0941	Yes
	neutral	0.6270	0.6982	0.0712	0.6448	0.6869	0.0420	Yes
	sad	0.4113	0.3896	0.0217	0.4165	0.4113	0.0052	Yes
	others	0.4109	0.4466	0.0358	0.4031	0.4387	0.0356	Yes
CM Test	happy	0.8705	0.7424	0.1280	0.8549	0.7576	0.0973	Yes
	neutral	0.5420	0.7158	0.1738	0.5954	0.7000	0.1046	Yes
	sad	0.4884	0.3559	0.1324	0.3837	0.3390	0.0447	Yes
	others	0.3611	0.4783	0.1171	0.4352	0.5072	0.0721	Yes

#### IV. DISCUSSION AND CONCLUSION

To summarize, this study investigated algorithmic bias in CNNs for emotion classification, focusing on gender as the protected attribute. The analysis leveraged the FairFace dataset, supplemented by emotional labels from the DeepFace pre-trained model. Our custom CNN model, consisting of four convolutional blocks followed by fully connected and dropout layers to mitigate overfitting, was trained using the Adam optimizer with a learning rate of 0.0001 and employed an early stopping mechanism based on validation loss.

Causal modeling techniques were used to detect biases in the model’s classifications. A path diagram was used to describe the pathways through which gender could influence the model’s outputs. The path coefficients from the causal analysis revealed that gender bias significantly affected the predicted emotions. To mitigate this bias, we adjusted the class probabilities from the CNN model based on the fitted causal models and aggregated the adjusted probabilities using maximum probability. The debiased classifications reduced gender disparities across all emotions without sacrificing overall accuracy.

Our contribution to knowledge is two-fold. First, we extend the causal modeling techniques for bias mitigation to multiclass classification problems. Second, while the existing literature mostly applies post-processing of algorithmic bias to traditional machine learning algorithms, we demonstrate that it can also be effectively applied to more advanced algorithms, such as CNNs. In the future, we will further apply causal modeling to address algorithmic bias. Specifically, we will develop a stronger theoretical foundation for the conditions under which post-processing can enhance fairness while improving accuracy. We will also explore the use of causal modeling to address biases that originate from the training data.

To conclude, causal modeling is an effective approach for

addressing algorithmic bias in post-processing. It is easy to implement using existing statistical tools. Furthermore, its statistical roots ensure ease of interpretation. When used to complement a complex AI model, a causal model can enhance explainability, enabling stakeholders to better understand the nature of the bias and how it can be mitigated.

#### ACKNOWLEDGMENT

ChatGPT was used to review the grammar of this paper.

#### REFERENCES

- [1] N. Mehrabi, F. Morstatter, N. Saxena, K. Lerman, and A. Galstyan, “A survey on bias and fairness in machine learning,” *ACM Computing Surveys*, <https://dl.acm.org/doi/10.1145/3457607>. Last accessed 1 December 2024.
- [2] E. Ferrara, “Fairness and bias in artificial intelligence: A brief survey of sources, impacts, and mitigation strategies,” *arXiv.org*, <https://arxiv.org/abs/2304.07683>. Last accessed 1 December 2024.
- [3] T. Mahoney, K. R. Varshney, and M. Hind, *AI Fairness: How to Measure and Reduce Unwanted Bias in Machine Learning*, O’Reilly, 2020.
- [4] M. Hardt, E. Price, and N. Srebro, “Equality of opportunity in supervised learning,” *Advances in Neural Information Processing Systems 2016*, 29, pp. 3315–3323.
- [5] W. Hui and W. K. Lau, “Detecting and mitigating algorithmic bias in binary classification using causal modeling,” *4th International Conference on Computer Communication and Information Systems*, Phuket, Thailand, February 27–29, 2024. Available: <https://doi.org/10.1109/CC CIS63483.2024.00016>
- [6] P. Putzel and S. Lee, “Blackbox post-processing for multiclass fairness,” 2022. Available: <https://arxiv.org/abs/2201.04461>. Last accessed 4 October 2023.
- [7] W. Hui and W. K. Lau, “Mitigating Nonlinear Algorithmic Bias in Binary Classification,” *IEEE Conference on Artificial Intelligence*, 2024. Available: <https://ieeexplore.ieee.org/document/10605518/>
- [8] S. Sharma, Y. Zhang, J. M. R. Aliaga, D. Bouneffouf, V. Muthusamy, and K. R. Varshney, “Data augmentation for discrimination prevention and bias disambiguation,” *Proceedings of the AAAI/ACM Conference on AI, Ethics, and Society*, and Society, 2020, pp.358–364.
- [9] N. Joshi and P. Burlina, “AI fairness via domain adaptation,” Available: <https://arxiv.org/abs/2104.01109>. Last accessed 1 December 2024.

- [10] L. E. Celis, L. Huang, V. Keswani, and N. K. Vishnoi, "Classification with fairness constraints: A meta-algorithm with provable guarantees," Proceedings of the 2019 Conference on Fairness, Accountability, and Transparency, Atlanta, GA, USA, pp. 29–31.
- [11] A. Beutel, J. Chen, Z. Zhao, and E. H. Chi, "Data decisions and theoretical implications when adversarially learning fair representations," Proceedings of Workshop on Fairness, Accountability, and Transparency in Machine Learning, Halifax, Canada, August 2017. Available: <https://arxiv.org/pdf/1707.00075.pdf>
- [12] W. Paul, A. Hadzic, N. Joshi, F. Alajaji, and P. Burlina, "TARA: Training and representation alteration for AI fairness and domain generalization," *Neural Computation*, 34 (3), 2022, 716-753.
- [13] J. Pearl, "Direct and indirect effects," Proceedings of the Seventeenth Conference on Uncertainty in Artificial Intelligence, 2001, pp. 411-420.
- [14] J. Pearl, *Causality*. Cambridge University Press, 2009.
- [15] M. J. Kusner, J. Loftus, C. Russell, and R. Silva, "Counterfactual fairness," *Advances in Neural Information Processing Systems*, USA, 2017, pp. 4066–4076.
- [16] D. Madras, E. Creager, T. Pitassi, and R. Zemel, "Fairness through causal awareness: Learning causal latent-variable models for biased data," Proceedings of the Conference on Fairness, Accountability, and Transparency, January 2019, pp. 349-358. Available: <https://doi.org/10.1145/3287560.3287564>
- [17] A. Khademi, S. Lee, D. Foley, and V. Honavar, "Fairness in algorithmic decision making: An excursion through the lens of causality," *The World Wide Web Conference*, May 2019, pp. 2907-2914.
- [18] FairFace Dataset. Available: <https://huggingface.co/datasets/HuggingFaceM4/FairFace>
- [19] DeepFace. Available: <https://github.com/serengil/deepface>
- [20] B. Zadrozny and C. Elkan, "Transforming classifier scores into accurate multiclass probability estimates," Proceedings of the 8th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, 2002, pp. 694–699. <https://doi.org/10.1145/775047.775151>
- [21] Z. Zhang and L. Wang, *Advanced Statistics Using R*. Granger, IN: ISDSA Press. ISBN: 978-1-946728-01-2.