

Comprehensive Subjective and Objective Evaluation Method for Text-generated Video

Zelu Qi, Ping Shi*, Shuqi Wang, Zhaoyang Zhang, Zefeng Ying, Da Pan

Abstract—Recent text-to-video (T2V) technology advancements, as demonstrated by models such as Gen3, Pika, and Sora, have significantly broadened its applicability and popularity. This progress has created a growing demand for accurate quality assessment metrics to evaluate the perceptual quality of text-generated videos and optimize video generation models. However, assessing the quality of text-generated videos remains challenging due to the presence of highly complex distortions, such as unnatural actions and phenomena that defy human cognition. To address these challenges, we constructed a large-scale benchmark dataset for Text-generated Video evaluation, T2VEval-Bench, comprising 148 textual words and 1,783 videos generated by 12 models. During the subjective evaluation, we collected five key scores: overall impression, video quality, aesthetic quality, realness, and text-video consistency. For objective evaluation, we developed the T2VEval model, which assesses videos across three branches: quality, authenticity, and consistency. Using an attention-based fusion module, T2VEval effectively integrates features from each branch and predicts scores with the aid of a large oracle model. Additionally, we implemented a progressive training strategy, enabling each branch to learn targeted knowledge while maintaining synergy with the others. Experimental results demonstrate that T2VEval achieves state-of-the-art performance across multiple metrics. The dataset and code will be open-sourced upon completion of the follow-up work.

I. INTRODUCTION

Text-to-video (T2V) technology has made significant advancements in the last two years and garnered increasing attention from the general community. As an important branch of Generative Artificial Intelligence (GenAI), T2V models [1, 2, 12, 33, 43, 44, 13, 39, 58, 19, 29, 11, 40, 52, 53, 41, 3] have developed rapidly recently. Contemporary T2V models like Sora, Gen, PixVerse, Kling etc. have enabled video generation from simple textual prompts and demonstrated impressive visual quality and alignment with prompts. However, as illustrated in Figure 1, text-generated videos still exhibit several notable deficiencies that cannot be overlooked. These shortcomings can significantly detract from the user’s viewing experience. Therefore, developing a comprehensive and effective Text-to-Video Quality Assessment (T2VQA) strategy is essential to ensure an optimal user experience and to guide the optimization of T2V models.

In recent years, numerous studies have focused on establishing T2V evaluation benchmarks and automated metrics [25, 24, 50, 16, 54, 20, 35], assessing text-generated videos

across dimensions such as visual quality, temporal consistency, and text-video alignment. Although this approach offers a more detailed representation of the generative abilities of T2V models, it might lead to metrics that are less applicable and generalizable. For instance, readability assessments of generated text become redundant in contexts where text generation is irrelevant. Furthermore, many works design automated metrics by directly employing models such as DOVER[45] and RAFT[37], which are trained and tested on real video datasets, thus overlooking the inherent statistical distribution differences between real videos and text-generated videos. In addition, some studies, similar to traditional video/image quality assessments, use a single score to represent the quality of text-generated videos. Although this approach simplifies the evaluation process and enhances metric applicability, it can easily overlook the strengths and weaknesses of certain T2V models in specific generation tasks.

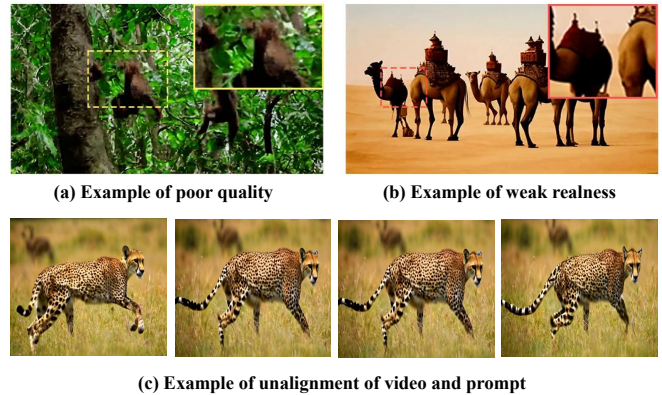


Fig. 1. Examples of defects in text-generated videos. (a) As shown in the yellow matrix part of the picture, there is obvious distortion similar to “block effect” in the picture. (b) As shown in the red matrix part of the picture, the camel’s limbs and head are “broken”. (c) The prompt describes a cheetah chasing an antelope. However, the generated video only has a cheetah, no antelope, and the state of “chasing” is not simulated.

To overcome the aforementioned challenges, we first constructed **T2VEval-Bench**, a comprehensive benchmark for T2VQA. T2VEval-Bench encompasses four key components: standardized evaluation dimensions, textual prompt generation, video generation, and subjective score collection. Specifically, we achieved a balanced trade-off between evaluation granularity and metric applicability by defining five scoring dimensions, including video quality, aesthetic quality, text-video alignment, realness, and overall preference, considering the prevalent defects in current text-generated videos. Overall preference refers to the evaluators’ initial impressions of the

*Corresponding author

Zelu Qi, Ping Shi, Shuqi Wang, Zhaoyang Zhang, Zefeng Ying and Da Pan are from the School of Information and Communication Engineering, Communication University of China, Chaoyang District, Beijing, China (e-mail: theoneqi2001@cuc.edu.cn)

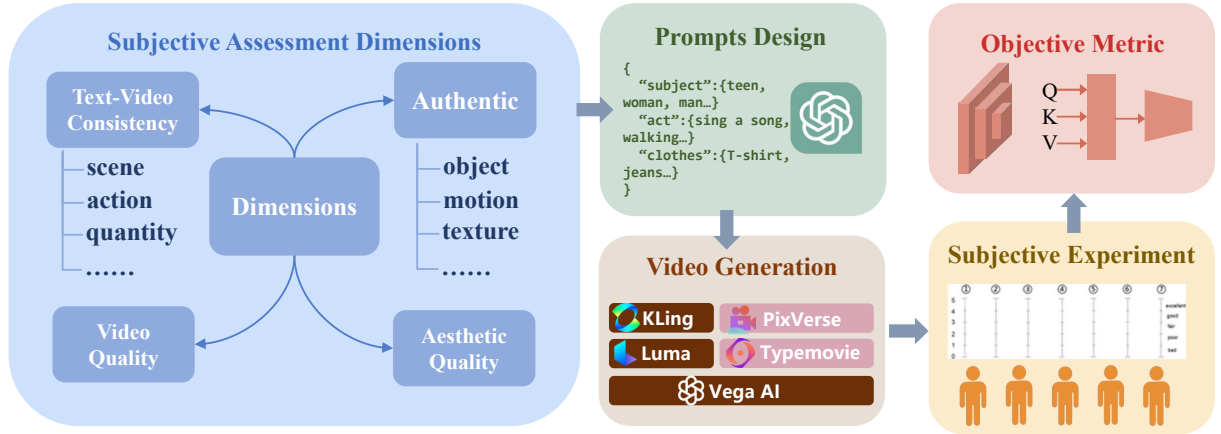


Fig. 2. The overall framework of our work, which includes the T2V evaluation benchmark T2VEval-Bench, encompassing standardized evaluation dimensions, textual prompt generation, video generation and subjective experiment. Building upon this benchmark, we further designed T2VEval, an objective evaluation method for text-generated videos.

videos, which are collectively influenced by the other four dimensions. For prompt generation, we utilized large language models (LLMs) in conjunction with manual verification to create 100 textual prompts covering four themes: humans, animals, landscapes, and imagination. Additionally, we designed prompts to reflect regional and cultural characteristics as well as physical laws. We also incorporated 48 publicly available prompts from Sora. Subsequently, we generated videos using 12 state-of-the-art T2V models and included 48 videos publicly available from Sora, resulting in a total of 1,783 text-generated videos. Building on this dataset, we conducted extensive subjective evaluation experiments, collecting subjective annotations within a strictly controlled laboratory environment and performing the necessary data processing.

Based on the dataset we constructed, we further designed **T2VEval**, an objective evaluation model for text-generated videos. Previous works, such as FETV [25], EvalCrafter [24], and VBench [16], have developed dedicated evaluation metrics for each evaluation dimension. However, these metrics generally lack broad applicability, and they directly employ models trained on real video datasets, thereby overlooking the inherent distributional differences between real videos and text-generated videos. Other studies like T2VQA[20] and AIGC-VQA [28], have implemented end-to-end evaluations of videos, but they only consider video quality and text-video alignment. Therefore, we designed a novel end-to-end evaluation model, which includes a video quality encoding branch, a video realness encoding branch, and a text-video alignment representation branch. The video quality encoder is implemented based on the Swin-3D network [26], the video realness encoder utilizes the ConvLexNet-3D network [27], which is specifically pre-trained on a generated video discrimination dataset, and the text-video alignment is achieved using BLIP [22]. Considering that video quality and realness rely solely on visual perception, we prioritize the fusion of quality and realness features before integrating them with text-video alignment features. Additionally, we adopted a progressive

training strategy that ensures the independent effectiveness of each branch while promoting collaboration among the branches.

Our contributions are summarized as follows:

- We propose a systematic evaluation benchmark called **T2VEval-Bench** that encompasses four core components—standardized evaluation dimensions, textual prompt generation, video generation, and subjective score collection—ultimately defining five refined scoring dimensions (video quality, aesthetic quality, text-video alignment, realness, and overall preference) tailored to address common defects in text-generated videos. We further compile a large-scale, multi-model text-generated video dataset (a total of 1,783 videos), annotated under rigorously controlled experimental conditions, providing a reproducible and robust benchmark for future research.
- We introduce a multi-branch end-to-end framework called **T2VEval**, which incorporating a video quality encoding branch, a video realness encoding branch, and a text-video alignment representation branch. In terms of model architecture, a progressive training strategy is adopted: we first fuse visually pertinent features (quality and realness) before integrating the text-video alignment branch. This design ensures each branch’s independent effectiveness while maintaining overall synergy, leading to more precise and objective assessments of defects in text-generated videos.
- Our designed T2V objective evaluation metric achieved state-of-the-art performance on both T2VEval-Bench and T2VQA-DB[20]. Experimental results show that T2VEval effectively assesses the performance of different T2V models and has broad potential applications.

II. RELATED WORK

A. Subjective evaluation for Text-generated Videos

Chivileva et al. [7] constructed the first text-generated video evaluation dataset. They obtained 201 textual prompts by

combining ChatGPT and manual writing, covering topics such as famous figures, regions, and special festivals. Five T2V models, namely Aphantasia, Text2Video-Zero, T2VSynthesis, Tune-a-Video, and Video Fusion, were selected to generate 1005 videos. Subsequently, 24 subjects were invited to subjectively score the generated videos from the perspectives of naturalness and consistency. Liu et al. proposed FETV [25]. They designed a set of diverse and fine-grained textual prompts and classified them into three aspects: main content, control attributes, and text complexity. At the same time, a time category was specifically designed for text-to-video, covering spatial and temporal dimensions. On this basis, the authors selected four T2V models, including CogVideo, Text2Video-zero, ModelScopeT2V, and ZeroScope, and conducted subjective evaluations in terms of static quality, temporal quality, overall alignment, and fine-grained alignment. EvalCrafter [24] first constructed a comprehensive text prompt corpus covering daily objects, attributes, and actions. It specified the metadata of common elements in the real world and expanded them using large language models like ChatGPT to obtain complete text prompts. It also enriched and expanded the prompts through those written by real-world users and from text-to-image (T2I) datasets. Subsequently, 2500 videos were generated on 5 T2V models, and subjective evaluations were carried out in terms of video quality, text-video consistency, motion quality, and time consistency. Wu et al. [50] constructed the TVGE dataset. They adopted the prompt set proposed in EvalCrafter [24] and generated 2543 videos on 5 T2V models. Ten professional scorers were invited to score the videos in terms of video quality and video-text consistency. Huang et al. [16] believed that the existing evaluation benchmarks could not accurately reflect the highlights and problems of different generation models. Based on this, they proposed Vbench, which further refined the evaluation dimensions of T2V. Sixteen fine-grained evaluation dimensions for generated videos were designed, including subject identity inconsistency, motion smoothness, time flicker, and spatial relationship. One hundred text prompts were designed for each evaluation dimension. In addition, the authors also evaluated T2V models for different content categories, such as people, animals, and landscapes. A total of 8 content categories were considered, and 100 prompts were designed for each category. Based on this, the authors conducted subjective evaluations on 4 T2V models and collected corresponding 16-dimensional scores. Li et al. [55] constructed the LGVQ dataset, which contains 468 text prompts covering combinations of different foreground contents, background contents, and motion states. Six T2V models were used to generate 2808 videos, and 60 subjects were invited to perceptually score the spatial quality, temporal quality, and text-video alignment of each video. Based on the LGVQ dataset, the authors carried out benchmark tests using 14 IQA methods, 16 VQA methods, and 9 methods based on CLIP and visual question answering. Zhang et al. [54] pointed out that the existing subjective evaluation benchmarks for T2V generally have limitations in reliability, reproducibility, and practicability. In view of this, this paper proposes the T2VHE benchmark, which specifies the evaluation dimensions (including video quality, temporal quality, motion quality, text

alignment, etc.) used in T2V evaluation, the annotator training process and example descriptions, and a user-friendly GUI interface. The authors further proposed a dynamic scoring scheme. By combining the automatic scoring method to pre-annotate the videos, the amount of manually annotated data was subsequently reduced by 50%. Kou et al. [20] believed that the current T2V evaluation benchmarks have overly complex divisions of evaluation dimensions and lack a simple and effective evaluation index. Therefore, the authors constructed T2VQA-DB and invited 24 subjects to score 10,000 text-generated videos. The subjects were required to give an overall score considering video quality and text-video consistency.

All of the above works focus on constructing general subjective evaluation benchmarks for text-to-video. At the same time, there are also works that conduct subjective evaluations for specific video content types or evaluation angles. Chen et al. [6] constructed the GAIA dataset for action quality assessment of generated videos from the perspective of actions in the generated videos, covering various full-body, hand, and facial actions. TC-Bench [9] focuses on evaluating the temporal composition and consistency of each element in the generated videos. T2VBench [17] and DEVIL [23] evaluate from the perspective of the dynamic degree of text-to-video. T2V-CompBench [35] evaluates T2V models from seven dimensions such as dynamic attribute binding, spatial relationship, and generation computing ability in terms of the ability of T2V models to combine different objects, attributes, and actions. In addition, Miao et al. [31] paid special attention to the security risks of text-to-video. They pointed out that the generated videos may contain illegal or unethical content, and previous work lacked a quantitative understanding of security. Therefore, the authors introduced T2VSafetyBench to evaluate T2V models in 12 aspects such as violence, gore, discrimination, political sensitivity, copyright, and trademark infringement.

B. Objective Metrics for T2V Generation

Chivileva et al. [7] proposed the first T2V evaluation index, which assesses the naturalness of the video and the similarity between the text and the video. In the text similarity evaluation, corresponding captions are generated for each video based on the BLIP model. Then, the similarity between the generated captions and the text prompts is calculated using the text encoder of BLIP. For the evaluation of naturalness, a series of handcrafted features are introduced, including texture, sharpness, color, spectrum, entropy, contrast, keypoint detection, and the number and size of speckles. FETV [25] aimed at the problem that previous text-to-video evaluation metrics such as FVD, CLIPSim, and IS could not accurately reflect human subjective perception. It improved FVD and CLIPSim and proposed the index FVD-UMT for evaluating video fidelity and the index UMTScore for evaluating text-video alignment. Wu et al. [50] proposed T2VScore to automatically evaluate text-to-video in terms of video quality and text-video consistency. T2VScore consists of two components, T2VScore-A and T2VScore-Q, which evaluate text-video consistency and video quality respectively. Specifically,

TABLE I

DETAILED INFORMATION ABOUT THE MODELS INCLUDED IN THIS ARTICLE, INCLUDING FRAME RATE, DURATION, RESOLUTION, ABILITIES AND RELEASE DATE OF THE VERSION USED IN THE EXPERIMENT. *SORA HAS NOT YET OPENED ITS INTERFACE, AND ONLY 48 PUBLISHED VIDEOS PARTICIPATED IN OUR EVALUATION.

Model	Duration	FPS	Resolution	Abilities	Release Date
Sora*	8-60s	30fps	1280 × 720 or 1920 × 1080	T2V	23.12
Gen-3	8s	24fps	2816 × 1536	T2V & I2V & V2V	24.06
KLing	5s	30fps	1280 × 720	T2V & I2V	24.06
Dreamina	12s	8fps	1680 × 720	T2V & I2V	24.08
Typemovie	32s	24fps	1024 × 576	T2V & I2V	24.09
Pixeling	5s	24fps	1024 × 576	T2V & I2V	23.12
Dream Machine	5s	24fps	1360 × 752	T2V & I2V	24.06
Vega AI	4s	12fps	1024 × 576	T2V & I2V	23.12
PixVerse V2	4s	18fps	1408 × 768 or 1024 × 576	T2V & I2V	24.07
Pika 1.5	3s	24fps	1280 × 720	T2V & I2V	24.10
Show-1	3.63s	8fps	576 × 320	T2V	23.10
VideoCrafter	1.6s	10fps	512 × 320	T2V & I2V	24.02
Open-Sora 1.2	4.25s	24fps	1280 × 720	T2V & I2V & V2V	24.06

B. Prompt Selection and Video Generation

The construction and selection of prompts are critical to the evaluation of text-to-video (T2V) models, as they directly influence the credibility and reliability of the results. To ensure both diversity and comprehensiveness, we designed representative prompts aligned with evaluation dimensions and content categories. These prompts are derived from 48 publicly available entries in the Sora dataset and 100 additional manually curated prompts to enhance fairness and accuracy.

The prompts are divided into four categories: humans, animals, landscapes, and surreal scenes. Referring to the scheme adopted by [9, 24, 16], we utilized a large language model (LLM) to pre-generate prompts, followed by manual refinement, as illustrated in Figure 3. Basic elements for each category were predefined and organized into JSON files, which were used as inputs for the LLM to generate over 50 candidates per category, each limited to 50 words. After a thorough review, we finalized 100 test prompts: 30 for humans, 14 for animals, 38 for landscapes, and 18 for surreal scenes. These prompts are designed to align with the dimensions of the evaluation, covering aspects such as real world scenes, cultural characteristics, extreme weather conditions, actions,

expressions, spatial relationships and visual styles, as detailed in Figure 4.

For subjective evaluation, we tested 12 of the most representative and advanced T2V models, including Sora, Pika, Gen-3, Open-Sora, PixVerse, Show-1, VideoCrafter, Dreamina, KLing, Dream Machine, Pixeling, and TypeMovie. Details of these models are provided in Table I. Using 100 custom prompts and Sora’s 48 prompts, a total of 1,735 videos were generated across 11 models (excluding Sora). The distribution of generated videos for each category is shown in Figure 4.

Notably, the T2V models included in this evaluation are current as of July 2024. We plan to supplement and update the list of models in future evaluations to ensure continued relevance and comprehensiveness.

C. Subjective Experiment

Subjective evaluations were conducted in strict accordance with the criteria of the ITU.BT series [4]. The evaluation process was conducted in a controlled laboratory setting to maintain consistent video viewing and evaluation conditions. Subjective evaluations were conducted using a 5-point scale continuous single stimulus quality scoring method, classified

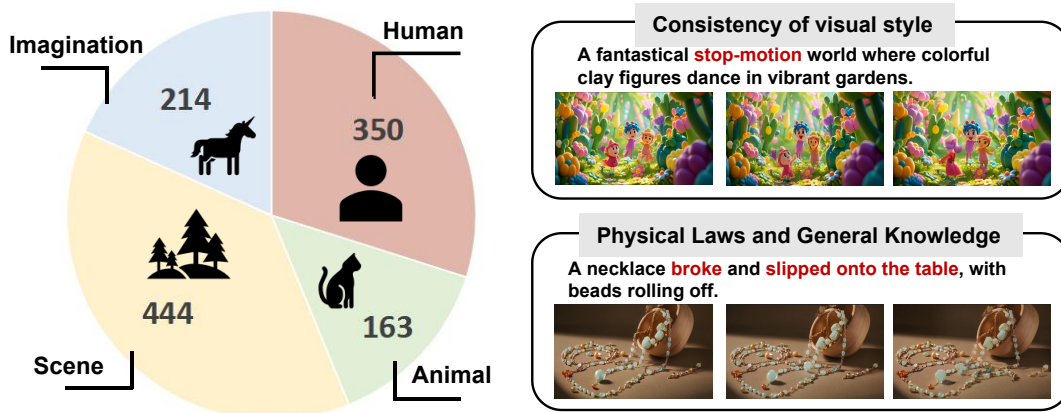


Fig. 4. Prompt content category distribution and example of prompt-video pairs.

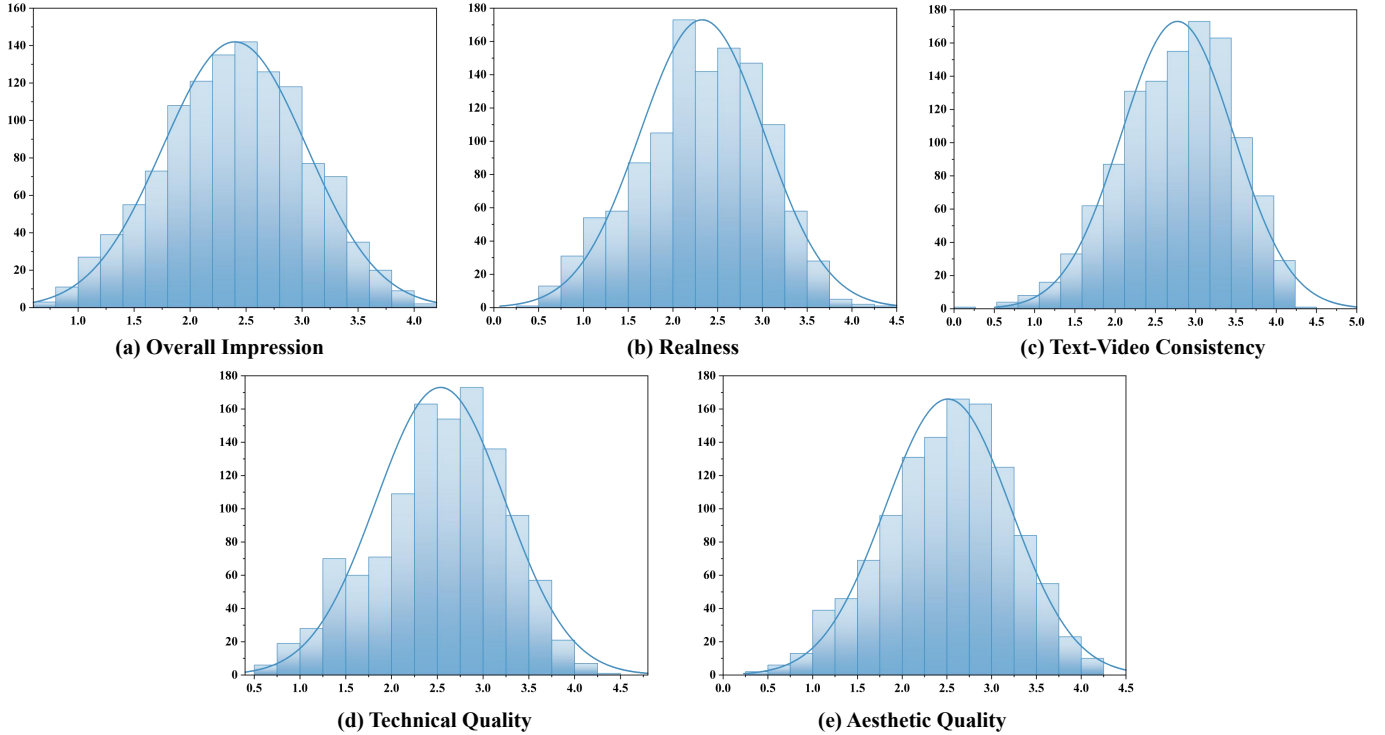


Fig. 5. Distribution of subjective scores in each dimension.

as 0-1 (bad), 1-2 (poor), 2-3 (average), 3-4 (good), 4-5 (excellent), and each video was evaluated by 7 to 9 professional evaluators. In total, we recruited 73 evaluators, including 20 men and 53 women, aged between 18 and 28, all from Communication University of China. Their academic backgrounds range from undergraduate to doctoral level, covering science and engineering (e.g. electronic information, computer science) and humanities and arts (e.g. international journalism, new media, film studies). We collected at least 7 subjective scores for each video in all evaluation dimensions, for a total of 58,660 raw scores.

Based on the requirements of ITU-R series standards, we

use 95% confidence intervals to detect and remove outliers from the original scores. For the score of a video generated by model i for prompt j in dimension k , the confidence interval is calculated as $[\mu_{ijk} - 2\sigma_{ijk}, \mu_{ijk} + 2\sigma_{ijk}]$. Any scores falling outside this interval are considered outliers and removed. To maintain data integrity, we ensure that at least five valid scores remain for each video in every dimension.

After outlier removal, we normalize the data and calculate the Mean Opinion Score (MOS) for model i on prompt j in dimension k , denoted as MOS_{ijk} . The final score for each model in each dimension was obtained by averaging its scores

TABLE II

THE FINAL RANKING OF THE PARTICIPATING MODELS, SORA'S SCORE ONLY INCLUDES 48 PROMPTS SCORES, WHICH MAY HAVE CERTAIN LIMITATIONS. THE RED FONT REPRESENTS THE HIGHEST SCORE, THE BLUE FONT REPRESENTS THE SECOND HIGHEST SCORE, THE BOLD FONT REPRESENTS A SCORE WITH COMPETITIVE POTENTIAL, AND THE GREEN FONT REPRESENTS THE LOWEST SCORE.

Model	Overall Impression	Text-Video Consistency	Realness	Technical Quality	Aesthetic Quality
Sora*	0.851	0.864	0.823	0.882	0.851
Gen-3	0.633	0.668	0.574	0.695	0.662
KLing	0.565	0.608	0.572	0.557	0.536
Dreamina	0.590	0.629	0.512	0.633	0.651
Typemovie	0.483	0.451	0.500	0.560	0.562
Pixeling	0.466	0.544	0.420	0.464	0.467
Dream Machine	0.496	0.543	0.478	0.528	0.488
Vega AI	0.453	0.496	0.427	0.481	0.454
Pixverse	0.531	0.589	0.498	0.539	0.565
Pika	0.445	0.499	0.407	0.504	0.468
Show1	0.356	0.486	0.385	0.286	0.336
Open-Sora	0.392	0.500	0.350	0.375	0.372
VideoCrafter	0.410	0.545	0.381	0.347	0.390

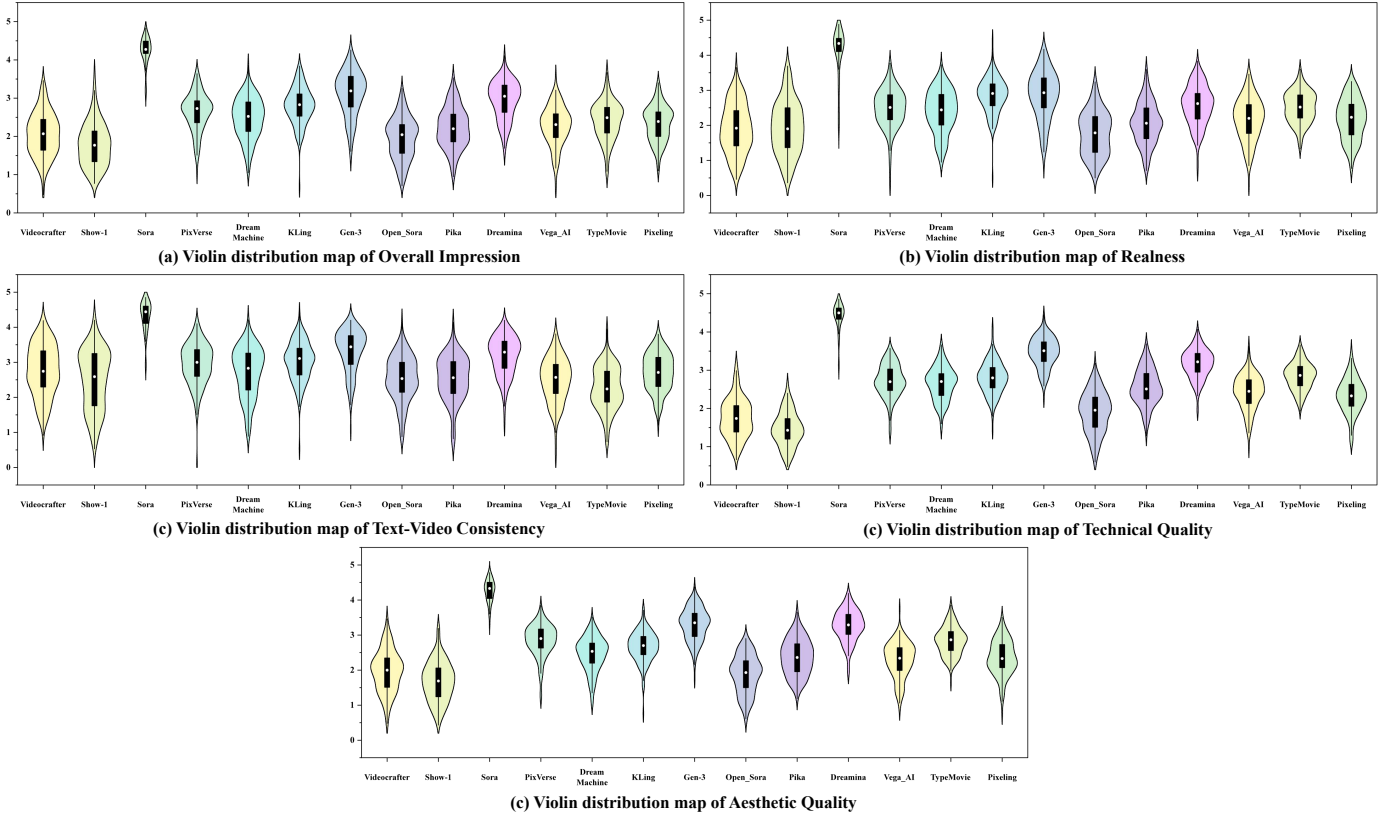


Fig. 6. The Violin distribution maps of the model’s subjective score in each evaluation dimension

across all prompts:

$$MOS_{ik} = \frac{\sum_{j=1}^M MOS_{ijk}}{M} \quad (1)$$

Figure 5 shows the MOS distribution for each dimension, demonstrating that the scores cover nearly the entire possible range and follow a normal distribution. This confirms the comprehensiveness and validity of the subjective scores.

D. Subjective Evaluation Results

We performed a comprehensive set of experiments and analyses on T2VEval-Bench to summarize the performance of the evaluated models. Table II provides the scores of the 12 models across all evaluation dimensions, while Figure 6 visualizes the score distribution using a violin plot. Notably, Sora achieves the highest scores in all dimensions, exhibiting a highly concentrated and stable distribution. However, it is important to note that Sora’s ranking is based solely on its 48 publicly available videos, which introduces certain limitations to the evaluation.

Aside from Sora, the Gen-3 model demonstrates strong competitiveness and potential across all dimensions. Additionally, K Ling excels in the realness dimension, while Dreamina stands out in aesthetic quality, highlighting its strengths in specific application scenarios. For instance, Dreamina shows potential for animation creation, whereas K Ling is well-suited for tasks such as storyboard enhancement. In contrast, Open-Sora V1.2 and Show1 exhibit the weakest performance, primarily due to poor video quality with noticeable artifacts like

block distortions. These models also struggle with maintaining entity consistency (e.g., people and animals) and frame-to-frame coherence.

To explore which dimensions have the greatest impact on participants’ overall impression when watching text-generated videos, we build a simple MLP regression model. The input consists of the scores from the four dimensions, intending to predict the overall impression score. We divide the data into an 8: 2 ratio for training and testing, achieving an accuracy of 84% on the test set, demonstrating the effectiveness of the model. Based on this, we perform a gradual sensitivity analysis to determine the influence of each dimension, as shown in Table III. Notably, we find that the video quality dimension has a limited impact, which contradicts general expectations. We think this may be because there is a certain correlation between video quality and aesthetic quality and realness. This may lead to the limited impact of perturbing video quality alone on the final output.

Finally, based on our categorization of prompt content, we

TABLE III
GRADIENT SENSITIVITY OF EACH DIMENSION.

Model	Sensitivity
Text-Video Consistency	0.316132
Realness	0.246698
Video Quality	0.233618
Aesthetic Quality	0.235428

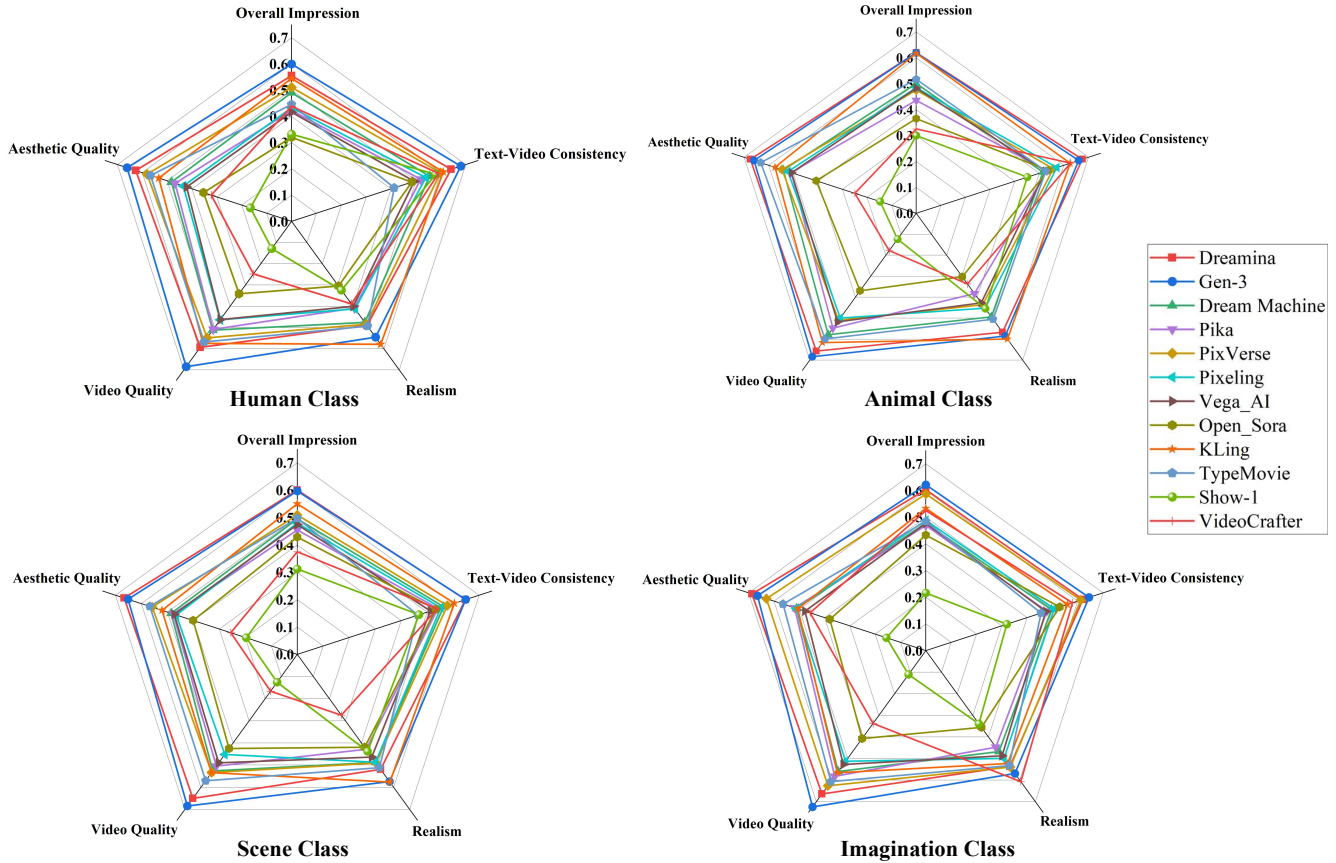


Fig. 7. The radar maps of each model under different prompt’s categories

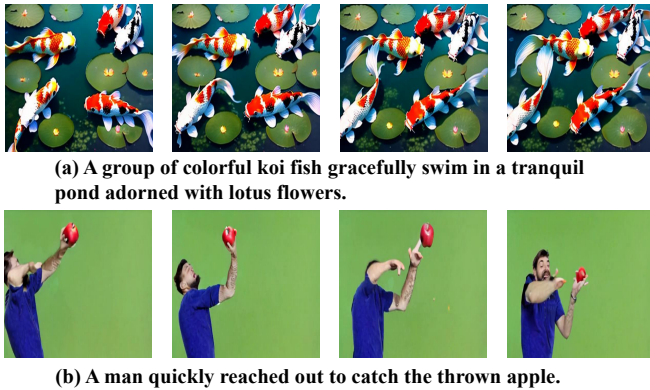


Fig. 8. Examples of realness distortion in text-generated videos. (a) It is impossible to simulate the natural feeling of fish swimming in water. (b) The limbs of the person are distorted and the action of “catching an apple” is not expressed.

analyze model performance across each category, as shown in Figure 7. Gen-3 consistently outperforms other models across all prompt categories, while Open-Sora, VideoCrafter, and Show-1 exhibit the weakest performance. This aligns with the conclusions presented in Table II. Furthermore, it is evident that regardless of the prompt category, the scores for the realness dimension are generally lower than those of other dimensions. This highlights that the primary challenge faced by current T2V models lies in the semantic distortions

associated with the realness dimension. Specifically, these models struggle to accurately understand and represent the physiological structures (e.g., facial features, limbs), movement patterns (e.g., running, dancing), and physical laws (e.g., sliding, dripping) of organisms in the real world, as illustrated in Figure 8.

IV. OBJECTIVE EVALUATION METRIC

Based on the T2VEval-Bench we constructed, we propose an innovative model, T2VEval, which employs a multi-task architecture to accomplish the objective evaluation of T2V models. The model consists of four main components: a video quality encoder, a realness representation module, a text-video alignment encoder, and a quality regression module. Figure 9 illustrates the architecture of T2VEval. Below, we provide a detailed description of each component.

A. Video Quality Encoder

The video quality encoding module aims to represent distortions in both the spatial and temporal domains. In the spatial domain, common distortions include blur, noise, overexposure/underexposure, etc., while temporal domain distortions include jitter, motion blur, and others. This dimension can be understood as a conventional video quality assessment (VQA) problem. The Swin-T 3D architecture has been shown in recent studies to be well-suited for various VQA tasks [46, 45]. By

using a 3D sliding window attention mechanism, it has strong capabilities for extracting spatiotemporal features, making it effective for analyzing video distortions in both the spatial and temporal domains. Therefore, we directly adopt the Tec branch from DOVER as the backbone for the video quality encoder. Given a video clip v , we have:

$$f_q = \text{Swin3D}(v) \quad (2)$$

B. Realness Representation Module

Common realness distortions in the spatial domain of text-generated videos include the loss of limbs or face of the subject, lack of texture details, etc. In the temporal domain, the main problems are unnatural motion and inconsistency between consecutive frames. We believe that the realness flaw in text-generated videos is essentially a phenomenon that goes against conventional human cognition, and this cognitive-level semantic distortion is often difficult to characterize through simple networks.

Inspired by natural language processing work such as BERT [8] and PPT [10], we designed a pre-training task for the realness evaluation module, namely AI-generated videos detection. We collected 5,000 AI-generated videos and 5,000 real-world videos from the DeMemba datasets [5], respectively, to construct a pre-training dataset. These data will be used to train a classification network with ConvNeXt 3D [27] as the backbone. The final pre-trained network achieved a classification accuracy of 98% in the dataset and 83% zero-shot classification accuracy on T2VEval-Bench. This pre-trained network will be further fine-tuned in the evaluation task.

$$f_r = \text{ConvNeXt3D}(v) \quad (3)$$

C. Text-Video Alignment Encoder

Text-video alignment refers to the consistency between the video content and the text prompt. CLIP [32] and BLIP [22] are models with strong zero-shot text-to-image matching capabilities. However, experiments [7, 16, 24, 25] have shown that directly using CLIP or BLIP to compute this similarity has a low correlation with subjective scores. Additionally, some approaches attempt to generate captions for the video using MLLM (Multimodal Large Language Models) and then compare the similarity between the captions and prompts [7], but results indicate this method is also unreliable.

Therefore, we consider modeling text-video alignment in the latent space. Specifically, we use a frozen BLIP encoder to separately encode the text and video frames, and then project the text and video features into a unified feature space through a feature alignment layer. Finally, a cross-attention module is used to encode the similarity between the text and video features. Given a video V and text prompt t , we have:

$$f_b = \text{SA}(\text{CA}\{\text{BLIP}(v_i), \text{BLIP}(\text{prompt})\}_{i=1}^N) \quad (4)$$

D. Quality Regression Module

The proposed Quality Regression Module consists of two key components: the Fidelity Fusion Module and the Feature Fusion Module. Inspired by T2VQA [50], the module adopts a Transformer-based architecture to achieve a progressive and effective integration of features.

First, the Fidelity Fusion Module focuses on fusing the video quality feature f_q and the realness feature f_r , resulting in fidelity features f_v that capture the visual defects of the video. This step leverages the strong task dependency between video realness and quality, both of which are entirely reliant on

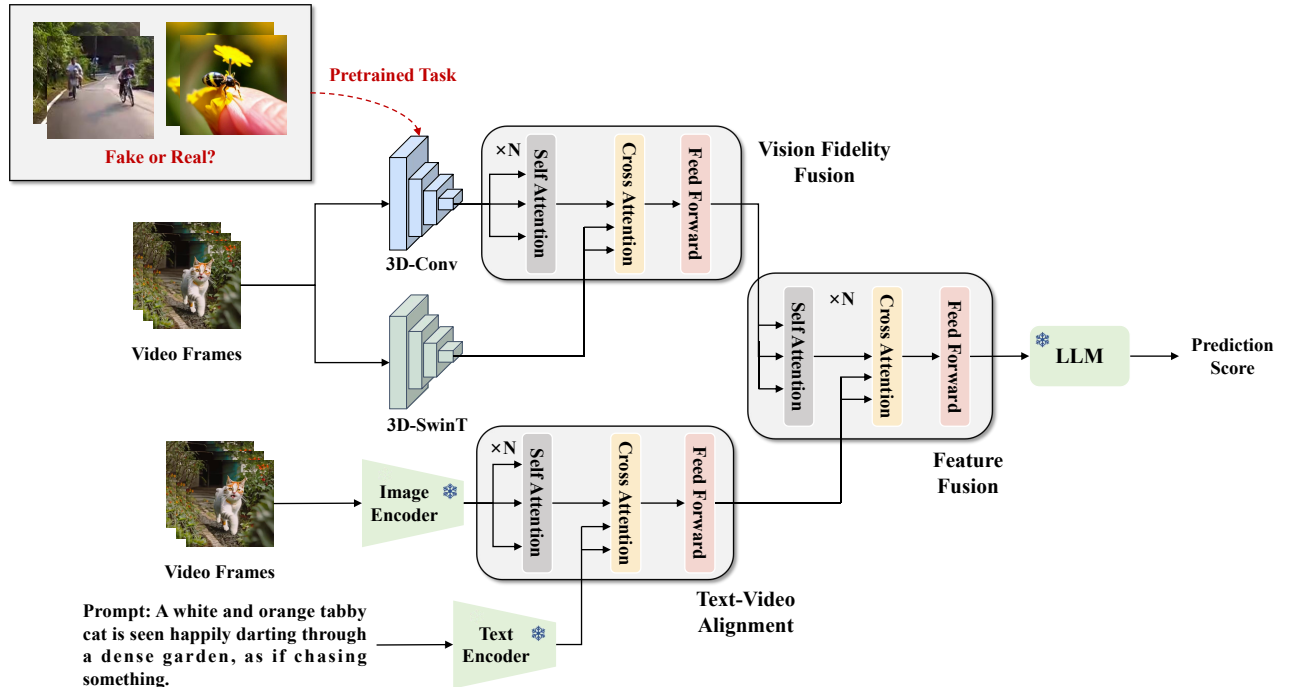


Fig. 9. The overall architecture of proposed T2VEval.

visual content. By prioritizing this fusion, the module aligns with the perceptual hierarchy of humans, who tend to be more sensitive to visual distortion when evaluating text-generated videos.

$$f_v = FFN(SA(CA(f_r), f_q)) \quad (5)$$

Then the Feature Fusion Module further fuse f_v with f_b to help the model unify features from the visual-textual perspective to understand the video features more comprehensively.

$$f = FFN(SA(CA(f_v), f_b)) \quad (6)$$

LLM has achieved excellent results on IQA/VQA tasks [48, 47, 49, 56]. Inspired by this, we use LLM as the quality regression module in T2VEval and guide LLM by designing a special prompt word "Please rate the quality of the video". The output of LLM is the probability distribution of the five quality levels (bad, poor, fair, good, and excellent) specified by ITU, and assigns them weights of 1-5 in order. Finally, the final quality score is obtained by calculating the softmax of each token and multiplying it by the corresponding weight.

$$s_{pred} = \sum_{i=1}^5 i \times softmax(\lambda_i) = \sum_{i=1}^5 i \times \frac{e^{\lambda_i}}{\sum_{j=1}^5 e^{\lambda_j}} \quad (7)$$

where λ_i is the probability distribution of the i -th level token.

E. Training Strategy

To maximize the effectiveness of each branch and enable them to focus on task-specific learning, we propose a divide-and-conquer training strategy. This approach ensures each branch specializes in its designated task while contributing to the overall performance.

Initially, we prioritize enhancing features unrelated to text, such as video quality and realism, by refining purely visual dimensions without involving text input. In the next phase, we fine-tune the full parameters of the BLIP model to optimize text-video alignment. Finally, we integrate the three branches with a fusion module, fine-tuning a limited set of parameters to promote cooperative learning across multiple aspects, including video quality, realism, and text-video alignment.

Specifically, we first fine-tune all parameters of the video quality evaluation branch using video quality scores, and similarly fine-tune all parameters of the realism evaluation

branch using realism scores. For the alignment branch, text-video consistency scores are used to fine-tune all parameters of the BLIP model. In the final stage, we incorporate the fusion module and selectively fine-tune a subset of the BLIP parameters.

To further enhance performance, we adopt a dual-loss optimization strategy [21] for each branch. This strategy combines Pearson’s linear correlation coefficient and ranking loss, ensuring robust optimization tailored to each evaluation dimension.

$$L_{plcc} = \frac{1}{2} \left(1 - \frac{\sum_{i=1}^m (s_i - \bar{s})(y_i - \bar{y})}{\sqrt{\sum_{i=1}^m (s_i - \bar{s})^2} \sqrt{\sum_{i=1}^m (y_i - \bar{y})^2}} \right) \quad (8)$$

$$L_{rank} = \frac{1}{m^2} \sum_{i=1}^m \sum_{j=1}^m (\max(0, |y_i - y_j| - e(y_i, y_j)) \cdot (s_i - s_j)) \quad (9)$$

Here, y and \bar{y} denote the quality annotations and their mean value, respectively, while s and \bar{s} represent the quality predictions and their mean value. This optimization strategy enhances each branch by aligning its outputs with human perceptual judgments and ensuring that the rank order of the outputs adheres to the expected ordinal properties.

V. EXPERIMENTS AND RESULTS

A. Implement Details

When training and testing on T2VEval-Bench, we followed common dataset splitting practices, reserving 80% for training and 20% for testing. To eliminate bias from a single split, we randomly split the dataset 10 times and averaged the results for performance comparison.

For the text-video alignment branch, we use the BLIP encoder [22] to extract features, while the video quality encoder is initialized with weights pre-trained by Swin-T on the Kinetics-400 dataset [18]. For the realness encoder, we initialize it with pre-trained parameters on a self-built classification dataset. The LLM used in the quality regression head is the 7B version of Vicuna v1.5 [57], which is finetuned from Llama2 [38]. It is worth noting that the gradients of the BLIP encoder and Vicuna v1.5 are frozen during training.

TABLE IV
PERFORMANCE COMPARISON OF DIFFERENT MODELS

Type	Models	T2VEval-Bench				T2VQA-DB			
		SROCC \uparrow	PLCC \uparrow	KROCC \uparrow	RMSE \downarrow	SROCC \uparrow	PLCC \uparrow	KROCC \uparrow	RMSE \downarrow
Zero-shot	CLIPSim	0.0460	0.0656	0.0296	0.9171	0.1047	0.1277	0.0702	21.683
	BLIP	0.1690	0.1718	0.1116	0.9131	0.1659	0.1860	0.1112	18.373
	ImageReward	0.2611	0.2798	0.1738	0.8515	0.1875	0.2121	0.1266	18.243
	UMTScore	0.1832	0.1600	0.1258	0.9196	0.0676	0.0721	0.0453	22.559
Finetuned	SimpleVQA	0.4815	0.5206	0.3421	0.6031	0.6275	0.6338	0.4466	11.163
	FAST-VQA	0.5878	0.5952	0.4382	0.6660	0.7173	0.7295	0.5303	10.595
	DOVER	0.6070	0.5994	0.4272	0.6107	0.7609	0.7693	0.5704	9.8072
	T2VQA	0.6598	0.6603	0.4757	0.5749	0.7965	0.8066	0.6058	9.0210
	T2VEval (Ours)	0.7098	0.7252	0.5218	0.5296	0.8049	0.8175	0.6159	8.6133

In the training and testing process, we first sampled 8 frames from the input video and resized them to 224×224 pixels. We used the Adam optimizer initialized with a learning rate of $1e-5$, and the learning rate decayed from 1 to 0 using a cosine scheduler. T2VEval was trained for 30 epochs with a batch size of 4 on a server equipped with one Nvidia GeForce RTX 3090.

We employ the differentiable Pearson Linear Correlation Coefficient (PLCC) and rank loss as the loss function. PLCC is a common metric for evaluating the correlation between sequences, while the rank loss was introduced to help the model better distinguish relative video quality. The final loss function is defined as:

$$L = L_{plcc} + \lambda \cdot L_{rank} \quad (10)$$

λ is a hyperparameter used to balance the different loss functions, which we set to 0.3.

The evaluation metrics we selected include the Pearson Correlation Coefficient (PLCC), Spearman Rank-Order Correlation Coefficient (SROCC), Kendall’s Rankorder Correlation Coefficient (KROCC) and Root Mean Square Error (RMSE). SROCC and PLCC measure the monotonicity of the predictions, while RMSE assesses prediction accuracy. A better model should exhibit higher SROCC and PLCC scores, whereas lower RMSE values indicate better performance.

B. Performance Comparison

We utilized BLIP [22], CLIPSim [43], ImageReward [51], UMTScore [25], Simple VQA [36], Fast-VQA [46], DOVER [45], and T2VQA [50] as reference algorithms. Among them, T2VQA is specifically designed for T2V evaluation. DOVER, Simple VQA, and Fast-VQA are established and effective models for video quality assessment (VQA) tasks. CLIPSim computes the average similarity between text and individual video frames. BLIP and ImageReward are adapted to

convert image quality assessment (IQA) metrics into VQA metrics, while UMTScore is tailored for evaluating text-video alignment. We employed pretrained weights for CLIPSim, BLIP, and ImageReward for zero-shot testing, while Simple VQA, Fast-VQA, DOVER, and T2VQA were fine-tuned on the T2VEval-Bench.

Table IV compares the performance of T2VEval with other methods. The results demonstrate that our method achieves state-of-the-art performance on T2VEval-Bench, surpassing the second-best method by nearly 4%. Zero-shot models performed significantly lower, likely due to their focus on either text-video alignment or the inability to capture temporal information in video frames. While VQA models achieved higher scores, indicating the importance of video quality in influencing user perception of text-generated videos, relying solely on video quality is insufficient. High-quality videos may still exhibit misalignment with prompts or semantic inconsistencies, underscoring the need for multi-dimensional evaluation.

Figure 10 shows scatter plots comparing predicted scores and MOS for BLIP, CLIPSim, ImageReward, UMTScore, Simple VQA, Fast-VQA, DOVER, T2VQA, and T2VEval. A better-performing model exhibits a fitting curve closer to the diagonal with fewer scattered points. As depicted, T2VEval significantly outperforms other algorithms, demonstrating a closer fit and reduced dispersion in predictions.

Additionally, we fine-tuned and tested T2VEval on the T2VQA-DB dataset, following the same data partitioning method as T2VEval-Bench. The results, averaged across 10 partitions, are presented in the table. These experiments confirm that T2VEval also achieves state-of-the-art performance on this dataset.

C. Ablation Studies

To verify the effectiveness of the key modules in T2VEval, we conducted a series of ablation experiments, including

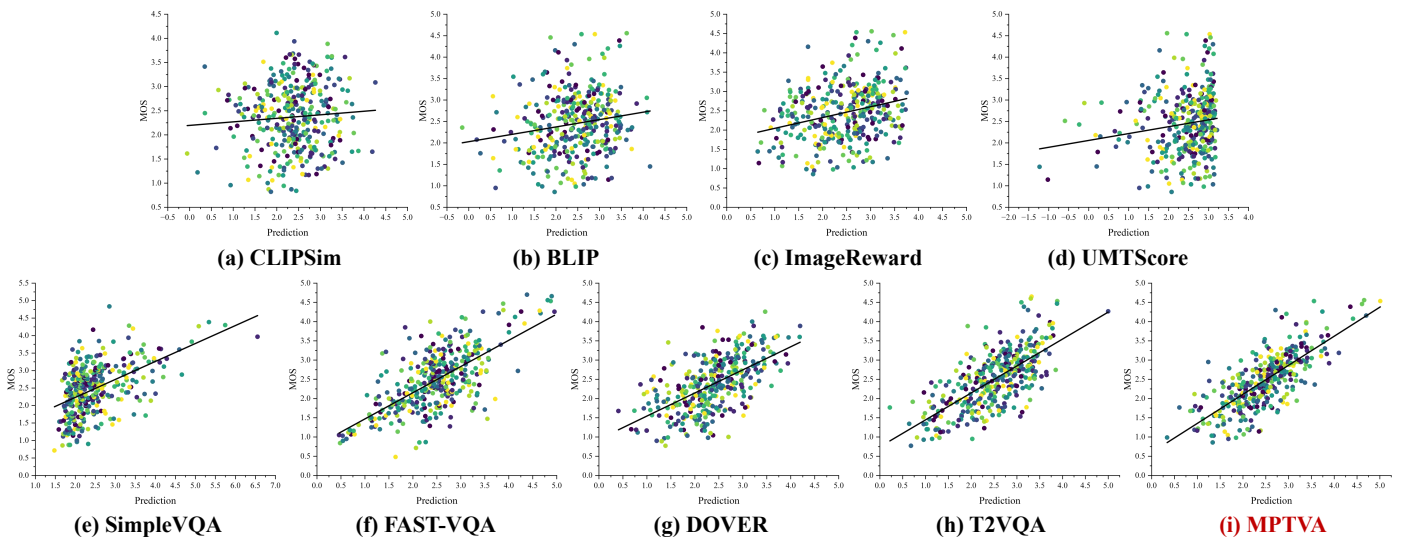


Fig. 10. Scatter plots of the predicted scores vs. MOSs. The curves are obtained by a four-order polynomial nonlinear fitting. The brightness of scatter points from dark to bright means density from low to high.

TABLE V
PERFORMANCE COMPARISON OF ABLATION STUDIES.

Models	PLCC \uparrow	SROCC \uparrow	KROCC \uparrow	RMSE \downarrow
T2VEval-QC	0.6826	0.6946	0.5001	0.5826
T2VEval-RC	0.6838	0.6691	0.4925	0.5664
T2VEval-RC&QC	0.6757	0.6680	0.4833	0.5988
T2VEval-Cat	0.6524	0.6493	0.4680	0.5857
T2VEval-Add	0.6678	0.6609	0.4867	0.5782
T2VEval-Random	0.6683	0.6443	0.4630	0.5721
T2VEval-ImageNet	0.6704	0.6760	0.4901	0.5883
T2VEval-Once	0.6977	0.6860	0.5001	0.5553
T2VEval	0.7098	0.7252	0.5218	0.5296

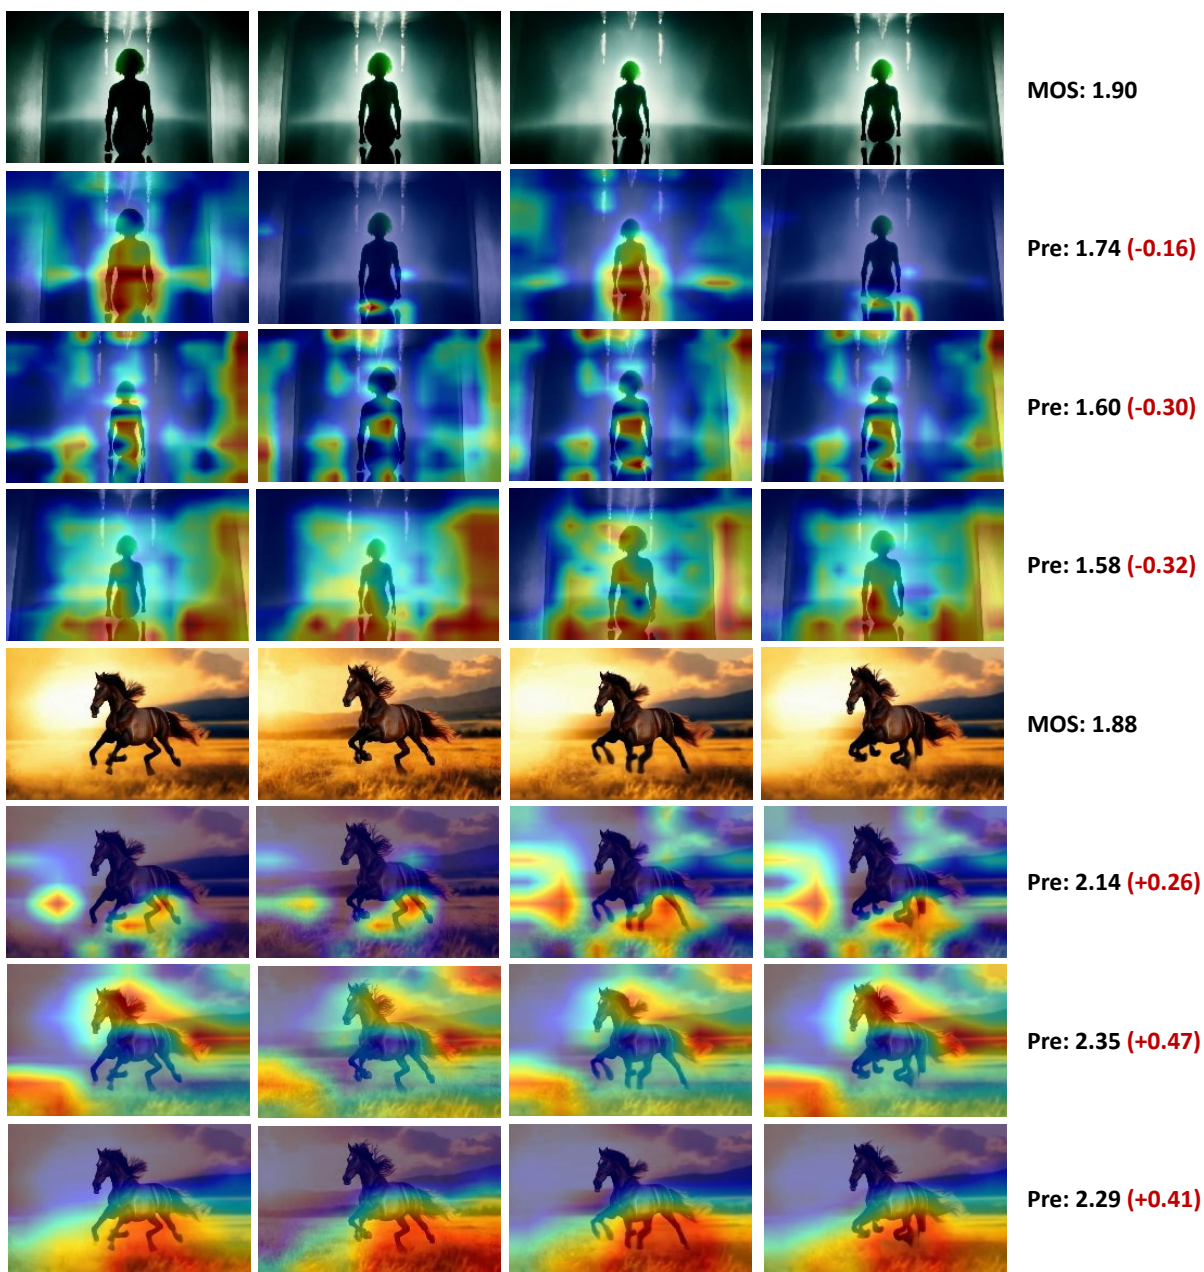


Fig. 11. Grad-CAM diagram of 3D network under different pre-training strategies and the final T2VEval.

the vision fidelity fusion strategy, realness module pre-train strategy and divide-and-conquer training strategy.

1) Video Fidelity Fusion Strategy Ablation Experiment:

A well-designed and accurate fusion strategy is crucial for capturing complementary information between features while preserving their independence, thereby enhancing the model’s overall performance. To explore the optimal fusion order, we compared the existing approach with three alternative fusion strategies: (1) realness-consistency first fusion (denoted as T2VEval-RC), (2) quality-consistency first fusion (denoted as T2VEval-QC), and (3) separate fusion of realness and quality with consistency (denoted as T2VEval-RC&QC). All fusion processes utilize a cross-attention mechanism. Experimental results indicate that the best performance is achieved by first fusing video quality and realness features, as shown in Table V.

This result may be attributed to two key factors. First, realness and video quality are entirely dependent on visual content and exhibit a strong task dependency. Second, this fusion order aligns more closely with human perceptual priorities when watching T2V content, where viewers are more sensitive to visual defects. Thus, prioritizing the fusion of quality and realness features allows the model to better focus on critical visual information.

Additionally, T2VEval employs a cross-attention mechanism to fuse quality and realness features. In previous studies, alternative fusion methods, such as feature summation and concatenation, have also been utilized. To evaluate their effectiveness, we compared the cross-attention fusion strategy against summation and concatenation methods. As shown in Table V, the cross-attention method significantly outperforms the other two approaches.

This superiority can be explained by the dynamic nature of cross-attention, which assigns adaptive weights to different features based on their relevance. Unlike summation and concatenation, cross-attention selectively highlights valuable information while maintaining contextual integrity. Feature summation, on the other hand, may result in information loss due to the "smoothing" effect during addition, which reduces the distinctions between features. While concatenation preserves all feature information, it fails to establish meaningful interactions between features.

In contrast, cross-attention enables pairwise interactions and weight calculations for features, effectively preserving and enhancing information integrity. This mechanism allows the model to capture more complex relationships between features, ensuring that key information is neither diluted nor masked, ultimately leading to superior performance.

2) Realness Module Pre-train Strategy Ablation Experiment:

When designing the realness evaluation branch, we introduced the pre-training task of AI-generated video detection, instead of simply using ImageNet pre-trained weights or random initialization. We replaced the pre-trained weights of Conv3D with ImageNet weights (denoted as T2VEval-ImageNet), random initialization (denoted as T2VEval-Random) and fine-tuned them in the same training environment, experimental results are shown in Table V. In addition, we further used Grad-CAM to analyze the impact of

different pre-training strategies on the model’s focus area, as shown in Figure 11. In the figure, we show the activation map of the 3D network under loading different pre-trained weights.

As shown in Figure 11, we present Grid-CAM heatmaps from the same layer of a 3D network for three initialization methods: random initialization, ImageNet initialization, and AI-generated video detection-based initialization. The figure illustrates results for two samples from the test set. Each sample includes four sets of data:

- The first set shows the original video frame and its corresponding MOS score.
- The second set displays the heatmap, predicted score, and the error relative to the MOS score obtained using the initialization method proposed in this paper.
- The third and fourth sets show the results for ImageNet initialization and random initialization, respectively.

In the first sample, the video shows characters with missing legs. Ideally, the model should focus on the area around the legs. The heatmap reveals that our proposed initialization method effectively guides the model to focus on the lower leg area, whereas the heatmaps from ImageNet and random initialization methods appear more disorganized. Furthermore, the prediction error demonstrates that our initialization method achieves the lowest error.

In the second sample, the legs of the horses intermittently leave the ground, disappearing and reappearing abnormally over time. The visualization results show that our initialization method produces heatmaps with significantly lower entropy than the other methods, with a sharper focus on the leg area in the frame. This highlights the effectiveness of our approach in guiding the model to concentrate on critical regions and achieve more accurate predictions.

This fully demonstrates the effectiveness of introducing valid and highly relevant prior information in the model training phase, which we will further explore in future work.

3) The effectiveness of each branch and Training Strategy Ablation Experiment:

In this section, we perform ablation experiments to evaluate the effectiveness of each branch and the divide-and-conquer training strategy employed. Specifically, we remove each of the three branches of the model and conduct fine-tuning tests on the T2VEval-Bench dataset. The dataset partitioning method remains consistent with the previous experiments. The results, presented in Table VI, demonstrate that removing any branch leads to varying degrees of performance degradation, confirming the importance and effectiveness of the three dimensions assessed in the T2VQA task. Notably, removing the quality branch has the smallest impact on model performance, suggesting that accounting for the unique properties of text-generated videos in T2VQA tasks is more critical than solely relying on general quality assessments.

Additionally, we evaluate the impact of the divide-and-conquer training strategy by comparing it to a single-stage training approach where the entire model is trained at once using overall impression scores (denoted as T2VEval-Once). The results, shown in Table V, indicate that the progressive training strategy outperforms the single-stage approach. This finding highlights that the progressive strategy effectively

TABLE VI
ABLATION STUDY ON THE USAGE OF QUALITY BRANCH, REALNESS BRANCH AND ALIGNMENT BRANCH IN T2VEVAL.

Quality Branch	Realness Branch	Alignment Branch	PLCC \uparrow	SROCC \uparrow	KROCC \uparrow	RMSE \downarrow
×	✓	✓	0.6831	0.6829	0.4922	0.5631
✓	×	✓	0.6572	0.6713	0.4845	0.5911
✓	✓	×	0.6402	0.6211	0.4475	0.6055
✓	✓	✓	0.7098	0.7252	0.5218	0.5296

facilitates cooperation between branches, leading to improved overall performance.

VI. CONCLUSION

In conclusion, this paper focuses on both subjective and objective quality assessment of text-generated videos. To this end, we constructed a multi-dimensional text-generated video subjective evaluation dataset, T2VEval-Bench, which comprises 1,783 videos generated by 12 advanced T2V models. Through subjective research, we collected mean opinion scores for overall impression, video quality, realness, and text-video consistency. Based on T2VEval-Bench, we developed a text-generated video quality evaluation model called T2VEval, which extracts video features from three key perspectives: text-video alignment, video quality, and realness. These features are fused using an attention-based mechanism, and the final prediction is performed through regression using a large language model (LLM). To enhance training efficiency, a divide-and-conquer strategy is employed, enabling collaborative training across the branches. Experimental results demonstrate that T2VEval effectively evaluates the quality of text-generated videos. In future work, we plan to expand the dataset by including additional models and keeping up-to-date with model version updates. Moreover, we aim to address challenges related to detecting and evaluating realness defects in text-generated videos.

REFERENCES

- [1] Andreas Blattmann et al. “Align your latents: High-resolution video synthesis with latent diffusion models”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2023, pp. 22563–22575.
- [2] Andreas Blattmann et al. “Stable video diffusion: Scaling latent video diffusion models to large datasets”. In: *arXiv preprint arXiv:2311.15127* (2023).
- [3] Tim Brooks et al. “Video generation models as world simulators”. In: (2024). URL: <https://openai.com/research/video-generation-models-as-world-simulators>.
- [4] RECOMMENDATION ITU-R BT. *Methodology for the subjective assessment of the quality of television pictures*. 2012.
- [5] Haoxing Chen et al. “DeMamba: AI-Generated Video Detection on Million-Scale GenVideo Benchmark”. In: *arXiv preprint arXiv:2405.19707* (2024).
- [6] Zijian Chen et al. “GAIA: Rethinking Action Quality Assessment for AI-Generated Videos”. In: *arXiv preprint arXiv:2406.06087* (2024).
- [7] Iya Chivileva et al. “Measuring the quality of text-to-video model outputs: Metrics and dataset”. In: *arXiv preprint arXiv:2309.08009* (2023).
- [8] Jacob Devlin. “Bert: Pre-training of deep bidirectional transformers for language understanding”. In: *arXiv preprint arXiv:1810.04805* (2018).
- [9] Weixi Feng et al. “TC-Bench: Benchmarking Temporal Compositionality in Text-to-Video and Image-to-Video Generation”. In: *arXiv preprint arXiv:2406.08656* (2024).
- [10] Yuxian Gu et al. “Ppt: Pre-trained prompt tuning for few-shot learning”. In: *arXiv preprint arXiv:2109.04332* (2021).
- [11] Yingqing He et al. “Latent video diffusion models for high-fidelity long video generation”. In: *arXiv preprint arXiv:2211.13221* (2022).
- [12] Jonathan Ho et al. “Imagen video: High definition video generation with diffusion models”. In: *arXiv preprint arXiv:2210.02303* (2022).
- [13] Wenyi Hong et al. “Cogvideo: Large-scale pretraining for text-to-video generation via transformers”. In: *arXiv preprint arXiv:2205.15868* (2022).
- [14] Vlad Hosu et al. *The Konstanz Natural Video Database*. 2017. URL: <http://database.mmsp-kn.de>.
- [15] Vlad Hosu et al. “The Konstanz natural video database (KoNViD-1k)”. In: *2017 Ninth International Conference on Quality of Multimedia Experience (QoMEX)*. IEEE. 2017, pp. 1–6.
- [16] Ziqi Huang et al. “Vbench: Comprehensive benchmark suite for video generative models”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2024, pp. 21807–21818.
- [17] Pengliang Ji et al. “T2VBench: Benchmarking Temporal Dynamics for Text-to-Video Generation”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2024, pp. 5325–5335.
- [18] Will Kay et al. “The kinetics human action video dataset”. In: *arXiv preprint arXiv:1705.06950* (2017).
- [19] Levon Khachatryan et al. “Text2video-zero: Text-to-image diffusion models are zero-shot video generators”. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 2023, pp. 15954–15964.
- [20] Tengchuan Kou et al. “Subjective-aligned dataset and metric for text-to-video quality assessment”. In: *Proceedings of the 32nd ACM International Conference on Multimedia*. 2024, pp. 7793–7802.
- [21] Bowen Li et al. “Blindly assess quality of in-the-wild videos via quality-aware pre-training and motion per-

- ception”. In: *IEEE Transactions on Circuits and Systems for Video Technology* 32.9 (2022), pp. 5944–5958.
- [22] Junnan Li et al. “Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation”. In: *International conference on machine learning*. PMLR. 2022, pp. 12888–12900.
- [23] Mingxiang Liao et al. “Evaluation of text-to-video generation models: A dynamics perspective”. In: *arXiv preprint arXiv:2407.01094* (2024).
- [24] Yaofang Liu et al. “Evalcrafter: Benchmarking and evaluating large video generation models”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2024, pp. 22139–22149.
- [25] Yuanxin Liu et al. “Fetv: A benchmark for fine-grained evaluation of open-domain text-to-video generation”. In: *Advances in Neural Information Processing Systems* 36 (2024).
- [26] Ze Liu et al. “Video swin transformer”. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 2022, pp. 3202–3211.
- [27] Zhuang Liu et al. “A convnet for the 2020s”. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 2022, pp. 11976–11986.
- [28] Yiting Lu et al. “Aigc-vqa: A holistic perception metric for aigc video quality assessment”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2024, pp. 6384–6394.
- [29] Zhengxiong Luo et al. “Videofusion: Decomposed diffusion models for high-quality video generation”. In: *arXiv preprint arXiv:2303.08320* (2023).
- [30] Yanjun Ma et al. “PaddlePaddle: An open-source deep learning platform from industrial practice”. In: *Frontiers of Data and Computing* 1.1 (2019), pp. 105–115.
- [31] Yibo Miao et al. “T2vsafetybench: Evaluating the safety of text-to-video generative models”. In: *arXiv preprint arXiv:2407.05965* (2024).
- [32] Alec Radford et al. “Learning transferable visual models from natural language supervision”. In: *International conference on machine learning*. PMLR. 2021, pp. 8748–8763.
- [33] Uriel Singer et al. “Make-a-video: Text-to-video generation without text-video data”. In: *arXiv preprint arXiv:2209.14792* (2022).
- [34] Zeina Sinno and Alan Conrad Bovik. “Large-scale study of perceptual video quality”. In: *IEEE Transactions on Image Processing* 28.2 (2018), pp. 612–627.
- [35] Kaiyue Sun et al. “T2v-compbench: A comprehensive benchmark for compositional text-to-video generation”. In: *arXiv preprint arXiv:2407.14505* (2024).
- [36] Wei Sun et al. “A deep learning based no-reference quality assessment model for ugc videos”. In: *Proceedings of the 30th ACM International Conference on Multimedia*. 2022, pp. 856–865.
- [37] Zachary Teed and Jia Deng. “Raft: Recurrent all-pairs field transforms for optical flow”. In: *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part II* 16. Springer. 2020, pp. 402–419.
- [38] Hugo Touvron et al. “Llama 2: Open foundation and fine-tuned chat models”. In: *arXiv preprint arXiv:2307.09288* (2023).
- [39] Ruben Villegas et al. “Phenaki: Variable length video generation from open domain textual descriptions”. In: *International Conference on Learning Representations*. 2022.
- [40] Jiuniu Wang et al. “Modelscope text-to-video technical report”. In: *arXiv preprint arXiv:2308.06571* (2023).
- [41] Xiang Wang et al. “A recipe for scaling up text-to-video generation with text-free videos”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2024, pp. 6572–6582.
- [42] Yilin Wang, Sasi Inguva, and Balu Adsumilli. “YouTube UGC dataset for video compression research”. In: *2019 IEEE 21st International Workshop on Multimedia Signal Processing (MMSp)*. IEEE. 2019, pp. 1–5.
- [43] Chenfei Wu et al. “Godiva: Generating open-domain videos from natural descriptions”. In: *arXiv preprint arXiv:2104.14806* (2021).
- [44] Chenfei Wu et al. “Nüwa: Visual synthesis pre-training for neural visual world creation”. In: *European conference on computer vision*. Springer. 2022, pp. 720–736.
- [45] Haoning Wu et al. “Exploring video quality assessment on user generated contents from aesthetic and technical perspectives”. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 2023, pp. 20144–20154.
- [46] Haoning Wu et al. “Fast-vqa: Efficient end-to-end video quality assessment with fragment sampling”. In: *European conference on computer vision*. Springer. 2022, pp. 538–554.
- [47] Haoning Wu et al. “Q-align: Teaching llms for visual scoring via discrete text-defined levels”. In: *arXiv preprint arXiv:2312.17090* (2023).
- [48] Haoning Wu et al. “Q-instruct: Improving low-level visual abilities for multi-modality foundation models”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2024, pp. 25490–25500.
- [49] Haoning Wu et al. “Towards open-ended visual quality comparison”. In: *European Conference on Computer Vision*. Springer. 2025, pp. 360–377.
- [50] Jay Zhangjie Wu et al. “Towards a better metric for text-to-video generation”. In: *arXiv preprint arXiv:2401.07781* (2024).
- [51] Jiazheng Xu et al. “Imagereward: Learning and evaluating human preferences for text-to-image generation”. In: *Advances in Neural Information Processing Systems* 36 (2024).
- [52] Zhuoyi Yang et al. “Cogvideox: Text-to-video diffusion models with an expert transformer”. In: *arXiv preprint arXiv:2408.06072* (2024).
- [53] David Junhao Zhang et al. “Show-1: Marrying pixel and latent diffusion models for text-to-video generation”. In: *International Journal of Computer Vision* (2024), pp. 1–15.

- [54] Tianle Zhang et al. “Rethinking Human Evaluation Protocol for Text-to-Video Models: Enhancing Reliability, Reproducibility, and Practicality”. In: *arXiv preprint arXiv:2406.08845* (2024).
- [55] Zhichao Zhang et al. “Benchmarking AIGC Video Quality Assessment: A Dataset and Unified Model”. In: *arXiv preprint arXiv:2407.21408* (2024).
- [56] Zicheng Zhang et al. “Q-boost: On visual quality assessment ability of low-level multi-modality foundation models”. In: *2024 IEEE International Conference on Multimedia and Expo Workshops (ICMEW)*. IEEE, 2024, pp. 1–6.
- [57] Lianmin Zheng et al. “Judging llm-as-a-judge with mt-bench and chatbot arena”. In: *Advances in Neural Information Processing Systems* 36 (2023), pp. 46595–46623.
- [58] Daquan Zhou et al. “Magicvideo: Efficient video generation with latent diffusion models”. In: *arXiv preprint arXiv:2211.11018* (2022).