

DynamicFace: High-Quality and Consistent Video Face Swapping using Composable 3D Facial Priors

Runqi Wang^{1,2}, Sijie Xu¹, Tianyao He^{1,3}, Yang Chen¹, Wei Zhu¹, Dejia Song¹,
Nemo Chen¹, Xu Tang¹, Yao Hu¹

¹Xiaohongshu

²ShanghaiTech University

³Shanghai Jiao Tong University

Abstract

Face swapping transfers the identity of a source face to a target face while retaining the attributes like expression, pose, hair, and background of the target face. Advanced face swapping methods have achieved attractive results. However, these methods often inadvertently transfer identity information from the target face, compromising expression-related details and accurate identity. We propose a novel method DynamicFace that leverages the power of diffusion model and plug-and-play temporal layers for video face swapping. First, we introduce four fine-grained facial conditions using 3D facial priors. All conditions are designed to be disentangled from each other for precise and unique control. Then, we adopt Face Former and ReferenceNet for high-level and detailed identity injection. Through experiments on the FF++ dataset, we demonstrate that our method achieves state-of-the-art results in face swapping, showcasing superior image quality, identity preservation, and expression accuracy. Besides, our method could be easily transferred to video domain with temporal attention layer. Our code and results will be available on the project page: <https://dynamic-face.github.io/>.

Introduction

Face swapping has attracted many interests because of its wide applications, such as portrait reenactment, film production, and virtual reality. But there are still two pivotal challenges: 1) balance identity from source face and motion from target face. 2) give precise non-identity motion guidance to maintain temporal consistency.

Recent works (Li et al. 2020; DeepFakes 2019; Shen, Yan, and Zeng 2018) have made great efforts to achieve good face swapping results. However, these methods often focus on inner facial texture but ignore shape and illumination. Later, some works (Wang et al. 2021; Xu et al. 2021) combine the expert knowledge from 3D face reconstruction to achieve better performance with both reconstruction loss and identity loss. But training model on two losses will face a trade-off problem between identity and reconstruction, which often leads to instability and unreliability. Balancing identity and reconstruction with only losses constraint is conflict. We should provide accurate information for controllable generation.

Recently, diffusion-based models (Ho, Jain, and Abbeel 2020; Song et al. 2021; Rombach et al. 2022) have exhibited high customizability for various conditions and impressive

Conditions / Attributes	Source	Target	Normal	Landmark	UV Map	Background	Result
	Shape	✓	✓	✓	—	—	—
Expression	✓	✓	—	✓	—	—	
Pose	✓	✓	✓	—	—	—	
Lighting	✓	✓	—	—	✓	—	
Background	✓	✓	—	—	—	✓	

✓ From source face image ✓ From target face frames — w/o. the attribute

Figure 1: **Composable face conditions.** We aim to decompose face into four conditions and capture its unique usage of each condition. Conditions are disentangled with each other and provide essential guidance with 3D facial priors.

ability to generate images with high resolution and complex scenes. Some works (Han et al. 2024; Zhao et al. 2023; Kim et al. 2022) try to utilize the diversity and powerful generation ability of diffusion model to achieve face swapping. However, these methods could not achieve video face swapping directly. And idealized face guidance should preserve the non-identity attributes of I_{tgt} , which include non-facial attributes (e.g., background and hair), facial posture (e.g., expression and pose) and facial color (e.g., lighting). Previous works didn't pay much attention to the potentiality of 3D facial priors to simultaneously maintain identity from source face and complicated motion information from target face.

In this work, we propose a method named DynamicFace for face swapping by incorporating precise and disentangled facial conditions to the powerful Stable Diffusion model (Rombach et al. 2022) and apply temporal attention layer in AnimateDiff (Guo et al. 2024) to make DynamicFace also available in video domain. We introduce a new multiple conditioning mechanism to address the limitations of previous methods. Specifically, 1) to accurately control expression, pose, and other motion, we introduce four fine-grained facial conditions: background, shape-aware normal map, expression-related landmark, and identity-removed UV texture map. These four conditions fully encapsulate the desired information in the target face and are well disentangled from each other. 2) to avoid intro-

ducing unexpected identity information from the target face, we propose a alignment strategy to form spatial-aligned conditions using 3D facial priors. This involves extracting pose and expression parameters from the target face video and shape parameters from the source image using the prior of 3D face reconstruction model 3DDFA-V3 (Wang et al. 2024b), and then rendering the 2D face normal map and the UV texture map with these facial parameters.

In summary, our main contributions are as follows:

- We propose DynamicFace, a novel diffusion-based video face swapping approach that could generate high-fidelity and consistent faces leveraging the prior knowledge of Stable Diffusion.
- To introduce precise guidance when controlling face motion, we decompose the face into four conditions: background, shape-aware normal map, expression-related landmark, and identity-removed UV texture map. We disentangle conditions with each other using 3D facial priors for its distinct usage, which preserves shape aligned with source image and non-identity attributes.
- We adopt an identity-aware ReferenceNet and Face Former to inject facial information. These two modules ensure the identity consistency of the human subject across kinds of expressions and poses without any identity loss.

Related Work

Recently, face swapping has drawn much attention from the research community, and it has many applications in visual effects. Face swapping means transferring the identity information of the source image to the target image while keeping the other attributes like the expression and background of the target image unchanged.

Face Swapping

Early methods directly warp the source face according to the target facial landmarks, thus failing to address the large differences in posture and expression. 3DMM-based methods swap faces by 3D-fitting and re-rendering. However, these methods often cannot handle lighting differences on face and suffer from poor fidelity. Later, GAN-based methods improve the fidelity of the generated faces. Deepfakes (DeepFakes 2019) transfers the target attributes to the source face by an encoder-decoder structure while being constrained by two specific identities. FSGAN (Nirkin, Keller, and Hassner 2019) animates the source face with target facial landmarks and fuses it with the target background. SimSwap (Chen et al. 2020) introduces a feature matching loss to help preserve the target attributes. These methods require a facial mask for blending, which limits face shape variation.

Diffusion models have shown remarkable performance in various generative tasks, emerging as a powerful alternative to traditional GANs for image synthesis. The innovative approach of these models lies in their ability to gradually refine an image by reversing a learned noising process, which has led to significant advancements in image quality and diversity. In the context of face swapping, diffusion models have introduced a new paradigm for identity manipulation in face

images. DiffSwap (Zhao et al. 2023) proposes a diffusion-based pipeline in latent space for face swapping by integrating 3D-aware masked diffusion and midpoint estimation during the reverse process. DiffFace (Kim et al. 2022) introduces an ID conditional DDPM. However, pure pixel-wise diffusion without pretraining requires more data, and extra forward steps with gradients make training more memory-consuming. These both make training process difficult. Face Adapter (Han et al. 2024) only utilizes an efficient adapter to introduce identity information and preserve attributes of the target face image, but it is difficult to achieve temporal consistency when balancing the trade-off between identity and motion. In addition, these diffusion-based methods could not easily transfer to the video domain.

Identity-Preserving Generation

The impressive generative abilities of foundation models have attracted recent research endeavors investigating their personalized generation potential. With popular pretrained T2I and T2V diffusion models like Stable Diffusion (Rombach et al. 2022) and AnimateDiff (Guo et al. 2024), several ID-Preserving methods are proposed with promising results. IP-Adapter (Ye et al. 2023) and InstantID (Wang et al. 2024a) could maintain high face fidelity with effective adaptable plugins. But, it’s hard to accurately control expression and pose without rich motion guidance, which makes video generation difficult. Animate Anyone (Hu 2024) intends to use spatial-attention to extract identity from source face image and pose sequence to offer motion information, but this lacks appearance alignment which results in inaccurate identity. Champ (Zhu et al. 2024) aims to introduce multiple pose conditions from 3D human parametric model for accurately capturing both pose and shape variations. However, the conditions of the champ are not sufficiently disentangled, leading to redundant information. In this paper, we aim to first decompose all facial conditions with their own unique usage and to make full use of the prior knowledge of Stable Diffusion for face swapping.

Method

We propose a method to empower the diffusion model with motion-controllable modules and identity-injection modules, allowing for video face swapping with one source face image and target face frames. In this section, we will first introduce the brief prior knowledge of latent diffusion models. Then, we give the details of composable face conditions and Mixture-of-Guiders for controlling motion and appearance-aware modules to accurately preserve identity.

Preliminary: Latent Diffusion Models

Diffusion models generate a realistic image from a standard Gaussian distribution by reversing a recurrent noising process (Ho, Jain, and Abbeel 2020). However, pure diffusion process in pixel-space is really memory-consuming. Latent Diffusion Model (Rombach et al. 2022) makes the forward and reverse process in the latent space to reduce computation with an autoencoder. It first encodes the desired image into lower-dimension: $\mathbf{z} = \mathcal{E}(x)$. Then, LDM applies diffusion



Figure 2: **Video face swapping.** We adopt precise conditions and motion module for better temporal consistency. Given source face image and target face frames, DynamicFace can generate faces with high identity consistency and motion accuracy.

in the latent space. The forward process gradually alters to Gaussian distribution from the data $\mathbf{z}_0 \sim q(\mathbf{z}_0)$, which could be concluded as $q(\mathbf{z}_t|\mathbf{z}_0) := \mathcal{N}(\mathbf{z}_t; \sqrt{\bar{\alpha}_t}\mathbf{z}_0, (1 - \bar{\alpha}_t)\mathbf{I})$, where $\bar{\alpha}_t$ is a predefined mean schedule. In addition, the reverse process is as follows:

$$p_\theta(\mathbf{z}_{t-1}|\mathbf{z}_t) := \mathcal{N}(\mathbf{z}_{t-1}; \mu_\theta(\mathbf{z}_t, t), \sigma_\theta(\mathbf{z}_t, t)\mathbf{I}), \quad (1)$$

where μ_θ and σ_θ are parameterized with neural network. A common training strategy that uses noise approximation model $\epsilon_\theta(\mathbf{z}_t, t, c)$ performs better than other forms from experiments in previous work (Nichol and Dhariwal 2021). The training objective could be represented by a simplified L2 loss between ground truth noise and predicted noise:

$$\mathcal{L}_{ldm} = \mathbb{E}_\theta \left[\|\epsilon - \epsilon_\theta(\mathbf{z}_t, t, c)\|^2 \right], \quad (2)$$

where c is the designed facial conditions, and t represents the timestep of current noisy image. At last, we use the decoder to reconstruct image from the latent output: $\hat{x} = \mathcal{D}(\mathbf{z}_0)$.

Composable Face Conditions

The goal of face swapping is to preserve the identity of source face image and spatially align well with the target face image. Given a source face image I_{src} and a sequence of target face video frames $I_{tgt}^{1:N}$, we first adopt a 3D facial reconstruction method to obtain 3D face model, F_{src} and $F_{tgt}^{1:N}$, containing different geometry parameters like identity α , pose β , expression θ and albedo γ . We intend to combine the identity of source face and motion of target face together. Figure 1 illustrates the attribute information contained in each condition and its corresponding source. The key of the composable face condition in our work is to design more accurate and independent condition for flexible and accurate controlling. To make conditions disentangled with each other, we decompose faces into four conditions: background, expression, shape, and illumination. The details are as follows:

Shape-Aware Pose Condition. We use the 3DDFA-V3 (Wang et al. 2024b) to estimate facial parameters from each frame of target face video and source face image. Then, we render the 2D normal map from 3D face for pose

and shape information. However, apart from the necessary pose and expression details, these images also encapsulate identity-specific facial geometry from the target individuals. The identity information essential for our purpose should be extracted from the source image. To address this mismatching issue, we utilize a facial shape alignment strategy which combines the identity information from the source image with the pose and expression information from the driving frames to generate the refined 2D facial conditions:

$$I_{normal}^{1:N} = \mathcal{R}_{normal}(F(\alpha_{src}, \beta_{tgt}^{1:N}, \theta_{base}^{1:N}), c_{tgt}^{1:N}), \quad (3)$$

where $I_{normal}^{1:N}$ represents the shape and pose information of 2D facial conditions, the rendered surface normal map, for frames $1 : N$. \mathcal{R}_{normal} represents the rendering operation with normal texture of the mesh. $F(\cdot)$ stands for 3D face model used to obtain face vertices with facial parameters. c represents the camera information to project the 3D mesh into image space. α_{src} is extracted from the source face image, while $\beta_{tgt}^{1:N}$, and $c_{tgt}^{1:N}$ are pose, camera parameters extracted from the target face frames and $\theta_{base}^{1:N}$ is expression parameter from template face. We intend to remove specific expression information from target face to better disentangle expression condition and pose condition.

Background-Preservation Condition. We only need to change facial area in face swapping task. So, the background information could be directly sent to the model as a conditional inpainting task. The key of designing background condition is how to generate face mask. Most face swapping methods use the original facial mask of target face image, but this will ignore the face shape differences during inference. Face Adapter (Han et al. 2024) uses dilated facial area to train an area predictor for possible inpainting mask estimation. Nevertheless, finding an optimal dilation size is crucial, as a face mask with small dilation also introduces useless shape information of the target face image, whereas a face mask with large dilation may contain face occlusion that makes model training more difficult. Here, we first use a pretrained face parser (Yu et al. 2018) to predict facial area M_{tgt} and occlusion area M_{occ} . To avoid learning facial shape of target face during training, we apply random shift on the facial area M_{tgt} to get M_{tgt}^{shift} . To address the

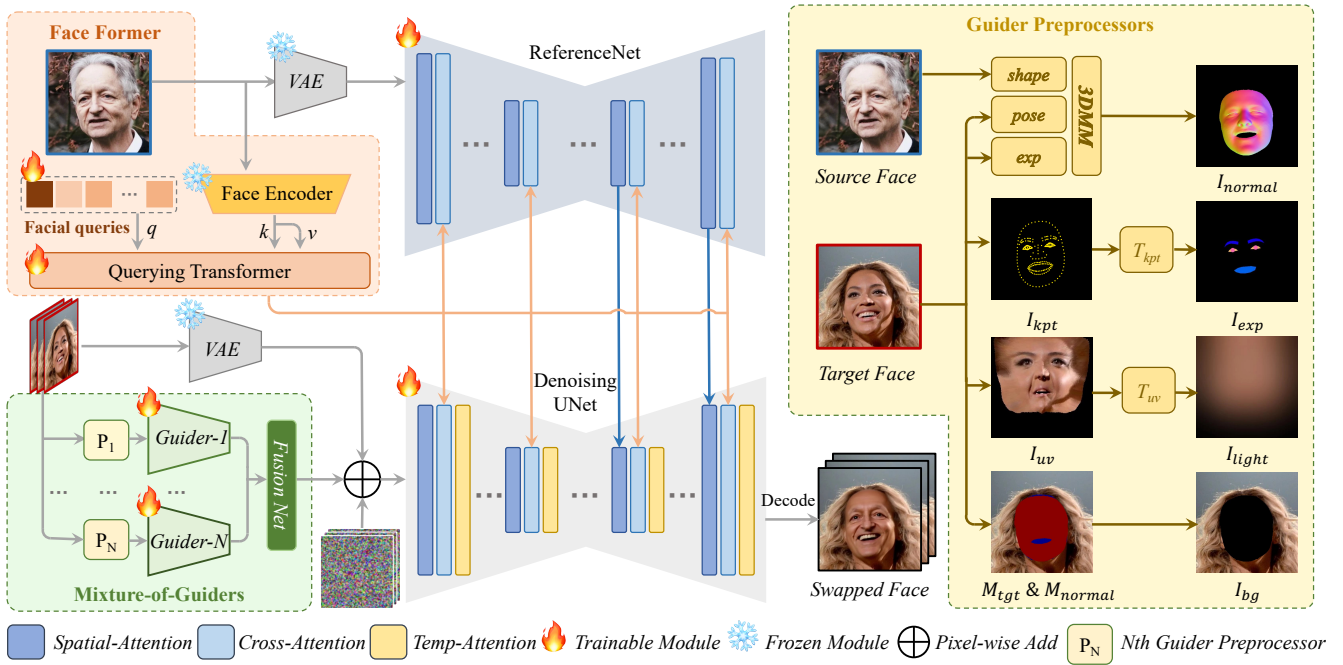


Figure 3: **The overview of the proposed method.** A VAE encoder and the ReferenceNet extract detailed features from the source face, which are then merged into the Stable Diffusion main UNet via spatial-attention. The face encoder (Deng et al. 2019) extracts high-level features from the source face image with querying transformer, which is then injected into both the ReferenceNet and the main UNet via cross-attention. Four composable face conditions are fed into four expert guiders and fused with fusion net in the latent space. Temporal-attention aims to improve the temporal consistency across frames. After iterative denoising, the output of the main UNet is decoded into the final animated video by a VAE decoder.

shape misalignment problem in the inference phase, we replace M_{tgt}^{shift} with M_{tgt}^{normal} from the area of I_{normal} , containing shape of source face and position of target face. The swapping area M_{swap} could be described as follow:

$$M_{swap} = \begin{cases} (M_{tgt} \cup M_{tgt}^{shift}) \cap (1 - M_{occ}) & \text{Train} \\ (M_{tgt} \cup M_{tgt}^{normal}) \cap (1 - M_{occ}) & \text{Test} \end{cases} \quad (4)$$

Finally, we can decompose non-identity background condition from target face image for environmental information injection:

$$I_{bg}^{1:N} = (1 - M_{swap}^{1:N}) \circ I_{tgt}^{1:N} \quad (5)$$

Expression-Related Condition. Facial expression is essential for face swapping. It’s hard to combine identity of source face image and facial expression of target face image. Some methods (Zhao et al. 2023; Han et al. 2024) use 3D face reconstruction to get 3D-aware keypoints by replacing the shape with source face image. However, the 3D-aware keypoints miss the detailed information of the eyes and its precision is suboptimal. In this work, we adopt 2D landmark of target face image, and transform points to segmentation for a simple and straight representation. We use several sets of boundary landmark to generate expression segmentation including areas of eyebrows, eyes, eyeballs and mouth:

$$I_{exp}^{1:N} = H(l_{eyebrows}^{1:N}, l_{eyes}^{1:N}, l_{eyeballs}^{1:N}, l_{mouth}^{1:N}) \quad (6)$$

where $H(\cdot)$ represents that we compute several convex hulls of given landmarks and combine these semantic areas together. We strive to remove identity information of target face image, for example, only use the area inside mouth to prevent bringing the thickness of mouth which may include identity.

Identity-Erased Illumination Condition. Environmental lighting is also a necessary condition to make generated face frames well aligned with target face frames. Few methods pay attention to illumination in face swapping task. With the 3D facial prior in previous section, we could use the UV texture map of target face frames to provide illumination information. UV texture map contains irrelevant identity of target face image, while we only need to capture lighting from it. So, we add blur on the rendered UV texture map to destroy target face identity as:

$$I_{light}^{1:N} = \text{Blur}(\mathcal{R}_{uv}(V_{3d}, Tex_{uv})), \quad (7)$$

where $I_{light}^{1:N}$ means the illumination condition with 2D representation, for frames $1 : N$. \mathcal{R}_{uv} stands for the rendering operation with UV mapping. V_{3d} represents vertices of 3D face mesh and Tex_{uv} stands for the texture color of UV mapping. More details are shown in ablation study.

Mixture-of-Guiders

Now, we have completed four composable face conditions with their unique usage by leveraging the 3D facial prior of both source face image and target face frames. All conditions are spatially mapped into image-level motion sequences. Inspired by the previous work (Zhu et al. 2024), we use Mixture-of-Guiders for lightweight guidance instead of several ControlNets. All guiders are implemented as a set of convolution and activation layers, aiming to extract local spatial information. This architecture facilitates condition adaptability while promoting parameter efficiency. We also add a self-attention module to learn the unique information from each disentangled face condition. This could capture more global information from each guidance. Even though all conditions are well designed for its distinct character and spatially aligned with generated face, there are still some mismatching which could not be solved due to limitation of 3D reconstruction and compression when passing to guiders. The conditions from some works are not disentangled from each other, which contains too much redundant information, and they directly fuse these guidance condition through summation. This would cause the network only learn useful information from some detailed condition and drop some of repeated condition for easier learning. We adopt a fusion net to better fuse these four distinct face conditions. We first concat all face conditions after each guiders and use a self-attention mechanism to learn the spatial relation among these conditions. Both guiders and fusion net apply zero convolution at the last layer to maintain the prior knowledge of original Stable Diffusion and make the whole architecture more lightweight to train with motion guidance.

Appearance-Aware Controlling

Face Former. In this work, to enhance the ability of identity injection, Face Former is proposed to enable the diffusion model to accurately preserve the identity with the face image prompt. In text-to-video tasks, textual prompts primarily ensure semantic relevance with the generated visual content, whereas image-to-video tasks demand precise consistency due to the detailed features encapsulated in images. Prior studies in image-driven generation have used the CLIP image encoder as a substitute for the text encoder in cross-attention layer, but this design struggles with accurate facial representation. Here, we use a face recognition model instead of the vision-language CLIP model (Radford et al. 2021) to extract face embedding from the face image prompt. To effectively inject the face embedding to the original diffusion model, we use a lightweight trainable querying transformer like recent work (Li et al. 2023; Han et al. 2024; He et al. 2024) to transform identity token space to semantic-level textual space. We create N_{token} learnable facial queries as input for the querying transformer. The facial queries will interact with face embedding through each self-attention layer. Thus, these tokens could be sent to the UNet for high-level identity injection in face swapping.

ReferenceNet. To maintain dense facial textures and preserve detailed identity of source face image, we adopt a ReferenceNet for detailed-level identity injection. The facial



Figure 4: **Qualitative comparisons on FF++.** Our method performs well to unseen data distribution and can also better preserve both the identity (e.g., shape and facial texture) and the motion including expression and pose.

features from Face Former is often less effective to preserve detailed information. This is partly because the face encoder processes low-resolution face images (112×112), leading to a loss of fine-grained details. Additionally, face encoder emphasizes high-level feature matching, resulting in a deficit of detailed features during the encoding phase. Inspired by methods like MasaCtrl (Cao et al. 2023) and Animate Anyone (Hu 2024), we adopt a ReferenceNet that improves identity preservation given a source face image. ReferenceNet creates a trainable copy of the base UNet of Stable Diffusion to compute condition features in each denoising step, injecting appearance features through a spatial attention mechanism. The spatial attention mechanism maintains the semantic layout of source face while preserving details such as facial texture, and other intra-personal attributes, ensuring appearance consistency. We integrate features from ReferenceNet into the base UNet by replacing the self-attention layer with a spatial-attention layer in middle and upsample stage, facilitating effective feature learning and initialization. We adopt random cutout on the source face image with irregular shape to enhance the robustness of appearance encoding.

Experiments

Implementation Details

We choose VGGFace2 (Cao et al. 2018), VFHQ (Xie et al. 2022) and a private dataset as the training set. Particularly, low-quality faces are removed to ensure high-quality training. For evaluation, we select FaceForensics++ dataset to test. The training process consists of two stages. In the initial training stage, we sample faces from same individuals to train spatial modules including face querying transformer and ReferenceNet for identity injection, guiders and main denoising UNet for motion controlling. As for the four facial conditions, we randomly dropout either expression-related condition or shape-aware pose condition for their possibly repeated representation to make our network extract information from all conditions, instead of learning from eas-

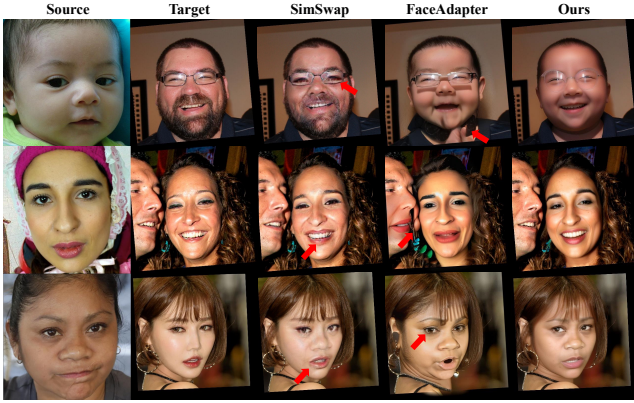


Figure 5: **Qualitative comparisons on FFHQ.** Our method can generate high-resolution faces with accurate identity and precise motion containing expression, pose and gaze. The background of our results is also more realistic.

ier one. The purpose of the first stage is to adapt the prior knowledge of Stable Diffusion into human face domain. During the second training stage, we only adjust the temporal layer to maintain the temporal consistency across frames. All the face images and frames are resized to 512×512 . We finetune the model for 260,000 steps using a batch size of 32. In the second training stage, we focus on training the temporal layer for 40,000 steps using 16-frame video sequences with a batch size of 16. We use same augmentation in both two stages for robust training. Apart from the reconstruction loss on the whole image from Equation (2), we also add two losses on the whole facial area and several facial regions (e.g., eyes, ears, mouth and nose) to help network focus on the facial appearance and expression. The learning rate is 1×10^{-5} in two stages. We fine-tuned the 3D face model (Wang et al. 2024b) for higher accuracy. The temporal attention layers are initialized with pretrained model in AnimateDiff (Guo et al. 2024). We optimize the overall framework using Adam on 4 NVIDIA H800 GPUs.

Metrics

Following common practice, we randomly sample 10 images from each video to perform face swapping and compute the image-level metrics including ID retrieval, pose error, expression error, eye motion error and mouth position error. To compute ID Retrieval, we first extract the identity feature using a different face recognition model (Wang et al. 2018) from our face encoder. For each swapped face, we compute the nearest face from all the frames in FF++ using the cosine similarity and check whether it is from the source video. The pose error is computed by the mean L2 distance of pitch, yaw, and roll between the swapped face and the target face estimated by a different pose estimator (Martyniuk et al. 2022). The expression error is the L2 distance between the expression vectors extracted by (Martyniuk et al. 2022) of the swapped face and the target face. Both eye motion error and mouth position error are evaluated by 2D keypoints to compare the position consistency between swapped

Table 1: Quantitative comparisons with state-of-the-art methods on FF++.

Methods	ID Retri. \uparrow	Pose \downarrow	Expr. \downarrow	Mouth \downarrow	Eye \downarrow
Deepfakes	91.40	3.32	5.02	7.11	0.35
FaceShifter	96.00	2.12	3.49	3.45	0.29
MegaFS	81.62	5.33	4.52	9.34	0.31
SimSwap	98.50	1.05	2.85	2.39	0.22
DiffSwap	17.21	1.67	3.05	3.56	0.24
Face Adapter	98.69	1.90	4.15	4.08	0.23
Ours	99.20	1.73	3.08	1.69	0.16

faces and target faces. We also sample 30 frames to calculate video-level metrics containing CLIP frame consistency and warping error (Lei, Xing, and Chen 2020). For CLIP frame consistency, we use CLIP (Radford et al. 2021) to obtain feature vectors of consecutive frames and then compute the cosine similarity between consecutive frames. To compute warping error, we calculate the warp differences on every two frames with an optical flow estimation network (Ilg et al. 2017) and calculate the final score using the average of all the pairs.

Quantitative Comparisons

Our method is compared with six methods including Deepfakes (DeepFakes 2019), FaceShifter (Li et al. 2020), MegaFS (Zhu et al. 2021), SimSwap (Chen et al. 2020), DiffSwap (Zhao et al. 2023) and Face Adapter (Han et al. 2024). For Deepfakes and FaceShifter, we use their released face swapping results of the sampled 10,000 images. For MegaFS, SimSwap, DiffSwap, and Face-Adapter, the face swapping results are generated with their released codes. Table 1 shows that our method achieves the best scores under most evaluation metrics, including identity retrieval, mouth position error and eye motion error. These results validate the controllable superiority of our method. Our pose error results are slightly poorer than others due to DynamicFace altering face shape, affecting the face shape-sensitive head pose estimator used. Figure 5 illustrates that DynamicFace is competitive in preserving the background, motion of target face, and identity of source face well, especially for shape. In addition, we compare the video face swapping results of DynamicFace with motion module and without motion module to show that even if fine-grained conditions are provided, motion module is still essential due to the strong diversity of diffusion model. Figure 2 shows that our method could achieve promising consistency and generate controllable facial expression across frames. DynamicFace can generate faces with higher quality rather than GAN-based methods, and achieve better controllable ability than other Diffusion-based methods.

Ablation study

In order to further explore the effect of composable face conditions and other modules in DynamicFace, we conduct a ablation study on 1) four facial conditions 2) identity injection modules 3) motion module.

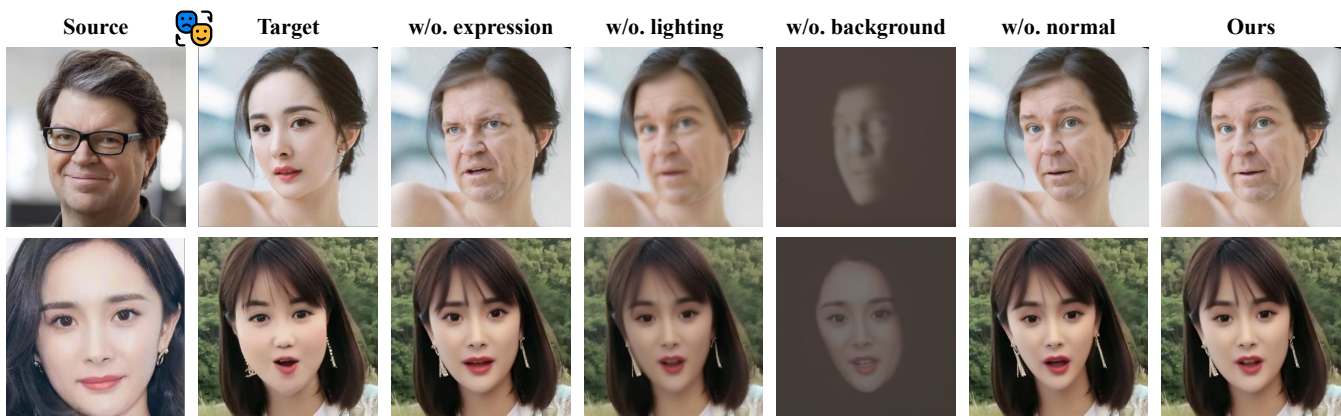


Figure 6: **Ablation study for different conditions.** We explore the contribution of different facial conditions. Results show that each face guidance has its own unique effect.

Table 2: Ablation study for the motion module of our method during video face swapping.

	Identity Preservation		Motion Fidelity				Temporal Consistency	
	ID Retri. \uparrow	ID Simi. \uparrow	Pose \downarrow	Expr. \downarrow	Mouth \downarrow	Eye \downarrow	Frame Cons. \uparrow	Warping Err. \downarrow
A) <i>w/o</i> motion module	99.21	0.594	1.81	3.12	1.98	0.17	95.78	0.091
B) <i>w/</i> motion module	98.90	0.574	1.54	2.94	2.30	0.16	99.02	0.046

Table 3: Ablation study for the impact of Face Former and ReferenceNet on identity injection. The best result is highlighted in bold.

Face Former	ReferenceNet	ID Simi. \uparrow	Pose \downarrow	Expr. \downarrow
	\checkmark	0.520	1.35	3.23
\checkmark		0.515	1.34	3.18
\checkmark	\checkmark	0.547	1.21	2.32

Significance of composable face conditions. Four facial conditions aim to provide necessary guidance for controllable generation. Figure 6 shows that each condition plays its role in face swapping and each of them is necessary. Background could provide detailed environmental information, ensuring the generation outside facial area as an inpainting paradigm. Normal map is well-aligned with the shape of source face image and maintains the pose of target face frames, which guide precise shape and pose generation. UV texture map reflects the lighting of target face, making illumination consistent during face swapping.

Reliability of motion module. Despite our efforts to design precise conditions for generating swapped faces with identical motion to the target face, the intrinsic diversity of diffusion models leads to a noticeable variation. It will generate faces with the same motion but slightly different details, making video face swapping unavailable. Here, we evaluate the importance of motion module from three aspects: identity preservation, motion fidelity, and temporal consistency. Table 2 shows that DynamicFace could achieve great temporal consistency with motion module.

Effectiveness of identity injection modules. ReferenceNet and Face Former intend to enhance the ability of identity preservation with detailed-level and high-level injection. For a fair comparison, we train three models with same settings to explore the importance of identity modules. Experiments in Table 3 indicate that both ReferenceNet and Face Former improve identity extraction. In detail, ReferenceNet could extract detailed textures from the whole reference image and select useful facial features to inject in our main denoising UNet. Face Former provides high-level identity features with the knowledge of face recognition model.

Conclusion

We present a novel method named DynamicFace which leveraged the powerful pretrained diffusion model with delicately disentangled facial conditions, achieving promising face swapping results in both image and video domains. Experiments show that the designed facial conditions could give precise and unique evidence on required information (e.g., shape, expression, pose, lighting, and background). Several efforts have been taken to adapt the diffusion model to face swapping, including Face Former, ReferenceNet, Mixture-of-Guiders and motion module. Extensive experiments demonstrate that our framework can achieve superior results compared to previous methods, with better controllability and scalability. With above fine-grained facial conditions and temporal layer, our method can achieve consistent face swapping in video domain. We hope our attempt can inspire future work to further explore the formulation and implementation of face-swapping to achieve better results.

References

- Cao, M.; Wang, X.; Qi, Z.; Shan, Y.; Qie, X.; and Zheng, Y. 2023. MasaCtrl: Tuning-Free Mutual Self-Attention Control for Consistent Image Synthesis and Editing. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 22560–22570.
- Cao, Q.; Shen, L.; Xie, W.; Parkhi, O. M.; and Zisserman, A. 2018. Vggface2: A dataset for recognising faces across pose and age. In *13th IEEE international conference on automatic face & gesture recognition*, 67–74. IEEE.
- Chen, R.; Chen, X.; Ni, B.; and Ge, Y. 2020. SimSwap: An Efficient Framework For High Fidelity Face Swapping. In *Proceedings of the 28th ACM International Conference on Multimedia*, 2003–2011.
- DeepFakes. 2019. DeepFakes. <https://github.com/deepfakes/faceswap>. Online; Accessed March 1, 2021.
- Deng, J.; Guo, J.; Xue, N.; and Zafeiriou, S. 2019. Arcface: Additive angular margin loss for deep face recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 4690–4699.
- Guo, Y.; Yang, C.; Rao, A.; Liang, Z.; Wang, Y.; Qiao, Y.; Agrawala, M.; Lin, D.; and Dai, B. 2024. AnimateDiff: Animate Your Personalized Text-to-Image Diffusion Models without Specific Tuning. In *The Twelfth International Conference on Learning Representations*.
- Han, Y.; Zhu, J.; He, K.; Chen, X.; Ge, Y.; Li, W.; Li, X.; Zhang, J.; Wang, C.; and Liu, Y. 2024. Face Adapter for Pre-Trained Diffusion Models with Fine-Grained ID and Attribute Control. *arXiv preprint arXiv:2405.12970*.
- He, X.; Liu, Q.; Qian, S.; Wang, X.; Hu, T.; Cao, K.; Yan, K.; Zhou, M.; and Zhang, J. 2024. ID-Animator: Zero-Shot Identity-Preserving Human Video Generation. *arXiv preprint arXiv:2404.15275*.
- Ho, J.; Jain, A.; and Abbeel, P. 2020. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33: 6840–6851.
- Hu, L. 2024. Animate anyone: Consistent and controllable image-to-video synthesis for character animation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 8153–8163.
- Ilg, E.; Mayer, N.; Saikia, T.; Keuper, M.; Dosovitskiy, A.; and Brox, T. 2017. FlowNet 2.0: Evolution of optical flow estimation with deep networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2462–2470.
- Kim, K.; Kim, Y.; Cho, S.; Seo, J.; Nam, J.; Lee, K.; Kim, S.; and Lee, K. 2022. DiffFace: Diffusion-based face swapping with facial guidance. *arXiv preprint arXiv:2212.13344*.
- Lei, C.; Xing, Y.; and Chen, Q. 2020. Blind video temporal consistency via deep video prior. *Advances in Neural Information Processing Systems*, 33: 1083–1093.
- Li, J.; Li, D.; Savarese, S.; and Hoi, S. 2023. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, 19730–19742. PMLR.
- Li, L.; Bao, J.; Yang, H.; Chen, D.; and Wen, F. 2020. Advancing high fidelity identity swapping for forgery detection. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 5074–5083.
- Martyniuk, T.; Kupyn, O.; Kurlyak, Y.; Krashenyi, I.; Matas, J.; and Sharmanska, V. 2022. DAD-3DHeads: A Large-scale Dense, Accurate and Diverse Dataset for 3D Head Alignment from a Single Image. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*.
- Nichol, A. Q.; and Dhariwal, P. 2021. Improved denoising diffusion probabilistic models. In *International conference on machine learning*, 8162–8171. PMLR.
- Nirkin, Y.; Keller, Y.; and Hassner, T. 2019. FSGAN: Subject Agnostic Face Swapping and Reenactment. In *Proceedings of the IEEE International Conference on Computer Vision*, 7184–7193.
- Radford, A.; Kim, J. W.; Hallacy, C.; Ramesh, A.; Goh, G.; Agarwal, S.; Sastry, G.; Askell, A.; Mishkin, P.; Clark, J.; et al. 2021. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, 8748–8763. PMLR.
- Rombach, R.; Blattmann, A.; Lorenz, D.; Esser, P.; and Ommer, B. 2022. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*.
- Shen, F.; Yan, S.; and Zeng, G. 2018. Neural style transfer via meta networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 8061–8069.
- Song, Y.; Sohl-Dickstein, J.; Kingma, D. P.; Kumar, A.; Ermon, S.; and Poole, B. 2021. Score-Based Generative Modeling through Stochastic Differential Equations. In *International Conference on Learning Representations*.
- Wang, H.; Wang, Y.; Zhou, Z.; Ji, X.; Gong, D.; Zhou, J.; Li, Z.; and Liu, W. 2018. Cosface: Large margin cosine loss for deep face recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 5265–5274.
- Wang, Q.; Bai, X.; Wang, H.; Qin, Z.; and Chen, A. 2024a. InstantID: Zero-shot Identity-Preserving Generation in Seconds. *arXiv preprint arXiv:2401.07519*.
- Wang, Y.; Chen, X.; Zhu, J.; Chu, W.; Tai, Y.; Wang, C.; Li, J.; Wu, Y.; Huang, F.; and Ji, R. 2021. HifiFace: 3D Shape and Semantic Prior Guided High Fidelity Face Swapping. *arXiv preprint arXiv:2106.09965*.
- Wang, Z.; Zhu, X.; Zhang, T.; Wang, B.; and Lei, Z. 2024b. 3D Face Reconstruction with the Geometric Guidance of Facial Part Segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 1672–1682.
- Xie, L.; Wang, X.; Zhang, H.; Dong, C.; and Shan, Y. 2022. Vfhq: A high-quality dataset and benchmark for video face super-resolution. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 657–666.
- Xu, Z.; Yu, X.; Hong, Z.; Zhu, Z.; Han, J.; Liu, J.; Ding, E.; and Bai, X. 2021. FaceController: Controllable Attribute Editing for Face in the Wild. In *Proceedings of*

the AAAI Conference on Artificial Intelligence, volume 35, 3083–3091.

Ye, H.; Zhang, J.; Liu, S.; Han, X.; and Yang, W. 2023. Ip-adapter: Text compatible image prompt adapter for text-to-image diffusion models. *arXiv preprint arXiv:2308.06721*.

Yu, C.; Wang, J.; Peng, C.; Gao, C.; Yu, G.; and Sang, N. 2018. Bisenet: Bilateral segmentation network for real-time semantic segmentation. In *Proceedings of the European conference on computer vision*, 325–341.

Zhao, W.; Rao, Y.; Shi, W.; Liu, Z.; Zhou, J.; and Lu, J. 2023. Diffswap: High-fidelity and controllable face swapping via 3d-aware masked diffusion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 8568–8577.

Zhu, S.; Chen, J. L.; Dai, Z.; Xu, Y.; Cao, X.; Yao, Y.; Zhu, H.; and Zhu, S. 2024. Champ: Controllable and Consistent Human Image Animation with 3D Parametric Guidance. In *European Conference on Computer Vision (ECCV)*.

Zhu, Y.; Li, Q.; Wang, J.; Xu, C.-Z.; and Sun, Z. 2021. One shot face swapping on megapixels. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 4834–4844.