

# Towards Robust and Realistic Human Pose Estimation via WiFi Signals

Yang Chen<sup>1</sup>, Jingcai Guo<sup>1\*</sup>, Song Guo<sup>2</sup>, Jingren Zhou<sup>3</sup>, and Dacheng Tao<sup>4</sup>

<sup>1</sup>The Hong Kong Polytechnic University <sup>2</sup>Hong Kong University of Science and Technology

<sup>3</sup>Alibaba Group <sup>4</sup>Nanyang Technological University

jc-jingcai.guo@polyu.edu.hk

## Abstract

*Robust WiFi-based human pose estimation is a challenging task that bridges discrete and subtle WiFi signals to human skeletons. This paper revisits this problem and reveals two critical yet overlooked issues: 1) cross-domain gap, i.e., due to significant variations between source-target domain pose distributions; and 2) structural fidelity gap, i.e., predicted skeletal poses manifest distorted topology, usually with misplaced joints and disproportionate bone lengths. This paper fills these gaps by reformulating the task into a novel two-phase framework dubbed **DT-Pose**: **D**omain-consistent representation learning and **T**opology-constrained **P**ose decoding. Concretely, we first propose a temporal-consistent contrastive learning strategy with uniformity regularization, coupled with self-supervised masking-reconstruction operations, to enable robust learning of domain-consistent and motion-discriminative WiFi-specific representations. Beyond this, we introduce a simple yet effective pose decoder with task prompts, which integrates Graph Convolution Network (GCN) and Transformer layers to constrain the topology structure of the generated skeleton by exploring the adjacent-overarching relationships among human joints. Extensive experiments conducted on various benchmark datasets highlight the superior performance of our method in tackling these fundamental challenges in both 2D/3D human pose estimation tasks<sup>1</sup>.*

## 1. Introduction

Image-based human pose estimation, a highly active and hot topic, has recently achieved remarkable success in both 2D [3, 91] and 3D scenarios [52, 19], spanning single-person [96] and multi-person settings [73, 55]. These advancements have significantly propelled broad applications in virtual reality [98], autonomous driving [99], and the

healthcare community [39]. However, those visual-based methods face inherent limitations due to realistic challenges (e.g., lighting intensity, view variations, and occlusions). Furthermore, rising concerns regarding privacy have driven the growing research attention toward non-visual modalities (e.g., WiFi [93, 14], RF [17], and wearable sensor [7] signals), which offer significant advantages in privacy protection and resilience to occlusions. Among these, the WiFi modality holds promise due to its widespread deployment and easy accessibility in the IoT era.

Tracing the development of the WiFi-based human pose estimation field, it has gradually evolved from single-person 2D to more complex multi-person 3D pose estimation [79, 80, 48, 72, 107, 94, 71, 105, 93, 14]. Predominately, these methods rely on complex regression networks designed to map the WiFi signals to corresponding 2D/3D pose coordinates under the supervised learning paradigm. However, these approaches typically hypothesize an identical distribution of training and testing data, inconsistent with the variability encountered in real-world scenarios. To address this limitation, the recently introduced WiFi dataset (MM-Fi [95]) incorporates cross-domain settings, presenting new challenges for evaluating the generalizability of WiFi-based human pose estimation methods.

Upon analyzing WiFi signals across diverse domains, we observed a notable difference in pose coordinates distribution between the source domain and target domain in the cross-environment setting, contrasting with the identical distribution hypothesis before (Fig. 1 (a)). Prior methods learned the task-specific representations in this setting that overfitted to pose distributions within the source domain while failing to generalize effectively to the target domain. This limitation indicates the inadequacy of the supervised learning paradigm in capturing the intrinsic motion properties of WiFi signals, even leading to the learning of spurious, motion-unrelated, and noise features that bias results toward the source domain. While the recently proposed AdaPose [106] model similarly notes this issue, its reliance on pre-acquired data from the target domain as a prerequisite for domain adaption renders it imprac-

\*Jingcai Guo is the corresponding author.

<sup>1</sup>Code is available at: <https://github.com/cseeyangchen/DT-Pose>.

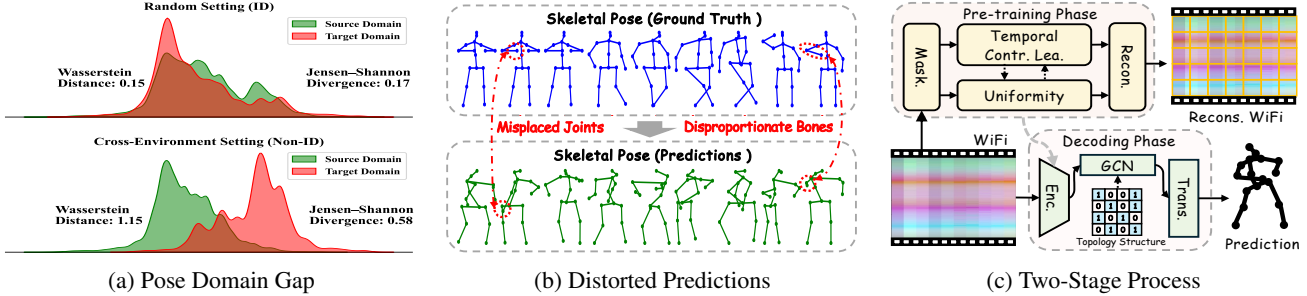


Figure 1: (a) shows the pose coordinates distribution between the source and target domains. (b) represents the predictions of the MetaFi++ method [105] and corresponding ground truth. (c) denotes the overview framework of our method.

tical and suboptimal. Thus, we aim to explore domain-consistent and motion-discriminative WiFi representations independent of pose coordinate space, thereby enhancing cross-domain transferability.

In addition to domain generalization challenges, we also observe that existing methods frequently predict distorted poses with unrealistic topologies (e.g., misplaced joints and disproportionate bone lengths), as shown in Fig. 1 (b). These deficiencies stem from the undesirable modeling of joint relationships during the pose decoding phase, which neglects the intricate spatial properties of human joints. Moreover, mapping joint features to pose coordinates without structural constraints proves inferior. To address these issues, we propose incorporating explicit skeletal structure constraints to better model the non-trivial spatial relationships among joints.

Building on the above observations, we propose a novel framework (*DP-Pose*), which reformulates WiFi-based human pose estimation as a two-phase process: *Domain-consistent* WiFi representation learning and *Topology-constrained Pose* decoding, as depicted in Fig. 1 (c). In the first phase, we initially transform the WiFi signals into image-like data and adopt the self-supervised masking-reconstruction operation in MAE [36] as the main line to learn domain-consistent WiFi-specific representations. Considering the temporal property of WiFi signals, we introduce contrastive learning by treating adjacent WiFi frames within an action sequence as positive pairs and other batch WiFi samples as negative pairs, yielding more motion-discriminative representations. Additionally, uniformity regularization is applied to prevent dimensional collapse caused by the sparsity of WiFi signals. In the second phase, the pre-trained encoder is frozen to extract domain-consistent WiFi representations, followed by the introduction of task prompt and Graph Convolution Network (GCN) layers that leverage pre-defined human topology constraints to model local correlations among adjacent joints. Concurrently, we integrate the Transformer layers to establish more holistic dependencies among overarching joints. By exploring these adjacent-overarching spatial relationships of human joints, our framework ensures the generation of realis-

tic poses that adhere to human skeletal topology.

The main contributions can be summarized as follows:

- We develop a novel self-supervised method to learn domain-consistent and motion-discriminative WiFi representations using temporal contrastive masking-reconstruction strategy with uniformity regularization, effectively mitigating cross-domain gap challenges.
- We propose a topology-constrained pose decoding mechanism that combines task prompt, Graph Convolution Network (GCN), and Transformer layers to generate realistic poses by exploring the intrinsic adjacent-overarching spatial characteristics of human joints.
- We evaluate the superior performance of our method through extensive experiments on the MM-Fi, WiPose, and Person-in-WiFi-3D datasets, demonstrating its effectiveness in mitigating cross-domain and structural fidelity gaps for WiFi-based pose estimation tasks.

## 2. Related Work

### 2.1. Masked Pre-training

Masked pretraining techniques have been widely studied across various data modalities for self-supervised representation learning, leveraging the reconstruction of masked inputs as a core strategy [16, 66, 2, 36, 78, 81, 40, 92, 12]. Among these modalities, the BERT [16] and GPT [66] are two seminal language models that pioneered the masked modeling paradigm by predicting masked word tokens based on context information. Inspired by them, the computer vision community introduced masked pertaining frameworks for images, giving rise to representative methods like BEiT [2] and MAE [36], while the video community [78, 81] subsequently demonstrated that the masked mechanism extends effectively into the temporal dimension. Beyond these, other data modalities, including audio (Audio-MAE [40]), skeleton (SkeletonMAE [92]), and time series (TimeMAE [12]), have similarly validated the feasibility and efficacy of masked modeling for task-agnostic

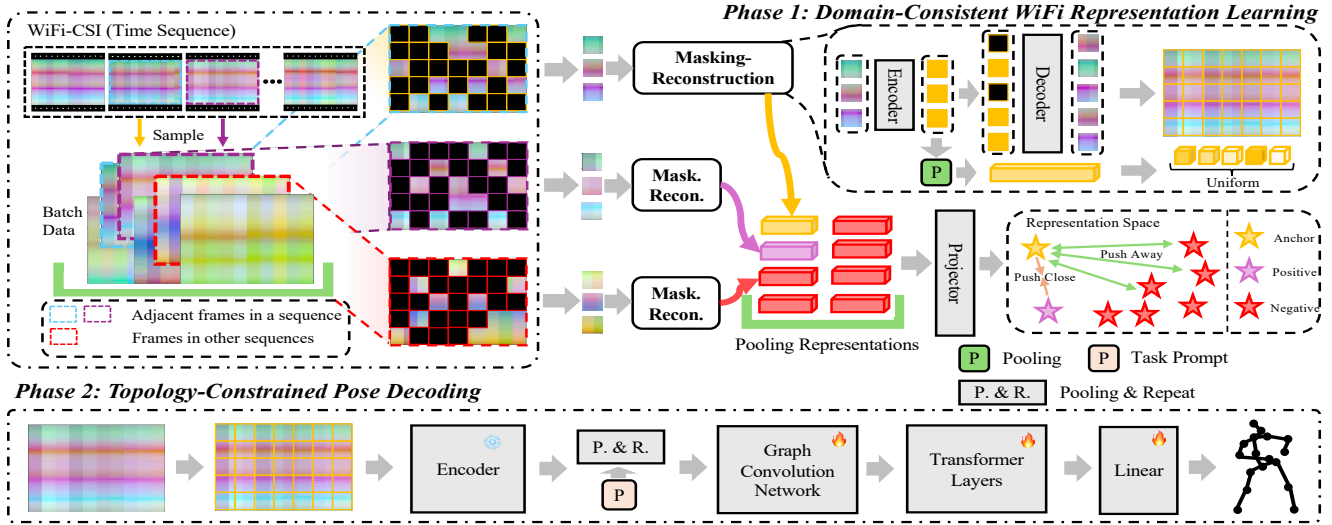


Figure 2: The pipeline of our method, including the pre-training and pose decoding phases.

representation learning in a self-supervised manner. **[Summary]:** To the best knowledge of us, this work is the first to employ a self-supervised masked pre-training paradigm in the WiFi modality. Moreover, we propose the temporal-consistent contrastive strategy with uniformity regularization to obtain motion-discriminative representations.

## 2.2. Skeleton-based Action Recognition

Learning skeleton action representation can be conceptualized as the inverse process of human pose decoding. Typically, skeleton-based action recognition methods can be categorized into CNN-based, GCN-based, and Transformer-based [82, 9, 11, 74, 13, 8]. CNN-based methods transform skeleton sequences into image-like formats to extract discriminative representations [82, 56]. In contrast, GCN-based methods model human joints and bones as graph nodes and edges, explicitly incorporating learnable adjacent matrix to explore spatial-temporal features, thus improving performance by a large margin [11, 74, 13, 10]. More recently, Transformer-based methods leverage self-attention mechanisms to capture long-range dependencies among joints [63, 18, 38]. **[Summary]:** Inspired by the superior performance of using GCN and Transformers to learn representations from the skeleton forwardly, we combine their advantages to decode skeletal poses from representations reversely, yielding more realistic and faithful pose prediction.

## 2.3. WiFi-Based Pose Estimation

WiFi-based human pose estimation is an emerging research topic that has gradually flourished in recent years, encompassing a range of tasks from single-person 2D [79, 14] and 3D [48, 72, 71, 105] to multi-person 2D [80] and 3D scenarios [93]. Early work in this field, such as WiSPPN [79, 80], pioneers 2D pose estimation by em-

ploying fundamental CNN models [37]. Subsequently, WiPose [48] extends to 3D poses through a combination of CNN and RNN layers, thereby leveraging temporal dynamics to yield smoother skeletal predictions. Differently, both GoPose [72] and Winect [71] methods leverage the two-dimensional angle-of-arrival features of WiFi signals to estimate 3D poses. More recent methods, such as MetaFi++ [105] and Person-in-WiFi-3D [93], employ the Transformer layers to learn WiFi representations for single-/multi-person 3D pose estimation. Concurrently, HPE-Li [14] has designed dynamic kernels and integrated them into CNN layers to predict poses more efficiently. **[Summary]:** In this work, we are the first to address the cross-domain gap challenge by the self-supervised contrastive masking-reconstruction paradigm. Simultaneously, we capture adjacent-overarching spatial correlations of joints to produce structural fidelity poses.

## 3. Method

### 3.1. Preliminary

Typically, WiFi signals are captured using multiple transmitters and receivers, with each signal comprising multiple subcarriers operating in orthogonal frequency bands to facilitate inter-device communication. These subcarriers describe the signal propagation process, known technically as Channel State Information (CSI). As shown in Fig. 3 (a), the CSI undergoes various distortions attributed to multipath effects and physical transformations, e.g., reflections, diffraction, and scattering [93, 105]. Leveraging these properties, we can record time-continuous WiFi signals that are dynamically influenced by human activities, i.e., action movements, thereby enabling the estimation of corresponding human poses. More specifically, one WiFi sample can be represented as  $\mathbf{X} \in \mathbb{R}^{E \times R \times A \times S \times T}$ , where

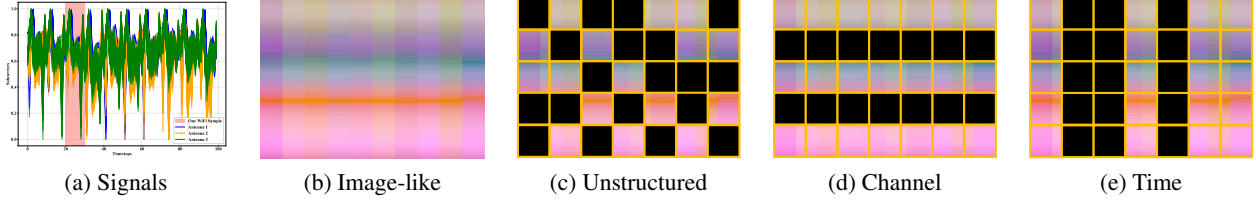


Figure 3: Original WiFi CSI signals and different masking strategies on the MM-Fi dataset.

$E, R, A, S$  denote the numbers of transmitters, receivers, antennas, and subcarriers, respectively. Here,  $T = \frac{f_{\text{wifi}}}{f_{\text{video}}}$  represents the temporal resolution, equal to the ratio of the WiFi sampling frequency to that of the corresponding video action sequence. Notably, increasing the number of subcarriers and antennas enhances the resolution of the WiFi signals, capturing more subtle movements and finer variations. We define the ground truth of 3D pose coordinates for each frame as  $\mathbf{Y} \in \mathbb{R}^{M \times J \times C}$ , where  $M$  represents the number of humans,  $J$  indicates the number of joints, and  $C$  specifies the spatial dimensions (coordinates). Hence, the entire dataset can be formalized as  $\mathcal{D} = \{\mathbf{X}_i \in \mathbb{R}^{E \times R \times A \times S \times T}, \mathbf{Y}_i \in \mathbb{R}^{M \times J \times C}\}_{i=1}^N$ , where  $N$  is the total number of samples.

### 3.2. Domain-Consistent Representation Learning

**Masking-Reconstruction Operation.** To more closely align the WiFi modality with the image-based framework employed in MAE [36], we first reshape each WiFi sample into an image-like form  $\hat{\mathbf{X}}_i \in \mathbb{R}^{A \times ERS \times T}$ , as illustrated in Fig. 3 (b). Concretely, we treat the antenna dimension  $A$  as the image channels, the concatenated subcarriers from all devices ( $ERS$ ) to image height, and the temporal resolution  $T$  as image width. Subsequently, to investigate the best suitable masking strategy tailored to WiFi signals, we consider three distinct approaches at the pre-training stage, including unstructured (i.e., random masking with grid shape), channel-structured (i.e., random masking subcarriers along the time-frequency axis), time-structured (i.e., random masking timesteps along the subcarrier axis), as shown in Fig. 3 (c) - (e). Following MAE [36], we divide  $\hat{\mathbf{X}}_i$  into non-overlapped regular grid patches and employ convolution layers to embed each patch, obtaining  $\tilde{\mathbf{X}}_i \in \mathbb{R}^{n \times d}$ , where  $n$  is the patch numbers and  $d$  is the embedding dimension. We then incorporate fixed sinusoidal positional embeddings into these embedded patches and apply random masking with a high ratio (80% in our experiments) to enforce robust representation learning. The encoder, comprising 4 stacked Transformer layers, is tasked with learning domain-consistent WiFi representations, while 2 Transformer layers in the decoder strive to reconstruct the original WiFi  $\hat{\mathbf{X}}_i$ , ultimately producing a reconstruction  $\mathbf{X}'_i$ . The entire masking-reconstruction procedure is optimized by minimizing the mean squared error (MSE) between the

reconstruction and the original input as follows:

$$\mathcal{L}_{\text{Mask}} = \|\mathbf{X}'_i - \hat{\mathbf{X}}_i\|_2^2. \quad (1)$$

**Temporal-Consistent Contrastive Learning.** Continuous WiFi samples captured over the duration of an action sequence can reflect the temporal variation of the motion. However, masking-reconstruction operation for individual WiFi samples would only extract modality-specific representations, lacking the essential motion patterns, as shown in Fig. 5 (a). Motivated by this, we treat adjacent WiFi frames within the same action sequence as a positive pair due to motion consistency within them. Notice that the WiFi samples in a batch include one-pair adjacent WiFi frames ( $\hat{\mathbf{X}}_t, \hat{\mathbf{X}}_{t+1}$ ) from the same sequence and other non-isomorphic WiFi frames  $\{\hat{\mathbf{X}}_i\}_{i=1}^{B-2}$  from all action sequences, where  $B$  is the batch size. Thus, other combinations of WiFi samples in a batch should be negative pairs. Following the masking-reconstruction stage, we apply a pooling operation to the visible embedding patches of each sample from the encoder to derive a representation  $\mathbf{e}_i \in \mathbb{R}^d$ . Next, we project them to obtain positive pair representations ( $\mathbf{s}_t, \mathbf{s}_{t+1}$ ) and other sample representations  $\{\mathbf{v}_i\}_{i=1}^{B-2}$ . Then, we pull the positive pair closer and push the negative pairs away in a batch based on InfoNCE loss as follows:

$$\mathcal{L}_{\text{CL}} = -\log \frac{\phi(\rho(\mathbf{s}_t, \mathbf{s}_{t+1})/\tau)}{\phi(\rho(\mathbf{s}_t, \mathbf{s}_{t+1})/\tau) + \sum_{i=1}^{B-2} \phi(\rho(\mathbf{s}_t, \mathbf{v}_i)/\tau)}, \quad (2)$$

where  $\rho(\cdot)$  denotes the cosine similarity,  $\phi(\cdot)$  is the  $\exp(\cdot)$  function, and  $\tau$  is the temperature parameter.

**Objective with Uniformity Regularization.** The masking-reconstruction process encourages the extraction of WiFi-specific representations that are largely domain-agnostic, while the temporal-consistent contrastive learning objective ensures that these representations capture discriminative motion patterns. However, due to the inherent sparsity and homogeneity of WiFi signals, the learned representations may suffer from dimensional collapse, as depicted in Fig. 6. Here, we introduce explicit uniformity regularization to enhance representation diversity as follows:

$$\mathcal{L}_{\text{unif}} = \frac{1}{B} \sum_{j=1, j \neq i}^B (\mathbf{e}_i^\top \mathbf{e}_j)^2. \quad (3)$$

Overall, the pre-training optimization objective for each

WiFi sample can be formulated as follows:

$$\mathcal{L} = \mathcal{L}_{\text{Mask}} + \lambda_{\text{CL}} \cdot \mathcal{L}_{\text{CL}} + \lambda_{\text{unif}} \cdot \mathcal{L}_{\text{unif}}, \quad (4)$$

where  $\mathcal{L}_{\text{CL}}$  and  $\lambda_{\text{unif}}$  are trade-off hyperparameters.

### 3.3. Topology-Constrained Pose Estimation

**Adjacent Joint Local Modeling.** After the pre-training phase, we freeze the WiFi encoder to extract WiFi representations  $\mathbf{F} \in \mathbb{R}^{n \times d}$ . To align these representations with the structure of human joints, we first pool all patches into one vector and repeat them into the number of human joints. Next, we add the learnable task prompt on them to obtain  $\tilde{\mathbf{F}} \in \mathbb{R}^{J \times d}$  for structural pose shape learning. Furthermore, we represent the human skeleton as a graph, where each joint is a vertex and each bone is an edge. This graph structure allows us to define the adjacency matrix  $\mathbf{A} \in \{0, 1\}^{J \times J}$ , where  $\mathbf{A}_{i,j} = 1$  indicates that the  $i$ -th joint and  $j$ -th joint are physical connected and  $\mathbf{A}_{i,j} = 0$  otherwise. By employing Graph Convolution Networks (GCN), we leverage adjacency matrix  $\mathbf{A}$  to aggregate information from spatially connected joints. Formally, the updated representation  $\tilde{\mathbf{F}}$  is computed as follows:

$$\tilde{\mathbf{F}} = \sigma(\mathbf{D}^{-\frac{1}{2}} \mathbf{A} \mathbf{D}^{-\frac{1}{2}} \mathbf{X} \mathbf{W}), \quad (5)$$

where  $\mathbf{D} \in \mathbb{R}^{J \times J}$  is the degree matrix for normalization,  $\mathbf{W}$  is a learnable parameter,  $\sigma$  is the activate function.

**Overarching Joint Holistic Modeling.** Beyond local relationships, it is essential to capture holistic, long-range correlations among overarching joints. To this end, we treat the joints as an ordered sequence and apply Transformer encoder layers to enhance their non-physical interdependencies, such as the potential relationships between head and hand joints in ‘drinking water’ pose. We calculate the attention values among all joints as follows:

$$\mathbf{Q} = \tilde{\mathbf{F}} \mathbf{W}_Q, \mathbf{K} = \tilde{\mathbf{F}} \mathbf{W}_K, \mathbf{V} = \tilde{\mathbf{F}} \mathbf{W}_V, \quad (6)$$

$$\mathbf{Z}_{\text{attn}} = \text{LN}(\tilde{\mathbf{F}} + \text{softmax}(\frac{\mathbf{Q}\mathbf{K}^T}{\sqrt{\tilde{d}}})\mathbf{V}), \quad (7)$$

where  $\mathbf{W}_Q, \mathbf{W}_K, \mathbf{W}_V$  are learnable parameters,  $\tilde{d}$  is the dimension of  $\mathbf{K}$ , and  $\text{LN}(\cdot)$  denotes the layer normalization. Then, we feed them into the feed-forward network  $\text{FFN}(\cdot)$  and regress them into pose coordinates by MLPs  $\Psi(\cdot)$ :

$$\mathbf{Z} = \text{LN}(\text{FFN}(\mathbf{Z}_{\text{attn}}) + \mathbf{Z}_{\text{attn}}), \hat{\mathbf{Y}}_i = \Psi(\mathbf{Z}), \quad (8)$$

where  $\hat{\mathbf{Y}}_i$  is the predicted pose. By jointly capturing local dependencies among adjacent joints through GCNs and holistic relationships among overarching joints via Transformers, our method ensures that the predicted pose is structurally coherent and realistic.

**Objective.** For training the pose decoder, we adopt the MSE loss for each sample to regress the pose as follows:

$$\mathcal{L} = \|\hat{\mathbf{Y}}_i - \mathbf{Y}_i\|_2^2. \quad (9)$$

## 4. Experiments

### 4.1. Dataset

**MM-Fi** [95]. It comprises 27 distinct action categories performed by 40 volunteers across four different rooms, resulting in approximately 320.76k single-person synchronized frames. One transmitter with one antenna and one receiver with three antennas capture all WiFi signals. Each skeletal pose consists of 17 joints encoded with 3D coordinates. To rigorously assess robustness, the dataset introduces three protocols and three settings for data splitting. Protocol 3 (P3) encompasses all 27 action categories, while Protocol 1 (P1) and Protocol 2 (P2) focus on 14 daily activities and 13 rehabilitation exercises, respectively. Setting 1 (S1 Random Split) randomly divides all data into training and testing sets with a 3:1 ratio. Setting 2 (S2 Cross-Subject Split) employs 32 subjects for training and the remaining 8 subjects for testing. Setting 3 (S3 Cross-Environment Split) selects 3 rooms randomly for training and others for testing.

**WiPose** [107]. It contains 12 action categories performed by 12 volunteers. WiFi signals are captured by one transmitter with three antennas and one receiver with three antennas. Each pose annotation comprises 18 joints in 2D coordinates. The official split provides 132847 WiFi samples for training and 33753 for testing.

**Person-in-WiFi-3D** [93]. It includes 8 daily actions performed by 7 volunteers at three distinct locations. A single transmitter with one antenna and three receivers with three antennas capture all WiFi signals. Each skeleton pose features 14 joints with 3D coordinates. The dataset has been officially partitioned into training and test sets, with 89946 WiFi samples allocated for training and 7824 for testing.

### 4.2. Comparison with the State-of-the-Art Methods

**3D Pose Estimation.** We evaluate our proposed method comprehensively for 3D pose estimation, comparing its performance against a range of state-of-the-art methods, as shown in Table 1 and Table 3. Notably, our framework outperforms all existing methods across three metrics in each protocol and setting, demonstrating robust generalization capability. In particular, the superior PA-MPJPE results attest to the plausibility of our predicted poses, underscoring that the generated skeletal structures are topologically coherent. Moreover, the remarkable gains observed under the cross-domain settings confirm that our pre-training phase successfully captures general representations, while the subsequent pose decoder effectively establishes the correlations between representations and pose spaces.

**2D Pose Estimation.** To further reveal the versatility of our self-supervised method, we evaluate its performance on 2D pose estimation tasks, as shown in Table 2 and Table 10 (in Appendix). Compared to existing methods, our framework achieves the best results, showing the effectiveness of our

Table 1: State-of-the-art comparisons on MM-Fi dataset regarding 3D pose estimation. The best and the second-best results are marked in **Red** and **Blue**, respectively.

Method	Protocol 1				Protocol 2				Protocol 3			
	PCK@20 $\uparrow$	PCK@50 $\uparrow$	MPJPE $\downarrow$	PA-MPJPE $\downarrow$	PCK@20 $\uparrow$	PCK@50 $\uparrow$	MPJPE $\downarrow$	PA-MPJPE $\downarrow$	PCK@20 $\uparrow$	PCK@50 $\uparrow$	MPJPE $\downarrow$	PA-MPJPE $\downarrow$
<i>Setting 1 (Random Split):</i>												
MetaFi++ [105]	49.1	86.5	186.9	120.7	32.2	81.7	213.5	121.4	43.9	85.0	197.1	121.2
HPE-Li [14]	<b>56.2</b>	<b>87.6</b>	<b>173.4</b>	<b>104.5</b>	<b>36.9</b>	<b>81.9</b>	<b>206.1</b>	<b>102.7</b>	<b>49.6</b>	<b>85.6</b>	<b>184.3</b>	<b>106.4</b>
<b>DT-Pose (Ours)</b>	<b>59.4</b>	<b>88.9</b>	<b>165.3</b>	<b>101.0</b>	<b>41.4</b>	<b>83.5</b>	<b>195.6</b>	<b>101.2</b>	<b>51.7</b>	<b>86.5</b>	<b>178.5</b>	<b>104.5</b>
<i>Setting 2 (Cross-Subject):</i>												
MetaFi++ [105]	36.4	<b>85.5</b>	<b>222.3</b>	125.4	24.0	77.5	247.0	122.7	32.3	<b>81.9</b>	231.1	124.0
HPE-Li [14]	<b>38.2</b>	82.8	228.6	<b>106.8</b>	<b>26.9</b>	<b>78.0</b>	<b>242.6</b>	<b>101.9</b>	<b>36.5</b>	80.8	<b>228.6</b>	<b>107.7</b>
<b>DT-Pose (Ours)</b>	<b>41.9</b>	<b>86.7</b>	<b>213.0</b>	<b>105.6</b>	<b>28.5</b>	<b>78.5</b>	<b>238.3</b>	<b>101.1</b>	<b>37.7</b>	<b>82.6</b>	<b>221.6</b>	<b>106.2</b>
<i>Setting 3 (Cross-Environment):</i>												
MetaFi++ [105]	<b>9.3</b>	<b>55.1</b>	<b>367.8</b>	121.0	<b>5.3</b>	<b>45.9</b>	<b>360.2</b>	117.2	<b>6.4</b>	<b>49.1</b>	<b>369.5</b>	116.0
HPE-Li [14]	4.3	47.8	381.1	<b>110.3</b>	4.2	40.3	378.2	<b>104.0</b>	3.4	41.9	388.4	<b>107.9</b>
<b>DT-Pose (Ours)</b>	<b>10.7</b>	<b>58.8</b>	<b>332.7</b>	<b>105.1</b>	<b>4.4</b>	<b>49.7</b>	<b>338.3</b>	<b>102.0</b>	<b>9.8</b>	<b>61.2</b>	<b>316.8</b>	<b>104.2</b>

Table 2: State-of-the-art comparisons on the WiPose dataset regarding 2D pose estimation. The best and the second-best results are marked in **Red** and **Blue**, respectively.

Method	MPJPE $\downarrow$	PA-MPJPE $\downarrow$
MetaFi++ [105]	49.2	30.1
HPE-Li [14]	<b>40.9</b>	<b>25.9</b>
<b>DT-Pose (Ours)</b>	<b>34.3</b>	<b>23.1</b>

Table 3: State-of-the-art comparisons on the Person-in-WiFi-3D (One-Person) dataset regarding 3D pose estimation. The best and the second-best results are marked in **Red** and **Blue**, respectively.

Method	MPJPE $\downarrow$	PA-MPJPE $\downarrow$
MetaFi++ [105]	132.0	75.8
HPE-Li [14]	120.2	<b>69.5</b>
Wi-Pose [48]	101.8	-
Person-in-WiFi-3D [93]	<b>91.7</b>	-
<b>DT-Pose (Ours)</b>	<b>90.0</b>	<b>58.7</b>

Table 4: Masking strategies on the MM-Fi (P1-S1).

Masking Strategy	MPJPE $\downarrow$	PA-MPJPE $\downarrow$
Channel-Structured	175.2	103.9
Time-Structured	180.7	107.1
Unstructured (Ours)	165.3	101.0

design in learning task-agnostic WiFi representations.

### 4.3. Ablation Study

**Influence of Masking Strategies.** In Table 4, we present a comparative analysis of masking strategies. The experimental results indicate that the unstructured strategy performs best during pre-training, primarily because it can attend to contextual cues spanning both time and channel levels.

**Influence of Masking Ratios.** In Fig. 4, we study the effect of varying masking ratios. The performance initially

Table 5: Component analysis in the pre-training phase on the MM-Fi (P1-S1). MR: mask-reconstruction; TC-CL: temporal-consistent contrastive learning.

MR	TC-CL	Uniformity	MPJPE $\downarrow$	PA-MPJPE $\downarrow$
<i>Scratch:</i>				
$\times$	$\times$	$\times$	198.6	100.9
$\checkmark$	$\times$	$\times$	183.1	102.0
$\checkmark$	$\checkmark$	$\times$	173.1	102.7
$\checkmark$	$\times$	$\checkmark$	181.8	101.9
$\checkmark$	$\checkmark$	$\checkmark$	165.3	101.0

Table 6: Component analysis in the pose decoder on the MM-Fi (P1-S1). †: MLPs as the pose decoder; ‡: we transform all patches into the number of joints by MLPs.

Task Prompt	GCN	Transformers	MPJPE $\downarrow$	PA-MPJPE $\downarrow$
$\times$	$\times$	$\times$	197.4 $^\dagger$	103.5 $^\dagger$
$\checkmark$	$\times$	$\times$	174.1	101.3
$\times$	$\checkmark$	$\times$	179.8 $^\ddagger$	107.0 $^\ddagger$
$\times$	$\times$	$\checkmark$	181.4 $^\ddagger$	103.0 $^\ddagger$
$\checkmark$	$\checkmark$	$\times$	166.7	103.2
$\checkmark$	$\times$	$\checkmark$	167.1	101.1
$\times$	$\checkmark$	$\checkmark$	167.0	103.3
$\checkmark$	$\checkmark$	$\checkmark$	<b>165.3</b>	<b>101.0</b>

improves as the masking ratios increase but begins to decline once the ratio surpasses 80%, likely due to the rising difficulty of reconstructing a large portion of inputs. Thus, we use the default masking ratio at 80%.

**Influence of Pre-training Components.** Table 5 studies the influence of each component in our pre-training phase. Notably, our pre-training phase yields more general and robust representations than the model trained from scratch. Moreover, the temporal-consistent contrastive strategy contributes a lot, highlighting the necessity of capturing motion dynamics in WiFi-based pose estimation.

**Influence of Pose Decoding Components.** We perform a

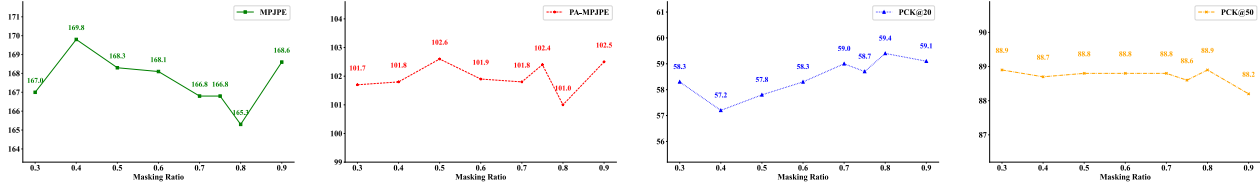


Figure 4: Performance on the MM-Fi (Protocol 1 - Setting 1) dataset with different masking ratios.

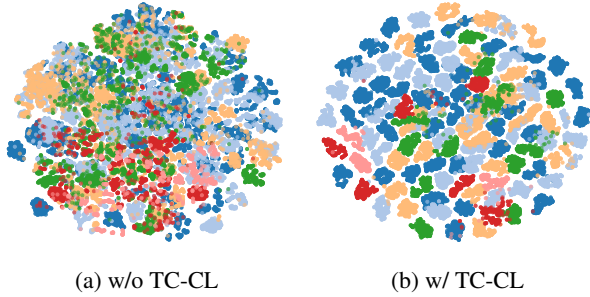


Figure 5: t-SNE visualization of WiFi representations on the MM-Fi (P1-S1). (a) represents that we drop the temporal-consistent contrastive strategy in the pre-training phase. (b) denotes that we equip it. Each color corresponds to a distinct action category.

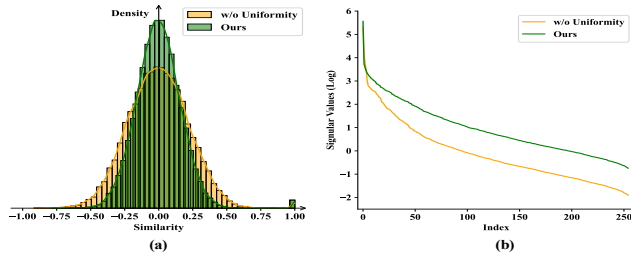


Figure 6: Dimension collapse. (a) represents the statistics of the covariance values of the WiFi representation dimensions. (b) compares the singular values of WiFi representations (zoom in for a better view).

detailed ablation study of each module within the pose decoder, as depicted in Table 6. Notably, substituting simple MLP decoding with our adjacent-overarching joint modeling strategy significantly improves the accuracy of absolute joint localization, emphasizing the importance of capturing both local and global skeletal dependencies. Furthermore, the task prompt, which adaptive learns human skeletal priors into the decoding process, proves to be critical. If we remove it, the PA-MPJPE metrics will degrade a lot.

#### 4.4. Qualitative Analysis

**Masking-Reconstruction Visualization.** In Fig. 7, we plot the raw, masked, and reconstructed WiFi signals, selecting four actions to highlight variations in WiFi signal patterns.

Table 7: Performance of our method for each joint on the MM-Fi (P1-S1). L. denotes the left and R. denotes the right.

Joints	MPJPE↓	PA-MPJPE↓
Bot Torso	102.7	56.7
L.Hip	106.9	63.7
L.Knee	105.7	66.1
L.Foot	104.1	88.6
R.Hip	108.3	64.3
R.Knee	105.3	67.4
R.Foot	109.5	90.8
Center Torso	112.3	44.5
Upper Torso	135.8	54.2
Neck Base	158.2	66.2
Center Head	160.5	70.9
R.Shoulder	147.7	73.6
R.Elbow	249.1	140.5
R.Hand	364.5	284.0
L.Shoulder	141.8	77.2
L.Elbow	235.8	132.4
L.Hand	362.4	277.0
Average	165.3	101.0

Our method faithfully reconstructs the original WiFi signals, underscoring its ability to capture domain-consistent and motion-discriminative WiFi representations effectively. **Temporal-Consistent Contrastive Learning.** Here, we plot the t-SNE visualization of the WiFi representations, comparing models trained with and without the temporal-consistent contrastive strategy, as shown in Fig. 5. Evidently, incorporating it improves inter-sequence separability and intra-sequence compactness, thereby strengthening the temporal-consistent property within the same action sequence and prompting the motion-discriminative capacity among different action sequences.

**Dimension Collapse Phenomenon.** In Fig. 6 (a), we calculate the covariance values of each dimension of the WiFi representations. A more compact distribution is clearly visible when the uniformity term is included, implying that it enriches dimensional diversity and improves inter-dimensional dependencies. Additionally, Fig. 6 (b) represents the singular values of WiFi representations. More large singular values emerge upon introducing the uniformity term, suggesting that the embedding space mitigates the dimension collapse and preserves richer information.

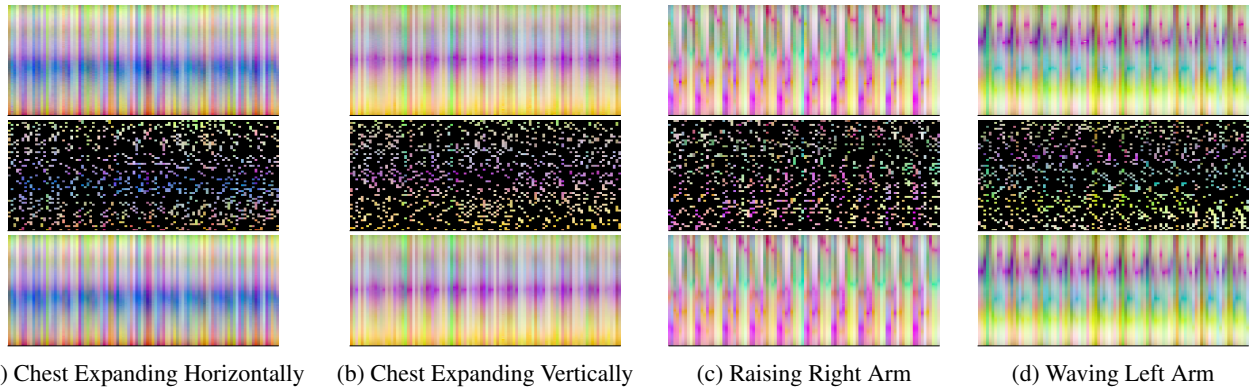


Figure 7: WiFi visualizations on the MM-Fi (P3-S1). The first row represents the raw WiFi signals, the second row represents the masked WiFi input, and the third denotes the reconstructed WiFi output. All of them contain ten continuous frames.

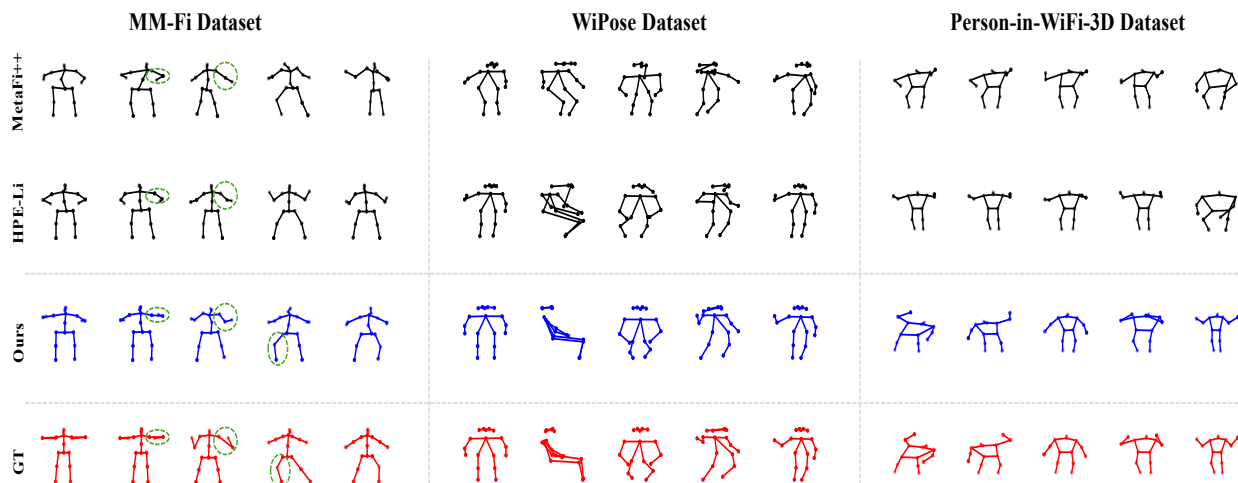


Figure 8: Predicted poses of the MetaFi++ [105], HPE-Li [14], and our proposed method among three different datasets.

**Joints Analysis.** To evaluate the joint-level accuracy of our method, we calculate the pose estimation error for each joint, as shown in Table 7. Our method performs superior on coarse-grained body parts like the torso. However, the hands and elbows exhibit the highest errors, a finding that similarly appears in the other two datasets (Table 8 and Table 9) in Appendix A.4. These results stem from the limited resolution of current WiFi signals, which hinders the capture of fine-grained actions, e.g., hand movements.

**Pose Realistic.** Fig. 8 compares predicted poses across various methods and datasets. Our predictions exhibit a more consistent motion tendency in the MM-Fi dataset, highlighted by the green circles. Moreover, as the resolution of WiFi signals increases in the other two datasets, the predicted poses of our method become more coherent and precise. Notably, our predicted skeletal structures adhere closely to the human topology, with joint locations and bone lengths aligning well against the ground truth.

## 5. Conclusion

In this paper, we revisit the task of WiFi-based human pose estimation and focus on two previously overlooked yet crucial issues: 1) cross-domain gap; and 2) structural fidelity gap. To address these challenges, we propose domain-consistent WiFi representation learning and topology-constrained pose decoding methods. In the former, we incorporate temporal-consistent contrastive learning into the self-supervised masking-reconstruction operations to learn domain-consistent and motion-discriminative WiFi representations. Additionally, uniformity regularization is employed to prevent dimension collapse. Moreover, we propose the task prompt, introduce the human topology structure into the Graph Convolution layers, and combine them with Transformer layers to explore the local-global spatial relationships among joints, constraining the decoded pose to be more realistic and fidelity. Experiments on the MM-Fi, WiPose, and Person-in-WiFi-3D datasets show the superior performance of our proposed method in 2D/3D human pose estimation tasks.



## References

- [1] Sikai Bai, Jie Zhang, Shuaicheng Li, Song Guo, Jingcai Guo, Jun Hou, Tao Han, and Xiaocheng Lu. Diprompt: Disentangled prompt tuning for multiple latent domain generalization in federated learning. *CVPR*, 2024.
- [2] Hangbo Bao, Li Dong, Songhao Piao, and Furu Wei. Beit: Bert pre-training of image transformers. *arXiv preprint arXiv:2106.08254*, 2021.
- [3] Zhe Cao, Tomas Simon, Shih-En Wei, and Yaser Sheikh. Realtime multi-person 2d pose estimation using part affinity fields. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7291–7299, 2017.
- [4] Junyang Chen, Jingcai Guo, Xueliang Li, Huan Wang, Zhenghua Xu, Zhiguo Gong, Liangjie Zhang, and Victor CM Leung. Cgraphnet: Contrastive graph context prediction for sparse unlabeled short text representation learning on social media. *IEEE Transactions on Computational Social Systems*, 2024.
- [5] Junyang Chen, Jingcai Guo, Qin Zhang, Kaishun Wu, Liangjie Zhang, Victor CM Leung, Huan Wang, and Zhiguo Gong. Unveiling user interests: A deep user interest exploration network for sequential location recommendation. *Information Sciences*, 689:121416, 2025.
- [6] Junyang Chen, Rui Mi, Huan Wang, Huisi Wu, Jiqian Mo, Jingcai Guo, Zhihui Lai, Liangjie Zhang, and Victor CM Leung. A review of few-shot and zero-shot learning for node classification in social networks. *IEEE Transactions on Computational Social Systems*, 2024.
- [7] Weiya Chen, Chenchen Yu, Chenyu Tu, Zehua Lyu, Jing Tang, Shiqi Ou, Yan Fu, and Zhidong Xue. A survey on hand pose estimation with wearable sensors and computer-vision-based methods. *Sensors*, 20(4):1074, 2020.
- [8] Yang Chen, Jingcai Guo, Song Guo, and Dacheng Tao. Neuron: Learning context-aware evolving representations for zero-shot skeleton action recognition. *arXiv preprint arXiv:2411.11288*, 2024.
- [9] Yang Chen, Jingcai Guo, Tian He, Xiaocheng Lu, and Ling Wang. Fine-grained side information guided dual-prompts for zero-shot skeleton action recognition. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 778–786, 2024.
- [10] Yang Chen, Tian He, Junfeng Fu, Ling Wang, Jingcai Guo, Ting Hu, and Hong Cheng. Vision-language meets the skeleton: Progressively distillation with cross-modal knowledge for 3d action representation learning. *IEEE Transactions on Multimedia*, 2024.
- [11] Yuxin Chen, Ziqi Zhang, Chunfeng Yuan, Bing Li, Ying Deng, and Weiming Hu. Channel-wise topology refinement graph convolution for skeleton-based action recognition. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 13359–13368, 2021.
- [12] Mingyue Cheng, Qi Liu, Zhiding Liu, Hao Zhang, Rujiao Zhang, and Enhong Chen. Timemae: Self-supervised representations of time series with decoupled masked autoencoders. *arXiv preprint arXiv:2303.00320*, 2023.
- [13] Hyung-gun Chi, Myoung Hoon Ha, Seunggeun Chi, Sang Wan Lee, Qixing Huang, and Karthik Ramani. Infogcn: Representation learning for human skeleton-based action recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 20186–20196, 2022.
- [14] Toan D Gian, Tien Dac Lai, Thien Van Luong, Kok-Seng Wong, and Van-Dinh Nguyen. Hpe-li: Wifi-enabled lightweight dual selective kernel convolution for human pose estimation. In *European Conference on Computer Vision*, pages 93–111. Springer, 2025.
- [15] Fuxiang Deng, Emil Jovanov, Houbing Song, Weisong Shi, Yuan Zhang, and Wenyao Xu. Wildar: Wifi signal-based lightweight deep learning model for human activity recognition. *IEEE Internet of Things Journal*, 2023.
- [16] Jacob Devlin. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [17] Junqiao Fan, Jianfei Yang, Yuecong Xu, and Lihua Xie. Diffusion model is a good pose estimator from 3d rf-vision. In *European Conference on Computer Vision*, pages 1–18. Springer, 2025.
- [18] Zhimin Gao, Peitao Wang, Pei Lv, Xiaoheng Jiang, Qidong Liu, Pichao Wang, Mingliang Xu, and Wanqing Li. Focal and global spatial-temporal transformer for skeleton-based action recognition. In *Proceedings of the Asian Conference on Computer Vision*, pages 382–398, 2022.
- [19] Jia Gong, Lin Geng Foo, Zhipeng Fan, Qihong Ke, Hossein Rahmani, and Jun Liu. Diffpose: Toward more reliable 3d pose estimation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13041–13051, 2023.
- [20] Jingcai Guo. An improved incremental training approach for large scaled dataset based on support vector machine. pages 149–157, 2016.
- [21] Jingcai Guo. Learning robust visual-semantic mapping for zero-shot learning. *arXiv preprint arXiv:2104.05668*, 2021.
- [22] Jingcai Guo and Song Guo. Adaptive adjustment with semantic feature space for zero-shot recognition. pages 3287–3291, 2019.
- [23] Jingcai Guo and Song Guo. Ams-sfe: Towards an alignment of manifold structures via semantic feature expansion for zero-shot learning. pages 73–78, 2019.
- [24] Jingcai Guo and Song Guo. Ee-ae: An exclusivity enhanced unsupervised feature learning approach. pages 3517–3521, 2019.
- [25] Jingcai Guo and Song Guo. A novel perspective to zero-shot learning: Towards an alignment of manifold structures via semantic feature expansion. *IEEE Transactions on Multimedia*, 23:524–537, 2020.
- [26] Jingcai Guo, Song Guo, Shiheng Ma, Yuxia Sun, and Yuanyuan Xu. Conservative novelty synthesizing network for malware recognition in an open-set scenario. *IEEE Transactions on Neural Networks and Learning Systems*, 2021.
- [27] Jingcai Guo, Song Guo, Shiheng Ma, Yuxia Sun, and Yuanyuan Xu. Cns-net: Conservative novelty synthesizing

- network for malware recognition in an open-set scenario. *arXiv preprint arXiv:2305.01236*, 2023.
- [28] Jingcai Guo, Song Guo, Jie Zhang, and Ziming Liu. Fedfsnet: Mitigating non-iid federated learning via fuzzy synthesizing network. *arXiv preprint arXiv:2208.12044*, 2022.
- [29] Jingcai Guo and Ziming Liu. Application: Image-based visual perception. pages 123–144, 2022.
- [30] Jingcai Guo, Shiheng Ma, Jie Zhang, Qihua Zhou, and Song Guo. Dual-view attention networks for single image super-resolution. pages 2728–2736, 2020.
- [31] Jingcai Guo, Zhijie Rao, Zhi Chen, Song Guo, Jingren Zhou, and Dacheng Tao. On the element-wise representation and reasoning in zero-shot image recognition: A systematic survey. *arXiv preprint arXiv:2408.04879*, 2024.
- [32] Jingcai Guo, Zhijie Rao, Song Guo, Jingren Zhou, and Dacheng Tao. Fine-grained zero-shot learning: Advances, challenges, and prospects. *arXiv preprint arXiv:2401.17766*, 2024.
- [33] Jingcai Guo, Han Wang, Yuanyuan Xu, Wenchao Xu, Yufeng Zhan, Yuxia Sun, and Song Guo. Multimodal dual-embedding networks for malware open-set recognition. *IEEE Transactions on Neural Networks and Learning Systems*, 2024.
- [34] Jingcai Guo, Yuanyuan Xu, Wenchao Xu, Yufeng Zhan, Yuxia Sun, and Song Guo. Mdenet: Multi-modal dual-embedding networks for malware open-set recognition. *arXiv preprint arXiv:2305.01245*, 2023.
- [35] Jingcai Guo, Qihua Zhou, Xiaocheng Lu, Ruibin Li, Ziming Liu, Jie Zhang, Bo Han, Junyang Chen, Xin Xie, and Song Guo. Parsnets: A parsimonious composition of orthogonal and low-rank linear networks for zero-shot learning. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24*, pages 4062–4070. International Joint Conferences on Artificial Intelligence Organization, 2024.
- [36] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16000–16009, 2022.
- [37] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [38] Tian He, Yang Chen, Xu Gao, Ling Wang, Ting Hu, and Hong Cheng. Enhancing skeleton-based action recognition with language descriptions from pre-trained large multimodal models. *IEEE Transactions on Circuits and Systems for Video Technology*, 2024.
- [39] Tian He, Yang Chen, Ling Wang, and Hong Cheng. An expert-knowledge-based graph convolutional network for skeleton-based physical rehabilitation exercises assessment. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 2024.
- [40] Po-Yao Huang, Hu Xu, Juncheng Li, Alexei Baevski, Michael Auli, Wojciech Galuba, Florian Metze, and Christoph Feichtenhofer. Masked autoencoders that listen. *Advances in Neural Information Processing Systems*, 35:28708–28720, 2022.
- [41] Fushuo Huo, Ziming Liu, Jingcai Guo, Wenchao Xu, and Song Guo. Utdnet: A unified triplet decoder network for multimodal salient object detection. *Neural Networks*, 2023.
- [42] Fushuo Huo, Ziming Liu, Jingcai Guo, Wenchao Xu, and Song Guo. Utdnet: A unified triplet decoder network for multimodal salient object detection. *Neural Networks*, 170:521–534, 2024.
- [43] Fushuo Huo, Wenchao Xu, Jingcai Guo, Haozhao Wang, and Yunfeng Fan. Non-exemplar online class-incremental continual learning via dual-prototype self-augment and refinement. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 12698–12707, 2024.
- [44] Fushuo Huo, Wenchao Xu, Jingcai Guo, Haozhao Wang, Yunfeng Fan, and Song Guo. Offline-online class-incremental continual learning via dual-prototype self-augment and refinement. *arXiv preprint arXiv:2303.10891*, 2023.
- [45] Fushuo Huo, Wenchao Xu, Jingcai Guo, Haozhao Wang, and Song Guo. C2kd: Bridging the modality gap for cross-modal knowledge distillation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16006–16015, 2024.
- [46] Fushuo Huo, Wenchao Xu, Song Guo, Jingcai Guo, Haozhao Wang, and Ziming Liu. Procc: Progressive cross-primitive consistency for open-world compositional zero-shot learning. *arXiv preprint arXiv:2211.12417*, 1, 2022.
- [47] Fushuo Huo, Wenchao Xu, Song Guo, Jingcai Guo, Haozhao Wang, Ziming Liu, and Xiaocheng Lu. Procc: Progressive cross-primitive compatibility for open-world compositional zero-shot learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 12689–12697, 2024.
- [48] Wenjun Jiang, Hongfei Xue, Chenglin Miao, Shiyang Wang, Sen Lin, Chong Tian, Srinivasan Murali, Haochen Hu, Zhi Sun, and Lu Su. Towards 3d human pose construction using wifi. In *Proceedings of the 26th Annual International Conference on Mobile Computing and Networking*, pages 1–14, 2020.
- [49] Miaoge Li, Jingcai Guo, Richard Yi Da Xu, Dongsheng Wang, Xiaofeng Cao, and Song Guo. Tsca: On the semantic consistency alignment via conditional transport for compositional zero-shot learning. *arXiv preprint arXiv:2408.08703*, 2024.
- [50] Ruibin Li, Jingcai Guo, Qihua Zhou, and Song Guo. Freepih: Training-free painterly image harmonization with diffusion model. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 7464–7473, 2024.
- [51] Ruibin Li, Qihua Zhou, Song Guo, Jie Zhang, Jingcai Guo, Xinyang Jiang, Yifei Shen, and Zhenhua Han. Dissecting arbitrary-scale super-resolution capability from pre-trained diffusion generative models. *arXiv preprint arXiv:2306.00714*, 2023.
- [52] Wenhao Li, Hong Liu, Runwei Ding, Mengyuan Liu, Pichao Wang, and Wenming Yang. Exploiting temporal

- contexts with strided transformer for 3d human pose estimation. *IEEE Transactions on Multimedia*, 25:1282–1293, 2022.
- [53] Yichen Li, Wenchao Xu, Haozhao Wang, Ruixuan Li, Yining Qi, and Jingcai Guo. Personalized federated domain-incremental learning based on adaptive knowledge matching. *arXiv preprint arXiv:2407.05005*, 2024.
- [54] Yichen Li, Wenchao Xu, Haozhao Wang, Yining Qi, Jingcai Guo, and Ruixuan Li. Personalized federated domain-incremental learning based on adaptive knowledge matching. In *European Conference on Computer Vision*, pages 127–144. Springer, 2025.
- [55] Huan Liu, Qiang Chen, Zichang Tan, Jiang-Jiang Liu, Jian Wang, Xiangbo Su, Xiaolong Li, Kun Yao, Junyu Han, Errui Ding, et al. Group pose: A simple baseline for end-to-end multi-person pose estimation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 15029–15038, 2023.
- [56] Mengyuan Liu, Hong Liu, and Chen Chen. Enhanced skeleton visualization for view invariant human action recognition. *Pattern Recognition*, 68:346–362, 2017.
- [57] Ziming Liu, Jingcai Guo, Song Guo, and Xiaocheng Lu. Epsilon: Exploring comprehensive visual-semantic projection for multi-label zero-shot learning. *arXiv preprint arXiv:2408.12253*, 2024.
- [58] Ziming Liu, Jingcai Guo, Xiaocheng Lu, Song Guo, Peiran Dong, and Jiewei Zhang. Gbe-mlzsl: A group bi-enhancement framework for multi-label zero-shot learning. *arXiv preprint arXiv:2309.00923*, 2023.
- [59] Ziming Liu, Song Guo, Jingcai Guo, Yuanyuan Xu, and Fushuo Huo. Towards unbiased multi-label zero-shot learning with pyramid and semantic attention. *IEEE Transactions on Multimedia*, 2022.
- [60] Xiaocheng Lu, Song Guo, Ziming Liu, and Jingcai Guo. Decomposed soft prompt guided fusion enhancing for compositional zero-shot learning. pages 23560–23569, 2023.
- [61] Xiaocheng Lu, Ziming Liu, Song Guo, Jingcai Guo, Fushuo Huo, Sikai Bai, and Tao Han. Drpt: Disentangled and recurrent prompt tuning for compositional zero-shot learning. *arXiv preprint arXiv:2305.01239*, 2023.
- [62] Shiheng Ma, Jingcai Guo, Song Guo, and Minyi Guo. Position-aware convolutional networks for traffic prediction. *arXiv preprint arXiv:1904.06187*, 2019.
- [63] Chiara Plizzari, Marco Cannici, and Matteo Matteucci. Spatial temporal transformer network for skeleton-based action recognition. In *Pattern recognition. ICPR international workshops and challenges: virtual event, January 10–15, 2021, Proceedings, Part III*, pages 694–701. Springer, 2021.
- [64] Tianyu Qi, Yufeng Zhan, Peng Li, Jingcai Guo, and Yuanqing Xia. Arena: A learning-based synchronization scheme for hierarchical federated learning—technical report. *arXiv preprint arXiv:2308.10298*, 2023.
- [65] Tianyu Qi, Yufeng Zhan, Peng Li, Jingcai Guo, and Yuanqing Xia. Hwamei: A learning-based synchronization scheme for hierarchical federated learning. pages 534–544, 2023.
- [66] Alec Radford. Improving language understanding by generative pre-training. 2018.
- [67] Zhijie Rao, Jingcai Guo, Xiaocheng Lu, Jingming Liang, Jie Zhang, Haozhao Wang, Kang Wei, and Xiaofeng Cao. Dual expert distillation network for generalized zero-shot learning. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24*, pages 4833–4841. International Joint Conferences on Artificial Intelligence Organization, 2024.
- [68] Zhijie Rao, Jingcai Guo, Xiaocheng Lu, Qihua Zhou, Jie Zhang, Kang Wei, Chenxin Li, and Song Guo. Attribute-aware representation rectification for generalized zero-shot learning. *arXiv preprint arXiv:2311.14750*, 2023.
- [69] Zhijie Rao, Jingcai Guo, Luyao Tang, Yue Huang, Xinghao Ding, and Song Guo. Srcd: Semantic reasoning with compound domains for single-domain generalized object detection. *arXiv preprint arXiv:2307.01750*, 2023.
- [70] Zhijie Rao, Jingcai Guo, Luyao Tang, Yue Huang, Xinghao Ding, and Song Guo. Srcd: Semantic reasoning with compound domains for single-domain generalized object detection. *IEEE Transactions on Neural Networks and Learning Systems*, 2024.
- [71] Yili Ren, Zi Wang, Sheng Tan, Yingying Chen, and Jie Yang. Winect: 3d human pose tracking for free-form activity using commodity wifi. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 5(4):1–29, 2021.
- [72] Yili Ren, Zi Wang, Yichao Wang, Sheng Tan, Yingying Chen, and Jie Yang. Gopose: 3d human pose estimation using wifi. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 6(2):1–25, 2022.
- [73] Dahu Shi, Xing Wei, Liangqi Li, Ye Ren, and Wenming Tan. End-to-end multi-person pose estimation with transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11069–11078, 2022.
- [74] Yi-Fan Song, Zhang Zhang, Caifeng Shan, and Liang Wang. Constructing stronger and faster baselines for skeleton-based action recognition. *IEEE transactions on pattern analysis and machine intelligence*, 45(2):1474–1488, 2022.
- [75] Xueyang Tang, Song Guo, and Jingcai Guo. Personalized federated learning with contextualized generalization. pages 2241–2247, 2022.
- [76] Xueyang Tang, Song Guo, Jingcai Guo, Jie ZHANG, and Yue Yu. Causally motivated personalized federated invariant learning with shortcut-averse information-theoretic regularization. In *Forty-first International Conference on Machine Learning*, 2024.
- [77] Xueyang Tang, Song Guo, Jie ZHANG, and Jingcai Guo. Learning personalized causally invariant representations for heterogeneous federated clients. In *The Twelfth International Conference on Learning Representations*, 2023.
- [78] Zhan Tong, Yibing Song, Jue Wang, and Limin Wang. Videomae: Masked autoencoders are data-efficient learners for self-supervised video pre-training. *Advances in neural information processing systems*, 35:10078–10093, 2022.

- [79] Fei Wang, Stanislav Panev, Ziyi Dai, Jinsong Han, and Dong Huang. Can wifi estimate person pose? *arXiv preprint arXiv:1904.00277*, 2019.
- [80] Fei Wang, Sanping Zhou, Stanislav Panev, Jinsong Han, and Dong Huang. Person-in-wifi: Fine-grained person perception using wifi. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 5452–5461, 2019.
- [81] Limin Wang, Bingkun Huang, Zhiyu Zhao, Zhan Tong, Yinan He, Yi Wang, Yali Wang, and Yu Qiao. Videomae v2: Scaling video masked autoencoders with dual masking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14549–14560, 2023.
- [82] Pichao Wang, Zhaoyang Li, Yonghong Hou, and Wanqing Li. Action recognition based on joint trajectory maps using convolutional neural networks. In *Proceedings of the 24th ACM international conference on Multimedia*, pages 102–106, 2016.
- [83] Yingchun Wang, Jingcai Guo, Song Guo, Yi Liu, Jie Zhang, and Weizhan Zhang. Sfp: Spurious feature-targeted pruning for out-of-distribution generalization. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 8412–8420, 2024.
- [84] Yingchun Wang, Jingcai Guo, Song Guo, and Weizhan Zhang. Data quality-aware mixed-precision quantization via hybrid reinforcement learning. *arXiv preprint arXiv:2302.04453*, 2023.
- [85] Yingchun Wang, Jingcai Guo, Song Guo, Weizhan Zhang, and Jie Zhang. Exploring optimal substructure for out-of-distribution generalization via feature-targeted model pruning. *arXiv preprint arXiv:2212.09458*, 2022.
- [86] Yingchun Wang, Jingcai Guo, Yi Liu, Song Guo, Weizhan Zhang, Xiangyong Cao, Qinghua Zheng, et al. Sfp: Spurious feature-targeted pruning for out-of-distribution generalization. *arXiv preprint arXiv:2305.11615*, 2023.
- [87] Yingchun Wang, Jingcai Guo, Jie Zhang, Song Guo, Weizhan Zhang, and Qinghua Zheng. Towards fairer and more efficient federated learning via multidimensional personalized edge models. pages 1–8, 2023.
- [88] Yiming Wang, Lingchao Guo, Zhaoming Lu, Xiangming Wen, Shuang Zhou, and Wanyu Meng. From point to space: 3d moving human pose estimation using commodity wifi. *IEEE Communications Letters*, 25(7):2235–2239, 2021.
- [89] Yingchun Wang, Song Guo, Jingcai Guo, Jie Zhang, Weizhan Zhang, Caixia Yan, and Yuanhong Zhang. Towards performance-maximizing neural network pruning via global channel attention. *Neural Networks*, 171:104–113, 2024.
- [90] Yingchun Wang, Song Guo, Jingcai Guo, Weizhan Zhang, Yida Xu, Jie Zhang, and Yi Liu. Efficient stein variational inference for reliable distribution-lossless network pruning. *arXiv preprint arXiv:2212.03537*, 2022.
- [91] Yihan Wang, Muyang Li, Han Cai, Wei-Ming Chen, and Song Han. Lite pose: Efficient architecture design for 2d human pose estimation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13126–13136, 2022.
- [92] Hong Yan, Yang Liu, Yushen Wei, Zhen Li, Guanbin Li, and Liang Lin. Skeletonmae: graph-based masked autoencoder for skeleton sequence pre-training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 5606–5618, 2023.
- [93] Kangwei Yan, Fei Wang, Bo Qian, Han Ding, Jinsong Han, and Xing Wei. Person-in-wifi 3d: End-to-end multi-person 3d pose estimation with wi-fi. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 969–978, 2024.
- [94] Jianfei Yang, Xinyan Chen, Han Zou, Dazhuo Wang, and Lihua Xie. Autofi: Toward automatic wi-fi human sensing via geometric self-supervised learning. *IEEE Internet of Things Journal*, 10(8):7416–7425, 2022.
- [95] Jianfei Yang, He Huang, Yunjiao Zhou, Xinyan Chen, Yuecong Xu, Shenghai Yuan, Han Zou, Chris Xiaoxuan Lu, and Lihua Xie. Mm-fi: Multi-modal non-intrusive 4d human dataset for versatile wireless sensing. *Advances in Neural Information Processing Systems*, 36, 2024.
- [96] Feng Zhang, Xiatian Zhu, and Chen Wang. Single person pose estimation: a survey. *arXiv preprint arXiv:2109.10056*, 2021.
- [97] Jie Zhang, Song Guo, Jingcai Guo, Deze Zeng, Jingren Zhou, and Albert Zomaya. Towards data-independent knowledge transfer in model-heterogeneous federated learning. *IEEE Transactions on Computers*, 2023.
- [98] Ce Zheng, Wenhan Wu, Chen Chen, Taojiannan Yang, Si-jie Zhu, Ju Shen, Nasser Kehtarnavaz, and Mubarak Shah. Deep learning-based human pose estimation: A survey. *ACM Computing Surveys*, 56(1):1–37, 2023.
- [99] Jingxiao Zheng, Xinwei Shi, Alexander Gorban, Junhua Mao, Yang Song, Charles R Qi, Ting Liu, Visesh Chari, Andre Cornman, Yin Zhou, et al. Multi-modal 3d human pose estimation with 2d weak supervision in autonomous driving. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4478–4487, 2022.
- [100] Qihua Zhou, Jingcai Guo, Song Guo, Ruibin Li, Jie Zhang, Bingjie Wang, and Zhenda Xu. On the robustness of neural-enhanced video streaming against adversarial attacks. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 17123–17131, 2024.
- [101] Qihua Zhou, Song Guo, Jun Pan, Jiacheng Liang, Jingcai Guo, Zhenda Xu, and Jingren Zhou. Pass: Patch automatic skip scheme for efficient on-device video perception. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024.
- [102] Qihua Zhou, Song Guo, Zhihao Qu, Jingcai Guo, Zhenda Xu, Jiawei Zhang, Tao Guo, Boyuan Luo, and Jingren Zhou. Octo:{INT8} training with loss-aware compensation and backward quantization for tiny on-device learning. pages 177–191, 2021.
- [103] Qihua Zhou, Ruibin Li, Song Guo, Peiran Dong, Yi Liu, Jingcai Guo, and Zhenda Xu. Cadm: Codec-aware diffusion modeling for neural-enhanced video streaming. *arXiv preprint arXiv:2211.08428*, 2022.
- [104] Qihua Zhou, Zhihao Qu, Song Guo, Boyuan Luo, Jingcai Guo, Zhenda Xu, and Rajendra Akerkar. On-device learn-

ing systems for edge intelligence: A software and hardware synergy perspective. *IEEE Internet of Things Journal*, 8(15):11916–11934, 2021.

- [105] Yunjiao Zhou, He Huang, Shenghai Yuan, Han Zou, Lihua Xie, and Jianfei Yang. Metafi++: Wifi-enabled transformer-based human pose estimation for metaverse avatar simulation. *IEEE Internet of Things Journal*, 10(16):14128–14136, 2023.
- [106] Yunjiao Zhou, Jianfei Yang, He Huang, and Lihua Xie. Adapose: Towards cross-site device-free human pose estimation with commodity wifi. *IEEE Internet of Things Journal*, 2024.
- [107] Yue Zhou, Aichun Zhu, Caojie Xu, Fangqiang Hu, and Yifeng Li. Perunet: Deep signal channel attention in unet for wifi-based human pose estimation. *IEEE Sensors Journal*, 22(20):19750–19760, 2022.

## A. Appendix

### A.1. Implementation Details

In the pre-training phase, the encoder-decoder is trained for 400 epochs using the AdamW, employing a batch size of 256, a learning rate of  $1.5e-4$  with cosine annealing schedule, a warm-up epoch of 40, and a weight decay of 0.05. The mask ratio is set as 80%. For the MM-Fi dataset, we train the pose decoder for 50 epochs using the SGD optimizer with a weight decay of 0.01. For the WiPose dataset, we train the pose decoder with the AdamW optimizer for 50 epochs. For the Person-in-WiFi-3D dataset, we train the pose decoder for 200 epochs using the AdamW optimizer. All the learning rates are  $1e-3$ , and the batch size is 32. All the experiments are finished using the PyTorch platform on a GeForce RTX 4090 GPU.

### A.2. Evaluation Metric

Three evaluation metrics are adopted following mainstream methods [95, 14, 105]:

**Mean Per Joint Position Error (MPJPE (mm)):** Measure the average Euclidean distance between ground truth and predictions, which is widely used to evaluate absolute positional accuracy.

**Procrustes Analysis MPJPE (PA-MPJPE (mm)):** Measure the MPJPE after aligning the predictions and ground truth using rigid transformations (translation, rotation, and scaling) by Procrustes analysis. Typically, it can be used to reflect the similarity in human shape and structure.

**Percentage of Correct Keypoints (PCK@ $\alpha$  (%)):** Measure the percentage of predictions that fall within a certain threshold distance from the ground truth. The threshold is set as a fraction  $\alpha$  of the torso length following the previous works [14, 105]. It is widely used to evaluate the local accuracy.

### A.3. WiFi Representations Comparison

Fig. 9 provides the t-SNE visualization of WiFi representations across multiple models and datasets. In contrast to both the raw WiFi signals and other existing methods, the learned WiFi representations of our proposed method exhibit excellent inter-sequence separability and intra-sequence compactness. Consequently, this motion-discriminative representation space benefits subsequent pose estimation tasks, whereas prior methods tend to learn spurious or motion-irrelevant features that can undermine estimation accuracy.

### A.4. Joints Analysis

As shown in Table 8 and Table 9, the error associated with estimating hand and elbow joints decreases when an increased number of antennas and receivers is employed for

Table 8: Performance of our method for each joint on the WiPose dataset. L. denotes the left and R. denotes the right.

Joints	MPJPE↓	PA-MPJPE↓
Nose	30.9	14.9
Neck	27.3	11.7
R.Shoulder	28.7	13.4
R.Elbow	38.7	25.6
R.Wrist	48.2	35.8
L.Shoulder	29.8	16.6
L.Elbow	37.2	24.9
L.Wrist	43.3	30.6
R.Hip	24.6	17.2
R.Knee	21.0	19.3
R.Ankle	22.6	21.7
L.Hip	25.6	17.9
L.Knee	22.4	19.2
L.Ankle	26.0	22.2
R.Eye	31.6	15.5
L.Eye	32.4	16.3
R.Ear	30.8	14.9
L.Ear	96.8	77.7
Average	34.3	23.1

Table 9: Performance of our method for each joint on the Person-in-WiFi-3D (One-Person) dataset. L. denotes the left and R. denotes the right.

Joints	MPJPE↓	PA-MPJPE↓
Neck	71.6	36.2
Head	77.6	43.1
L.Shoulder	80.5	37.8
R.Shoulder	81.1	37.8
L.Elbow	107.4	54.1
L.Hip	57.7	41.5
R.Elbow	114.2	55.1
R.Hip	58.6	42.0
L.Hand	164.8	117.9
L.Knee	65.6	52.2
R.Hand	179.2	122.4
R.Knee	64.3	52.8
L.Ankle	69.8	65.8
R.Ankle	67.4	62.5
Average	90.0	58.7

WiFi signal capture. Consequently, if the goal is to detect more fine-grained actions and reliably represent them in WiFi signals, it becomes imperative to either deploy a greater number of devices or acquire signals at higher resolutions.

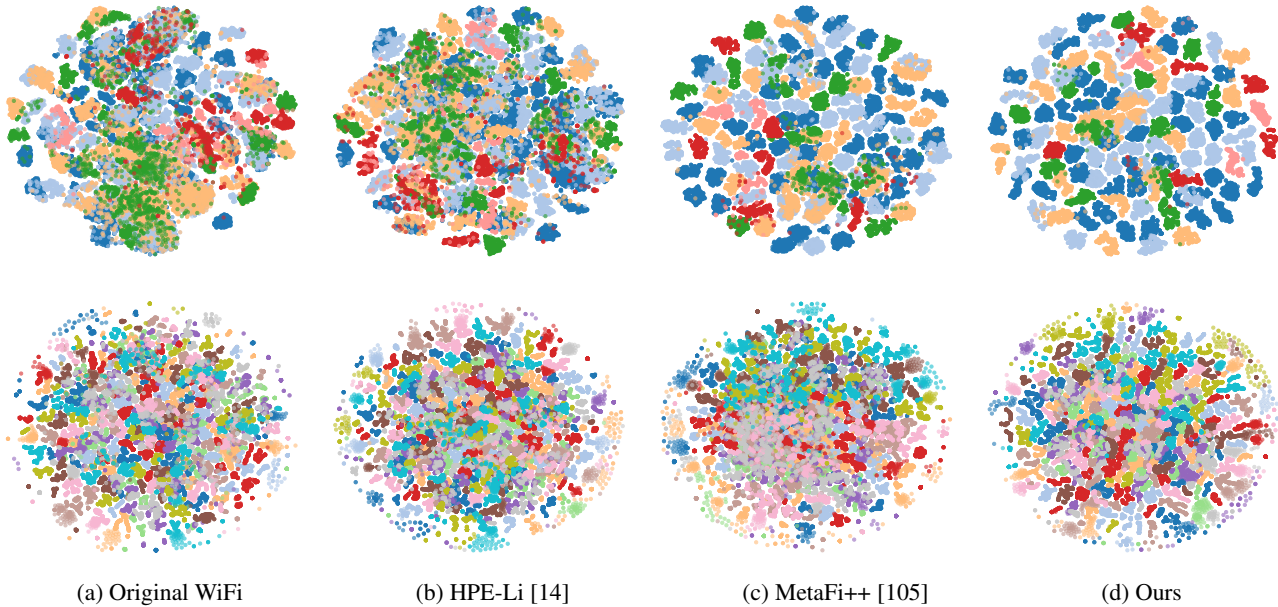


Figure 9: t-SNE visualization of WiFi representations. The first row denotes the WiFi representations extracted on the MM-Fi (Protocol 1 - Setting 1) testing set, and the second row represents the representations obtained on the WiPose testing set. Each color corresponds to a distinct action category.

Table 10: State-of-the-art comparisons on MM-Fi dataset regarding 2D pose estimation under Protocol 3 with Setting 1 split. The best and the second-best results are marked in **Red** and **Blue**, respectively.

Method	PCK@20 $\uparrow$	PCK@30 $\uparrow$	PCK@40 $\uparrow$	PCK@50 $\uparrow$	MPJPE $\downarrow$	PA-MPJPE $\downarrow$
Wi-Pose [48]	48.6	65.1	75.6	82.4	158.2	97.7
Wi-Mose [88]	48.7	66.6	77.3	83.9	155.8	95.4
WiLDAR [15]	44.1	62.6	72.6	79.3	170.3	115.6
WiSPPN [79]	45.4	63.2	74.1	81.0	166.5	110.0
PerUnet [107]	50.1	67.3	77.6	83.6	154.6	98.6
MetaFi++ [105]	45.5	64.4	75.1	81.8	164.4	106.3
HPE-Li [14]	<b>52.1</b>	<b>68.2</b>	<b>78.2</b>	<b>85.1</b>	<b>149.4</b>	<b>92.5</b>
<b>DT-Pose (Ours)</b>	<b>65.8</b>	<b>77.9</b>	<b>85.1</b>	<b>89.8</b>	<b>137.0</b>	<b>92.3</b>