

# Robotic World Model: A Neural Network Simulator for Robust Policy Optimization in Robotics

Chenhao Li  
ETH AI Center  
ETH Zurich, Switzerland  
chenhli@ethz.ch

Andreas Krause  
Department of Computer Science  
ETH Zurich, Switzerland  
krausea@ethz.ch

Marco Hutter  
Department of Mechanical Engineering  
ETH Zurich, Switzerland  
mahutter@ethz.ch

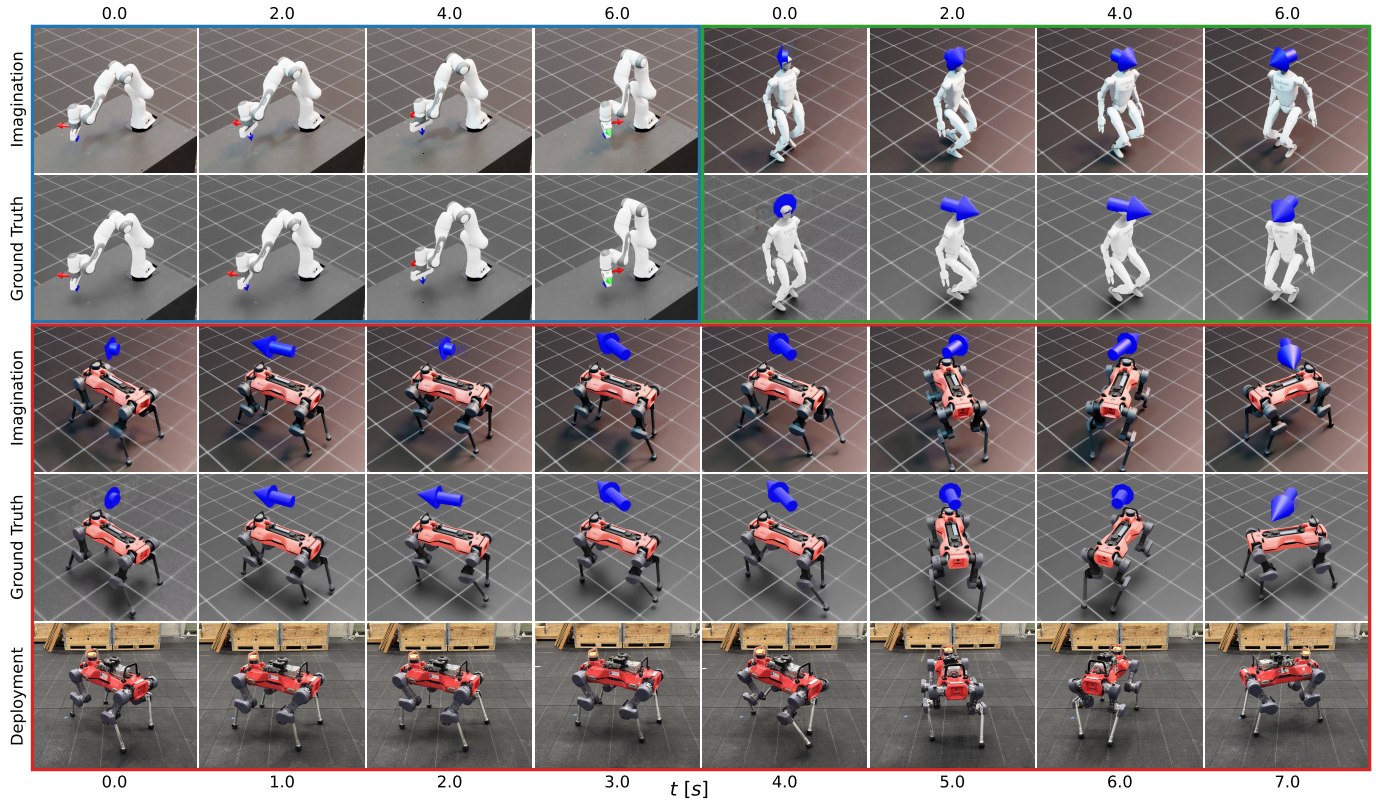


Fig. 1: Autoregressive imagination, ground-truth simulation, and real-world deployment of RWM across diverse robotic systems from the same initialization. For each environment, the top row showcases the RWM autoregressively predicting future trajectories in imagination. The second row visualizes the ground truth evolution in simulation. Specifically for the ANYmal-D quadruped, the framework achieves robust policy optimization through MBPO-PPO, enabling zero-shot deployment on hardware. The visualized coordinate and arrow markers denote the predicted and measured end-effector pose and base velocity, respectively.

**Abstract**—Learning robust and generalizable world models is crucial for enabling efficient and scalable robotic control in real-world environments. In this work, we introduce a novel framework for learning world models that accurately capture complex, partially observable, and stochastic dynamics. The proposed method employs a dual-autoregressive mechanism and self-supervised training to achieve reliable long-horizon predictions without relying on domain-specific inductive biases, ensuring adaptability across diverse robotic tasks. We further propose a policy optimization framework that leverages world models for efficient training in imagined environments and seamless deployment in real-world systems. Through extensive experiments, our approach consistently outperforms state-of-the-art methods,

demonstrating superior autoregressive prediction accuracy, robustness to noise, and generalization across manipulation and locomotion tasks. Notably, policies trained with our method are successfully deployed on ANYmal-D hardware in a zero-shot transfer, achieving robust performance with minimal sim-to-real performance loss. This work advances model-based reinforcement learning by addressing the challenges of long-horizon prediction, error accumulation, and sim-to-real transfer. By providing a scalable and robust framework, the introduced methods pave the way for adaptive and efficient robotic systems in real-world applications.

## I. INTRODUCTION

Robotic systems have achieved remarkable advancements in recent years, driven by progress in reinforcement learning (RL) [1, 2] and control theory [3, 4]. High-fidelity simulators have played a pivotal role in these developments, enabling safe and efficient policy training [4, 5, 6]. However, the transfer of policies from simulation to real-world environments remains a significant challenge due to inevitable inaccuracies in modeling real-world dynamics [7, 8, 9]. These inaccuracies lead to performance degradation when deploying learned policies on physical hardware, a problem commonly referred to as the sim-to-real gap.

A prevalent limitation in many approaches is the lack of adaptation and learning once the policy is deployed on the real system [10, 11, 12]. This results in underutilization of the valuable data generated during real-world interactions. Robotic systems operating in dynamic and uncertain environments require the ability to continually adapt their behavior to new conditions. The inability to exploit real-world experience for further learning restricts the system’s robustness and limits its ability to handle evolving scenarios effectively. Truly intelligent robotic systems should operate efficiently and reliably using limited data, adapting to real-world conditions in a scalable manner [13, 14]. While model-free RL algorithms such as Proximal Policy Optimization (PPO) [2] and Soft Actor-Critic (SAC) [1] have demonstrated impressive results in simulation, their high interaction requirements make them impractical for real-world robotics. Sample-efficient methods are therefore essential for leveraging the information in real-world data without extensive environment interactions [15, 16].

A promising solution is the use of predictive models of the environment, commonly referred to as world models [17, 18]. World models simulate environment dynamics to enable planning and policy optimization, often referred to as *learning in imagination* [19]. These models have shown success across diverse robotic domains, including manipulation [20, 21], navigation [14], and locomotion [13]. However, developing reliable and generalizable world models poses unique challenges due to the complexity of real-world dynamics, including nonlinearities, stochasticity, and partial observability [22, 23].

Existing approaches often incorporate domain-specific inductive biases, such as structured state representations or hand-designed network architectures [24, 25, 26], to improve model fidelity. While effective, these methods are limited in their scalability and adaptability to novel environments or tasks. In contrast, a general framework for learning world models without domain-specific assumptions has the potential to enhance generalization and applicability across a wide range of robotic systems and scenarios.

In this work, we present a novel approach for learning world models that emphasizes robustness and accuracy over long-horizon predictions. Our method is designed to operate without handcrafted representations or specialized architectural biases, enabling broad applicability to diverse robotic tasks. To evaluate the utility of these learned models, we further propose a policy

optimization method using PPO and demonstrate successful deployment in both simulated and real-world environments. To the best of our knowledge, this is the first framework to reliably train policies on a learned neural network simulator without any domain-specific knowledge and deploy them on physical hardware with minimal performance loss.

**Our contributions** are summarized as follows:

- We introduce a novel network architecture and training framework that enables the learning of reliable world models capable of long autoregressive rollouts, a critical property for downstream planning and control.
- We provide a comprehensive evaluation suite spanning diverse robotic tasks to benchmark our method. Comparative experiments with existing world model frameworks demonstrate the effectiveness of our approach.
- We propose an efficient policy optimization framework that leverages the learned world models for continuous control and generalizes effectively to real-world scenarios.

By addressing the challenges associated with learning world models, this work contributes toward bridging the gap between data-driven modeling and real-world deployment. The proposed framework enhances the scalability, adaptability, and robustness of robotic systems, paving the way for broader adoption of model-based reinforcement learning in real-world applications.

## II. RELATED WORK

### A. World Models for Robotics

World models have emerged as a cornerstone in robotics for capturing system dynamics and enabling efficient planning and control through simulated trajectories. Early works like PILCO [27] demonstrated exceptional sample efficiency by leveraging Gaussian processes, but their applicability to high-dimensional, nonlinear systems has been limited by scalability constraints. The advent of deep neural networks expanded the horizons of dynamics modeling, allowing complex robotic systems to be effectively modeled and controlled. For example, neural network dynamics models have been integrated with Model Predictive Control (MPC) to enhance adaptability in real-world settings [13]. A prominent application of world models is in robotic control, where dynamics models are used to describe real-world dynamics for policy optimization [28]. Extensions to vision-based tasks have been realized through visual foresight techniques [21, 29, 20], which learn visual dynamics for planning in high-dimensional sensory spaces. Similar ideas are applied to train RL agents in such world models aiming to fully replicate real environment interactions [17, 30]. These approaches underline the versatility of world models in tasks requiring rich perceptual inputs.

To improve the generalization of black-box neural network-based world models beyond the training distribution, many works incorporate known physics principles or state structures into model design, addressing potential limitations in control performance. Examples include foot-placement dynamics [24], object invariance [25], granular media interactions [31], frequency domain parameterization [26], rigid body



dynamics [23], and semi-structured Lagrangian dynamics models [32]. While these methods demonstrate impressive results, they often require strong domain knowledge and carefully crafted inductive biases, which can restrict their scalability and adaptability to diverse robotic applications. Latent-space dynamics models offer an alternative by abstracting the state space into compact representations, enabling efficient long-horizon planning. Deep Planning Network (PlaNet) [18] and its successor Dreamer [33, 14, 34] exemplify this trend, achieving state-of-the-art performance in continuous control and visual navigation tasks. These frameworks have been extended to real-world robotics [22, 35], demonstrating their potential in both simulation and hardware deployment.

### B. Model-Based Reinforcement Learning

Model-Based Reinforcement Learning (MBRL) has emerged as a powerful approach to address the limitations of model-free reinforcement learning, particularly in scenarios where sample efficiency and safety are critical. Unlike model-free methods, which learn policies directly from interactions with the environment, MBRL leverages a learned model of the environment to simulate interactions, enabling more efficient and safer policy learning. One of the pioneering methods in MBRL is Probabilistic Ensembles with Trajectory Sampling (PETS), which uses an ensemble of probabilistic neural networks to model the environment dynamics [15]. This ensemble approach captures the uncertainty in the environment, allowing for more robust decision-making. Building on the idea of latent-space modeling, PlaNet leverages a latent dynamics model to plan directly in a learned latent space [18]. This approach enables long-horizon planning and is particularly effective in environments where direct planning in the raw state space would be computationally prohibitive. Similar ideas were also seen in previous attempts [36, 37]. Dreamer extends the concept by incorporating an actor-critic framework into the latent dynamics model, enabling the simultaneous learning of both the dynamics model and the policy [33, 14, 34]. Variations on the architectural design also see success in improving generation capabilities of such latent dynamics models with autoregressive transformer [38] and the stochastic nature of variational autoencoders [39]. Recent advancements in this area include TD-MPC and TD-MPC2, which integrate model-based learning with MPC to achieve high-performance control in dynamic environments. TD-MPC leverages temporal difference learning to refine the model and improve the accuracy of long-term predictions [40, 41], while TD-MPC2 extends this approach by incorporating more sophisticated planning strategies to handle environments with high variability [42].

Recognizing the strengths of both model-based and model-free methods, several hybrid approaches have been developed to combine the sample efficiency of MBRL with the robustness of model-free reinforcement learning. One notable example is Model-Based Policy Optimization (MBPO), which uses a model-based approach for planning and policy optimization but refines the policy using model-free updates [16]. It emphasizes selectively relying on the learned model when its predictions

are accurate, thus mitigating the negative effects of model inaccuracies. Building on similar principles, Model-based Offline Policy Optimization (MOPO) extends the framework to the offline setting, where learning is conducted entirely from previously collected data without further environment interaction [43]. MOPO introduces uncertainty penalization in the learned model’s predictions to ensure conservative policy updates, effectively reducing the risk of overfitting to model errors. Model-Based Meta-Policy-Optimization (MB-MPO) advances MBPO by incorporating meta-learning techniques to improve the generalization of learned policies across different tasks [44]. This method trains a meta-policy that can quickly adapt to new environments by leveraging a shared model, enhancing the applicability of MBPO in multi-task settings. In contrast to using zeroth-order model-free reinforcement learning for policy optimization, first-order gradient-based optimization is used to improve policy learning [45, 46]. These methods scale up the world models to capture intricate details of environment dynamics and directly apply gradient-based optimization to improve policy learning. This allows for more efficient and precise policy updates, particularly in complex, high-dimensional environments, where accurate gradient information is crucial for performance.

## III. APPROACH

### A. Reinforcement Learning and World Models

We formulate the problem by modeling the environment as a Partially Observable Markov Decision Process (POMDP) [47], defined by the tuple  $(\mathcal{S}, \mathcal{A}, \mathcal{O}, T, R, O, \gamma)$ , where  $\mathcal{S}$ ,  $\mathcal{A}$ , and  $\mathcal{O}$  denote the state, action, and observation spaces, respectively. The transition kernel  $T : \mathcal{S} \times \mathcal{A} \rightarrow \mathcal{S}$  captures the environment dynamics  $p(s_{t+1} | s_t, a_t)$ , while the reward function  $R : \mathcal{S} \times \mathcal{A} \times \mathcal{S} \rightarrow \mathbb{R}$  maps transitions to scalar rewards. Observations  $o_t \in \mathcal{O}$  are emitted according to probabilities  $p(o_t | s_t)$ , governed by the observation function  $O : \mathcal{S} \rightarrow \mathcal{O}$ . The agent seeks to learn a policy  $\pi_\theta : \mathcal{O} \rightarrow \mathcal{A}$  that maximizes the expected discounted return  $\mathbb{E}_{\pi_\theta} \left[ \sum_{t \geq 0} \gamma^t r_t \right]$ , where  $r_t$  is the reward at time  $t$  and  $\gamma \in [0, 1]$  is the discount factor.

World models [17] approximate the environment dynamics by learning  $p(s_{t+1} | s_t, a_t)$ . These models facilitate policy optimization by enabling simulated environment interactions in *imagination* [19]. Training typically involves three iterative steps: (1) collect data from real environment interactions; (2) train the world model using the collected data; and (3) optimize the policy within the simulated environment produced by the world model.

Despite the success of existing frameworks in achieving tasks in simplified settings, their application to complex low-level robotic control remains a significant challenge. To address this gap, we propose Robotic World Model (RWM), a novel framework for learning robust world models in partially observable and dynamically complex environments. RWM builds on the core concept of world models but introduces architectural and training innovations that enable reliable long-horizon predictions, even in stochastic and partially observable

settings. By incorporating historical context and autoregressive training, RWM addresses challenges such as error accumulation and partially observable and discontinuous dynamics, which are critical in real-world robotics applications.

### B. Self-supervised Autoregressive Training

To address the inherent complexity of partially observable environments, we propose a self-supervised autoregressive training framework as the backbone of RWM. This framework trains the world model  $p_\phi$  to predict future observations by leveraging both historical observation-action sequences and its own predictions, ensuring robustness over extended rollouts.

The input to the world model consists of a sequence of observation-action pairs spanning  $M$  historical steps. At each time step  $t$ , the model predicts the distribution of the next observation  $p(o_{t+1} | o_{t-M+1:t}, a_{t-M+1:t})$ . Predictions are generated autoregressively: at each step, the predicted observation  $o'_{t+1}$  is appended to the history and combined with the next action  $a_{t+1}$  to serve as input for subsequent predictions. This process is repeated over a prediction horizon of  $N$  steps, producing a sequence of future predictions. The predicted observation  $k$  steps ahead can thus be written as

$$o'_{t+k} \sim p_\phi(\cdot | o_{t-M+k:t}, o'_{t+1:t+k-1}, a_{t-M+k:t+k-1}). \quad (1)$$

A similar process is also applied to predict privileged information  $c$ , such as contacts, providing an additional learning objective that implicitly embeds critical information for accurate long-term predictions. Such a training scheme introduces the model to the distribution it will encounter at test time, reducing the mismatch between training and inference distributions. Overall, the model is optimized by minimizing the multi-step prediction error:

$$\mathcal{L} = \frac{1}{N} \sum_{k=1}^N \alpha^k [L_o(o'_{t+k}, o_{t+k}) + L_c(c'_{t+k}, c_{t+k})], \quad (2)$$

where  $L_o$  and  $L_c$  quantify the discrepancy between predicted and true observations and privileged information, and  $\alpha$  denotes a decay factor. This autoregressive training objective encourages the hidden states to encode representations that support accurate and reliable long-horizon predictions.

Training data is constructed by sliding a window of size  $M+N$  over collected trajectories, providing sufficient historical context for prediction targets. To improve gradient propagation through autoregressive predictions, we apply reparameterization tricks to enable effective end-to-end optimization. By incorporating historical observations, RWM captures unobservable dynamics, addressing the challenges of partially observable and potentially discontinuous environments. The autoregressive training mitigates error accumulation, a common issue in long-horizon predictions, and eliminates the need for handcrafted representations or domain-specific inductive biases, enhancing generalization across diverse tasks. This process is illustrated in Fig. 2a, in contrast to the teacher-forcing pipeline in Fig. 2b, which is commonly adopted to train many popular architectures [33, 48]. Specifically, teacher-forcing can be

viewed as a special case of autoregressive training with forecast horizon  $N = 1$ , which boosts training with higher parallelization.

While the proposed autoregressive training framework can be applied to any network architecture, RWM utilizes a GRU-based architecture for its ability to maintain long-term historical context while operating on low-dimensional inputs. The network predicts the mean and standard deviation of a Gaussian distribution describing the next observation. Our framework introduces a *dual-autoregressive mechanism*:

- *Inner autoregression* updates GRU hidden states autoregressively after each historical step within the context horizon  $M$ .
- *Outer autoregression* feeds predicted observations from the forecast horizon  $N$  back into the network.

This architecture, visualized in Fig. 3, ensures robustness to long-term dependencies and transitions, making RWM suitable for complex robotics applications.

### C. Policy Optimization on Learned World Models

Policy optimization in RWM is conducted using the learned world model, following a framework inspired by Model-Based Policy Optimization (MBPO) [16] and the Dyna algorithm [49]. During imagination, the actions are generated recursively by the policy  $\pi_\theta$  conditioned on the observations predicted by the world model  $p_\phi$ , which is further conditioned on the previous predictions. The actions at time  $t+k$  can thus be written as

$$a'_{t+k} \sim \pi_\theta(\cdot | o'_{t+k}), \quad (3)$$

where  $o'_{t+k}$  is drawn autoregressively from the distribution according to Eq. 1. The approach combines model-based imagination with model-free reinforcement learning to achieve efficient and robust policy optimization, as outlined in Algorithm 1.

---

#### Algorithm 1 Policy optimization with RWM

---

- 1: Initialize policy  $\pi_\theta$ , world model  $p_\phi$ , and replay buffer  $\mathcal{D}$
  - 2: **for** learning iterations = 1, 2, ... **do**
  - 3:   Collect observation-action pairs in  $\mathcal{D}$  by interacting with the environment using  $\pi_\theta$
  - 4:   Update the world model  $p_\phi$  with autoregressive training using data sampled from  $\mathcal{D}$  according to Eq. 2
  - 5:   Initialize imagination agents with observations sampled from  $\mathcal{D}$
  - 6:   Roll out imagination trajectories using  $\pi_\theta$  and  $p_\phi$  for  $T$  steps according to Eq. 3
  - 7:   Update  $\pi_\theta$  using PPO or another reinforcement learning algorithm
  - 8: **end for**
- 

The replay buffer  $\mathcal{D}$  aggregates real environment interactions collected by a single agent. The world model  $p_\phi$  is trained on this data following the autoregressive scheme described in Sec. III-B. Imagination agents are initialized from samples in  $\mathcal{D}$  and simulate trajectories using the world model for  $T$

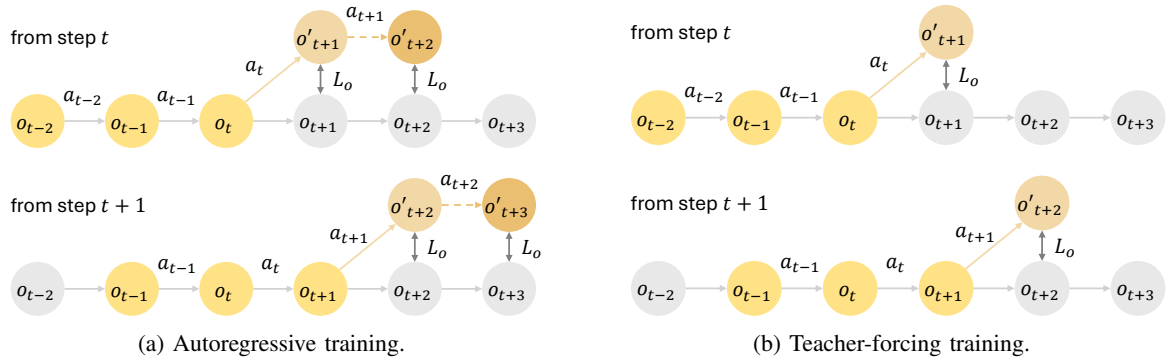


Fig. 2: Comparison of training paradigms for world models with an example of a history horizon  $H = 3$ . (a) Autoregressive training operates with an example of a forecast horizon  $N = 2$ , leveraging historical data and its own predictions for long-horizon robustness. The dashed arrows denote the sequential autoregressive prediction steps. (b) Teacher-forcing training can be viewed as a special case of autoregressive training with a forecast horizon  $N = 1$ , using ground truth observations for next-step predictions to optimize parallelization but limiting robustness to error accumulation.

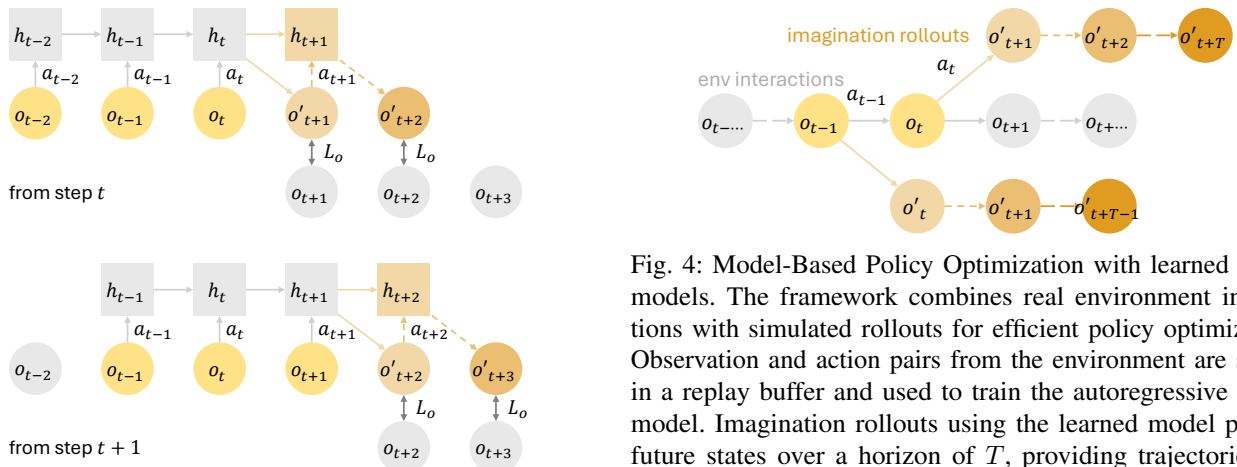


Fig. 3: Dual-autoregressive mechanism employed in RWM. Inner autoregression updates GRU hidden states after each historical step within the context horizon, while outer autoregression feeds predicted observations from the forecast horizon back into the network. The dashed arrows denote the sequential autoregressive prediction steps, highlighting robustness to long-term dependencies and transitions.

steps, enabling policy updates through a reinforcement learning algorithm. The training diagram is visualized in Fig. 4.

While PPO is known for its strong performance in robotic tasks, training it on learned world models poses unique challenges. Model inaccuracies can be exploited during policy learning, leading to discrepancies between the imagined and true dynamics. This issue is exacerbated by the extended autoregressive rollouts required for PPO, which compound prediction errors. We denote this policy optimization method by MBPO-PPO.

Despite these challenges, RWM demonstrates its robustness by successfully optimizing policies over a hundred autoregressive steps with MBPO-PPO, far exceeding the capabilities of

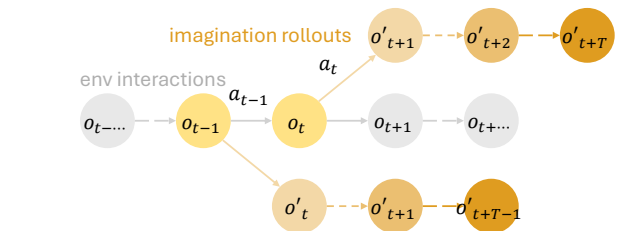


Fig. 4: Model-Based Policy Optimization with learned world models. The framework combines real environment interactions with simulated rollouts for efficient policy optimization. Observation and action pairs from the environment are stored in a replay buffer and used to train the autoregressive world model. Imagination rollouts using the learned model predict future states over a horizon of  $T$ , providing trajectories for policy updates through reinforcement learning algorithms.

existing frameworks such as MBPO [16], Dreamer [33, 14, 34], or TD-MPC [40, 42]. This result underscores the accuracy and stability of the proposed training method and its ability to synthesize policies deployable on hardware. By using MBPO-PPO, we provide a stringent test of model fidelity, establishing the effectiveness of our framework for real-world robotic tasks.

#### IV. EXPERIMENTS

We validate RWM through a comprehensive set of experiments across diverse robotic systems, environments, network architectures. The experiments are designed to assess the accuracy and robustness of RWM, evaluate its architectural and training design choices, and demonstrate its effectiveness across diverse robotic tasks and in real-world deployment combined with MBPO-PPO. We start the analysis by looking into the autoregressive prediction accuracy and robustness of the world model on ANYmalD learned with simulation data induced by a velocity tracking policy. The observation and action spaces of the world model are detailed in Table S1 and Table S3. We then compare various network architectures and the error induced



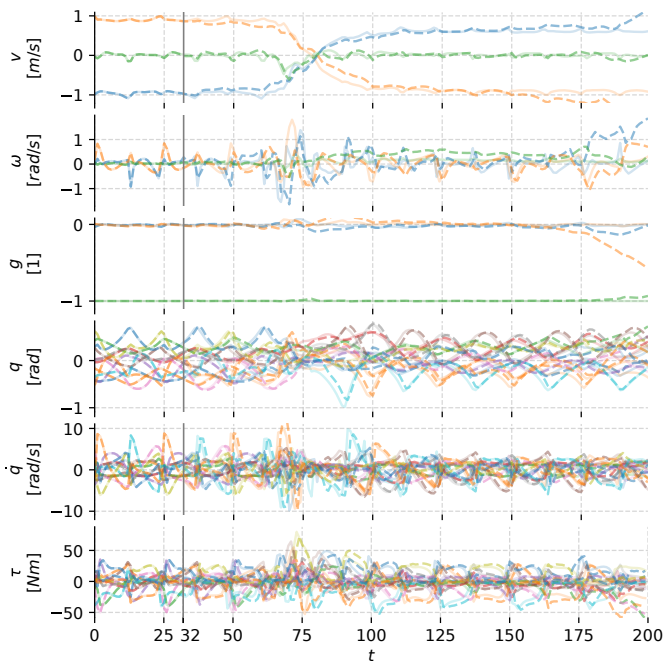


Fig. 5: Autoregressive trajectory prediction by RWM. Solid lines represent ground truth trajectories, while dashed lines denote predicted state evolution. The control frequency of the robot is at  $50\text{ Hz}$ . The model is trained with history horizon  $M = 32$  and forecast horizon  $N = 8$ . Predictions commence at  $t = 32$  using historical observations, with future observations predicted autoregressively by feeding prior predictions back into the model.

across diverse robotic environments and tasks to demonstrate the generality of RWM. And finally, we learn a policy in RWM with the proposed MBPO-PPO and demonstrate the applicability and robustness of the method on an ANYmal D hardware.

#### A. Autoregressive Trajectory Prediction

The capability of a world model to maintain high fidelity during autoregressive rollouts is critical for effective planning and policy optimization. To evaluate this aspect, we analyze the autoregressive prediction performance of RWM using trajectories collected from ANYmal D hardware. The control frequency of the robot is at  $50\text{ Hz}$ . The model is trained with history horizon  $M = 32$  and forecast horizon  $N = 8$ . Further details on the network architecture and training parameters are summarized in Sec. B1 and Sec. C1, respectively. The autoregressive trajectory predictions by RWM are visualized in Fig. 5.

At time  $t = 32$ , the world model initiates predictions based on historical observations. From this point onward, future observations are predicted autoregressively using its prior outputs, simulating the deployment scenario in downstream applications. In Fig. 5, the predicted observations are compared against the ground truth trajectories.

The results demonstrate that RWM exhibits a remarkable alignment between predicted and ground truth trajectories across all observed variables. This consistency persists over extended rollouts, showcasing the model’s ability to mitigate compounding errors—a critical challenge in long-horizon predictions. Despite the accumulated shifts at the far end of the prediction, the variables maintain close fidelity to the actual trajectories, with minimal deviations, even in stochastic and dynamically complex environments.

The proposed GRU-based autoregressive mechanism demonstrates superior predictive accuracy. The historical context encoded in the hidden states allows RWM to effectively capture partially observable dynamics, a capability evident in the accurate long-term predictions. This performance is further attributed to the dual-autoregressive mechanism introduced in Sec. III-B, which stabilizes predictions despite the short forecast horizon employed during training. This robust predictive capability has profound implications for downstream tasks. A comparison of state evolution between the RWM prediction and the ground truth simulation is illustrated in Fig. 1 (bottom). Both environments are initialized in the same state and propagated using the same policy to ensure a fair evaluation of the world model’s predictive accuracy.

The visualization highlights the ability of RWM to maintain consistency in trajectory predictions over long horizons, even beyond the training forecast horizon. This robustness is pivotal for stable policy learning and deployment, as discussed further in Sec. IV-E. The results underscore the capability of RWM to produce accurate long-horizon predictions, validating its applicability to real-world robotic tasks.

#### B. Robustness under Noise

A critical challenge in training world models is their ability to generalize under noisy conditions, particularly when predictions rely on autoregressive rollouts. Even small deviations from the training distribution can cascade into untrained regions, causing the model to hallucinate future trajectories. These issues are magnified in autoregressive settings due to the compounding nature of prediction errors. To assess the robustness of RWM, we analyze its performance under Gaussian noise perturbations applied to both observations and actions. We compare the results with an MLP-based baseline also trained autoregressively with the same history and forecast horizon, as shown in Fig. 6, where yellow curves denote the relative prediction error  $e$  for RWM, and grey curves represent the MLP baseline.

The results indicate a clear advantage of RWM over the MLP baseline across all noise levels. As forecast steps increase, the relative prediction error of the MLP model grows significantly, diverging more rapidly than RWM. In contrast, RWM demonstrates superior stability, maintaining lower prediction errors even under high noise levels. This robustness can be attributed to the dual-autoregressive mechanism introduced in Sec. III-B, which ensures stability in long-horizon predictions. The inner autoregression updates the GRU hidden states during the historical context window, while the outer autoregression feeds back predictions during the forecast horizon. This design

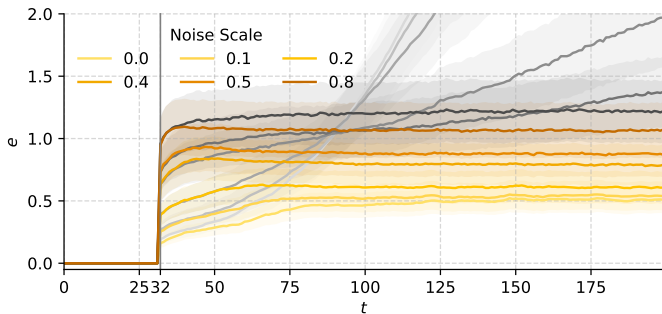


Fig. 6: Autoregressive trajectory prediction error under Gaussian noise. Yellow curves denote RWM at varying noise levels, demonstrating consistent robustness and lower error accumulation across forecast steps. Grey curves represent the MLP baseline, which exhibits significantly higher error accumulation and reduced robustness to noise.

minimizes the accumulation of errors by continually refining the state representation toward long-term predictions, even in the presence of noisy inputs.

### C. Dual-autoregressive Mechanism

The choice of history horizon  $M$  and forecast horizon  $N$  plays a critical role in the training and performance of RWM. The history horizon  $M$  governs the amount of historical information the model utilizes to infer the current state and predict future observations. The forecast horizon  $N$  defines the extent of supervised forward prediction steps during training. These two hyperparameters directly impact the autoregressive prediction accuracy and training time, as shown in Fig. 7.

The heatmap on the left in Fig. 7 shows the relative autoregressive prediction error  $e$  under different combinations of  $M$  and  $N$ . Models trained with a longer history horizon  $M$  consistently exhibit lower prediction errors, demonstrating the importance of providing sufficient historical context to capture the underlying dynamics. However, the influence of  $M$  plateaus beyond a certain point, indicating diminishing returns for very large history horizons. Forecast horizon  $N$ , on the other hand, plays a decisive role in improving long-term prediction accuracy. Increasing  $N$  during training leads to better performance in autoregressive rollouts, as it encourages the model to learn representations robust to compounding errors over extended prediction horizons. This improvement comes at the cost of increased training time, as shown in the heatmap on the right. Larger  $N$  values require sequential computation during training due to the autoregressive nature of the process, significantly lengthening the training duration.

Interestingly, when the forecast horizon  $N = 1$  (teacher-forcing), training can be highly parallelized, resulting in minimal training time. However, this setting leads to poor autoregressive performance, as the model lacks exposure to long-horizon prediction during training and fails to effectively handle compounding errors. From the results, an optimal trade-off emerges: moderate values of  $M$  and  $N$  balance prediction accuracy and training efficiency. For instance, a history horizon

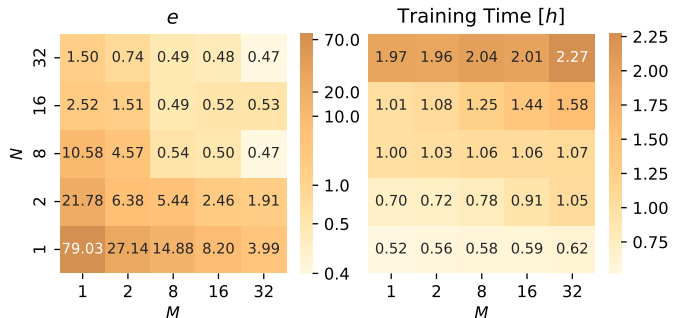


Fig. 7: Ablation study on the history horizon  $M$  and forecast horizon  $N$  in RWM. The heatmap on the left shows the relative autoregressive prediction error, with darker colors indicating higher errors. Models trained with larger history horizons  $M$  exhibit lower errors, although the improvements plateau beyond a certain point. Forecast horizon  $N$  has a significant impact, with longer horizons leading to better long-term prediction accuracy due to exposure to extended rollouts during training. The heatmap on the right illustrates training time, with darker colors representing longer durations. Increasing  $N$  significantly raises training time due to sequential computation, while shorter horizons (e.g.,  $N = 1$ , teacher-forcing) enable faster training but result in poor prediction accuracy.

of  $M = 32$  and forecast horizon of  $N = 8$  achieve strong autoregressive performance with manageable training time. These settings ensure sufficient historical context while training the model for robust long-term predictions. Overall, the results highlight the critical interplay between history and forecast horizons in autoregressive training. While extending both  $M$  and  $N$  improves accuracy, practical considerations of computational cost necessitate careful tuning of these hyperparameters to achieve optimal performance.

### D. Generality across Robotic Environments

To assess the generality and robustness of RWM across a diverse range of robotic environments, we compare its performance with several baseline methods, including MLP, recurrent state-space model (RSSM) [18, 33, 14, 34], and transformer-based architectures [48, 50]. These baselines represent widely adopted approaches in dynamics modeling and policy optimization. All models are given the same context during training and evaluation. Their training parameters are detailed in Sec. B2. The relative autoregressive prediction errors  $e$  for these models across various environments are shown in Fig. 8. The tasks span manipulation scenarios as well as quadruped and humanoid locomotion tasks, allowing for a comprehensive evaluation of the models. In addition, we highlight the importance of the autoregressive training introduced in Sec. III-B by including both RWM trained with teacher-forcing (RWM-TF) and autoregressive training (RWM-AR), demonstrating the significant performance gains achieved by the latter.

The results highlight the superiority of RWM trained with autoregressive training (RWM-AR), which consistently achieves

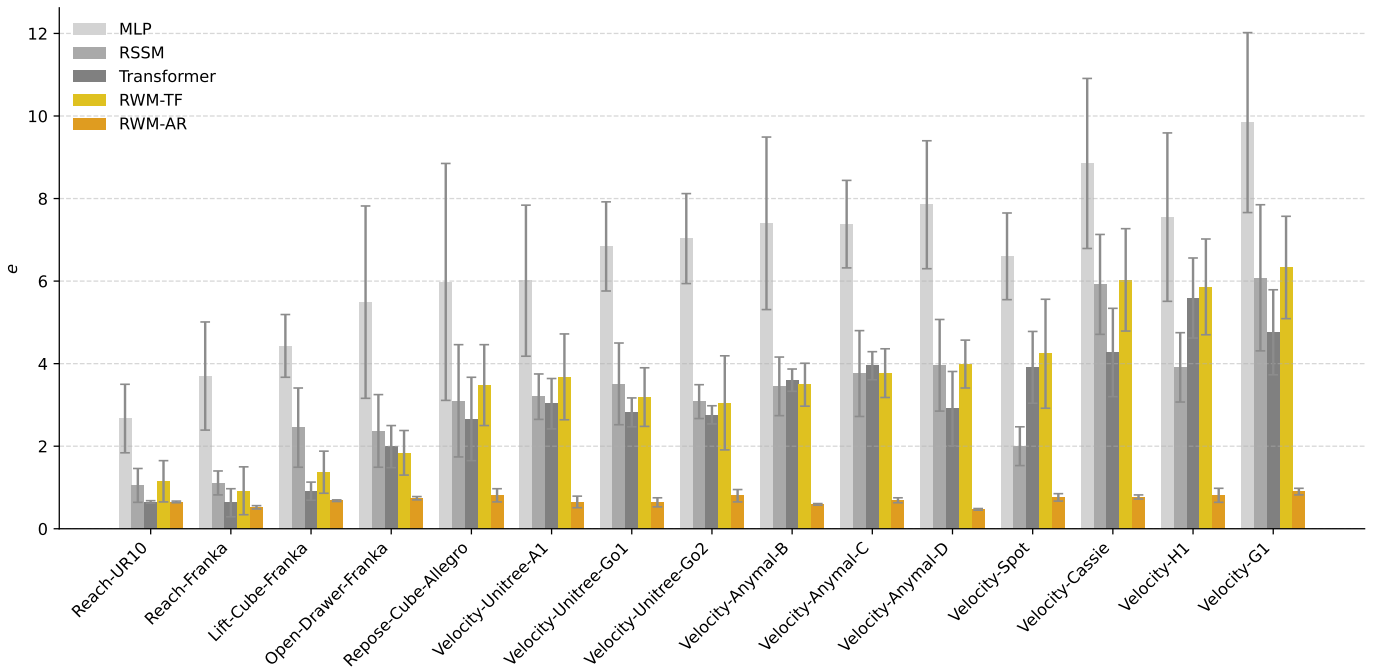


Fig. 8: Autoregressive trajectory prediction errors across diverse robotic environments and network architectures. RWM trained with autoregressive training (RWM-AR) consistently outperforms baseline methods, including MLP, recurrent state-space model (RSSM), and transformer-based architectures. RWM-AR demonstrates superior generalization and robustness across tasks, from manipulation to locomotion. Autoregressive training (RWM-AR) reduces compounding errors over long rollouts, significantly improving performance compared to teacher-forcing training (RWM-TF).

the lowest prediction errors across all environments. The performance gap between RWM-AR and the baselines is especially pronounced in complex and dynamic tasks, such as velocity tracking for legged robots, where accurate long-horizon predictions are critical for effective control. The comparison also reveals that RWM-AR significantly outperforms its teacher-forcing counterpart (RWM-TF), underscoring the importance of autoregressive training in mitigating compounding prediction errors over long rollouts. We additionally visualize the imagination rolled out by RWM-AR compared with the ground truth simulation in Fig. 1 and Fig. 9.

One of the key factors driving this performance is RWM’s dual-autoregressive mechanism, which ensures robustness in long-horizon predictions by sequentially incorporating historical context and feeding back its own predictions during rollouts. In contrast, models such as RSSM and transformers often exhibit error accumulation due to their reliance on shorter training horizons or weaker temporal representations. This capability is particularly evident in tasks with dynamically complex trajectories, such as legged locomotion, where slight inaccuracies in prediction can cascade into large errors over time. Importantly, the autoregressive training approach further amplifies the robustness of RWM by simulating the conditions encountered during deployment. While teacher-forcing training (RWM-TF) performs adequately in environments with shorter prediction horizons, it struggles with long rollouts where compounding errors dominate. Autoregressive training (RWM-

AR), on the other hand, exposes the model to its own predictions during training, enabling it to better handle error propagation and produce reliable trajectories over extended horizons.

Note that the baselines are trained using teacher forcing as they are traditionally implemented. However, the proposed autoregressive training framework is architecture-agnostic and can also be applied to baseline models. When trained with autoregressive training, RSSM achieves a performance comparable to the proposed GRU-based architecture. Nevertheless, we opt for the GRU-based model due to its simplicity and computational efficiency. On the other hand, training transformer architectures with autoregressive training does not scale effectively, as the multi-step gradient propagation in autoregressive forecasting leads to GPU memory constraints, limiting their practicality for this approach. These results demonstrate that RWM, when combined with autoregressive training, achieves robust and generalizable performance across diverse robotic tasks. Its ability to consistently outperform baseline architectures highlights the effectiveness of its design in addressing the challenges of long-horizon prediction and error accumulation.

### E. Policy Learning and Hardware Transfer

Using MBPO-PPO, we train a goal-conditioned velocity tracking policy for ANYmalD leveraging RWM. At the beginning of each imagination rollout, a target velocity is sampled alongside the initial observation retrieved from the



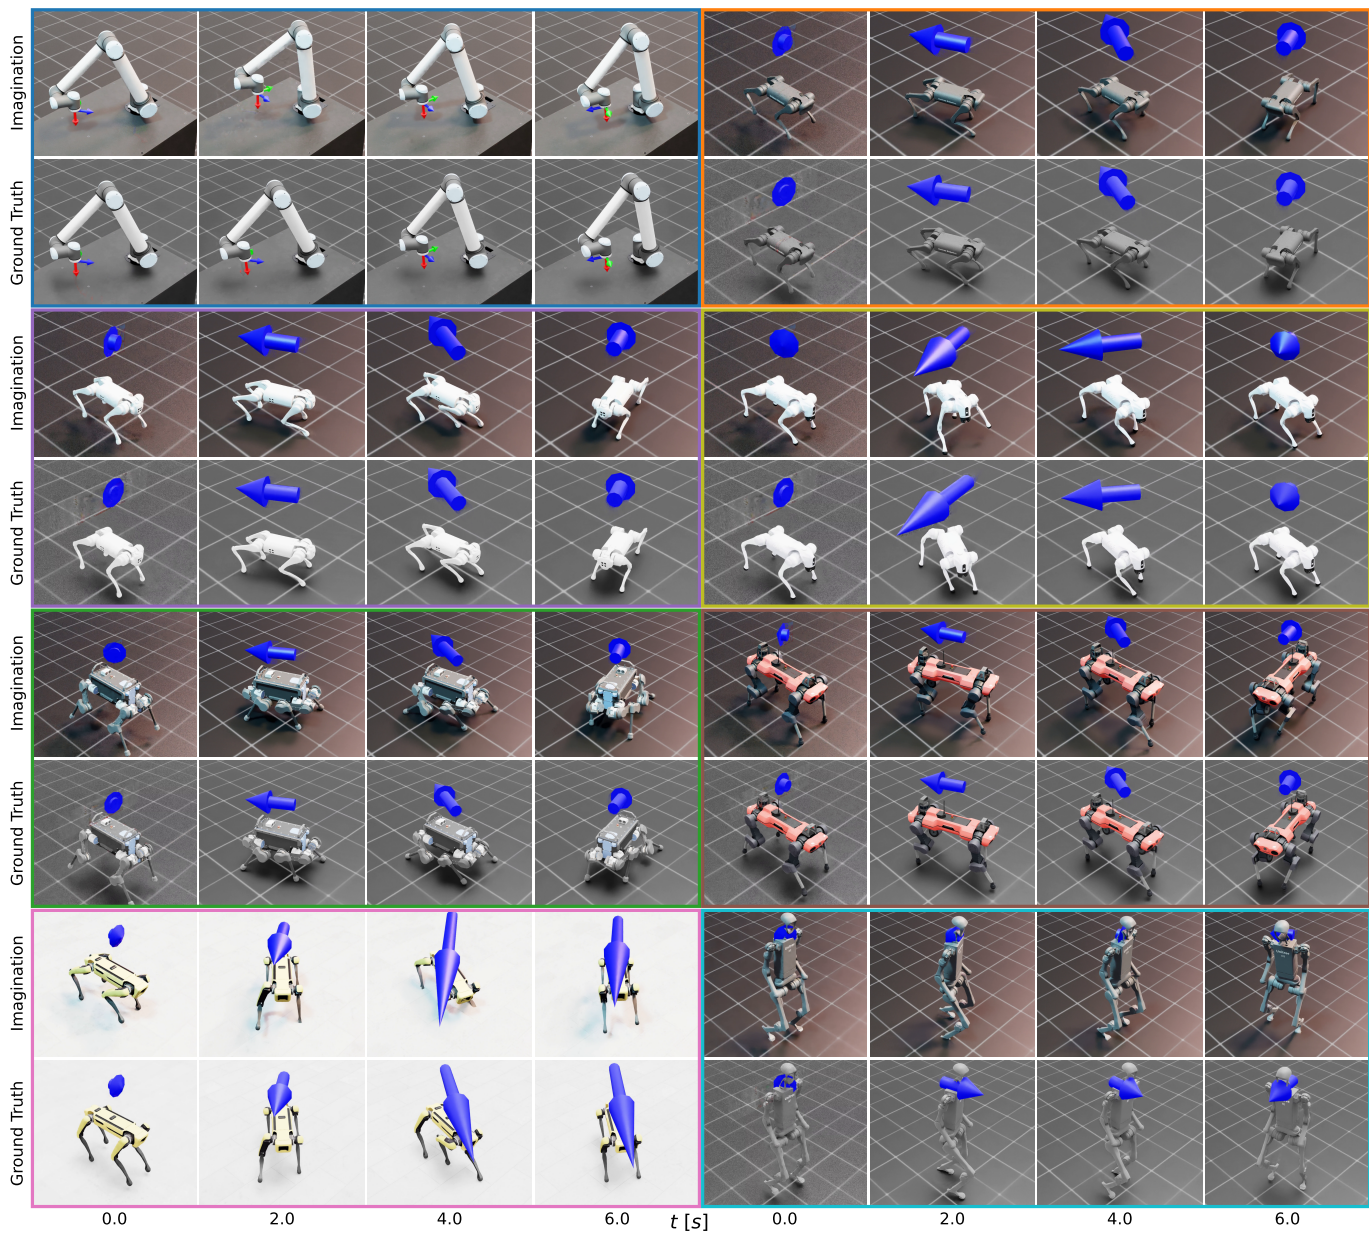


Fig. 9: Autoregressive imagination of RWM and ground-truth simulation across diverse robotic systems. For each environment, the top row showcases the RWM autoregressively predicting future trajectories in imagination. The second row visualizes the ground truth evolution in simulation. The visualized coordinate and arrow markers denote the predicted and measured end-effector pose and base velocity, respectively.

replay buffer  $\mathcal{D}$ . The policy selects an action based on the sampled observation and velocity command. RWM then predicts the next observation based on the observation-action pair, and the reward is computed from this transition. This process continues recursively over the rollout horizon, with the collected imagination trajectories being used to update the policy. After each iteration, the updated policy interacts with the real environment, collecting additional data for the replay buffer, which is subsequently used to refine RWM.

The policy’s observation and action spaces are detailed in Sec. A1, and its architecture is described in Sec. B3. Reward

formulations are provided in Sec. A2, while training parameters are summarized in Sec. C2.

Note that learning policies with long imagination rollouts from a learned world model is especially challenging due to the inherent compounding errors in the autoregressive nature of the predictions arising from two key factors: The world model’s reliance on previous predictions to infer future observations, which introduces drift over time. And the policy’s dependence on predicted observations to compute actions, amplifying errors in the generated trajectories. We compare MBPO-PPO with two baselines: Short-Horizon Actor-Critic (SHAC) [45] and

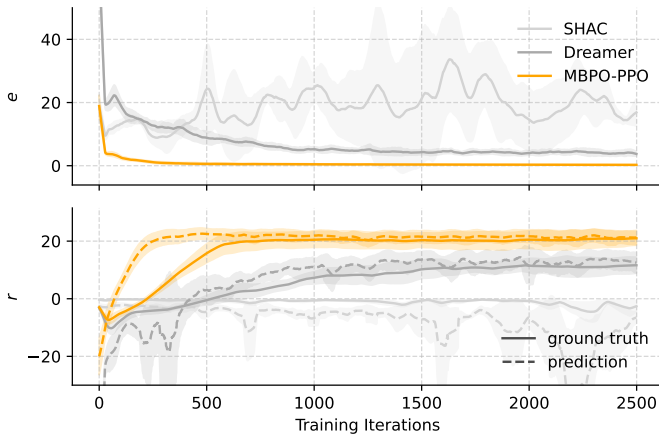


Fig. 10: Model error and policy mean reward for the ANYmal D velocity tracking task with MBPO-PPO. The policy is trained using estimated rewards computed from predicted observations by RWM. Ground truth rewards, visualized with solid lines, are reported by the simulator for *evaluation* purposes only.

DreamerV3 [34]. SHAC employs a first-order gradient-based method that propagates gradients through the world model to optimize the policy. Dreamer, in contrast, integrates a latent-space dynamics model with an actor-critic framework, emphasizing sample efficiency and robustness in continuous control tasks. The comparative results of model error and policy performance are shown in Fig. 10.

Figure 10 (top) illustrates the model error  $e$  during policy optimization. While MBPO-PPO demonstrates a significant reduction in model error over training, stabilizing at a consistently low value, SHAC struggles with high and fluctuating model error throughout the process. Its reliance on first-order gradients for optimization is not well-suited for discontinuous dynamics, such as those encountered in legged locomotion, where system behavior changes drastically due to varying contact patterns. The resulting inaccurate gradients lead to suboptimal policy updates, producing chaotic robot behaviors during training. These chaotic behaviors, in turn, generate low-quality training data for updating RWM, exacerbating model inaccuracies. This feedback loop causes a compounding failure mode where both the policy and the model collapse. Dreamer exhibits lower model error than SHAC but still significantly higher error compared to MBPO-PPO. Although Dreamer effectively leverages its latent-space dynamics model for policy optimization, its reliance on shorter planning horizons during training limits its ability to handle long-horizon dependencies, particularly in stochastic environments. As a result, Dreamer encounters moderate compounding errors during policy learning, which hinder its convergence to optimal behaviors. While Dreamer’s model error stabilizes faster than SHAC, it remains insufficiently accurate for effective sim-to-real transfer.

On the bottom plot illustrating rewards  $r$ , the predicted rewards (dashed lines) for MBPO-PPO slightly overshoot the ground truth rewards (solid lines) during the early and middle stages of training. This overshooting occurs because

the policy optimization process amplifies any small inaccuracies in the world model’s predicted rewards, particularly during the policy’s initial improvement phases. The world model, although accurate, learns a slightly optimistic approximation of the reward function, which the policy leverages during optimization. This leads to an overestimation of expected rewards in the learned policy. Despite this overshooting, the predicted rewards converge closer to the ground truth as training progresses, indicating that the model-predicted rewards remain sufficiently accurate to guide effective policy learning. Importantly, MBPO-PPO ultimately achieves a high ground truth reward, demonstrating that the overshooting does not hinder its convergence or real-world applicability.

In contrast, SHAC fails to converge entirely. The policy learned under SHAC generates erratic and ineffective robot behaviors, which not only prevent meaningful policy improvement but also undermine the accuracy of the learned world model. This is particularly detrimental for challenging dynamics like legged locomotion, where accurate policy optimization is crucial for producing stable and effective behaviors. Dreamer demonstrates partial convergence, achieving higher rewards compared to SHAC but significantly lagging behind MBPO-PPO. The policies learned using Dreamer exhibit smoother and more stable behaviors than SHAC but fail to match the robustness and performance of the policies optimized with RWM. This discrepancy highlights Dreamer’s limited capacity to generalize to the intricate and discontinuous dynamics of legged locomotion tasks.

To evaluate the robustness of the learned policy, we deploy it on ANYmalD hardware in a zero-shot transfer setup. SHAC and Dreamer fail to produce a deployable policy due to its collapse during training. However, as shown in Fig. 1, the policy learned using MBPO-PPO demonstrates reliable and robust performance in tracking goal-conditioned velocity commands and maintaining stability under external disturbances, such as unexpected impacts and terrain conditions. The success of MBPO-PPO in hardware deployment is a direct result of the high-quality trajectory predictions generated by RWM, which enable accurate and effective policy optimization. Videos showcasing the robustness of the policy in hardware, including its responses to external disturbances, are available in our supplementary materials. These results underline the effectiveness of RWM and MBPO-PPO in enabling robust and scalable policy deployment for real-world robotic systems.

## V. LIMITATIONS

The policy learned with RWM surpasses existing MBRL methods in both robustness and generalization. However, it still falls short of the performance achieved by well-tuned model-free RL methods trained on high-fidelity simulators. Model-free RL, being a more mature and extensively optimized paradigm, excels in settings where unlimited interaction with near-perfect simulators is possible. In contrast, the strengths of MBRL are more pronounced in scenarios where accurate or efficient simulation is infeasible, making it an indispensable tool for

enabling intelligent agents to eventually learn and adapt in complex, real-world environments.

In this work, the world model is pre-trained using simulation data prior to policy optimization, reducing instability during training. However, training from scratch remains challenging as policies can exploit model inaccuracies during exploration, leading to inefficiency and instability. In addition, the need for additional interaction with the environment to fine-tune the world model highlights areas for further refinement. Nevertheless, enabling safe and effective online learning directly on hardware remains challenging. Current training in simulation avoids potential hardware damage, but incorporating safety constraints and robust uncertainty estimates will be critical for deploying RWM and MBPO-PPO in real-world, lifelong learning scenarios. These limitations underscore the trade-offs inherent in MBRL frameworks, balancing data efficiency, safety, and performance while addressing the complexities of real-world robotic systems.

## VI. CONCLUSION

In this work, we present RWM, a robust and scalable framework for learning world models tailored to complex robotic tasks. Leveraging a dual-autoregressive mechanism, RWM effectively addresses key challenges such as compounding errors, partial observability, and stochastic dynamics. By incorporating historical context and self-supervised training over long prediction horizons, RWM achieves superior accuracy and robustness without relying on domain-specific inductive biases, enabling generalization across diverse tasks.

Through extensive experiments, we demonstrate that RWM consistently outperforms state-of-the-art approaches like RSSM and transformer-based architectures in autoregressive prediction accuracy across diverse robotic environments. Its ability to maintain stability under noise and dynamically complex scenarios further underscores its robustness and applicability to real-world tasks.

Building on RWM, we propose MBPO-PPO, a policy optimization framework that leverages long world model rollout fidelity. Policies trained using MBPO-PPO demonstrate superior performance in simulation and transfer seamlessly to hardware, as evidenced by zero-shot deployment on the ANYmal D robot. Unlike baseline methods such as SHAC and Dreamer, which struggle with unstable dynamics and compounding errors, MBPO-PPO reliably optimizes policies that generalize effectively to physical systems.

This work advances the field of model-based reinforcement learning by providing a generalizable, efficient, and scalable framework for learning and deploying world models. The results highlight RWM's potential to enable adaptive, robust, and high-performing robotic systems, setting a foundation for broader adoption of model-based approaches in real-world applications.



## REFERENCES

- [1] Tuomas Haarnoja, Aurick Zhou, Pieter Abbeel, and Sergey Levine. Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor. In *International conference on machine learning*, pages 1861–1870. PMLR, 2018.
- [2] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- [3] Hai Nguyen and Hung La. Review of deep reinforcement learning for robot manipulation. In *2019 Third IEEE international conference on robotic computing (IRC)*, pages 590–595. IEEE, 2019.
- [4] Emanuel Todorov, Tom Erez, and Yuval Tassa. Mujoco: A physics engine for model-based control. In *2012 IEEE/RSJ international conference on intelligent robots and systems*, pages 5026–5033. IEEE, 2012.
- [5] Viktor Makoviychuk, Lukasz Wawrzyniak, Yunrong Guo, Michelle Lu, Kier Storey, Miles Macklin, David Hoeller, Nikita Rudin, Arthur Allshire, Ankur Handa, et al. Isaac gym: High performance gpu-based physics simulation for robot learning. *arXiv preprint arXiv:2108.10470*, 2021.
- [6] Mayank Mittal, Calvin Yu, Qinxi Yu, Jingzhou Liu, Nikita Rudin, David Hoeller, Jia Lin Yuan, Ritvik Singh, Yunrong Guo, Hammad Mazhar, et al. Orbit: A unified simulation framework for interactive robot learning environments. *IEEE Robotics and Automation Letters*, 8(6):3740–3747, 2023.
- [7] Xue Bin Peng, Marcin Andrychowicz, Wojciech Zaremba, and Pieter Abbeel. Sim-to-real transfer of robotic control with dynamics randomization. In *2018 IEEE international conference on robotics and automation (ICRA)*, pages 3803–3810. IEEE, 2018.
- [8] Jemin Hwangbo, Joonho Lee, Alexey Dosovitskiy, Dario Bellicoso, Vassilios Tsounis, Vladlen Koltun, and Marco Hutter. Learning agile and dynamic motor skills for legged robots. *Science Robotics*, 4(26):eaau5872, 2019.
- [9] Chenhao Li, Marin Vlastelica, Sebastian Blaes, Jonas Frey, Felix Grimminger, and Georg Martius. Learning agile skills via adversarial imitation of rough partial demonstrations. In *Conference on Robot Learning*, pages 342–352. PMLR, 2023.
- [10] Jie Tan, Tingnan Zhang, Erwin Coumans, Atil Iscen, Yunfei Bai, Danijar Hafner, Steven Bohez, and Vincent Vanhoucke. Sim-to-real: Learning agile locomotion for quadruped robots. *arXiv preprint arXiv:1804.10332*, 2018.
- [11] Xue Bin Peng, Erwin Coumans, Tingnan Zhang, Tsang-Wei Lee, Jie Tan, and Sergey Levine. Learning agile robotic locomotion skills by imitating animals. *arXiv preprint arXiv:2004.00784*, 2020.
- [12] Chenhao Li, Sebastian Blaes, Pavel Kolev, Marin Vlastelica, Jonas Frey, and Georg Martius. Versatile skill control via self-supervised adversarial imitation of unlabeled mixed motions. In *2023 IEEE international conference on robotics and automation (ICRA)*, pages 2944–2950. IEEE, 2023.
- [13] Anusha Nagabandi, Gregory Kahn, Ronald S Fearing, and Sergey Levine. Neural network dynamics for model-based deep reinforcement learning with model-free fine-tuning. In *2018 IEEE international conference on robotics and automation (ICRA)*, pages 7559–7566. IEEE, 2018.
- [14] Danijar Hafner, Timothy Lillicrap, Mohammad Norouzi, and Jimmy Ba. Mastering atari with discrete world models. *arXiv preprint arXiv:2010.02193*, 2020.
- [15] Kurtland Chua, Roberto Calandra, Rowan McAllister, and Sergey Levine. Deep reinforcement learning in a handful of trials using probabilistic dynamics models. *Advances in neural information processing systems*, 31, 2018.
- [16] Michael Janner, Justin Fu, Marvin Zhang, and Sergey Levine. When to trust your model: Model-based policy optimization. *Advances in neural information processing systems*, 32, 2019.
- [17] David Ha and Jürgen Schmidhuber. Recurrent world models facilitate policy evolution. *Advances in neural information processing systems*, 31, 2018.
- [18] Danijar Hafner, Timothy Lillicrap, Ian Fischer, Ruben Villegas, David Ha, Honglak Lee, and James Davidson. Learning latent dynamics for planning from pixels. In *International conference on machine learning*, pages 2555–2565. PMLR, 2019.
- [19] Richard S Sutton. Dyna, an integrated architecture for learning, planning, and reacting. *ACM Sigart Bulletin*, 2(4):160–163, 1991.
- [20] Frederik Ebert, Chelsea Finn, Sudeep Dasari, Annie Xie, Alex Lee, and Sergey Levine. Visual foresight: Model-based deep reinforcement learning for vision-based robotic control. *arXiv preprint arXiv:1812.00568*, 2018.
- [21] Chelsea Finn, Ian Goodfellow, and Sergey Levine. Unsupervised learning for physical interaction through video prediction. *Advances in neural information processing systems*, 29, 2016.
- [22] Philipp Wu, Alejandro Escontrela, Danijar Hafner, Pieter Abbeel, and Ken Goldberg. Daydreamer: World models for physical robot learning. In *Conference on robot learning*, pages 2226–2240. PMLR, 2023.
- [23] Yunlong Song, Sangbae Kim, and Davide Scaramuzza. Learning quadruped locomotion using differentiable simulation. *arXiv preprint arXiv:2403.14864*, 2024.
- [24] Yuxiang Yang, Ken Caluwaerts, Atil Iscen, Tingnan Zhang, Jie Tan, and Vikas Sindhwani. Data efficient reinforcement learning for legged robots. In *Conference on Robot Learning*, pages 1–10. PMLR, 2020.
- [25] Cansu Sancaktar, Sebastian Blaes, and Georg Martius. Curious exploration via structured world models yields zero-shot object manipulation. *Advances in Neural Information Processing Systems*, 35:24170–24183, 2022.
- [26] Chenhao Li, Elijah Stanger-Jones, Steve Heim, and Sangbae Kim. Fld: Fourier latent dynamics for structured motion representation and learning. *arXiv preprint arXiv:2402.13820*, 2024.
- [27] Marc Deisenroth and Carl E Rasmussen. Pilco: A model-

- based and data-efficient approach to policy search. In *Proceedings of the 28th International Conference on machine learning (ICML-11)*, pages 465–472, 2011.
- [28] Sergey Levine, Chelsea Finn, Trevor Darrell, and Pieter Abbeel. End-to-end training of deep visuomotor policies. *Journal of Machine Learning Research*, 17(39):1–40, 2016.
- [29] Chelsea Finn and Sergey Levine. Deep visual foresight for planning robot motion. In *2017 IEEE International Conference on Robotics and Automation (ICRA)*, pages 2786–2793. IEEE, 2017.
- [30] Eloi Alonso, Adam Jelley, Vincent Micheli, Anssi Kanervisto, Amos Storkey, Tim Pearce, and François Fleuret. Diffusion for world modeling: Visual details matter in atari. *arXiv preprint arXiv:2405.12399*, 2024.
- [31] Suyoung Choi, Gwanghyeon Ji, Jeongsoo Park, Hyeongjun Kim, Juhyeok Mun, Jeong Hyun Lee, and Jemin Hwangbo. Learning quadrupedal locomotion on deformable terrain. *Science Robotics*, 8(74):eade2256, 2023.
- [32] Jacob Levy, Tyler Westenbroek, and David Fridovich-Keil. Learning to walk from three minutes of real-world data with semi-structured dynamics models. *arXiv preprint arXiv:2410.09163*, 2024.
- [33] Danijar Hafner, Timothy Lillicrap, Jimmy Ba, and Mohammad Norouzi. Dream to control: Learning behaviors by latent imagination. *arXiv preprint arXiv:1912.01603*, 2019.
- [34] Danijar Hafner, Jurgis Pasukonis, Jimmy Ba, and Timothy Lillicrap. Mastering diverse domains through world models. *arXiv preprint arXiv:2301.04104*, 2023.
- [35] Thomas Bi and Raffaello D’Andrea. Sample-efficient learning to solve a real-world labyrinth game using data-augmented model-based reinforcement learning. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 7455–7460. IEEE, 2024.
- [36] Manuel Watter, Jost Springenberg, Joschka Boedecker, and Martin Riedmiller. Embed to control: A locally linear latent dynamics model for control from raw images. *Advances in neural information processing systems*, 28, 2015.
- [37] David Ha and Jürgen Schmidhuber. World models. *arXiv preprint arXiv:1803.10122*, 2018.
- [38] Vincent Micheli, Eloi Alonso, and François Fleuret. Transformers are sample-efficient world models. *arXiv preprint arXiv:2209.00588*, 2022.
- [39] Weipu Zhang, Gang Wang, Jian Sun, Yetian Yuan, and Gao Huang. Storm: Efficient stochastic transformer based world models for reinforcement learning. *Advances in Neural Information Processing Systems*, 36, 2024.
- [40] Nicklas Hansen, Xiaolong Wang, and Hao Su. Temporal difference learning for model predictive control. *arXiv preprint arXiv:2203.04955*, 2022.
- [41] Yunhai Feng, Nicklas Hansen, Ziyang Xiong, Chandramouli Rajagopalan, and Xiaolong Wang. Finetuning offline world models in the real world. *arXiv preprint arXiv:2310.16029*, 2023.
- [42] Nicklas Hansen, Hao Su, and Xiaolong Wang. Td-mpc2: Scalable, robust world models for continuous control. *arXiv preprint arXiv:2310.16828*, 2023.
- [43] Tianhe Yu, Garrett Thomas, Lantao Yu, Stefano Ermon, James Y Zou, Sergey Levine, Chelsea Finn, and Tengyu Ma. Mopo: Model-based offline policy optimization. *Advances in Neural Information Processing Systems*, 33:14129–14142, 2020.
- [44] Ignasi Clavera, Jonas Rothfuss, John Schulman, Yasuhiro Fujita, Tamim Asfour, and Pieter Abbeel. Model-based reinforcement learning via meta-policy optimization. In *Conference on Robot Learning*, pages 617–629. PMLR, 2018.
- [45] Jie Xu, Viktor Makoviychuk, Yashraj Narang, Fabio Ramos, Wojciech Matusik, Animesh Garg, and Miles Macklin. Accelerated policy learning with parallel differentiable simulation. *arXiv preprint arXiv:2204.07137*, 2022.
- [46] Ignat Georgiev, Krishnan Srinivasan, Jie Xu, Eric Heiden, and Animesh Garg. Adaptive horizon actor-critic for policy learning in contact-rich differentiable simulation. *arXiv preprint arXiv:2405.17784*, 2024.
- [47] Richard S Sutton and Andrew G Barto. *Reinforcement learning: An introduction*. MIT press, 2018.
- [48] Lili Chen, Kevin Lu, Aravind Rajeswaran, Kimin Lee, Aditya Grover, Misha Laskin, Pieter Abbeel, Aravind Srinivas, and Igor Mordatch. Decision transformer: Reinforcement learning via sequence modeling. *Advances in neural information processing systems*, 34:15084–15097, 2021.
- [49] Richard S Sutton. Integrated architectures for learning, planning, and reacting based on approximating dynamic programming. In *Machine learning proceedings 1990*, pages 216–224. Elsevier, 1990.
- [50] Scott Reed, Konrad Zolna, Emilio Parisotto, Sergio Gomez Colmenarejo, Alexander Novikov, Gabriel Barth-Maron, Mai Gimenez, Yury Sulsky, Jackie Kay, Jost Tobias Springenberg, et al. A generalist agent. *arXiv preprint arXiv:2205.06175*, 2022.

APPENDIX

A. Task Representation

1) *Observation and action spaces*: The observation space for the ANYmal world model is composed of base linear and angular velocities  $v, \omega$  in the robot frame, measurement of the gravity vector in the robot frame  $g$ , joint positions  $q$ , velocities  $\dot{q}$  and torques  $\tau$  as in Table S1.

TABLE S1: World model observation space

Entry	Symbol	Dimensions
base linear velocity	$v$	0:3
base angular velocity	$\omega$	3:6
projected gravity	$g$	6:9
joint positions	$q$	9:21
joint velocities	$\dot{q}$	21:33
joint torques	$\tau$	33:45

The privileged information is used to provide an additional learning objective that implicitly embeds critical information for accurate long-term predictions. The space is composed of knee and foot contacts as in Table S2.

TABLE S2: World model privileged information space

Entry	Symbol	Dimensions
knee contact	–	0:4
foot contact	–	4:8

The action space is composed of joint position targets as in Table S3.

TABLE S3: Action space

Entry	Symbol	Dimensions
joint position targets	$q^*$	0:12

The observation space for the ANYmal velocity tracking policy is composed of base linear and angular velocities  $v, \omega$  in the robot frame, measurement of the gravity vector in the robot frame  $g$ , velocity command  $c$ , joint positions  $q$  and velocities  $\dot{q}$  as in Table S4.

TABLE S4: Policy observation space

Entry	Symbol	Dimensions
base linear velocity	$v$	0:3
base angular velocity	$\omega$	3:6
projected gravity	$g$	6:9
velocity command	$c$	9:12
joint positions	$q$	12:24
joint velocities	$\dot{q}$	24:36

2) *Reward functions*: The total reward is sum of the following terms with weights detailed in Table S5.

Linear velocity tracking  $x, y$

$$r_{v_{xy}} = w_{v_{xy}} e^{-\|c_{xy} - v_{xy}\|_2^2 / \sigma_{v_{xy}}^2},$$

TABLE S5: Reward weights

Symbol	$w_{v_{xy}}$	$w_{\omega_z}$	$w_{v_z}$	$w_{\omega_{xy}}$	$w_{q_\tau}$
Value	1.0	0.5	-2.0	-0.05	$-2.5e^{-5}$
Symbol	$w_{\dot{q}}$	$w_{\dot{a}}$	$w_{f_a}$	$w_c$	$w_g$
Value	$-2.5e^{-7}$	-0.01	0.5	-1.0	-5.0

where  $\sigma_{v_{xy}} = 0.25$  denotes a temperature factor,  $c_{xy}$  and  $v_{xy}$  denote the commanded and current base linear velocity.

Angular velocity tracking

$$r_{\omega_z} = w_{\omega_z} e^{-\|c_z - \omega_z\|_2^2 / \sigma_{\omega_z}^2},$$

where  $\sigma_{\omega_z} = 0.25$  denotes a temperature factor,  $c_z$  and  $\omega_z$  denote the commanded and current base angular velocity.

Linear velocity  $z$

$$r_{v_z} = w_{v_z} \|v_z\|_2^2,$$

where  $v_z$  denotes the base vertical velocity.

Angular velocity  $x, y$

$$r_{\omega_{xy}} = w_{\omega_{xy}} \|\omega_{xy}\|_2^2,$$

where  $\omega_{xy}$  denotes the current base roll and pitch velocity.

Joint torque

$$r_{q_\tau} = w_{q_\tau} \|\tau\|_2^2,$$

where  $\tau$  denotes the joint torques.

Joint acceleration

$$r_{\dot{q}} = w_{\dot{q}} \|\dot{q}\|_2^2,$$

where  $\dot{q}$  denotes the joint acceleration.

Action rate

$$r_{\dot{a}} = w_{\dot{a}} \|a' - a\|_2^2,$$

where  $a'$  and  $a$  denote the previous and current actions.

Feet air time

$$r_{f_a} = w_{f_a} t_{f_a},$$

where  $t_{f_a}$  denotes the sum of the time for which the feet are in the air.

Undesired contacts

$$r_c = w_c c_u,$$

where  $c_u$  denotes the counts of the undesired knee contacts.

Flat orientation

$$r_g = w_g g_{xy}^2,$$

where  $g_{xy}$  denotes the  $xy$ -components of the projected gravity.



## B. Network Architecture

1) *RWM*: The robotic world model consists of a GRU base and MLP heads predicting the mean and standard deviation of the next observation and privileged information such as contacts, as detailed in Table S6.

TABLE S6: RWM architecture

Component	Type	Hidden Shape	Activation
base	GRU	256, 256	—
heads	MLP	128	ReLU

2) *Baselines*: The network architectures of the baselines are detailed in Table S7.

TABLE S7: Baseline architecture

Network	Parameter	Value
MLP	hidden shape	256, 256
	activation	ReLU
RSSM	type	GRU
	hidden size	256
	layers	2
	latent dimension	64
	prior type categories	categorical 32
Transformer	type	decoder
	dimension	64
	heads	8
	layers	2
	context length	32
	positional encoding	sinusoidal

3) *MBPO-PPO*: The network architectures of the policy and the value function used in MBPO-PPO are detailed in Table S8.

TABLE S8: Policy and value function architecture

Network	Type	Hidden Shape	Activation
policy	MLP	128, 128, 128	ELU
value function	MLP	128, 128, 128	ELU

## C. Training Parameters

The learning networks and algorithm are implemented in PyTorch 2.4.0 with CUDA 12.6 and trained on an NVIDIA RTX 4090 GPU.

1) *RWM*: The training information of RWM is summarized in Table S9.

2) *MBPO-PPO*: The training information of MBPO-PPO is summarized in Table S10.

TABLE S9: RWM training parameters

Parameter	Symbol	Value
step time seconds	$\Delta t$	0.02
max iterations	—	2500
learning rate	—	$1e^{-4}$
weight decay	—	$1e^{-5}$
batch size	—	1024
history horizon	$M$	32
forecast horizon	$N$	8
forecast decay	$\alpha$	1.0
approximate training hours	—	1
number of seeds	—	5

TABLE S10: MBPO-PPO training parameters

Parameter	Symbol	Value
imagination environments	—	4096
imagination steps per iteration	—	100
step time seconds	$\Delta t$	0.02
buffer size	$ \mathcal{D} $	1000
max iterations	—	2500
learning rate	—	0.001
weight decay	—	0.0
learning epochs	—	5
mini-batches	—	4
KL divergence target	—	0.01
discount factor	$\gamma$	0.99
clip range	$\epsilon$	0.2
entropy coefficient	—	0.005
number of seeds	—	5