

Survey on Hand Gesture Recognition from Visual Input

Manousos Linardakis
*Department of Informatics and
Telematics,
Harokopio University of Athens
Athens, Greece
manouslinard@gmail.com*

Iraklis Varlamis
*Department of Informatics and
Telematics,
Harokopio University of Athens
Athens, Greece
varlamis@hua.gr*

Georgios Th. Papadopoulos
*Department of Informatics and
Telematics,
Harokopio University of Athens
Athens, Greece
g.th.papadopoulos@hua.gr*

Abstract—Hand gesture recognition has become an important research area, driven by the growing demand for human-computer interaction in fields such as sign language recognition, virtual and augmented reality, and robotics. Despite the rapid growth of the field, there are few surveys that comprehensively cover recent research developments, available solutions, and benchmark datasets. This survey addresses this gap by examining the latest advancements in hand gesture and 3D hand pose recognition from various types of camera input data including RGB images, depth images, and videos from monocular or multiview cameras, examining the differing methodological requirements of each approach. Furthermore, an overview of widely used datasets is provided, detailing their main characteristics and application domains. Finally, open challenges such as achieving robust recognition in real-world environments, handling occlusions, ensuring generalization across diverse users, and addressing computational efficiency for real-time applications are highlighted to guide future research directions. By synthesizing the objectives, methodologies, and applications of recent studies, this survey offers valuable insights into current trends, challenges, and opportunities for future research in human hand gesture recognition.

Index Terms—Gesture classification, Gesture estimation, Hand gesture recognition, Sign language recognition.

I. INTRODUCTION


Hand gesture recognition has captivated researchers' interest for decades, as it offers a natural and intuitive form of human-computer interaction. The ability to accurately detect and interpret hand gestures has numerous applications, from enhancing communication for the hearing impaired through sign language recognition [2], [5], [108] to enabling more efficient human-robot interaction in industrial and medical settings [12], [199] (see Fig. 1). Human hands play a versatile role in non-verbal communication, frequently conveying messages that can replace spoken words when interactions need to be brief and unambiguous. For example, gestures such as a thumbs-up for approval or a wave to beckon someone closer serve as universally understood signals that transcend language barriers and are often more practical than spoken language in certain contexts [43]. Additionally, hand gestures become especially valuable when communicating across physical distances where

speech may not be audible, and enhance gaming by providing an intuitive, immersive control method that replaces traditional input devices.

As gesture recognition technology continues to advance, it holds the potential to transform both human-computer [40], [162] and human-to-human [128], [188] interactions by enabling contactless control and enhancing accessibility for users with disabilities. Additionally, 3D hand reconstruction [85], [177] is an important aspect of human gesture recognition, offering valuable digital insights into hand movements and supporting applications in fields like 3D animation. The growing importance of this field underscores the need for accurate, real-time recognition systems capable of both interpreting and reconstructing a wide range of gestures across diverse environments.

The type of data used for hand gesture recognition influences the accuracy, efficiency, and suitability of hand recognition systems across various application domains. Such data are available in various modalities, collected by infrared sensors [14], [116], motion capture systems, cameras, and wearable devices [46], [48]. Methods relying on infrared sensors or motion capture technology for hand gesture classification and estimation typically involve complex setups that can limit their applicability in real-world scenarios. On the other side, RGB cameras are commonly found in smartphones, tablets, and laptops, making it easier for researchers to test methodologies and to collect large datasets without using specialized equipment. This democratization of technology enables researchers to develop and deploy gesture recognition systems that can be utilized in everyday settings. Based on the above, we focus on works that use RGB images, depth images, and video data collected by cameras, which are broadly available and accessible to researchers and are widely used in common user applications.

Compared to other recent surveys in the field, this survey offers a more comprehensive yet focused review of research in the field of Hand Gesture Recognition (HGR) using visual input. Unlike [150] that explores various modalities beyond visual input (e.g., EEG, EMG, and audio) with a primary emphasis on Sign Language Recognition (SLR) and limited discussion on hand gesture estimation, our work specifically

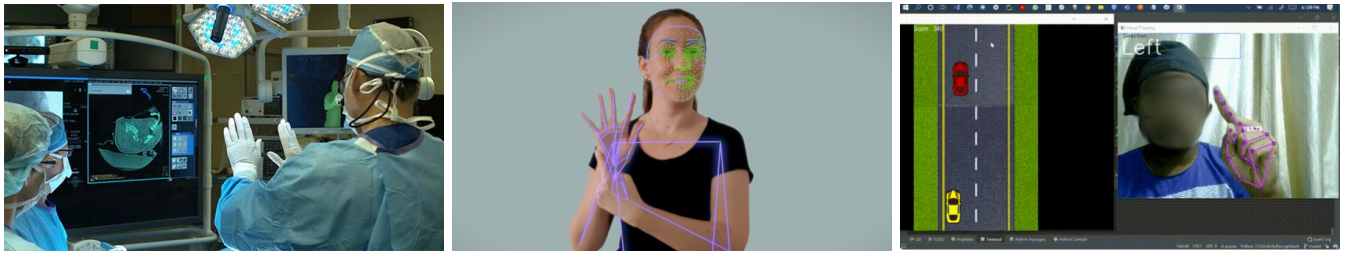

(a) Medical Assistance.

(b) Sign Language Interpretation.

(c) Gaming and Virtual Environments.

Fig. 1: Indicative applications of hand gesture recognition.

targets the visual input-based approaches. We categorize HGR into distinct tasks such as classification and estimation, as well as methodological distinctions like single-camera versus multi-camera setups, offering deeper insights into both general HGR and specialized topics like body reconstruction with an emphasis on HGR. Compared to [118] that categorizes Human Motion Recognition (HMR) methods broadly into vision sensor-based (VS) and wearable sensor-based (WS) ones, and further divide HGR into markerless and marker-based approaches, our survey focuses exclusively on visual input-based methods, ensuring a more detailed exploration of modern challenges, datasets, and trends. Moreover, we include research from 2018 to present, incorporating all latest advancements, challenges and trends. This focus and up-to-date analysis allow our survey to present a more relevant and actionable synthesis of current and future directions in HGR research.

A. Contributions of the Paper

This survey provides a comprehensive overview of recent advances in hand gesture recognition, aiming to cover multiple aspects, from algorithms and input types to applications and datasets. The main contributions of this paper can be summarized in the following:

- An organized presentation of research approaches: We organize the surveyed studies based on input data types (e.g., RGB images, depth images, video), hand capture techniques, and recognition methods used, providing a clear framework for understanding current research directions.
- A survey of applications and datasets: We analyze the applications and datasets employed in recent studies, discussing their main features, limitations, and suitability for different applications.
- A review of current research trends: We examine the latest trends in human gesture recognition and estimation, highlighting emerging approaches and key focus areas within the field.

B. Organization of the Paper

Section II presents the fundamental concepts and defines the terminology used in the field, and at the same time illustrates the various types of human gestures (e.g., static vs.

dynamic, hand, body, and facial gestures). Section III outlines the review methodology used to select and categorize the surveyed papers. Section IV provides an overview of the hand gesture recognition methods and their classifications, whereas Section V surveys the most popular algorithms employed in HGR and explains how they formulate and solve the task. Section VI discusses datasets used across different applications in hand gesture recognition. Section VII identifies trends and challenges highlighted in the literature. Finally, Section VIII summarizes key findings and suggests future research directions for advancements in the field.

II. BACKGROUND AND FUNDAMENTALS

A. Definition of Gesture and Gesture Recognition

A *gesture* can be defined as a structured, intentional movement or posture of the human body, often involving the hands, arms, or face, used to convey information and interact with devices, or control systems. Formally, let G represent a gesture, which can be expressed as a temporal sequence of poses:

$$G = \{P_1, P_2, \dots, P_n\}, \quad P_i \in \mathbb{R}^d$$

where P_i denotes the i -th pose, represented in a d -dimensional feature space capturing spatial or spatio-temporal characteristics such as joint coordinates, velocity, or orientation.

In the context of this study, *Gesture Recognition* is subdivided into two categories; *Gesture Classification* and *Gesture Estimation*.

1) *Gesture Classification*: Gesture classification refers to the computational process of detecting and interpreting gestures from input data. Given a time series of inputs $X = \{x_1, x_2, \dots, x_t\}$ derived from sensors or imaging devices (e.g., RGB cameras, depth sensors), gesture recognition involves mapping X to a predefined set of gesture labels $\mathcal{C} = \{C_1, C_2, \dots, C_k\}$:

$$f : X \rightarrow \mathcal{C},$$

where f is the recognition function, trained to minimize a loss function $\mathcal{L}(y, f(X))$, y being the ground truth label.

2) *Gesture Estimation*: Gesture estimation refers to the computational process of digitally representing a gesture’s structure and configuration. Unlike gesture classification, which maps gestures to predefined labels, gesture estimation aims to extract key spatial or temporal features of the gesture, such as joint positions, angles, or trajectories. Given a time series of inputs $X = \{x_1, x_2, \dots, x_t\}$ from sensors or imaging devices (e.g., RGB cameras, depth sensors), gesture estimation involves mapping X to a set of gesture pose parameters $P = \{p_1, p_2, \dots, p_n\}$ that define the gesture’s digital representation:

$$g : X \rightarrow P,$$

where g is the estimation function, trained to minimize a reconstruction loss $\mathcal{L}(\hat{P}, g(X))$, \hat{P} representing the ground truth gesture pose parameters (e.g., 3D joint coordinates or gesture skeleton structure).

B. Static and Dynamic Gestures

Gestures can be classified into *static* and *dynamic* ones. A *static gesture* is defined as a single pose P that remains unchanged over time:

$$G_{\text{static}} = P, \quad P \in \mathbb{R}^d.$$

In contrast, a *dynamic gesture* involves a sequence of poses over time, modeled as a trajectory:

$$G_{\text{dynamic}} = \{P_t \mid t = 1, 2, \dots, T\},$$

where T represents the duration of the hand gesture. Dynamic gestures require temporal modeling to capture dependencies across the movement sequence.

C. Multimodal Gestures

Multimodal gestures refer to gestures that involve multiple body parts or the integration of multiple sensory modalities to enhance the richness and clarity of communication. These gestures combine various sources of information, such as hand movements, facial expressions, or even audio cues, to form a more comprehensive understanding of human intent.

Formally, a multimodal gesture G_m can be expressed as the combination of modalities:

$$G_m = \{M_1, M_2, \dots, M_k\},$$

where M_i represents the i -th modality, such as hand motion, facial expressions, or audio signals. Each modality M_i can be represented in its own feature space \mathbb{R}^{d_i} , and the fusion of modalities $\phi(G_m)$ combines these features:

$$\phi(G_m) = \phi_1(M_1) \oplus \phi_2(M_2) \oplus \dots \oplus \phi_k(M_k),$$

where \oplus denotes the fusion operation, which may involve concatenation, attention mechanisms, or other techniques to integrate information.

Examples of multimodal gestures include:

- **Hand and Facial Expressions:** Gestures such as a thumbs-up combined with a smile to reinforce positive feedback.
- **Speech and Gestures:** Pointing while providing verbal instructions to emphasize spatial references.
- **Cross-Sensory Integration:** Clapping, snapping or vocal tone emphasis to accompany hand gestures, providing auditory reinforcement.

The integration of multimodal data often requires specialized frameworks to capture dependencies across modalities. These frameworks aim to improve recognition accuracy by leveraging complementary information and addressing ambiguities that may arise in unimodal systems. Multimodal gestures are particularly relevant in applications such as virtual reality, where body movements and vocal commands are often combined for immersive interactions, or in sign language translation, where facial expressions are critical for conveying grammatical nuances. Fig. 2 explains what a multimodal gesture may comprise using a hierarchical structure, and categorizing the visual and audio modalities into distinct gesture types.

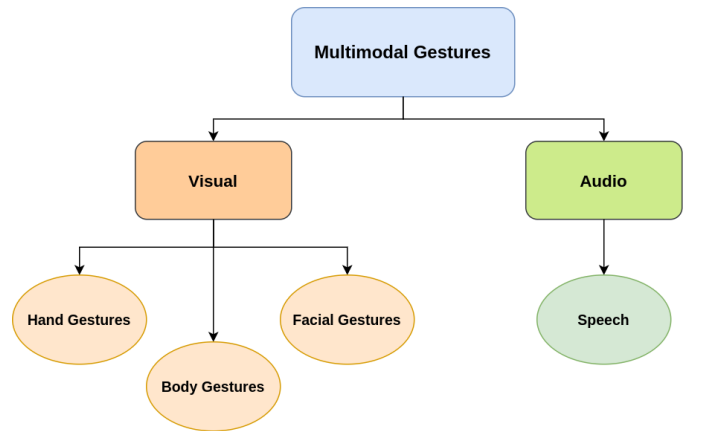


Fig. 2: Hierarchy of Multimodal Gestures.

D. Hand Gesture Recognition

Among the various types of gesture recognition, we focus on **hand gesture recognition** because it offers a unique combination of advantages. Hand gestures are highly expressive, enabling a wide range of commands, emotions, and intentions to be conveyed, making them versatile for applications such as human-computer interaction, virtual reality, and sign language interpretation. They also operate within a compact interaction zone, which is particularly practical for confined environments like vehicles, mobile devices, or personal workspaces. Additionally, hand gestures provide high precision and fine-grained control, essential for tasks like robotic manipulation, gaming, or medical surgery assistance. Many existing devices are already equipped with hardware optimized for capturing hand movements, reducing the need for specialized infrastructure. Furthermore, hand gestures are culturally and contextually universal, offering a natural and intuitive form

of communication compared to other gesture types that may vary in interpretation. Lastly, the strong research foundation in hand recognition, supported by well-defined datasets and algorithms, allows for rapid development and deployment of systems, making it an ideal focus area.

III. REVIEW METHODOLOGY

A. Article Selection

The selection of articles for this study targets all the recent papers in the computer vision field that specifically focus on hand gesture recognition from images and videos. To ensure a comprehensive review, we began by identifying the top-ranked venues in computer vision as listed under the "Top Publications - Computer Vision & Pattern Recognition" section on Google Scholar¹. Using a crawler developed for this purpose², we retrieved 2,307 articles from these top venues. Subsequently, we conducted a systematic screening process in which the titles and abstracts of all articles were carefully reviewed based on predefined inclusion criteria detailed in Section III-B, which prioritized recent studies focusing on hand gesture recognition techniques, systems, or applications. This rigorous filtering ensured that only the most relevant to hand gesture recognition contributions from Google Scholar's top venues for computer vision were included in the survey, and resulted in 37 articles that were directly relevant to the task. Given the limited number of relevant studies (from Google Scholar), we widened the search base by conducting additional searches in all venues listed in Scopus using specific boolean search queries, which are listed in Table I. The queries were carefully designed to contain the most relevant keywords to hand gesture recognition. To ensure consistency with the Google Scholar approach, we systematically reviewed the titles and abstracts of the matching papers from each query, assessing their alignment with the inclusion/exclusion criteria outlined in Section III-B. Articles were excluded if they lacked relevance to the hand gesture recognition task, its techniques, systems, or applications.

Table I includes the following columns:

- **Returned Papers:** The total number of papers retrieved from Scopus for each query.
- **Candidate Papers:** The number of papers remaining after duplicates were removed and topic modeling was applied.
- **Selected Papers:** The final number of papers chosen.

To determine the values in these columns, we employed a systematic methodology to curate the Scopus papers. The queries were executed sequentially, starting with the first query at the top of the table and progressing to the last query at the bottom. The process began with a broad query focused on terms such as "RGB," "hand," "gesture" and related recognition tasks, providing a foundation for further exploration. This was followed by an expansion into more specific

Query	Returned Papers	Candidate Papers	Selected Papers
"RGB" AND ("hand" OR "gesture") AND ("recognition" OR "classification")	1476	910	19
"sign" AND "gesture" AND "recognition"	2668	1442	29
"Hand" AND ("gesture" OR "pose") AND ("recognition" OR "estimation") AND ("RGB" OR "video" OR "skeleton" OR "multi modal")	2428	746	27
"Multiview" AND "Camera" AND "Hand" AND "Gesture"	5	1	1

TABLE I: Overview of queries addressed to Scopus database and paper counts

domains, such as sign language recognition, addressed by the second query. To avoid redundancy, articles retrieved from the first query were excluded from the results of the second query. Similarly, the third query broadened the search to include tasks related to hand pose estimation and multimodal approaches, while ensuring duplicates from previous queries were removed. For each collection of retrieved papers, topic modeling using Non-Negative Matrix Factorization (NNMF) was performed in a similar way as detailed in Section III-D. Specifically, NNMF was applied to the titles, keywords, and abstracts of the papers to extract thematic topics. Articles with topics related to the research focus were retained, significantly narrowing down the number of candidate papers. Finally, a selection process was performed based on the inclusion/exclusion criteria outlined in Section III-B, resulting in the final set of papers used in this study.

It is also worth noting that, despite sign language recognition generating a larger number of candidate papers, we chose not to select additional papers from this domain, in order to maintain a wider scope of hand gesture recognition from camera input, rather than focusing primarily on sign language. This reasoning also guided the continuation of queries related to hand gesture classification and estimation, as seen in the third query. This systematic approach ensured the curation of a high-quality collection of papers, specifically focusing on hand gesture recognition from camera input, for further analysis.

B. Inclusion/Exclusion Criteria

All selected articles have been rigorously reviewed and carefully analyzed based on the inclusion/exclusion criteria described in the following:

- Methodologies with human action recognition (entire body) that did not include hand estimation or classification were excluded,
- Studies were included only if published between 2018 and 2024,
- Only research publications available online (i.e., peer-reviewed conference proceedings, book chapters, and journal articles) were included, and
- Only studies written in English were considered.

¹https://scholar.google.com/citations?view_op=top_venues&hl=en&vq=eng_computervisionpatternrecognition

²the code will be made publicly available when the article will be published

All duplicate works that have been found in Scopus, while already in our list of Google Scholar results, were removed.

C. Quantitative Analysis

The search and filtering methodology described above helped us identify 113 studies (37 from Scholar and 76 from Scopus) that propose efficient methodologies for hand gesture recognition. To better understand how these studies are distributed over time and across different forums we performed a quantitative analysis, which is summarized in Table II and Fig. 3. The visualizations provide a comprehensive overview of the research landscape of hand gesture recognition, revealing trends in publication frequency, preferred venues, and topics.

1) *Distribution of Articles to Venues:* As shown in Table II, the main forums where research in hand gesture recognition has been published include the major computer vision conferences such as CVPR, ICCV, ICCVW, ECCV, and the International Journal of Computer Vision. These forums list more than 50% of the relevant works that contribute to advancements in this field.

Venue	Frequency
IEEE/CVF Conference on Computer Vision and Pattern Recognition	22.22%
IEEE/CVF International Conference on Computer Vision	11.11%
European Conference on Computer Vision	8.33%
IEEE/CVF International Conference on Computer Vision Workshops (ICCVW)	8.33%
International Journal of Computer Vision	8.33%
IEEE International Conference on Automatic Face & Gesture Recognition	5.56%
IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)	5.56%
International Conference on 3D Vision (3DV)	5.56%
International Conference on Pattern Recognition	5.56%
Asian Conference on Computer Vision (ACCV)	2.78%
British Machine Vision Conference (BMVC)	2.78%
Computer Vision and Image Understanding	2.78%
IEEE Transactions on Pattern Analysis and Machine Intelligence (PAMI)	2.78%
IEEE/CVF Computer Society Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)	2.78%
Journal of Visual Communication and Image Representation	2.78%
Pattern Recognition	2.78%

TABLE II: Distribution of Paper Venues.

2) *Research Timeline by Topic:* As shown in Fig. 3 the main topics discussed in the articles. The methodology for extracting the topics from the collection of articles is detailed in Section II-D that follows. The bar charts depict the annual occurrences of individual topics, while the line plot represents the total number of publications per year. The analysis reveals a substantial increase in publications in 2024, signaling growing research interest and advancements in the field of hand gesture recognition.

D. Topic modeling

In order to get a better understanding of the articles we retrieved, we decided to group them into topics, applying topic modeling [127]. The main topics are depicted in Fig. 4 and are described in the following.

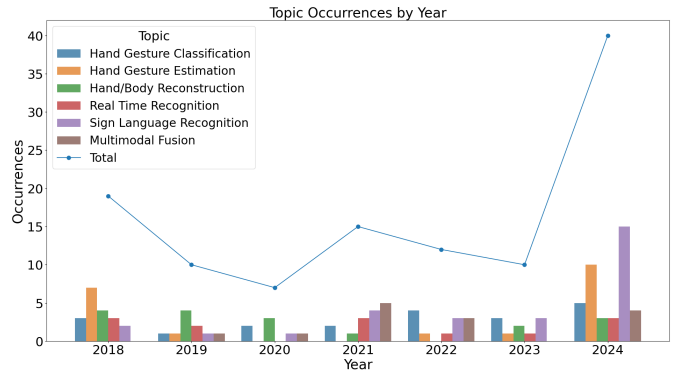


Fig. 3: Research Timeline by Topic.

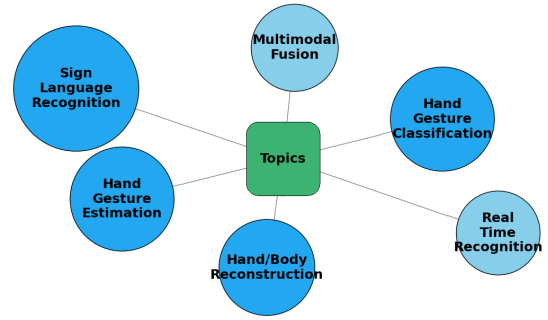


Fig. 4: Graph Representation of Hand Gesture Recognition Topics.

Among the various methods available for topic modeling, such as Latent Dirichlet Allocation (LDA) [57], Latent Semantic Analysis (LSA), Non-Negative Matrix factorization (NNMF) and clustering algorithms like K-Means or DB-SCAN [53], we employed Non-Negative Matrix Factorization (NNMF) [96], [178] for this task. NNMF is a linear algebra technique that decomposes a high-dimensional dataset into two lower-dimensional matrices with non-negative entries, making it particularly suitable for extracting interpretable topics. NNMF has been applied to the vectorized representations of the titles and keywords from the collected papers. This allowed us to uncover latent semantic structures, effectively identifying recurring article themes. After experimenting with various configurations, we determined that using six components produced the most coherent topics. To facilitate presentation and ensure clarity, the resulting topics were manually refined into the following:

- **Hand Gesture Classification:** Focuses on categorizing different types of hand gestures into predefined classes.
- **Hand Gesture Estimation:** Involves determining the 3D position and orientation of hand joints.
- **Sign Language Recognition:** Translates hand gestures into a corresponding sign language vocabulary.
- **Hand/Body Reconstruction:** Deals with accurate 3D model creation/estimation of hands or bodies.
- **Multimodal Fusion:** Combines multiple models and integrating data from diverse sources (e.g., video, depth

cameras) to improve accuracy and robustness.

- **Real-Time Recognition:** Emphasizes systems capable of recognizing and processing gestures in real-time.

In Fig. 4, the topics are represented as nodes, with larger nodes indicating a higher number of articles associated with the topic. The figure reveals that Hand Gesture Classification, Hand Gesture Estimation, and Sign Language Recognition are the most widely discussed topics in the related literature, likely because they correspond to broader tasks commonly addressed in the computer vision research domain. This further demonstrates that NNMF successfully captured the differentiation discussed in Section II-A, particularly between gesture classification and estimation. Hand/Body Reconstruction, although having fewer articles, can also be considered a task as it represents a narrower subcategory of Hand Gesture Estimation. However, its focus on indirect hand gesture estimation naturally results in fewer articles being assigned compared to the broader parent category. The remaining topics—Multimodal Fusion and Real-Time Recognition—are more specific and often describe techniques or strategies employed to tackle the aforementioned tasks. These categories were appropriately identified by NNMF as distinct due to their notable contributions, underscoring their importance as complementary topics.

IV. OVERVIEW OF HGR METHODS

Hand gesture recognition (HGR) has been the focus of extensive research, resulting in a wide range of methodologies. This section provides a comprehensive review of the methods found in the current literature, classified based on key factors such as the primary task objective (hand gesture classification or estimation), the type of input devices (e.g., RGB, RGB-D, or video, monocular or multi-view cameras), the type of hand gesture capture and representation (e.g., skeleton or box/filter), and the machine learning techniques employed in the recognition (e.g., SVMs, neural networks). These classifications are also summarized and visualized in Fig. 5.

A. Classify by task objective

As broadly described in Section II, we can distinguish two main hand recognition tasks: hand gesture classification and

hand gesture estimation. While this survey focuses primarily on hand gesture classification, the significance of the hand gesture estimation task cannot be overlooked, since it is supported by a crucial subset of general hand gesture recognition methods. In what follows, we briefly present the main objectives of the two tasks and discuss their main applications.

1) *Hand Gesture Classification:* The primary goal of hand gesture classification is to identify and categorize a given gesture into predefined classes [1], [119], [172]. As a result, the respective methods focus on interpreting the semantic meaning of gestures rather than their capturing and predicting their spatial representation. Hand gesture classification methods are widely used in applications like sign language recognition [24], [144], [188] and human-robot communication [12], [40].

In sign language recognition, the classifier distinguishes between subtle variations in gestures to correctly identify words or phrases, as shown in Fig. 6a. Similarly, in HCI, classification methods enable systems to interpret hand gestures to user commands that are then used to control devices or software applications. Hand classification approaches are often evaluated based on metrics such as accuracy, precision, recall, and F1-score, which reflect their ability to correctly classify gestures. The broad applicability of this task makes it an accessible and popular area of research, particularly with the growing availability of related image/video datasets for training and testing [65], [87], [101], [108].

2) *Hand Gesture Estimation:* Hand gesture estimation focuses on understanding and representing the topology or spatial structure of the hand [15], [56], [147]. Unlike classification, which assigns a gesture to a specific category, estimation methods aim to digitally recreate the hand’s pose or movement, as shown in Fig. 6b. This is typically achieved by generating a 2D or 3D representation, such as a skeleton with joints [107], [177] or a detailed mesh of the hand’s surface [129], [143].

The applications of hand gesture estimation are mainly in areas that require detailed spatial information, such as augmented reality (AR), virtual reality (VR), gaming, and animation. For example, in a VR environment, hand estimation methods allow users to interact with virtual objects through accurate hand tracking [151], [159].

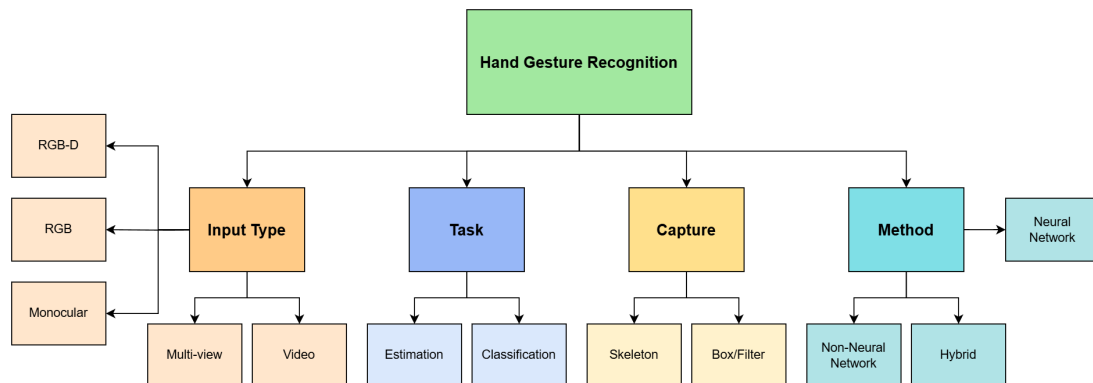


Fig. 5: Categories of Hand Gesture Recognition.



Fig. 6: Hand Recognition Objectives.

In some cases, hand gesture recognition systems combine both classification and estimation objectives to achieve a comprehensive understanding of gestures [9], [111], [186]. These hybrid approaches usually estimate the hand’s pose or topology (hand estimation), and then use this representation to classify the gesture (hand classification). This two-step process is particularly useful in scenarios where both precise hand tracking and semantic understanding are required.

B. Classify by Input Data type

The type of input data is an important factor in defining the effectiveness and scope of a hand gesture recognition method. This survey focuses on methods utilizing static images or video, which are widely used input data types due to the widespread availability of cameras and their accessibility to users. One classification is based on the format of the input data, which can be either RGB or RGB-D images, or video. A different classification is based on the type of camera, namely monocular or multi-view. In the following, we provide the main features of each of these input categories.

1) *RGB Methods*: RGB methods rely on static RGB images without considering sequential video frames, so the works of this category analyze a single frame to recognize/estimate static hand gestures [82], [126], [196]. Although these methods are limited to processing one frame at a time, they can be easily extended to handle multiple frames for video-based hand gesture recognition. However, such extensions are usually less efficient than methods specifically designed for video gesture recognition.

2) *RGB-D Methods*: RGB-D methods utilize depth image data, which combines traditional RGB information with depth data to enhance hand gesture recognition [26], [158], [173]. These methods typically work on a single RGB-D frame at a time to capture gesture details, providing richer spatial information compared to RGB-only approaches.

3) *Video Methods*: Video-based methods process sequences of RGB frames [16], [112], [166], or even RGB-D frame sequences [22], [59], [159], [162]. In the case of RGB-D video sequences, depth data accompanies each frame to provide a more comprehensive understanding of hand gestures. The respective methods in this category are designed for analyzing

dynamic hand movements in tasks such as sign language recognition or complex gesture analysis.

As shown in Fig. 7a, video-based methods represent a significant portion of the studies reviewed in this survey, accounting for 53% of the total number of articles. This prevalence can be attributed to the inherent versatility of video data, which not only incorporates static RGB frames but also effectively captures the dynamic aspects of hand motion. These qualities make video-based approaches particularly well-suited for a wide range of hand recognition tasks. Following video methods, static RGB images are used in 28% of the articles, while RGB-D images account for 19%.

4) *Monocular vs. Multi-View Input*: The type of camera setup—monocular or multi-view—further influences the methodology of hand gesture recognition. Monocular methods rely on a single camera to capture hand gestures, whereas multi-view methods use multiple cameras from different angles to provide a more complete representation of the hand.


Monocular methods dominate the field due to their simplicity, cost-effectiveness, and ease of deployment in real-life scenarios [28], [36], [117]. In contrast, multi-view methods, while offering improved accuracy and robustness in capturing complex gestures, require intricate setups involving multiple cameras, which limits their practicality for everyday use.

Despite their limited prevalence, multi-view setups are worth mentioning, particularly for applications in hand gesture estimation where capturing detailed 3D spatial information is critical [23], [64], [133]. However, as the survey progressed, the distinction between monocular and multi-view methods became less significant, with most articles opting for monocular setups (as also depicted in Fig. 7b) due to their practicality and widespread applicability.


C. Classify by Hand Gesture capture and representation

Hand capture methods play an important role in hand gesture recognition systems as they determine how hand gestures are acquired for further processing. These methods can be broadly classified into skeleton-based captures and box/filter-based captures, each offering unique advantages and challenges.

1) *Skeleton-Based Captures*: Skeleton-based methods represent the hand using a skeletal structure that consists of key

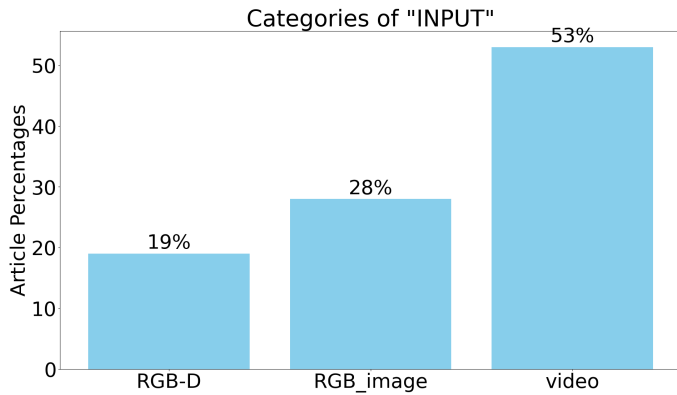

(a) Number of articles for RGB, RGB-D and video input.

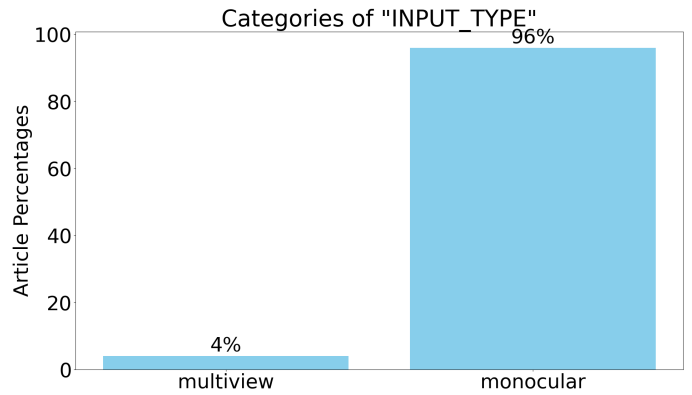

(b) Number of articles for monocular and multiview camera input.

Fig. 7: The distribution of articles per input data (RGB, RGB-D and video) and input device type (monocular and multi-view cameras).

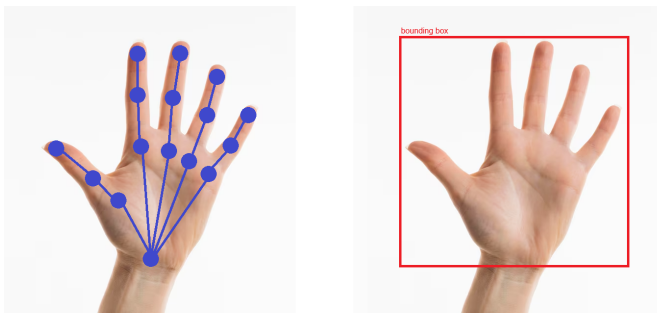


Fig. 8: Hand Capture Methods: Skeleton-based (left image) and box/filter-based (right image).

joints and connections [33], [105], [149]. These captures typically utilize graphs, where nodes represent specific hand joints or segments such as fingers, and edges denote the relationships or connections between them. This graph-based representation enables the system to focus on the underlying structure and movement dynamics of the hand. By abstracting the hand into a simplified skeleton, these methods are particularly effective in scenarios where the precise articulation of fingers and joints is important.

2) *Box/Filter-Based Captures*: Box/filter-based methods follow a different approach, focusing on capturing the hand's region using bounding boxes or regions of interest [4], [24], [131]. These methods involve detecting the hand from the image using a bounding box and once the hand is isolated, applying additional filters or algorithms to extract meaningful features related to the gesture, such as shape, texture, or movement patterns.

Skeleton-based captures excel in scenarios that require precise motion analysis and are robust against background noise. However, these methods often require more computational resources to represent the hand as a graph, making them more suitable for applications where accuracy and detailed articulation are prioritized over speed or simplicity. In contrast, box/filter-based methods are well-suited for working with 2D

data and are easily adaptable to a wide range of environments. These methods are generally more user-friendly and are widely applied in hand gesture classification tasks (as described in Section IV-F, where Bayes' Theorem demonstrates that box/filter methods are predominantly used in classification tasks), where the primary goal is to categorize gestures, rather than in estimation tasks, which require detailed hand representation. Despite their advantages, box/filter-based methods are sensitive to external factors such as lighting conditions, background clutter, and variations in hand appearance, which can negatively impact recognition performance.

It is worth noting that box/filter-based approaches have been studied more extensively in the literature compared to skeleton-based methods (as shown in Fig. 9). The greater prevalence of box/filter-based methods can likely be attributed to their relative simplicity, ease of implementation, and broader applicability across various scenarios, making them a preferred choice for researchers in the field.

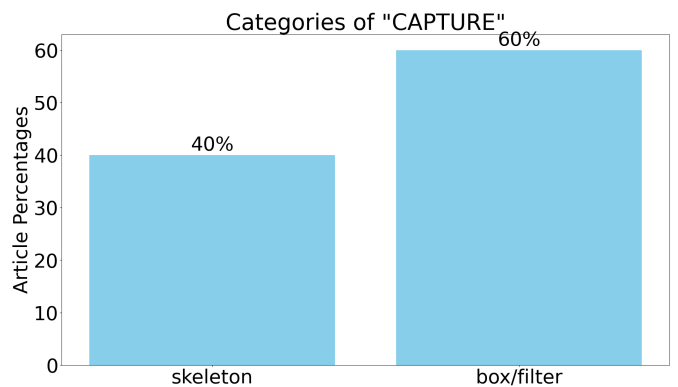


Fig. 9: Number of articles per hand capture method.

D. Classify by Recognition Techniques

Hand gesture recognition employs a variety of techniques to extract gesture-specific information from RGB data. In recent years, the combination of convolutional neural networks

(CNNs) with other neural network-based methods has emerged as the dominant approach, leveraging the strengths of multiple models. This trend is evident in the findings of this survey, where 68% of the selected articles employ such hybrid methods for hand gesture recognition. Nonetheless, standalone neural networks or traditional machine learning techniques, such as Support Vector Machines (SVMs) and Random Forests, continue to play a role in specific applications. Based on the methodologies used, the articles can be categorized into three groups: hybrid approaches, neural network-based approaches, and non-neural network approaches as discussed in the following.

1) *Neural Network Approaches*: Neural networks, particularly CNNs [21], [153], [176], have been extensively applied to hand gesture recognition due to their ability to learn spatial hierarchies and extract complex features directly from RGB data. Recent advancements, such as transformers [191], have further enriched this field by enabling models to capture temporal and contextual information. This capability is especially valuable for applications like sign language recognition and human-computer interaction (HCI), where understanding the context of previous gestures is crucial.

2) *Non-Neural Network Approaches*: Traditional machine learning methods, such as SVMs, remain relevant for specific hand gesture recognition tasks [10], [38], [66]. These methods typically involve pre-processing input images or video frames to extract features, which are then fed into machine learning models for classification or regression. While less common in recent studies, these approaches are still employed in scenarios where computational efficiency or simplicity is a priority.

3) *Hybrid Approaches*: Hybrid approaches represent the predominant methodology in hand gesture recognition, combining the strengths of multiple techniques to achieve higher accuracy and robustness. For instance, methods integrating CNNs with LSTMs leverage CNNs for spatial feature extraction and LSTMs for temporal pattern learning [42], [73], [120]. Other hybrid systems blend neural networks with traditional machine learning techniques in ensemble models or integrated frameworks [26], [137]. These approaches are particularly effective in tasks requiring adaptability and precision, as they exploit the complementary strengths of their components, offering a versatile solution for complex hand gesture recognition challenges.

The distribution of articles among these recognition methods is summarized in Fig. 10, providing a quantitative overview of their prevalence in the field.

E. Summary of Methodology Overview

To provide a clear understanding of the groupings, Table III summarizes the classification of the articles based on the criteria described in this section. Specifically, these criteria include:

- Type of input data: video, RGB-D, (static) RGB_image
- Input configuration: monocular or multiview
- Hand capture method: box/filter or skeleton
- Goal of hand recognition: estimation or classification

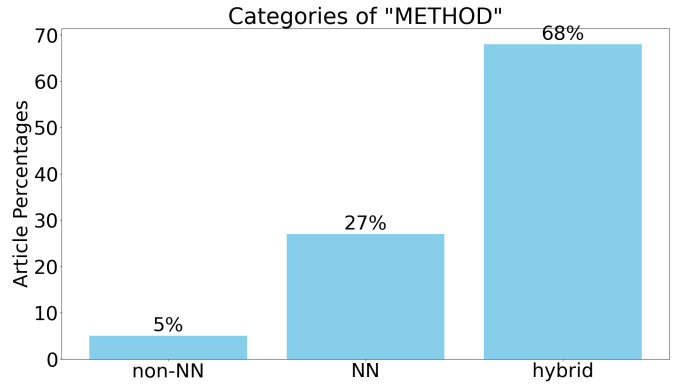


Fig. 10: Number of articles per recognition method.

- Method utilized: Neural Network (NN), non-Neural Network (non-NN), or hybrid

Combinations of values within a specific group/column are indicated using the "+" character. For instance, an entry of RGB-D+video in the "Input Type" column signifies that the referenced articles utilize a combination of RGB-D and video data for hand gesture recognition. This notation allows for a concise representation of articles employing multiple values of a group.

F. Association between input, input type, capture and hand recognition task

To better understand the relationships between the hand gesture categories discussed in Section IV and the hand recognition task (classification or estimation), we utilized Bayes' theorem. Bayes' theorem allows us to determine the probability of Y occurring given that X is true. The formula is as follows:

$$P(Y|X) = \frac{P(X|Y) \cdot P(Y)}{P(X)}$$

where:

- $P(Y|X)$ is the conditional probability of Y given X,
- $P(X|Y)$ is the likelihood of X given Y,
- $P(Y)$ is the prior probability of Y, and
- $P(X)$ is the marginal probability of X.

In our analysis, X represents the groups: *input*, *input_type*, *capture*, and *method*, and Y represents the *goal*, which can be either *estimation* or *classification*. For the groups *input* and *method*, we extended Bayes' theorem to consider joint probabilities, as these categories include three distinct values each. To simplify the analysis and derive meaningful insights, we merged the values within these categories as follows:

- **Input groups → RGB and Video vs. RGB-D**: Static RGB images and video data were combined into a single category to compare with RGB-D inputs. This grouping reflects the fact that RGB and video methods both rely solely on color information, whereas RGB-D methods include depth information, making them inherently different in terms of hardware requirements and data richness.

Input	Input type	Capture	Task	Method	Article
RGB-D	monocular	box/filter	classification	hybrid	[119]
		skeleton	estimation	hybrid	[98], [173]
RGB-D+RGB_image	monocular	box/filter	classification	NN	[172]
			classification	hybrid	[26], [137]
		skeleton	estimation	hybrid	[49]
			estimation	hybrid	[15], [94]
RGB-D+video	monocular	box/filter	classification	NN	[86]
			classification	hybrid	[22], [40], [78], [195]
			estimation	non-NN	[158]
		skeleton	estimation	hybrid	[147], [159]
			classification	NN	[123], [149]
			classification	hybrid	[11], [59], [84], [90], [162]
RGB_image	monocular	box/filter	classification	non-NN	[31]
			classification+estimation	NN	[41]
			classification	NN	[4], [21], [24], [148], [188]
		skeleton	classification	hybrid	[12], [82], [97], [106], [144], [196]
			classification	non-NN	[10], [38]
			estimation	NN	[71], [143]
	multiview	skeleton	estimation	hybrid	[60], [75], [76], [95], [130], [145]
			classification	NN	[153]
			classification	hybrid	[171]
		skeleton	classification+estimation	hybrid	[9]
			estimation	NN	[56], [126], [168], [191]
			estimation	hybrid	[107], [129], [151]
Video	monocular	box/filter	classification	hybrid	[198]
			classification	NN	[69], [87], [114], [121], [160]
		skeleton	classification	hybrid	[6], [28], [29], [36], [39], [42], [58], [67], [73], [74], [77], [79], [81], [89], [101], [104], [115], [128], [136], [139], [154], [180], [182], [199]
			estimation	NN	[176]
			estimation	hybrid	[37], [72], [184]
			classification	NN	[33], [34], [45], [117]
			classification	hybrid	[1], [51], [61], [65], [105], [120], [164], [200]
			classification+estimation	hybrid	[111], [186]
	multiview	classification+estimation	non-NN	[66]	
		estimation	NN	[16], [112]	
		estimation	hybrid	[166]	
		box/filter	classification	non-NN	[133]
		skeleton	classification	hybrid	[183]
			estimation	NN	[23]
		estimation	hybrid	[64]	

TABLE III: Summary of HGR Methods based on classification criteria of Section IV.

- **Method groups → Non-NN and Hybrid Methods vs. NN Methods:** Non-neural network (Non-NN) methods and hybrid methods were grouped together to contrast with purely neural network (NN) approaches. This grouping emphasizes the distinction between traditional machine learning approaches (Non-NN methods) and neural networks (NN). Hybrid methods were included with Non-NN methods as they sometimes incorporate Non-NN methods as submodels.

The results are visualized in Figures 11 to 14, where the conditional probabilities $P(Y|X)$ are shown for each combination of X and Y. Each subplot corresponds to a specific group, with blue bars representing the classification goal and red bars representing the estimation goal. Like so, the plots provide valuable insights into the relationship between

different groups and the probability of achieving classification or estimation goals.

Fig. 11 clearly shows that when using a box/filter capture methodology, the likelihood of targeting a classification task is almost twice as high as that for an estimation task. In Fig. 12, it is clear that multi-view camera setups are more likely to be used in hand estimation tasks than in classification.

As illustrated in Fig. 13, all method types –whether hybrid, non-NN, or NN– exhibit a higher probability of being utilized for classification tasks rather than estimation tasks. Notably, hybrid and non-NN methods favor classification nearly twice as much as estimation, emphasizing their inclination toward hand gesture classification. Similarly, in the *input* group (Fig. 14), all input types (e.g., video, RGB, and RGB-D) demonstrate a consistent association with classification tasks rather

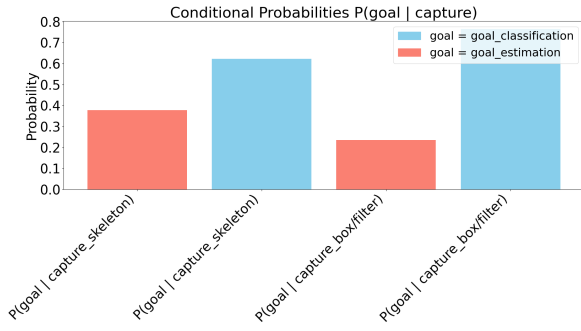


Fig. 11: Conditional Probability of goal given capture category.

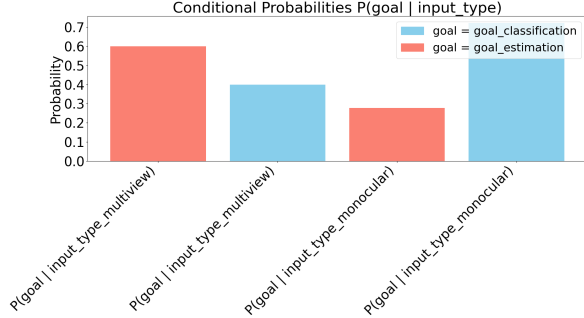


Fig. 12: Conditional Probability of goal given number of cameras.

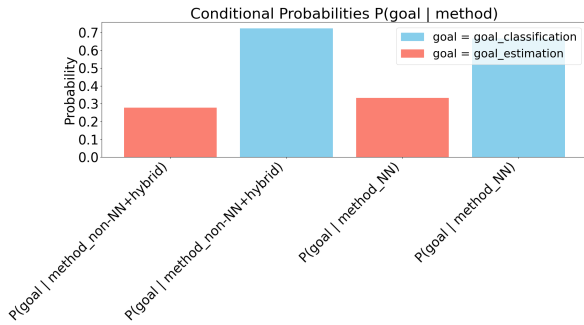


Fig. 13: Conditional Probability of goal given implementation method.

than estimation tasks. These observations indicate a general tendency toward classification across the analyzed groups, which aligns with the survey’s emphasis on hand gesture classification and reflects the broader trend in research papers that prioritize classification over hand representation

V. OVERVIEW OF ALGORITHMS USED IN HGR TASKS

The variety of techniques employed in HGR reflects the complexity of the task, ranging from spatial modeling to capturing temporal dynamics. This section explores the prominent algorithms utilized in HGR, emphasizing their unique strengths and applications in diverse real-world scenarios.

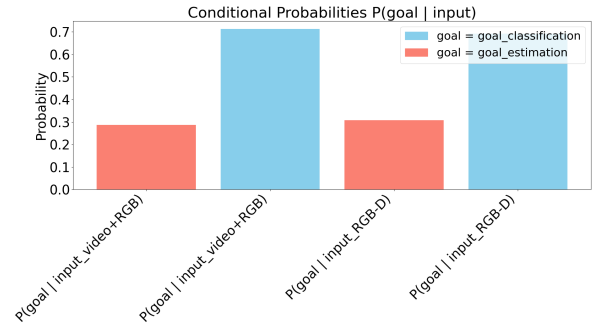


Fig. 14: Conditional Probability of goal given input modality.

A. Support Vector Machines (SVMs)

Support Vector Machines are a robust classification tool in HGR, particularly effective for distinguishing complex hand poses or subtle variations in gesture patterns. The works in the field employ different feature extraction techniques and representations to capture information from images. Typical examples are Histogram of Oriented Gradients [52], Hu Moment Invariants extracted by the hand contour [194], or positional and trajectory features of the hand joints.

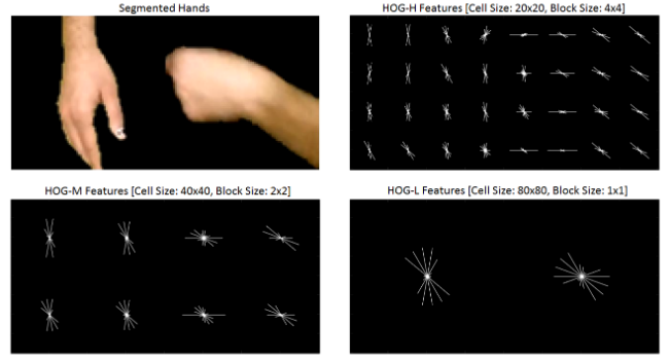


Fig. 15: An example of HOG features extracted from a hands’ image. Source [18].

Following the notation described in Section II, from a set of N input images the potential gestures are represented as $\mathcal{X} = \{\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_N\}$ where each vector $x_i \in \mathbb{R}^d$ is a d -dimensional feature vector extracted using HOG, skeletal tracking, etc. information. The set of corresponding class labels for each image is denoted as $\mathcal{Y} = \{y_1, y_2, \dots, y_N\}$ where $y_i \in \{1, 2, \dots, C\}$ represents the class of gesture i and C is the total number of distinct gesture classes. The SVM aims to find a hyperplane that separates the classes in the feature space. The SVM optimization problem can be expressed as:

$$\min_{\mathbf{w}, b} \frac{1}{2} \|\mathbf{w}\|^2 + \gamma \sum_{i=1}^N \xi_i$$

subject to:

$$y_i(\mathbf{w}^T \mathbf{x}_i + b) \geq 1 - \xi_i, \quad i = 1, 2, \dots, N$$

where \mathbf{w} is the weight vector defining the hyperplane, b is the bias term, $\gamma > 0$ is a regularization parameter controlling the trade-off between maximizing the margin and minimizing classification error, ξ_i are slack variables that allow for misclassification.

Once trained, the SVM model predicts the class label for a new input vector \mathbf{x}_{new} :

$$f(\mathbf{x}_{new}) = \text{sign}(\mathbf{w}^T \phi(\mathbf{x}_{new}) + b)$$

This function outputs $f(\mathbf{x}_{new}) = y_j$, where $j = 1, 2, \dots, C$, indicating which class the new gesture belongs to.

The integration of SVMs with handcrafted feature descriptors, such as Local Extrema Min-Max Pattern (LEMMP), has led to remarkable recognition accuracies, reaching up to 99% on benchmark datasets [10]. Kernel-based SVMs have proven successful in dynamic gesture recognition systems, achieving over 98% accuracy in tasks like Japanese Sign Language classification [66]. Ensemble methods, where SVMs are part of multi-camera systems, further enhance recognition accuracy by fusing results from multiple classifiers [133]. These attributes make SVMs a versatile choice for both static and dynamic gesture recognition.

B. Hidden Markov Models (HMMs)

Hidden Markov Models are widely employed for modeling sequential dependencies in HGR tasks [69], [73]. These probabilistic models excel at predicting gesture sequences by representing hidden processes through observable outputs.

The process of gesture recognition using HMMs can be formulated with the following steps:

- **Feature Extraction:** Initially, features are extracted from the video input. Techniques such as skin color segmentation may be employed to isolate the hand from the background, followed by tracking methods to monitor hand movements over time. Preprocessing techniques, such as grayscale conversion and edge detection, facilitate the extraction of key gesture regions for HMM-based sequence learning.
- **State Representation:** Each gesture is represented by a sequence of hidden states. For example, in a sign language recognition system, each state might correspond to a different phase of a gesture (e.g., starting position, mid-gesture, ending position).
- **Observation Sequence:** Observations are derived from features extracted from video frames that capture relevant aspects of the gesture. Common features include the position of key points (such as fingers and hands) and angles between joints. The continuous observation sequences—such as angles or positions—are quantized into discrete states suitable for HMM modeling. This quantization process involves mapping continuous values into discrete categories that can be effectively handled by the HMM framework.
- **Transition Probabilities:** To model the transitions between these hidden states, transition probabilities are defined. For example, let $P(s_t = j | s_{t-1} = i) = a_{ij}$

denote the probability of transitioning from state i at time $t - 1$ to state j at time t . This probabilistic framework allows us to account for the inherent variability in how gestures are performed.

- **Emission Probabilities:** In addition to transition probabilities, emission probabilities are also established that describe how observations are generated from hidden states. Each state emits observations according to a probability distribution, often modeled using Gaussian distributions. This means that for a given state s_t , the observation O_t is generated based on a distribution characterized by parameters specific to that state.
- **Training the HMM:** The parameters of the HMM—namely, transition and emission probabilities—are estimated using algorithms such as the Baum-Welch algorithm. This training phase is crucial for enabling the model to learn from example sequences of gestures.
- **Decoding Observation Sequences:** Once trained, algorithms like Viterbi are used to decode new observation sequences and to determine the most likely sequence of hidden states that corresponds to a given gesture.

Hybrid approaches integrating HMMs with CNNs or LSTMs capitalize on their strengths in spatial and temporal feature extraction, achieving state-of-the-art results in datasets with complex and continuous gestures.

C. Convolutional Neural Networks (CNNs)

Convolutional Neural Networks are often utilized in HGR due to their ability to process visual data and extract meaningful features from images in real-time [4]. For instance, their implementation in sign language recognition systems, such as those employing YOLOv8, has achieved recognition accuracies of up to 99.4%, effectively bridging communication gaps for deaf-mute individuals [160].

In the gesture recognition task using CNNs, each image is first represented as a 3D tensor. Let $\mathcal{I} = \{I_1, I_2, \dots, I_N\}$ be the set of input images representing different gestures, where N is the total number of images. Each image I_i can be represented as a 3D tensor $I_i \in \mathbb{R}^{H \times W \times C}$, where H, W are the image height and width, respectively, and C is the number of color channels (e.g., RGB).

The CNN model consists of multiple layers that process the input images to extract features and make predictions. The architecture typically includes:

- **Convolutional Layers:** These layers apply convolution operations to extract spatial features from the input images.
- **Activation Functions:** Non-linear activation functions like ReLU are applied after convolutional layers to introduce non-linearity into the model.
- **Pooling Layers:** These layers reduce the spatial dimensions of feature maps, helping to down-sample and retain important features while reducing computation.
- **Fully Connected Layers:** At the end of the network, fully connected layers are used to classify the gestures based on the extracted features.

The images are fed to the CNN in batches during the training and inference phase. The formal definition of gesture recognition on a given image is described in the following.

For a given input image I_i , let $F_k(I_i)$ denote the feature map produced by the k^{th} convolutional layer. The feature extraction can be expressed as:

$$F_k(I_i) = f(W_k * I_i + b_k) \quad (1)$$

where W_k is the filter (kernel) applied at layer k , b_k is the bias term, $*$ denotes convolution, $f(\cdot)$ is an activation function (e.g., ReLU).

The pooling operation that follows reduces dimensionality:

$$P(F_k(I_i)) = P(F_k(I_i))_{h,w} \quad (2)$$

where $P(\cdot)$ represents a pooling function (e.g., max pooling or average pooling).

After passing through several convolutional and pooling layers, let $H(I_i)$ be the output from the last fully connected layer before classification:

$$H(I_i) = W_f^T F_{final}(I_i) + b_f \quad (3)$$

The final class prediction for gesture recognition can then be obtained using a softmax function:

$$P(y|I_i) = softmax(H(I_i)) \quad (4)$$

The integration of CNNs with diverse datasets enhances their robustness, making them suitable for dynamic environments [114]. Metrics such as precision, recall, and processing time underscore their reliability, positioning CNNs as a foundational tool in the development of HGR systems.

D. Long Short-Term Memory (LSTM) Networks

When it comes to video input, the need for processing the temporal dimension of gestures raises. Long Short-Term Memory networks, a type of Recurrent Neural Network, are adept at capturing temporal dependencies in gesture data, particularly in video sequences [139], [199].

The LSTM model consists of memory cells that maintain information over long sequences. Each memory cell contains: i) the input gate that controls how much of the new input x_i to let into the memory, ii) the forget gate that decides what information to discard from the memory, and iii) the output gate that determines what part of the memory to output.

The first step of LSTM processing is the calculation of the gates, which comprise the input gate i_t , the forget gate f_t , and the output gate o_t , and are computed as follows:

$$i_t = \sigma(W_i x_t + U_i h_{t-1} + b_i) \quad (5)$$

$$f_t = \sigma(W_f x_t + U_f h_{t-1} + b_f) \quad (6)$$

$$o_t = \sigma(W_o x_t + U_o h_{t-1} + b_o) \quad (7)$$

where W_i, W_f, W_o are weight matrices for the input, forget, and output gates respectively, U_i, U_f, U_o are recurrent weight

matrices, b_i, b_f, b_o are bias vectors, h_{t-1} is the hidden state from the previous time step, and $\sigma(\cdot)$ is the sigmoid activation function.

The next step is the update of the cell state c_t using the following equation:

$$c_t = f_t * c_{t-1} + i_t * \tanh(W_c x_t + U_c h_{t-1} + b_c) \quad (8)$$

where W_c, U_c, b_c are weights and bias for the candidate values added to the cell state.

Finally, the output of the hidden state h_t for time step t is computed as:

$$h_t = o_t * \tanh(c_t) \quad (9)$$

After processing the entire sequence of frames in a video, a fully connected layer with a softmax activation function can be used to predict the class label as follows:

$$P(y|x_1, x_2, \dots, x_T) = softmax(W_h h_T + b_h) \quad (10)$$

where W_h and b_h are weights and biases for the final classification layer.

When combined with CNNs for feature extraction, LSTMs excel at analyzing sequential frames to recognize complex and continuous gestures [120]. Features may include joint coordinates from skeletal data or pixel values from video frames. For example, in skeleton-based approaches, 3D coordinates of key joints (e.g., wrists, elbows) are often used. Gestures may be segmented into fixed-length sequences before being fed into the LSTM. This segmentation can help capture important temporal dynamics and dependencies. The ability of LSTMs to retain context across time steps enables nuanced gesture understanding, making them ideal for real-time applications.

Enhanced with attention mechanisms, LSTMs can identify critical spatial and temporal regions, further improving accuracy and interpretability in user-centric environments. This is particularly useful in gesture recognition tasks, where certain frames or features may carry more significant information than others [93], [190]. The attention mechanism can be integrated into the LSTM framework by computing the attention score $e_{t,i}$ for input i at time t as follows:

$$e_{t,i} = v_a^T \tanh(W_a h_t + U_a h_i) \quad (11)$$

where v_a is a learned weight vector and W_a and U_a are weight matrices.

The attention weights can be computed using softmax: $a_{t,i} = \frac{e_{t,i}}{\sum_j e_{t,j}}$, whereas the context vector c_t is computed as a weighted sum of the hidden states $c_t = \sum_i a_{t,i} h_i$.

The final output of the LSTM with attention can be expressed as:

$$y_t = W_y h_t + V_y c_t + b_y \quad (12)$$

where W_y, V_y and b_y are parameters for the output layer.

E. Graph Convolutional Networks (GCNs)

Graph Convolutional Networks offer a unique approach to HGR by effectively modeling the spatial and structural relationships inherent in gesture data [45], [117]. Unlike CNNs, which operate on grid-like data, GCNs excel with non-Euclidean structures such as graphs, capturing complex dependencies like joint relationships in skeletal data or superpixel connections in images.

Hand gestures are often represented as graphs of skeletal joints. Each joint corresponds to a node in the graph, and edges represent physical connections between joints. For example, a hand gesture can be represented with nodes for each finger joint and edges connecting them based on anatomical structure. Features associated with each joint may include spatial coordinates, velocity, acceleration, or angles between adjacent joints. This multi-dimensional feature representation allows GCNs to learn complex patterns within gesture data. For dynamic gestures, sequences of graphs can be constructed over time. Each frame of a video can be represented as a graph, and GCNs can process these sequences to capture temporal dependencies.

The formulation of the gesture recognition task using GCNs begins with the representation of the potential gesture as a graph. $\mathcal{G} = (V, E)$ where $V = \{v_1, v_2, \dots, v_N\}$ is the set of nodes corresponding to key joints of the human body or hand, and E is the set of edges representing the connections between these joints. Each node v_i can be associated with a feature vector $x_i \in \mathbb{R}^d$, where d is the dimensionality of the features (e.g., joint coordinates).

The relationships between nodes are then described using an adjacency matrix A , where $A_{ij} = 1$ if there is an edge between nodes v_i and v_j and 0 otherwise.

The GCN processes the input graph through multiple layers to learn node representations. The output for each node can be expressed as:

$$H^{(l+1)} = \sigma \left(AH^{(l)}W^{(l)} \right) \quad (13)$$

where $H^{(l)}$ is the matrix of node features at layer l , $W^{(l)}$ is the weight matrix for layer l , A is the adjacency matrix, $\sigma(\cdot)$ is an activation function (e.g., ReLU).

After processing through several GCN layers, the final output can be computed as:

$$Y_{pred} = softmax(H^{(L)}W^{(L)}) \quad (14)$$

where $H^{(L)}$ is the output from the last GCN layer, and $W^{(L)}$ is the weight matrix for classification.

Innovations such as hybrid architectures combining GCNs with attention mechanisms have further enhanced their capabilities [12]. These systems leverage both local and global contextual information, ensuring precise recognition across challenging datasets, including multicultural sign language translation [106].

F. Transformer Models

The introduction of transformer-based models has significantly advanced HGR, offering superior performance in tasks

requiring the capture of long-range dependencies and intricate spatial-temporal relationships [51], [186], [191].

Since Transformers do not inherently capture the order of sequences, positional encodings $PE(t)$ are added to the input feature vector $x_t \in \mathbb{R}^d$ of each frame thus forming the final representation for time step t as $z_t = x_t + PE(t)$.

The self-attention mechanism allows the model to weigh the importance of different time steps when making predictions. The attention scores are calculated as:

$$A_{ij} = \frac{\exp \left(\frac{Q_i K_j^T}{\sqrt{d_k}} \right)}{\sum_{k=1}^T \exp \left(\frac{Q_i K_k^T}{\sqrt{d_k}} \right)} \quad (15)$$

where Q and K are the query and key matrices respectively and d_k is the dimensionality of the keys.

Consequently, the output representation for each time step can be computed as:

$$O_i = \sum_{j=1}^T A_{ij} V_j \quad (16)$$

where V is the value matrix corresponding to each input feature.

To generate Q , K , and V (for values) representations from z_t we apply learned linear transformations using weight matrices W_Q, W_K, W_V so that: $Q_t = W_Q z_t$, $K_t = W_K z_t$, $V_t = W_V z_t$.

After processing through multiple layers of self-attention and feed-forward networks, a final classification layer is applied:

$$P(y|x_1, x_2, \dots, x_T) = softmax(W_O O + b_O) \quad (17)$$

where O is the output from the last transformer layer, W_O and b_O are weights and biases for the output layer.

Innovations like hand-level tokenization reduce computational complexity while maintaining high accuracy. Multi-task transformer networks, designed for simultaneous gesture recognition and pose estimation, have further optimized performance through collaborative learning. These models excel in scenarios involving hand-object interactions or continuous sign language translation, achieving competitive results on benchmark datasets. Their ability to encode contextual features with precision highlights their transformative impact on HGR.

VI. DATASETS

This section categorizes datasets based on various criteria, including input type (e.g., RGB, RGB-D, video), number of samples, resolution, number of classes (for classification datasets), and gesture type (dynamic or static). Additionally, the categorization incorporates the primary hand gesture recognition tasks discussed in Section II-D. Since the same dataset can be used for multiple tasks and can be employed in multiple research works, we determine the primary task associated with each dataset, by considering the task that it is applied to in the majority of articles that use the dataset. For instance, if most articles that use a dataset, use it for Hand Gesture

Classification and only a few of them use it for Sign Language Recognition, the dataset is categorized under Hand Gesture Classification.

The datasets used for classification tasks such as Hand Gesture Classification and Sign Language Recognition are presented in Table IV. In a similar manner, Table V displays the datasets used for estimation tasks, including Hand Gesture Estimation and Hand/Body Reconstruction.

A. Dataset statistics

It is worth noting that some datasets referenced in the selected papers predate 2018 or even 2015, despite our focus on papers published after 2018. This discrepancy can be explained by the fact that these older datasets were created before the publication of the collected papers, establishing themselves as foundational or benchmark datasets in the field of hand gesture recognition. They are frequently reused and referenced due to their relevance and reliability in providing consistent and comparable results across studies. For instance, datasets from 2011 like the American Sign Language dataset (ASL) are often cited because they played an important role in shaping the direction of research and remain widely applicable in obtaining baseline results.

Figures 16 and 17 illustrate the distribution of datasets analyzed in this study. Specifically, Fig. 16 highlights that most datasets were created in 2018. The darker hues in the plot indicate that the most frequently used datasets were created in 2020, followed by those from 2016 and 2018. Overall, datasets created between 2016 and 2020 are the most utilized, likely because they strike a balance between recency and maturity. Older datasets (e.g., 2008–2014) may be less relevant due to outdated methods (e.g., lower resolution or fewer samples), while more recent datasets (2021 and later) may not yet have been widely adopted or refined.

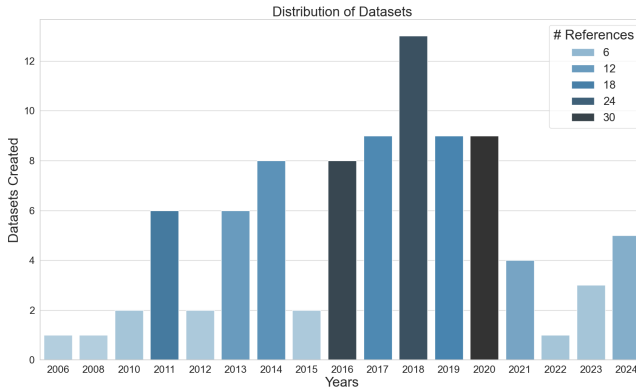


Fig. 16: Dataset Distribution.

Fig. 17 presents the most frequently used datasets, categorized by their respective tasks. The dataset with the highest number of references is ASL, which has been employed in 12 articles. ASL is widely recognized in the field of sign language research, and the number of works that use it proves the interest of researchers in benchmark datasets for sign

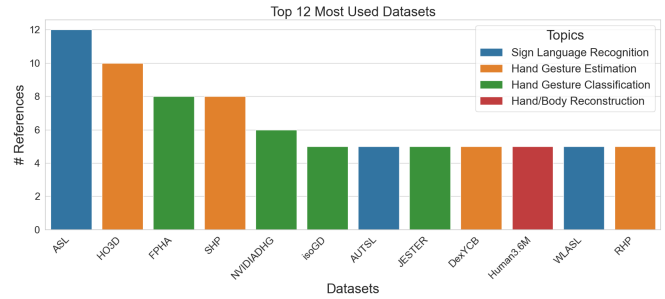


Fig. 17: Analysis of Most Utilized Datasets.

language recognition and consequently for the broader task of hand gesture classification. The HO3D dataset that follows has been employed in 10 articles for hand gesture estimation, establishing it as a key resource for this task.

B. Analysis of Dataset Findings

Overall, the survey identifies 46 articles addressing hand gesture classification (including sign language) and 33 articles on hand gesture estimation (including Hand/Body Reconstruction) that employ the datasets listed in Tables IV and V. This distribution underscores the survey’s emphasis on hand gesture classification, as the majority of datasets referenced in the surveyed papers are mainly developed for hand gesture classification tasks.

The datasets for hand gesture classification and sign language recognition vary significantly in terms of size, resolution, and complexity. Dynamic gesture datasets dominate, reflecting the complexity of real-world gestures, with notable examples such as the EPIC Kitchens dataset featuring over 11.5 million frames at high resolution and the Word-Level American Sign Language dataset offering 34,404 videos with 2,000 classes. Static datasets, like NUS II and Japanese Sign Language, are smaller but still crucial for specific applications. Sign language recognition datasets often include more detailed vocabulary, such as RWTH-PHOENIX14T with 3,953 classes and Microsoft American Sign Language with 1,000 classes, showcasing the focus on linguistic richness. The use of RGB-D data and skeleton features in several datasets, like NTU RGB+D and AUTSL, highlights the importance of multimodal inputs for enhancing classification performance.

The datasets for hand gesture estimation and hand/body reconstruction present a wide variety of input types, resolutions, and sample sizes, offering rich resources for advancing research in these domains. For hand gesture estimation, datasets such as InterHand2.6M (2.59 million frames, RGB) and Hands2017 (1.2 million frames, RGB-D) stand out due to their extensive size, making them ideal for training deep learning models. Many datasets, like SynthHands (220k frames) and GANerated (331k frames), use synthetic data, highlighting the role of simulated environments in complementing real-world data.

For hand/body reconstruction, datasets like Human3.6M (3.6 million frames, RGB+3D) and MPI-INF-3DHP (1.3

TABLE IV: Overview of datasets for hand gesture classification and sign language recognition.

Topic	Type of Gesture	Input	Dataset	Year	# Samples	Resolution	# Classes	
Hand Gesture Classification	Static	RGB	MUGD [13]	2011	2524 images	Not specified	36	
			NUS II [132]	2013	2000 images	120x160 pixels	10	
			TSL-FS [144]	2018	2974 images	Not specified	29	
			NUS-I [10]	2024	240 images	160x120 pixels	10	
			Hagrid-14 [10]	2024	Not specified	256x256 pixels	14	
		Microsoft Kinect and Leap Motion Dataset [100]	2013	1400 samples	Not specified	10		
		RGB+RGB-D	OU Hand [102]	2022	3000 images	640x480 pixels	10	
		3MHand [40]	2023	20000 frames	Not specified	7		
		video	RWTH [35]	2006	1400 samples	Not specified	35	
		RGB	GRIT Robot Commands [165]	2017	543 videos	640x480 pixels	9	
	Dynamic	RGB+RGB-D	JESTER [101]	2019	148092 videos	100x100 pixels	27	
			NVIDIA Dynamic Hand Gesture [109]	2016	1532 videos	Not specified	25	
			EgoGesture [193]	2018	24161 videos	640x480 pixels	83	
			Briareo [99]	2019	120 frames	Not specified	12	
			H2O [83]	2024	571k frames	Not specified	36	
		RGB+RGB-D+Skeleton	SHREC ¹⁷ [32]	2017	2800 sequences	640x480 pixels	28	
		RGB+RGB-D+Skeleton	UTKinect-Action3D [179]	2018	6220 frames	320x240 pixels	10	
		RGB+RGB-D+Skeleton+infrared	NTU RGB+D [146]	2016	56880 samples	Not specified	60	
		RGB-D	Montalbano [131]	2014	13858 videos	640x480 pixels	20	
		RGB-D+video+Skeleton	MSRDailyActivity3D [174]	2012	320 sequences	Not specified	16	
Sign Language Recognition	Static	RGB	RGB-D+video	DHG-14/28 [30]	2016	2800 frames	640x480 pixels	28
			First-Person Hand Action [20]	2018	100000 frames	Not specified	45	
			video	ASLVID [8]	2008	3800 signs	640x480	3000
			MSRA-3D [91]	2010	557 sequences	Not specified	20	
			HMDB-51 [80]	2011	6766 videos	240x240 pixels	51	
	UCF-101 [58]	2011	13320 videos	Not specified	101			
	ChaLearn LAP IsoGD [170]	2016	47933 videos	Not specified	249			
	Autism spectrum disorder dataset [199]	2018	1837 videos	1280x720 pixels	4			
	EPIC Kitchens [25]	2018	11.5M frames	1920x1080 pixels	149			
	RKS-PERSIANSIGN [138]	2020	10000 videos	Not specified	100			
Dynamic	Static	RGB	American Sign Language Digits [13]	2011	2245 images	Not specified	36	
			Nigerian Sign Language [70]	2015	25900 images	Not specified	37	
			BdSL [50]	2020	26713 images	300x500 pixels	36	
			PSL [54]	2021	1480 images	480x640 pixels	37	
			Japanese Sign Language [106]	2021	7380 images	400x400 pixels	41	
	Arabic Alphabet Sign Language [3]	2023	7534 images	Not specified	31			
	RGB+RGB-D	American Sign Language [134]	2011	48000 samples	128x128 pixels	24		
	LSA64 [142]	2016	3200 videos	1920x1080 pixels	64			
	Korean Sign Language [185]	2019	1540 videos	Not specified	77			
	British Sign Language [1]	2020	16497 frames	Not specified	18			
	BosphorusSign22k [124]	2020	22542 videos	Not specified	744			
	Word-Level American Sign Language [88]	2020	34404 videos	Not specified	2000			
	Indian Sign Language [155]	2020	4287 videos	Not specified	263			
	MINDS-Libras (BRASL) [140]	2021	1200 videos	1080x1920 pixels	20			
	Chinese sign language [182]	2024	25000 videos	Not specified	178			
RGB-D	Greek Sign Language [1]	2012	4910 videos	Not specified	20			
RGB-D+RGB+Skeleton	AUTSL [152]	2020	38336 videos	512x512 pixels	226			
video	PHOENIX-2014 [36]	2014	6841 videos	Not specified	1295			
	Microsoft American Sign Language [65]	2018	25000 videos	Not specified	1000			
	RWTH-PHOENIX14T [17]	2018	0.95 million frames	Not specified	3953			
	ALLVD [27]	2019	7798 videos	Not specified	2745			

million frames, RGB) provide large-scale annotations that are crucial for 3D pose estimation. The inclusion of static datasets, such as LSP and Expressive Hands and Faces Dataset, enriches the diversity by supporting precise annotation of hand and body details. Dynamic datasets, such as PoseTrack and PennAction, focus on video-based reconstruction, facilitating temporal modeling for human motion analysis. The breadth of these datasets underscores their pivotal role in developing robust, generalizable models across hand gesture estimation and body reconstruction tasks.

VII. CURRENT RESEARCH CHALLENGES AND FUTURE TRENDS

A. Challenges in Hand Gesture Classification

Hand gesture classification faces several challenges when applied in real-world scenarios. The variability in data, including different camera views, diverse execution styles of the

same action (e.g., using one or both hands), and varying action durations raise significant challenges that make temporal analysis and gesture segmentation particularly demanding. Other challenges comprise the occlusions of the hand by surrounding objects, which further complicates detection and tracking, low resolution, and the background and illumination variations that exacerbate the challenge of robust classification. Accurate annotation of occluded or ambiguous keypoints across multi-camera setups demands advanced techniques, such as triangulation and re-projection, adding layers of complexity to training data preparation.

Another critical aspect is the sensitivity to motion scales. Gesture classification can depend on short-term motion details for actions like "clapping" or long-term trends for movements such as "waving up." Effective handling of this variation requires sophisticated models that balance fast and slow tem-

TABLE V: Overview of datasets for hand gesture estimation and hand/body reconstruction.

Topic	Type of Gesture	Input	Dataset	Year	# Samples	Resolution		
Hand Gesture Estimation	Static	RGB	MP11+NZSL [56]	2018	2800 images	Not specified		
		RGB	OneHand10K [175]	2019	11703 images	Not specified		
		RGB	FreiHAND [198]	2019	37k frames	224x224 pixels		
		RGB+RGB-D	Stereo Hand [189]	2016	18000 RGB+18000 RGB-D	Not specified		
		RGB+RGB-D	ObMan [9]	2018	141550 images	256x256 pixels		
		RGB-D	ICVL [161]	2014	180K images	Not specified		
	Dynamic	RGB		Rendered Hand Pose [197]	2017	43986 images	320x320 pixels	
				BiliHands [176]	2024	11204 images	Not specified	
				GANerated [112]	2018	331k frames	256x256 pixels	
				InterHand2.6M [110]	2020	2590k frames	512x334 pixels	
		RGB+RGB-D		HIC [167]	2016	29 sequences	640x480 pixels	
				B2RGB [125]	2017	1888 frames	Not specified	
				SHOWMe [159]	2023	87540 frames	Not specified	
			RGB-D		Dexter+Object [156]	2016	3000 frames	640x480 pixels
					EgoDexter [113]	2017	3k frames	640x480 pixels
					Hands2017 [187]	2017	1.2 million frames	640x480 pixels
				SynthHands [113]	2017	220k frames	640x480 pixels	
		RGB-D+video		HO-3D [47]	2020	78k frames	640x480 pixels	
				DexYCB [20]	2021	582k frames	640x480 pixels	
				FORTH [122]	2011	7148 frames	Not specified	
	ASTAR [181]		2013	435 frames	Not specified			
	Dexter [157]		2013	3157 frames	Not specified			
	UCI-EGO [141]		2014	3640 frames	Not specified			
	NYU [163]		2014	8252 frames	Not specified			
	MSRA [135]		2014	2400 frames	Not specified			
Hand/Body Reconstruction	Static	RGB	LSP [62]	2010	2000 images	Not specified		
			COCO [92]	2014	328000 images	Not specified		
			Expressive hands and faces dataset [129]	2019	100 images	Not specified		
			LSP-Extended [62]	2019	10000 images	Not specified		
			MPI-INF-3DHP [103]	2017	1.3 million frames	Not specified		
	Dynamic	RGB	Kinetics-400 [19]	2017	400 videos	Not specified		
			InstaVariety [68]	2019	2.1 million frames	Not specified		
			Human3.6M [55]	2013	3.6 million images	50Hz video		
			3DPW [169]	2018	60 videos	Not specified		
			RGB+3D	CMU [63]	2015	297000 frames	Not specified	
RGB+RGB-D+video		PennAction [192]	2013	2326 videos	Not specified			
		PoseTrack [7]	2018	1337 videos	Not specified			

video

poral streams. Lastly, achieving real-time recognition with low latency while maintaining high accuracy is a persistent challenge, especially for early-stage gesture detection. The high data volumes that are inherent to temporal video streams increase computational demands, and the fusion of multimodal input which is becoming a necessity often requires separate networks for each modality, leading to significant model complexity. In terms of multimodal fusion, another challenge is the correct balance between modalities, which do not perform equally well in recognizing actions.

B. Future Trends in Hand Gesture Classification

Emerging approaches in static and dynamic hand gesture classification leverage advanced deep learning techniques and innovative fusion strategies to address these challenges. Hybrid models, combining Convolutional Neural Networks (CNNs) for spatial feature extraction with Recurrent Neural Networks (RNNs) and mainly Long Short-Term Memory (LSTM) networks for temporal modeling, and Transformers, comprise the current trend. The use of 3D CNNs alongside LSTMs can capture spatiotemporal patterns effectively and parallel processing within CNN architectures, incorporating multiple branches for different temporal resolutions, is gaining attraction. Such designs improve gesture recognition robustness and accuracy, even under complex conditions.

The integration of multimodal data, such as RGB, depth, and optical flow, continues to enhance recognition perfor-

mance, with innovative fusion strategies being explored at the data, feature, and decision levels. Graph-based models, such as Spatial-Temporal Graph Convolutional Networks (ST-GCNs), are emerging as effective tools for skeleton-based gesture recognition. Future research is likely to focus on improving online recognition scenarios with techniques like Connectionist Temporal Classification Loss (CTC) to align time-windowed predictions with actual gesture sequences [44]. Moreover, advancements in transfer learning, feature reduction (e.g., PCA), and serial-based fusion approaches are expected to streamline model complexity while maintaining accuracy, making gesture recognition systems more scalable and adaptable. For the seek of simplicity, experimental results show that the random sampling of frames from a video can lead to similar performance than extracting framewise features [90].

A growing trend in hand gesture recognition is the integration of transformer models, such as Vision Transformers (ViT), which excel at capturing global dependencies in visual data, enhancing classification performance when combined with complementary techniques like preprocessing and quality improvement [12].

C. Challenges in Sign Language Recognition

Sign language recognition faces numerous challenges, primarily arising from the complexity of sign languages and the technical restrictions that affect all computer vision tasks. Vision-based approaches must contend with changing envi-

ronmental conditions, cluttered backgrounds, varying illumination, and diverse image resolutions. Any occlusions of the hands further complicate sign identification, making it difficult to extract clear and consistent features. These challenges underscore the need for robust preprocessing and feature extraction techniques, which can help mitigate issues like noise and inconsistencies in input data.

Another major hurdle lies in data diversity and availability. Sign languages vary across regions, with unique vocabularies and grammatical structures, necessitating large-scale, annotated datasets that cover a wide range of signs and dialects. Many existing datasets are either too small or lack diversity, which limits generalization across different sign languages. Continuous sign language recognition (cSLR) is a computationally intensive task that requires simultaneous processing of spatial and temporal features. The integration of 3D-CNNs or Transformer models is a promising approach, which however demands significant computational resources, thus challenging the implementation of lightweight or real-time systems. Addressing these challenges requires advancements in model efficiency, and increased focus on data augmentation and synthesis techniques.

D. Future Trends in Sign Language Recognition

Recent trends in Sign Language Recognition comprise the use of advanced AI and deep learning methodologies to overcome existing challenges. Convolutional Neural Networks (CNNs) and Recurrent Neural Networks (more specifically LSTM networks) have been instrumental in achieving high accuracy for static and dynamic gesture recognition. Studies such as those utilizing faster R-CNNs and 3D-CNNs have showcased near-perfect recognition rates on structured datasets, with further improvements anticipated through the expansion of training data. Additionally, end-to-end learning frameworks, including the Transformer model, are gaining attraction for their ability to integrate spatial and temporal features, offering state-of-the-art results in continuous sign language recognition.

Emerging approaches also emphasize integrating pose estimation and wearable technologies to enhance sign identification. Systems such as MyoSign, which leverage wearables for precise hand and body motion tracking, represent a shift towards multimodal recognition systems that combine video and depth images with sensor data for improved robustness, signaling the trend for multimodal data fusion. Lightweight models like YOLOv3 are also being explored for real-time applications in challenging environments. Furthermore, researchers are exploring generative adversarial networks (GANs) and neural machine translation for automatic sign language production, bridging the gap between spoken and sign languages. These trends reflect a growing emphasis on scalability, multimodal integration, and creation of user-friendly applications that support seamless communication for individuals with hearing or speech impairments.

E. Challenges in Hand Gesture Estimation

Hand gesture estimation faces several challenges, which are connected to the complexity of human hand movements and the visual properties of hand images. One of the most prominent challenges is the high degree of freedom (DOF) of the human hand, which allows for complex and highly variable gestures involving numerous degrees of motion for each finger and joint. This flexibility leads to ambiguity in hand appearance, especially when fingers overlap or are occluded by objects. Self-occlusion and external object occlusion further complicate the task, as the system needs to accurately identify joint positions and hand gestures despite missing parts of the hand in the captured image. The variations in hand shapes, sizes, and textures introduce additional layers of difficulty, apart from the varying background and the changes in illumination, which all hinder accurate hand pose estimation. Traditional computer vision techniques often struggle to effectively represent and process the intricate details of hand poses, especially in dynamic scenarios where gestures are continuous and evolve over time.

The presence of noise in data collected from low-quality cameras can also degrade the performance of gesture recognition systems. Despite advancements in deep learning, the performance of hand pose estimation models still suffers from issues like overfitting when training on small or unbalanced datasets, especially when dealing with extreme or rare hand shapes. The need to generalize across a wide variety of hand postures while accounting for these imperfections remains a critical problem. Furthermore, the temporal dynamics of hand gestures present additional challenges, as many recognition systems primarily focus on spatial features, overlooking the importance of temporal changes. Gesture recognition systems need to capture sequential relationships and dynamic features effectively, requiring the integration of time-series data processing capabilities, such as temporal convolutions. Handling the temporal dimension, while also addressing spatial complexities, is a significant hurdle in creating robust, real-time hand gesture recognition systems.

F. Future Trends in Hand Gesture Estimation

One of the key trends in the field of Hand Gesture Estimation is the use of convolutional neural networks (CNNs) and other deep architectures to automatically learn features from large datasets of hand images. These techniques allow to further train more accurate and robust models that can handle complex hand poses. By leveraging large, diverse datasets, CNNs can adapt to variations in hand shapes, poses, and environmental conditions, improving the overall accuracy of gesture recognition and hand pose estimation. Additionally, the integration of advanced neural network architectures, such as recurrent neural networks (RNNs) and 3D convolutional neural networks (3D CNNs), has shown promise in effectively handling dynamic gestures. These models capture both spatial and temporal features, making them highly suitable for time-series gesture recognition tasks. For instance, the development of dynamic gesture recognition systems that employ optimized

Convolutional 3D architectures allow for more efficient processing of both local and global hand features, leading to improved recognition performance in real-time applications.

Another trend that has gained attraction is the joint estimation of both hand pose and gesture recognition in a unified framework. By combining the two tasks, models can more efficiently utilize shared features, improving the accuracy and robustness of both tasks. Multi-task learning approaches have become popular in this domain, where a single model is trained to perform multiple related tasks simultaneously. This trend is evident in the development of hybrid models that not only estimate hand poses, but also predict hand gestures using end-to-end deep learning pipelines. Such models often incorporate advanced techniques like feature extraction modules, where CNNs extract key features from input images and utilize them for both pose estimation and gesture recognition. Additionally, the use of depth cameras, RGB-D sensors, and other multi-modal inputs is gaining popularity, as these sensors provide richer information for pose estimation compared to traditional RGB images alone. These advancements allow for more accurate and real-time hand gesture recognition, even in challenging conditions like partial occlusions or cluttered environments.

G. Challenges in Hand Reconstruction

A significant challenge in 3D hand reconstruction is the variability in hand configurations and interactions with different environments, especially when the task relies solely on monocular data. Unlike multi-view images or depth maps, monocular images often provide less comprehensive information, making it difficult to capture the full 3D structure of the hand accurately. The presence of various hand poses, deformations, and interactions with objects only compounds this issue, as the models must generalize well across diverse hand-object interactions while maintaining real-time performance. As monocular input is more common in practical applications such as augmented reality and human-computer interaction, addressing these challenges is crucial to enabling seamless 3D hand tracking in real-world scenarios.

Another challenge is the accurate and consistent reconstruction of 3D hand shapes across video sequences. Hand movements are inherently dynamic, and to maintain accuracy and realism, the reconstruction model must effectively account for motion, deformation, and transitions between different poses. The complexity increases further when considering that many existing datasets suffer from limitations such as insufficient variability in hand poses, camera angles, and object interactions. These issues make it difficult for models to learn robust representations that can generalize to real-world scenarios, where hand poses can be unpredictable and highly diverse. Moreover, the reconstruction process often relies on noisy or incomplete input data, which further complicates the task of producing accurate 3D reconstructions that adhere to biomechanical constraints.

H. Future Trends in Hand Reconstruction

Recent trends in hand/body reconstruction have shifted towards self-supervised learning methods, which aim to eliminate the need for manual annotations of training data. These methods typically rely on large collections of unlabeled images or video sequences, combined with a 2D keypoint estimator, to learn 3D hand reconstructions. Self-supervised models, such as S2HAND and S2HAND(V), have shown promise in achieving accurate and consistent reconstructions by learning from video sequences with temporal consistency constraints. This approach significantly reduces the need for costly and labor-intensive data annotation, making it more scalable and applicable to real-world applications. Additionally, the integration of biomechanical models, which impose physical constraints on the reconstructed hands, has enhanced the realism and plausibility of the output, ensuring that reconstructed hand poses adhere to human anatomical limits.

The use of novel representations such as the grasping field (GF) has also gained attraction in the field. GF captures the critical interactions between hand and object by modeling the joint distribution of hand and object shape in a unified framework. This approach improves the accuracy of hand-object interaction modeling by enabling the synthesis of realistic human grasps. Furthermore, advancements in texture and shape consistency regularization are improving the realism of hand reconstructions, encouraging models to produce more coherent textures and shapes across frames. The combination of self-supervision, biomechanical constraints, and advanced modeling techniques such as the GF has led to significant improvements in both the accuracy and practicality of 3D hand and body reconstruction, pushing the boundaries of what is possible in applications like virtual reality, robotics, and human-computer interaction.

VIII. CONCLUSIONS

In this survey, we provided a comprehensive review of recent advancements in hand gesture recognition (HGR) from visual input, highlighting the methodologies, datasets, and applications that define the current state of the field. By organizing the literature based on input data types, recognition methods, and task-specific challenges, we established a clear framework for understanding the diverse approaches employed in HGR research. Our analysis revealed significant progress in areas such as robust classification techniques, advancements in 3D hand pose estimation, and the development of benchmark datasets tailored to specific application domains like virtual reality, sign language recognition, and robotics. Additionally, we emphasized the importance of integrating multimodal data and leveraging deep learning architectures to address increasingly complex real-world scenarios.

Despite these advancements, several challenges remain, including improving the robustness of HGR systems in uncontrolled environments, handling occlusions, ensuring scalability and generalization across diverse users, and achieving computational efficiency for real-time applications. Addressing these issues will require interdisciplinary collaboration and

continued innovation in algorithm design, dataset creation, and hardware optimization. This survey aims to serve as a valuable resource for researchers and practitioners by synthesizing recent trends, identifying gaps in the literature, and outlining future directions for developing more accurate, efficient, and accessible hand gesture recognition systems.

REFERENCES

- [1] Sunusi Bala Abdullahi, Kosin Chamnongthai, Veronica Bolon-Canedo, and Brais Cancela. Spatial-temporal feature-based end-to-end fourier network for 3d sign language recognition. *Expert Systems with Applications*, 248:123258, 2024.
- [2] Nikolas Adaloglou, Theocharis Chatzis, Ilias Papastratis, Andreas Stergioulas, Georgios Th. Papadopoulos, Vassia Zacharopoulou, George J. Xydopoulos, Klimnis Atzakas, Dimitris Papazachariou, and Petros Daras. A comprehensive study on deep learning-based methods for sign language recognition. *IEEE Transactions on Multimedia*, 24:1750–1762, 2022.
- [3] Muhammad Al-Barham, Adham Alsharkawi, Musa Al-Yaman, Mohammad Al-Fetyani, Ashraf Elnagar, Ahmad Abu SaAleek, and Mohammad Al-Odat. Rgb arabic alphabets sign language dataset. *arXiv preprint arXiv:2301.11932*, 2023.
- [4] Melek Alaftekin, Ishak Pacal, and Kenan Cicek. Real-time sign language recognition based on yolo algorithm. *Neural Computing and Applications*, 36(14):7609–7624, 2024.
- [5] Marie Alaghand, Hamid Reza Maghroor, and Ivan Garibay. A survey on sign language literature. *Machine Learning with Applications*, 14:100504, 2023.
- [6] Hassan Ali, Doreen Jirak, and Stefan Wermtner. Snapture—a novel neural architecture for combined static and dynamic hand gesture recognition. *Cognitive Computation*, 15(6):2014–2033, 2023.
- [7] Mykhaylo Andriluka, Umar Iqbal, Eldar Insafutdinov, Leonid Pishchulin, Anton Milan, Juergen Gall, and Bernt Schiele. Posetrack: A benchmark for human pose estimation and tracking. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 5167–5176, 2018.
- [8] Vassilis Athitsos, Carol Neidle, Stan Sclaroff, Joan Nash, Alexandra Stefan, Quan Yuan, and Ashwin Thangali. The american sign language lexicon video dataset. In *2008 IEEE Computer Society Conference on Computer Vision and Pattern Recognition Workshops*, pages 1–8. IEEE, 2008.
- [9] Danilo Avola, Luigi Cinque, Alessio Fagioli, Gian Luca Foresti, Adriano Fragomeni, and Daniele Pannone. 3d hand pose and shape estimation from rgb images for keypoint-based hand gesture recognition. *Pattern Recognition*, 129:108762, 2022.
- [10] Arti Bahuguna, Gopa Bhaumik, and Mahesh Chandra Govil. Local extrema min-max pattern: A novel descriptor for extracting compact and discrete features for hand gesture recognition. *Biomedical Signal Processing and Control*, 93:106203, 2024.
- [11] Pranav Balaji and Manas Ranjan Prusty. Multimodal fusion hierarchical self-attention network for dynamic hand gesture recognition. *Journal of Visual Communication and Image Representation*, 98:104019, 2024.
- [12] Eran Bamani, Eden Nissinman, Inbar Meir, Lisa Koenigsberg, and Avishai Sintov. Ultra-range gesture recognition using a web-camera in human-robot interaction. *Engineering Applications of Artificial Intelligence*, 132:108443, 2024.
- [13] Andre Barczak, Napoleon Reyes, M Abastillas, A Piccio, and Teo Susnjak. A new 2d static hand gesture colour image dataset for asl gestures. *Res Lett Inf Math Sci*, 15, 01 2011.
- [14] Simen Birkeland, Lin Julie Fjeldvik, Nadia Noori, Sreenivasa Reddy Yeduri, and Linga Ceddy Cenkermaddi. Video based hand gesture recognition dataset using thermal camera. *Data in Brief*, 54:110299, 2024.
- [15] Yujun Cai, Lihao Ge, Jianfei Cai, and Junsong Yuan. Weakly-supervised 3d hand pose estimation from monocular rgb images. In *Proceedings of the European conference on computer vision (ECCV)*, pages 666–682, 2018.
- [16] Yujun Cai, Lihao Ge, Jun Liu, Jianfei Cai, Tat-Jen Cham, Junsong Yuan, and Nadia Magnenat Thalmann. Exploiting spatial-temporal relationships for 3d pose estimation via graph convolutional networks. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019.
- [17] Necati Cihan Camgoz, Simon Hadfield, Oscar Koller, Hermann Ney, and Richard Bowden. Neural sign language translation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7784–7793, 2018.
- [18] Necati Cihan Camgöz, Ahmet Alp Kindiroğlu, and Lale Akarun. Sign language recognition for assisting the deaf in hospitals. In *Human Behavior Understanding: 7th International Workshop, HBU 2016, Amsterdam, The Netherlands, October 16, 2016, Proceedings 7*, pages 89–101. Springer, 2016.
- [19] Joao Carreira and Andrew Zisserman. Quo vadis, action recognition? a new model and the kinetics dataset. In *proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 6299–6308, 2017.
- [20] Yu-Wei Chao, Wei Yang, Yu Xiang, Pavlo Molchanov, Ankur Handa, Jonathan Tremblay, Yashraj S Narang, Karl Van Wyk, Umar Iqbal, Stan Birchfield, et al. Dexycb: A benchmark for capturing hand grasping of objects. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9044–9053, 2021.
- [21] Shruti Chavan, Xinrui Yu, and Jafar Saniie. Convolutional neural network hand gesture recognition for american sign language. In *2021 IEEE International Conference on Electro Information Technology (EIT)*, pages 188–192, 2021.
- [22] Huizhou Chen, Yunan Li, Huijuan Fang, Wentian Xin, Zixiang Lu, and Qiguang Miao. Multi-scale attention 3d convolutional network for multimodal gesture recognition. *Sensors*, 22(6):2405–2405, Mar 2022.
- [23] Enric Corona, Tomas Hodan, Minh Vo, Francisc Moreno-Noguer, Chris Sweeney, Richard Newcombe, and Lingni Ma. Lisa: Learning implicit shape and appearance of hands, 2022.
- [24] Basel A. Dabwan, Mukti E. Jadhav, Mohammed Al Yami, Eman A. Hassan, Soad M. Almula, and Yahya A. Ali. Classifying hand gestures for people with disabilities utilizing the mobilenetv2 model. In *2024 1st International Conference on Innovative Sustainable Technologies for Energy, Mechatronics, and Smart Systems (ISTEMS)*, pages 1–4, 2024.
- [25] Dima Damen, Hazel Doughty, Giovanni Maria Farinella, Sanja Fidler, Antonino Furnari, Evangelos Kazakos, Davide Moltisanti, Jonathan Munro, Toby Perrett, Will Price, et al. Scaling egocentric vision: The epic-kitchens dataset. In *Proceedings of the European conference on computer vision (ECCV)*, pages 720–736, 2018.
- [26] N.C Dayananda Kumar, K.V Suresh, and R Dinesh. Cnn based static hand gesture recognition using rgb-d data. In *2022 2nd International Conference on Artificial Intelligence and Signal Processing (AISP)*, pages 1–6, 2022.
- [27] Cleison Correia de Amorim, David Macêdo, and Cleber Zanchettin. Spatial-temporal graph convolutional networks for sign language recognition. In *International Conference on Artificial Neural Networks*, pages 646–657. Springer, 2019.
- [28] Giulia Zanon de Castro, Rúbia Reis Guerra, and Frederico Gadelha Guimarães. Automatic translation of sign language with multi-stream 3d cnn and generation of artificial depth maps. *Expert Systems with Applications*, 215:119394, 2023.
- [29] Mathieu De Coster, Mieke Van Herreweghe, and Joni Dambre. Isolated sign recognition from rgb video using pose flow and self-attention. In *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 3436–3445, 2021.
- [30] Quentin De Smedt, Hazem Wannous, and Jean-Philippe Vandeborre. Skeleton-based dynamic hand gesture recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, pages 1–9, 2016.
- [31] Quentin De Smedt, Hazem Wannous, and Jean-Philippe Vandeborre. Heterogeneous hand gesture recognition using 3d dynamic skeletal data. *Computer Vision and Image Understanding*, 181:60–72, 2019.
- [32] Quentin De Smedt, Hazem Wannous, Jean-Philippe Vandeborre, Joris Guerry, Bertrand Le Saux, and David Filliat. Shrec’17 track: 3d hand gesture recognition using a depth and skeletal dataset. In *3DOR-10th Eurographics Workshop on 3D Object Retrieval*, pages 1–6, 2017.
- [33] Zhiwen Deng, Yuquan Leng, Junkang Chen, Xiang Yu, Yang Zhang, and Qing Gao. Tms-net: A multi-feature multi-stream multi-level information sharing network for skeleton-based sign language recognition. *Neurocomputing*, 572:127194, 2024.
- [34] Guillaume Devineau, Fabien Moutarde, Wang Xi, and Jie Yang. Deep learning for hand gesture recognition on skeletal data. In *2018*

- 13th IEEE International Conference on Automatic Face & Gesture Recognition (FG 2018), pages 106–113. IEEE, 2018.
- [35] Philippe Dreuw, Thomas Deselaers, Daniel Keysers, and Hermann Ney. Modeling image variability in appearance-based gesture recognition. In *ECCV workshop on statistical methods in multi-image and video processing*, pages 7–18, 2006.
- [36] Yao Du, Taiying Peng, and Xiaohui Hu. Beyond granularity: Enhancing continuous sign language recognition with granularity-aware feature fusion and attention optimization. *Applied Sciences*, 14(19), 2024.
- [37] Enes Duran, Muhammed Kocabas, Vasileios Choutas, Zicong Fan, and Michael J. Black. Hmp: Hand motion priors for pose and shape estimation from video. In *2024 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 6341–6351, 2024.
- [38] Edmond Li Ren Ewe, Chin Poo Lee, Kian Ming Lim, Lee Chung Kwek, and Ali Alqahtani. Lavrf: Sign language recognition via lightweight attentive vgg16 with random forest. *PLOS ONE*, 19(4):1–22, 04 2024.
- [39] Dinghao Fan, Hengjie Lu, Shugong Xu, and Shan Cao. Multi-task and multi-modal learning for rgb dynamic gesture recognition. *IEEE Sensors Journal*, 21(23):27026–27036, 2021.
- [40] Qing Gao, Zhaojie Ju, Yongquan Chen, Qiwen Wang, and Chuliang Chi. An efficient rgb-d hand gesture detection framework for dexterous robot hand-arm teleoperation system. *IEEE Transactions on Human-Machine Systems*, 53(1):13–23, 2023.
- [41] Guillermo Garcia-Hernando, Shanxin Yuan, Seungryul Baek, and Tae-Kyun Kim. First-person hand action benchmark with rgb-d videos and 3d hand pose annotations. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 409–419, 2018.
- [42] Letizia Gionfrida, Wan M. R. Rusli, Angela E. Kedgley, and Anil A. Bharath. A 3dcnn-lstm multi-class temporal segmentation for hand gesture recognition. *Electronics*, 11(15), 2022.
- [43] Susan Goldin-Meadow. The role of gesture in communication and thinking. *Trends in Cognitive Sciences*, 3(11):419–429, 1999.
- [44] Alex Graves and Navdeep Jaitly. Towards end-to-end speech recognition with recurrent neural networks. In *International conference on machine learning*, pages 1764–1772. PMLR, 2014.
- [45] Xiaofeng Guo, Qing Zhu, Yaonan Wang, and Yang Mo. A hierarchical attention gcn network for body-hand gesture recognition. In *2023 China Automation Congress (CAC)*, pages 799–804, 2023.
- [46] Yunjian Guo, Kunpeng Li, Wei Yue, Nam-Young Kim, Yang Li, Guozhen Shen, and Jong-Chul Lee. A rapid adaptation approach for dynamic air-writing recognition using wearable wristbands with self-supervised contrastive learning. *Nano-Micro Letters*, 17(1):1–15, 2025.
- [47] Shreyas Hampali, Mahdi Rad, Markus Oberweger, and Vincent Lepetit. Honnotate: A method for 3d annotation of hand and object poses. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 3196–3206, 2020.
- [48] Yunus Hazar and Ömer Faruk Ertuğrul. Developing a real-time hand exoskeleton system that controlled by a hand gesture recognition system via wireless sensors. *Biomedical Signal Processing and Control*, 99:106886, 2025.
- [49] Dinh-Cuong Hoang, Phan Xuan Tan, Duc-Long Pham, Hai-Nam Pham, Son-Anh Bui, Chi-Minh Nguyen, An-Binh Phi, Khanh-Duong Tran, Viet-Anh Trinh, van-Duc Tran, Duc-Thanh Tran, van-Hiep Duong, Khanh-Toan Phan, van-Thiep Nguyen, van-Duc Vu, and Thu-Uyen Nguyen. Efficient multimodal fusion for hand pose estimation with hourglass network. *IEEE Access*, 12:113810–113825, 2024.
- [50] Oishee Bintey Hoque, Mohammad Imrul Jubair, Al-Farabi Akash, and Saiful Islam. Bds136: A dataset for bangladeshi sign letters recognition. In *Proceedings of the Asian Conference on Computer Vision*, 2020.
- [51] Jiwei Hu, Yunfei Liu, Kin-Man Lam, and Ping Lou. Sfte-net: A spatial-temporal feature extraction network for continuous sign language translation. *IEEE Access*, 11:46204–46217, 2023.
- [52] Phat Nguyen Huu and Tan Phung Ngoc. Hand gesture recognition algorithm using svm and hog model for control of robotic system. *Journal of Robotics*, 2021(1):3986497, 2021.
- [53] Rania Ibrahim, Ahmed Elbagoury, Mohamed S Kamel, and Fakhri Karray. Tools and approaches for topic detection from twitter streams: survey. *Knowledge and Information Systems*, 54:511–539, 2018.
- [54] Ali Imran, Abdul Razzaq, Irfan Ahmad Baig, Aamir Hussain, Sharaiz Shahid, and Tausif-ur Rehman. Dataset of pakistan sign language and automatic recognition of hand configuration of urdu alphabet through machine learning. *Data in Brief*, 36:107021, 2021.
- [55] Catalin Ionescu, Dragos Papava, Vlad Olaru, and Cristian Sminchisescu. Human3.6m: Large scale datasets and predictive methods for 3d human sensing in natural environments. *IEEE transactions on pattern analysis and machine intelligence*, 36(7):1325–1339, 2013.
- [56] Umar Iqbal, Pavlo Molchanov, Thomas Breuel Juergen Gall, and Jan Kautz. Hand pose estimation via latent 2.5d heatmap regression. In *Proceedings of the European Conference on Computer Vision (ECCV)*, September 2018.
- [57] Hamed Jelodar, Yongli Wang, Chi Yuan, Xia Feng, Xiahui Jiang, Yanchao Li, and Liang Zhao. Latent dirichlet allocation (lda) and topic modeling: models, applications, a survey. *Multimedia tools and applications*, 78:15169–15211, 2019.
- [58] Boyuan Jiang, MengMeng Wang, Weihao Gan, Wei Wu, and Junjie Yan. Stm: Spatiotemporal and motion encoding for action recognition. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019.
- [59] Songyao Jiang, Bin Sun, Lichen Wang, Yue Bai, Kunpeng Li, and Yun Fu. Skeleton aware multi-modal sign language recognition. In *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 3408–3418, 2021.
- [60] Zixun Jiao, Xihan Wang, Jingcao Li, Rongxin Gao, Miao He, Jiao Liang, Zhaoqiang Xia, and Quanli Gao. Handformer: Hand pose reconstructing from a single rgb image. *Pattern Recognition Letters*, 183:155–164, 2024.
- [61] Wang Jingyao, Yu Naigong, and Essaf Firdaus. Gesture recognition matching based on dynamic skeleton. In *2021 33rd Chinese Control and Decision Conference (CCDC)*, pages 1680–1685, 2021.
- [62] Sam Johnson and Mark Everingham. Learning effective human pose estimation from inaccurate annotation. In *CVPR 2011*, pages 1465–1472. IEEE, 2011.
- [63] Hanbyul Joo, Hao Liu, Lei Tan, Lin Gui, Bart Nabbe, Iain Matthews, Takeo Kanade, Shohei Nobuhara, and Yaser Sheikh. Panoptic studio: A massively multiview system for social motion capture. In *Proceedings of the IEEE international conference on computer vision*, pages 3334–3342, 2015.
- [64] Hanbyul Joo, Tomas Simon, and Yaser Sheikh. Total capture: A 3d deformation model for tracking faces, hands, and bodies. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 8320–8329, 2018.
- [65] Hamid Reza Vaezi Joze and Oscar Koller. Ms-asl: A large-scale data set and benchmark for understanding american sign language. *arXiv preprint arXiv:1812.01053*, 2018.
- [66] Manato Kakizaki, Abu Saleh Musa Miah, Koki Hirooka, and Jungpil Shin. Dynamic japanese sign language recognition throw hand pose estimation using effective feature extraction and classification approach. *Sensors*, 24(3), 2024.
- [67] Dawid Kalandyk and Tomasz Kapuściński. Temporal signed gestures segmentation in an image sequence using deep reinforcement learning. *Engineering Applications of Artificial Intelligence*, 131:107879, 2024.
- [68] Angjoo Kanazawa, Jason Y Zhang, Panna Felsen, and Jitendra Malik. Learning 3d human dynamics from video. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5614–5623, 2019.
- [69] Meghana Pai Kane, Sherwin Fernandes, Ricky Fonseca, Shika Desai, Akhil Shetye, and Ananya Sharma. Sign language apprehension using convolution neural networks. In *2022 13th International Conference on Computing Communication and Networking Technologies (ICCCNT)*, pages 1–7, 2022.
- [70] Byeongkeun Kang, Subarna Tripathi, and Truong Q Nguyen. Real-time sign language fingerspelling recognition using convolutional neural networks from depth map. In *2015 3rd IAPR Asian Conference on Pattern Recognition (ACPR)*, pages 136–140. IEEE, 2015.
- [71] Korrawe Karunratanakul, Jinlong Yang, Yan Zhang, Michael J. Black, Krikamol Mueandet, and Siyu Tang. Grasping field: Learning implicit representations for human grasps. In *2020 International Conference on 3D Vision (3DV)*, pages 333–344, 2020.
- [72] Muhammed Kocabas, Nikos Athanasiou, and Michael J. Black. Vibe: Video inference for human body pose and shape estimation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2020.
- [73] Oscar Koller, Necati Cihan Camgoz, Hermann Ney, and Richard Bowden. Weakly supervised learning with multi-stream cnn-lstm-hmms to discover sequential parallelism in sign language videos. *IEEE*

- transactions on pattern analysis and machine intelligence*, 42(9):2306–2320, 2019.
- [74] Oscar Koller, Sepehr Zargaran, Hermann Ney, and Richard Bowden. Deep sign: Enabling robust statistical continuous sign language recognition via hybrid cnn-hmms. *International Journal of Computer Vision*, 126:1311–1325, 2018.
- [75] Nikos Kolotouros, Georgios Pavlakos, Michael J. Black, and Kostas Daniilidis. Learning to reconstruct 3d human pose and shape via model-fitting in the loop. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019.
- [76] Nikos Kolotouros, Georgios Pavlakos, and Kostas Daniilidis. Convolutional mesh regression for single-image human shape reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2019.
- [77] Okan Köpüklü, Ahmet Gunduz, Neslihan Kose, and Gerhard Rigoll. Real-time hand gesture detection and classification using convolutional neural networks. In *2019 14th IEEE international conference on automatic face & gesture recognition (FG 2019)*, pages 1–8. IEEE, 2019.
- [78] Okan Kopuklu, Neslihan Kose, and Gerhard Rigoll. Motion fused frames: Data level fusion strategy for hand gesture recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, June 2018.
- [79] Deep R. Kothadiya, Chintan M. Bhatt, Hena Kharwa, and Felix Albu. Hybrid inceptionnet based enhanced architecture for isolated sign language recognition. *IEEE Access*, 12:90889–90899, 2024.
- [80] Hildegard Kuehne, Hueihan Jhuang, Estíbaliz Garrote, Tomaso Poggio, and Thomas Serre. Hmdb: a large video database for human motion recognition. In *2011 International conference on computer vision*, pages 2556–2563. IEEE, 2011.
- [81] Diksha Kumari and Radhey Shyam Anand. Isolated video-based sign language recognition using a hybrid cnn-lstm framework based on attention mechanism. *Electronics*, 13(7), 2024.
- [82] Bogdan Kwolek, Wojciech Baczynski, and Shinji Sako. Recognition of jsl fingerspelling using deep convolutional neural networks. *Neuro-computing*, 456:586–598, 2021.
- [83] Taemin Kwon, Bugra Tekin, Jan St^uhmer, Federica Bogo, and Marc Pollefeys. H2o: Two hands manipulating objects for first person interaction recognition. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 10138–10148, 2021.
- [84] Kenneth Lai and Svetlana N. Yanushkevich. Cnn+rnn depth and skeleton based dynamic hand gesture recognition. In *2018 24th International Conference on Pattern Recognition (ICPR)*, pages 3451–3456, 2018.
- [85] Viet-Thanh Le, Thanh-Hai Tran, Van-Nam Hoang, Van-Hung Le, Thi-Lan Le, and Hai Vu. Sst-gcn: Structure aware spatial-temporal gcn for 3d hand pose estimation. In *2021 13th International Conference on Knowledge and Systems Engineering (KSE)*, pages 1–6, 2021.
- [86] David González León, Jade Gröli, Sreenivasa Reddy Yedurí, Daniel Rossier, Romuald Mosqueron, Om Jee Pandey, and Linga Reddy Cenkeramaddi. Video hand gestures recognition using depth camera and lightweight cnn. *IEEE Sensors Journal*, 22(14):14610–14619, 2022.
- [87] Dongxu Li, Cristian Rodriguez Opazo, Xin Yu, and Hongdong Li. Word-level deep sign language recognition from video: A new large-scale dataset and methods comparison. In *2020 IEEE Winter Conference on Applications of Computer Vision (WACV)*, pages 1448–1458, 2020.
- [88] Dongxu Li, Cristian Rodriguez, Xin Yu, and Hongdong Li. Word-level deep sign language recognition from video: A new large-scale dataset and methods comparison. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, pages 1459–1469, 2020.
- [89] Jie-Ying Li, Herman Prawiro, Chia-Chen Chiang, Hsin-Yu Chang, Tse-Yu Pan, Chih-Tsun Huang, and Min-Chun Hu. Efficient hand gesture recognition using multi-task multi-modal learning and self-distillation. In *Proceedings of the 5th ACM International Conference on Multimedia in Asia, MMAsia '23*, New York, NY, USA, 2024. Association for Computing Machinery.
- [90] Rui Li, Hongyu Wang, Zhenyu Liu, Na Cheng, and Hongye Xie. First-person hand action recognition using multimodal data. *IEEE Transactions on Cognitive and Developmental Systems*, 14(4):1449–1464, 2022.
- [91] Wanqing Li, Zhengyou Zhang, and Zicheng Liu. Action recognition based on a bag of 3d points. In *2010 IEEE computer society conference on computer vision and pattern recognition-workshops*, pages 9–14. IEEE, 2010.
- [92] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *Computer Vision–ECCV 2014: 13th European Conference, Zurich, Switzerland, September 6–12, 2014, Proceedings, Part V 13*, pages 740–755. Springer, 2014.
- [93] Jinwei Liu, Baoguo Wei, Mingzhi Cai, and Yong Xu. Dynamic gesture recognition based on cnn-lstm-attention. In *2021 IEEE International Conference on Signal Processing, Communications and Computing (ICSPCC)*, pages 1–6. IEEE, 2021.
- [94] Xingyu Liu, Pengfei Ren, Yuanyuan Gao, Jingyu Wang, Haifeng Sun, Qi Qi, Zirui Zhuang, and Jianxin Liao. Keypoint fusion for rgb-d based 3d hand pose estimation. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(4):3756–3764, Mar 2024.
- [95] Haofan Lu, Shuiping Gou, and Ruimin Li. Spmhand: Segmentation-guided progressive multi-path 3d hand pose and shape estimation. *IEEE Transactions on Multimedia*, 26:6822–6833, 2024.
- [96] Minnan Luo, Feiping Nie, Xiaojun Chang, Yi Yang, Alexander Hauptmann, and Qinghua Zheng. Probabilistic non-negative matrix factorization and its robust extensions for topic modeling. *Proceedings of the AAAI Conference on Artificial Intelligence*, 31(1), Feb. 2017.
- [97] Ying Ma, Tianpei Xu, and Kangchul Kim. Two-stream mixed convolutional neural network for american sign language recognition. *Sensors*, 22(16), 2022.
- [98] Jameel Malik, Ahmed Elhayek, Fabrizio Nunnari, Kiran Varanasi, Kiarash Tamaddon, Alexis Heloir, and Didier Stricker. Deephps: End-to-end estimation of 3d hand pose and shape by learning from synthetic depth. In *2018 International Conference on 3D Vision (3DV)*, pages 110–119, 2018.
- [99] Fabio Manganaro, Stefano Pini, Guido Borghi, Roberto Vezzani, and Rita Cucchiara. Hand gestures for the human-car interaction: The briareo dataset. In *Image Analysis and Processing–ICIAP 2019: 20th International Conference, Trento, Italy, September 9–13, 2019, Proceedings, Part II 20*, pages 560–571. Springer, 2019.
- [100] Giulio Marin, Fabio Dominio, and Pietro Zanuttigh. Hand gesture recognition with leap motion and kinect pose recognition. In *2014 IEEE International conference on image processing (ICIP)*, pages 1565–1569. IEEE, 2014.
- [101] Joanna Materzynska, Guillaume Berger, Ingo Bax, and Roland Memisevic. The jester dataset: A large-scale video dataset of human gestures. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV) Workshops*, Oct 2019.
- [102] Matti Matilainen, Pekka Sangi, Jukka Holappa, and Olli Silvén. Ouhands database for hand detection and pose recognition. In *2016 Sixth international conference on image processing theory, tools and applications (IPTA)*, pages 1–5. IEEE, 2016.
- [103] Dushyant Mehta, Helge Rhodin, Dan Casas, Pascal Fua, Oleksandr Sotnychenko, Weipeng Xu, and Christian Theobalt. Monocular 3d human pose estimation in the wild using improved cnn supervision. In *2017 international conference on 3D vision (3DV)*, pages 506–516. IEEE, 2017.
- [104] Ozge Mercanoglu Sincan and Hacer Yalim Keles. Using motion history images with 3d convolutional networks in isolated sign language recognition. *IEEE Access*, 10:18608–18618, 2022.
- [105] Abu Saleh Musa Miah, Md. Al Mehedi Hasan, Satoshi Nishimura, and Jungpil Shin. Sign language recognition using graph and general deep neural network based on large scale dataset. *IEEE Access*, 12:34553–34569, 2024.
- [106] Abu Saleh Musa Miah, Md. Al Mehedi Hasan, Yoichi Tomioka, and Jungpil Shin. Hand gesture recognition for multi-culture sign language using graph and general deep learning network. *IEEE Open Journal of the Computer Society*, 5:144–155, 2024.
- [107] Purnendu Mishra and Kishor Sarawadekar. Multiple-hand 2d pose estimation from a monocular rgb image. *IEEE Access*, 12:40722–40735, 2024.
- [108] Noraini Mohamed, Mumtaz Begum Mustafa, and Nazean Jomhari. A review of the hand gesture recognition system: Current progress and future directions. *IEEE Access*, 9:157422–157436, 2021.
- [109] Pavlo Molchanov, Xiaodong Yang, Shalini Gupta, Kihwan Kim, Stephen Tyree, and Jan Kautz. Online detection and classification of dynamic hand gestures with recurrent 3d convolutional neural network. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4207–4215, 2016.

- [110] Gyeongsik Moon, Shou-I Yu, He Wen, Takaaki Shiratori, and Kyoung Mu Lee. Interhand2.6m: A dataset and baseline for 3d interacting hand pose estimation from a single rgb image. In *Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XX 16*, pages 548–564. Springer, 2020.
- [111] Wiktor Mucha and Martin Kampel. In my perspective, in my hands: Accurate egocentric 2d hand pose and action recognition. In *2024 IEEE 18th International Conference on Automatic Face and Gesture Recognition (FG)*, pages 1–9, 2024.
- [112] Franziska Mueller, Florian Bernard, Oleksandr Sotnychenko, Dushyant Mehta, Srinath Sridhar, Dan Casas, and Christian Theobalt. Generated hands for real-time 3d hand tracking from monocular rgb. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 49–59, 2018.
- [113] Franziska Mueller, Dushyant Mehta, Oleksandr Sotnychenko, Srinath Sridhar, Dan Casas, and Christian Theobalt. Real-time hand tracking under occlusion from an egocentric rgb-d sensor. In *Proceedings of the IEEE international conference on computer vision*, pages 1154–1163, 2017.
- [114] Abdullah Mujahid, Mazhar Javed Awan, Awais Yasin, Mazin Abed Mohammed, Robertas Damaševičius, Rytis Maskeliūnas, and Karar Hameed Abdulkareem. Real-time hand gesture recognition based on deep learning yolov3 model. *Applied Sciences*, 11(9), 2021.
- [115] Jonathan Munro and Dima Damen. Multi-modal domain adaptation for fine-grained action recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2020.
- [116] Sai Sree Nathala, Rakesh Reddy Yakkati, Daniel Skomedal Breland, Sreenivasa Reddy Yeduri, M. Sabarimalai Manikandan, Ajit Jha, Jing Zhou, and Linga Reddy Cenkeramaddi. A deep cnn-based hand gestures recognition using high-resolution thermal imaging. In *2024 IEEE 19th Conference on Industrial Electronics and Applications (ICIEA)*, pages 1–6, 2024.
- [117] Neelma Naz, Hasan Sajid, Sara Ali, Osman Hasan, and Muhammad Khurram Ehsan. Signgraph: An efficient and accurate pose-based graph convolution approach toward sign language recognition. *IEEE Access*, 11:19135–19147, 2023.
- [118] Donghyeon Noh, Hojin Yoon, and Donghun Lee. A decade of progress in human motion recognition: A comprehensive survey from 2010 to 2020. *IEEE Access*, 2024.
- [119] Iram Noreen, Muhammad Hamid, Uzma Akram, Saadia Malik, and Muhammad Saleem. Hand pose recognition using parallel multi stream cnn. *Sensors*, 21(24):8469–8469, Dec 2021.
- [120] Juan C. Núñez, Raúl Cabido, Juan J. Pantrigo, Antonio S. Montemayor, and José F. Vélez. Convolutional neural networks and long short-term memory for skeleton-based human activity and hand gesture recognition. *Pattern Recognition*, 76:80–94, 2018.
- [121] Abiodun Oguntimilehin and Kolade Balogun. Real-time sign language fingerspelling recognition using convolutional neural network. *International Arab Journal of Information Technology*, 21(1):158 – 165, 2024. Cited by: 1; All Open Access, Gold Open Access.
- [122] Iason Oikonomidis, Nikolaos Kyriazis, Antonis A Argyros, et al. Efficient model-based 3d tracking of hand articulations using kinect. In *BmVC*, volume 1, page 3, 2011.
- [123] Masaya Okano, Jia-Qing Liu, Tomoko Tateyama, and Yen-Wei Chen. Dhgd: Dynamic hand gesture dataset for skeleton-based gesture recognition and baseline evaluations. In *2024 IEEE International Conference on Consumer Electronics (ICCE)*, pages 1–4, 2024.
- [124] Oğulcan Özdemir, Ahmet Alp Kindroğlu, Necati Cihan Camgöz, and Lale Akarun. Bosphorussign22k sign language recognition dataset. *arXiv preprint arXiv:2004.01283*, 2020.
- [125] Paschalis Panteleris and Antonis Argyros. Back to rgb: 3d tracking of hands and hand-object interactions based on short-baseline stereo. In *Proceedings of the IEEE International Conference on Computer Vision Workshops*, pages 575–584, 2017.
- [126] Paschalis Panteleris, Iason Oikonomidis, and Antonis Argyros. Using a single rgb frame for real time 3d hand pose estimation in the wild. In *2018 IEEE Winter Conference on Applications of Computer Vision (WACV)*, pages 436–445, 2018.
- [127] Michael Paul and Roxana Girju. Topic modeling of research fields: An interdisciplinary perspective. In *Proceedings of the International Conference RANLP-2009*, pages 337–342, 2009.
- [128] Subrata Kumer Paul, Md. Abul Ala Walid, Rakhi Rani Paul, Md. Jamal Uddin, Md. Sohel Rana, Malay Kumar Devnath, Ishaat Rahman Dipu, and Md. Momenul Haque. An adam based cnn and lstm approach for sign language recognition in real time for deaf people. *Bulletin of Electrical Engineering and Informatics*, 13(1):499–509, 2024.
- [129] Georgios Pavlakos, Vasileios Choutas, Nima Ghorbani, Timo Bolkart, Ahmed A. A. Osman, Dimitrios Tzionas, and Michael J. Black. Expressive body capture: 3d hands, face, and body from a single image. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2019.
- [130] Georgios Pavlakos, Luyang Zhu, Xiaowei Zhou, and Kostas Daniilidis. Learning to estimate 3d human pose and shape from a single color image. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2018.
- [131] Lionel Pigou, Aarón van den Oord, Sander Dieleman, Mieke Van Herreweghe, and Joni Dambre. Beyond temporal pooling: Recurrence and temporal convolutions for gesture recognition in video. *CoRR*, abs/1506.01911, 2015.
- [132] Pramod Kumar Pisharady, Prahlad Vadakkepat, and Ai Poh Loh. Attention based detection and recognition of hand postures against complex backgrounds. *International Journal of Computer Vision*, 101:403–419, 2013.
- [133] Geoffrey Poon, Kin Chung Kwan, and Wai-Man Pang. Real-time multi-view bimanual gesture recognition. In *2018 IEEE 3rd International Conference on Signal and Image Processing (ICSIP)*, pages 19–23, 2018.
- [134] Nicolas Pugeault and Richard Bowden. Spelling it out: Real-time asl fingerspelling recognition. In *2011 IEEE International conference on computer vision workshops (ICCV workshops)*, pages 1114–1119. IEEE, 2011.
- [135] Chen Qian, Xiao Sun, Yichen Wei, Xiaoou Tang, and Jian Sun. Realtime and robust hand tracking from depth. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1106–1113, 2014.
- [136] Zhuang Qianzheng, Li Xiaodong, Ren Jie, and Qiao Yuanyuan. Real time hand gesture recognition applied for flight simulator controls. In *2021 IEEE 7th International Conference on Virtual Reality (ICVR)*, pages 407–411, 2021.
- [137] Rajesh George Rajan and P. Selvi Rajendran. Gesture recognition of rgb-d and rgb static images using ensemble-based cnn architecture. In *2021 5th International Conference on Intelligent Computing and Control Systems (ICICCS)*, pages 1579–1584, 2021.
- [138] Razieh Rastgoo, Kourosh Kiani, and Sergio Escalera. Hand sign language recognition using multi-view hand skeleton. *Expert Systems with Applications*, 150:113336, 2020.
- [139] Razieh Rastgoo, Kourosh Kiani, Sergio Escalera, and Mohammad Sabokrou. Multi-modal zero-shot dynamic hand gesture recognition. *Expert Systems with Applications*, 247:123349, 2024.
- [140] Tamires Martins Rezende, Sílvia Grasiella Moreira Almeida, and Frederico Gadelha Guimarães. Development and validation of a brazilian sign language database for human gesture recognition. *Neural Computing and Applications*, 33(16):10449–10467, 2021.
- [141] Grégory Rogez, Maryam Khademi, JS Supančić III, Jose Maria Martinez Montiel, and Deva Ramanan. 3d hand pose detection in egocentric rgb-d images. In *Computer Vision–ECCV 2014 Workshops: Zurich, Switzerland, September 6–7 and 12, 2014, Proceedings, Part I 13*, pages 356–371. Springer, 2015.
- [142] Franco Ronchetti, Facundo Quiroga, Cesar Estrebo, Laura Lanzarini, and Alejandro Rosete. Lsa64: A dataset of argentinian sign language. *XX II Congreso Argentino de Ciencias de la Computación (CACIC)*, 2016.
- [143] Yu Rong, Takaaki Shiratori, and Hanbyul Joo. Frankmocap: A monocular 3d whole-body pose estimation system via regression and integration. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV) Workshops*, pages 1749–1759, October 2021.
- [144] Arezoo Sadeghzadeh, A.F.M. Shahen Shah, and Md Baharul Islam. Mlmsign: Multi-lingual multi-modal illumination-invariant sign language recognition. *Intelligent Systems with Applications*, 22:200384, 2024.
- [145] Shunsuke Saito, Tomas Simon, Jason Saragih, and Hanbyul Joo. Pifuhd: Multi-level pixel-aligned implicit function for high-resolution 3d human digitization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2020.
- [146] Amir Shahrudiy, Jun Liu, Tian-Tsong Ng, and Gang Wang. Ntu rgb+d: A large scale dataset for 3d human activity analysis. In *Proceedings*

- of the *IEEE conference on computer vision and pattern recognition*, pages 1010–1019, 2016.
- [147] Subhashini Shanmugam and Revathi Sathya Narayanan. An accurate estimation of hand gestures using optimal modified convolutional neural network. *Expert Systems with Applications*, 249:123351, 2024.
- [148] Sakshi Sharma and Sukhwinder Singh. Vision-based hand gesture recognition using deep learning for the interpretation of sign language. *Expert Systems with Applications*, 182:115657, 2021.
- [149] Lei Shi, Yifan Zhang, Jian Cheng, and Hanqing Lu. Decoupled spatial-temporal attention network for skeleton-based action-gesture recognition. In *Proceedings of the Asian Conference on Computer Vision (ACCV)*, November 2020.
- [150] Jungpil Shin, Abu Saleh Musa Miah, Md Humaun Kabir, Md Abdur Rahim, and Abdullah Al Shiam. A methodological and structural review of hand gesture recognition across diverse data modalities. *IEEE Access*, 2024.
- [151] Feng Shuang, Wenbo He, and Shaodong Li. 3d hand reconstruction via aggregating intra and inter graphs guided by prior knowledge for hand-object interaction scenario. *Journal of Visual Communication and Image Representation*, 100:104129, 2024.
- [152] Ozge Mercanoglu Sincan and Hacer Yalim Keles. Autsl: A large scale multi-modal turkish sign language dataset and baseline methods. *IEEE access*, 8:181340–181355, 2020.
- [153] Anushka Singh, Fahad Eqbal Hashmi, Naman Tyagi, and Anant Kumar Jayswal. Impact of colour image and skeleton plotting on sign language recognition using convolutional neural networks (cnn). In *2024 14th International Conference on Cloud Computing, Data Science & Engineering (Confluence)*, pages 436–441. IEEE, 2024.
- [154] Wenwei Song, Wenxiong Kang, Lu Wang, Zenan Lin, and Mengting Gan. Video understanding-based random hand gesture authentication. *IEEE Transactions on Biometrics, Behavior, and Identity Science*, 4(4):453–470, 2022.
- [155] Advait Sridhar, Rohith Gandhi Ganesan, Pratyush Kumar, and Mitesh Khapra. Include: A large scale dataset for indian sign language recognition. In *Proceedings of the 28th ACM international conference on multimedia*, pages 1366–1375, 2020.
- [156] Srinath Sridhar, Franziska Mueller, Michael Zollhöfer, Dan Casas, Antti Oulasvirta, and Christian Theobalt. Real-time joint tracking of a hand manipulating an object from rgb-d input. In *Computer Vision–ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part II 14*, pages 294–310. Springer, 2016.
- [157] Srinath Sridhar, Antti Oulasvirta, and Christian Theobalt. Interactive markerless articulated hand motion tracking using rgb and depth data. In *Proceedings of the IEEE international conference on computer vision*, pages 2456–2463, 2013.
- [158] James Steven Supančić, Gregory Rogez, Yi Yang, Jamie Shotton, and Deva Ramanan. Depth-based hand pose estimation: methods, data, and challenges. *International Journal of Computer Vision*, 126:1180–1198, 2018.
- [159] Anilkumar Swamy, Vincent Leroy, Philippe Weinzaepfel, Fabien Baradel, Salma Galaaoui, Romain Brégier, Matthieu Armando, Jean-Sebastien Franco, and Grégory Rogez. Showme: Robust object-agnostic hand-object 3d reconstruction from rgb video. *Computer Vision and Image Understanding*, 247:104073, 2024.
- [160] Fatma M. Talaat, Walid El-Shafai, Naglaa F. Soliman, Abeer D. Algarni, Fathi E. Abd El-Samie, and Ali I. Siam. Real-time arabic avatar for deaf-mute communication enabled by deep learning sign language translation. *Computers and Electrical Engineering*, 119:109475, 2024.
- [161] Danhang Tang, Hyung Jin Chang, Alykhan Tejani, and Tae-Kyun Kim. Latent regression forest: Structured estimation of 3d articulated hand posture. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3786–3793, 2014.
- [162] Matteo Terreran, Leonardo Barcellona, and Stefano Ghidoni. A general skeleton-based action and gesture recognition framework for human–robot collaboration. *Robotics and Autonomous Systems*, 170:104523, 2023.
- [163] Jonathan Tompson, Murphy Stein, Yann Lecun, and Ken Perlin. Real-time continuous pose recovery of human hands using convolutional networks. *ACM Transactions on Graphics (ToG)*, 33(5):1–10, 2014.
- [164] Reena Tripathi and Bindu Verma. Motion feature estimation using bi-directional gru for skeleton-based dynamic hand gesture recognition. *Signal, image and video processing*, Apr 2024.
- [165] Eleni Tsironi, Pablo Barros, Cornelius Weber, and Stefan Wermter. An analysis of convolutional long short-term memory recurrent neural networks for gesture recognition. *Neurocomputing*, 268:76–86, 2017. Advances in artificial neural networks, machine learning and computational intelligence.
- [166] Zhigang Tu, Zhisheng Huang, Yujin Chen, Di Kang, Linchao Bao, Bisheng Yang, and Junsong Yuan. Consistent 3d hand reconstruction in video via self-supervised learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(8):9469–9485, 2023.
- [167] Dimitrios Tzionas, Luca Ballan, Abhilash Srikantha, Pablo Aponte, Marc Pollefeys, and Juergen Gall. Capturing hands in action using discriminative salient points and physics simulation. *International Journal of Computer Vision*, 118:172–193, 2016.
- [168] Gul Varol, Duygu Ceylan, Bryan Russell, Jimei Yang, Ersin Yumer, Ivan Laptev, and Cordelia Schmid. Bodynet: Volumetric inference of 3d human body shapes. In *Proceedings of the European Conference on Computer Vision (ECCV)*, September 2018.
- [169] Timo Von Marcard, Roberto Henschel, Michael J Black, Bodo Rosenhahn, and Gerard Pons-Moll. Recovering accurate 3d human pose in the wild using imus and a moving camera. In *Proceedings of the European conference on computer vision (ECCV)*, pages 601–617, 2018.
- [170] Jun Wan, Yibing Zhao, Shuai Zhou, Isabelle Guyon, Sergio Escalera, and Stan Z Li. Chalearn looking at people rgb-d isolated and continuous datasets for gesture recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, pages 56–64, 2016.
- [171] Bin Wang, Liwen Yu, and Bo Zhang. Al-mobilenet: a novel model for 2d gesture recognition in intelligent cockpit based on multi-modal data. *Artificial Intelligence Review*, 57(10):282, 2024.
- [172] Ching-Chen Wang, Yu-Chun Ding, Ching-Te Chiu, Chao-Tsung Huang, Yen-Yu Cheng, Shih-Yi Sun, Chih-Han Cheng, and Hsueh-Kai Kuo. Real-time block-based embedded cnn for gesture classification on an fpga. *IEEE Transactions on Circuits and Systems I: Regular Papers*, 68(10):4182–4193, 2021.
- [173] Guijin Wang, Xinghao Chen, Hengkai Guo, and Cairong Zhang. Region ensemble network: Towards good practices for deep 3d hand pose estimation. *Journal of Visual Communication and Image Representation*, 55:404–414, 2018.
- [174] Jiang Wang, Zicheng Liu, Ying Wu, and Junsong Yuan. Mining actionlet ensemble for action recognition with depth cameras. In *2012 IEEE conference on computer vision and pattern recognition*, pages 1290–1297. IEEE, 2012.
- [175] Yangang Wang, Cong Peng, and Yebin Liu. Mask-pose cascaded cnn for 2d hand pose estimation from single color image. *IEEE Transactions on Circuits and Systems for Video Technology*, 29(11):3258–3268, 2018.
- [176] Yangang Wang, Wenqian Sun, and Ruting Rao. Accurate and real-time variant hand pose estimation based on gray code bounding box representation. *IEEE Sensors Journal*, 24(11):18043–18053, 2024.
- [177] Yintong Wang, LiLi Chen, Jiamao Li, and Xiaolin Zhang. Handgcformer: A novel topology-aware transformer network for 3d hand pose estimation. In *2023 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 5664–5673, 2023.
- [178] Yu-Xiong Wang and Yu-Jin Zhang. Nonnegative matrix factorization: A comprehensive review. *IEEE Transactions on Knowledge and Data Engineering*, 25(6):1336–1353, 2013.
- [179] Lu Xia, Chia-Chih Chen, and Jake K Aggarwal. View invariant human action recognition using histograms of 3d joints. In *2012 IEEE computer society conference on computer vision and pattern recognition workshops*, pages 20–27. IEEE, 2012.
- [180] Shiwei Xiao, Yuchun Fang, and Lan Ni. Multi-modal sign language recognition with enhanced spatiotemporal representation. In *2021 International Joint Conference on Neural Networks (IJCNN)*, pages 1–8, 2021.
- [181] Chi Xu and Li Cheng. Efficient hand pose estimation from a single depth image. In *Proceedings of the IEEE international conference on computer vision*, pages 3456–3462, 2013.
- [182] Cuihong Xue, Jingli Jia, Ming Yu, Gang Yan, Yingchun Guo, and Yuehao Liu. Continuous sign language recognition based on hierarchical memory sequence network. *IET Computer Vision*, 18(2):247–259, 2024.
- [183] Chao-Lung Yang, Wen-Ting Li, and Shang-Che Hsu. Skeleton-based hand gesture recognition for assembly line operation. In *2020*

International Conference on Advanced Robotics and Intelligent Systems (ARIS), pages 1–6, 2020.

- [184] Chao-Lung Yang, Yang-Hsiu Tung, Tzu-Ching Kao, Chao-Hung Huang, En Liou, Po-Ting Lin, and Kai-Lung Hua. Combination of semantic segmentation and skeleton estimation for human hands detection. In *2023 International Conference on Advanced Robotics and Intelligent Systems (ARIS)*, pages 1–6, 2023.
- [185] Seunghan Yang, Seungjun Jung, Heekwang Kang, and Changick Kim. The korean sign language dataset for action recognition. In *International conference on multimedia modeling*, pages 532–542. Springer, 2019.
- [186] Qingshan Yin, Qiaochu Zhao, Huijie Jia, Yan Gao, Luoluo Feng, Chaoming Li, Yao Cheng, and Bin Lin. 3d hand pose estimation and gesture recognition based on hand-object interaction information. In *2023 IEEE/CIC International Conference on Communications in China (ICCC)*, pages 1–6, 2023.
- [187] Shanxin Yuan, Qi Ye, Guillermo Garcia-Hernando, and Tae-Kyun Kim. The 2017 hands in the million challenge on 3d hand pose estimation. *arXiv preprint arXiv:1707.02237*, 2017.
- [188] Hanaa Zaineldin, Nadiyah A. Baghdadi, Samah Adel Gamel, Mansourah Aljohani, Fatma M. Talaat, Amer Malki, Mahmoud Badawy, and Mostafa Elhosseini. Active convolutional neural networks sign language (activecnn-sl) framework: a paradigm shift in deaf-mute communication. *Artificial Intelligence Review*, 57, 06 2024.
- [189] Jiawei Zhang, Jianbo Jiao, Mingliang Chen, Liangqiong Qu, Xiaobin Xu, and Qingxiong Yang. 3d hand pose tracking and estimation using stereo matching. *arXiv preprint arXiv:1610.07214*, 2016.
- [190] Liang Zhang, Guangming Zhu, Lin Mei, Peiyi Shen, Syed Afaq Ali Shah, and Mohammed Bennamoun. Attention in convolutional lstm for gesture recognition. *Advances in neural information processing systems*, 31, 2018.
- [191] Pengfei Zhang and Deying Kong. Handformer2t: A lightweight regression-based model for interacting hands pose estimation from a single rgb image. In *2024 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 6236–6245, 2024.
- [192] Weiyu Zhang, Menglong Zhu, and Konstantinos G Derpanis. From actemes to action: A strongly-supervised representation for detailed action understanding. In *Proceedings of the IEEE international conference on computer vision*, pages 2248–2255, 2013.
- [193] Yifan Zhang, Congqi Cao, Jian Cheng, and Hanqing Lu. Egogesture: A new dataset and benchmark for egocentric hand gesture recognition. *IEEE Transactions on Multimedia*, 20(5):1038–1050, 2018.
- [194] Yufei Zhang, Zheyu Hu, Dawei Tu, and Xu Zhang. Human-robot interactive operating system for underwater manipulators based on hand gesture recognition. In *International Conference on Intelligent Robotics and Applications*, pages 575–586. Springer, 2023.
- [195] Benjia Zhou, Jun Wan, Yanyan Liang, and Guodong Guo. Adaptive cross-fusion learning for multi-modal gesture recognition. *Virtual Reality & Intelligent Hardware*, 3(3):235–247, 2021.
- [196] Weina Zhou and Kun Chen. A lightweight hand gesture recognition in complex backgrounds. *Displays*, 74:102226, 2022.
- [197] Christian Zimmermann and Thomas Brox. Learning to estimate 3d hand pose from single rgb images. In *Proceedings of the IEEE international conference on computer vision*, pages 4903–4911, 2017.
- [198] Christian Zimmermann, Duygu Ceylan, Jimei Yang, Bryan Russell, Max Argus, and Thomas Brox. Freihand: A dataset for markerless capture of hand pose and shape from single rgb images. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019.
- [199] Andrea Zunino, Pietro Morerio, Andrea Cavallo, Caterina Ansuini, Jessica Podda, Francesca Battaglia, Edvige Veneselli, Cristina Becchio, and Vittorio Murino. Video gesture analysis for autism spectrum disorder detection. In *2018 24th International Conference on Pattern Recognition (ICPR)*, pages 3421–3426, 2018.
- [200] Oğulcan Özdemir, İnci M. Baytaş, and Lale Akarun. Hand graph topology selection for skeleton-based sign language recognition. In *2024 IEEE 18th International Conference on Automatic Face and Gesture Recognition (FG)*, pages 1–5, 2024.



Manousos Linardakis is a B.Sc. graduate of the Department of Informatics and Telematics, Harokopio University of Athens, where he holds the all-time highest grade in the department's history as of this writing. He is currently pursuing an M.Sc. in Data Science and Machine Learning at the School of Electrical and Computer Engineering, National Technical University of Athens. He has conducted research in multi-robot exploration and computer vision, with practical experience in managing laboratory systems, implementing DevOps practices, and developing decision support software. He also participated in the Google Summer of Code as an open-source developer. His research interests include data science, machine learning and robotics with a focus on integrating theoretical advancements into practical, real-world applications.



Iraklis Varlamis (Member, IEEE) received an M.Sc. degree in information systems engineering from the University of Manchester Institute of Science and Technology, Manchester, U.K., and a Ph.D. degree from the Athens University of Economics and Business, Athens, Greece. He is currently a Professor of data management at the Department of Informatics and Telematics, Harokopio University of Athens (HUA), Kallithea, Greece. He has more than 250 articles published in international journals and conferences and more than 5000 citations on his work. He holds a patent from the Greek Patent Office for a system that thematically groups web documents using content and links. His research interests include data mining and social network analytics to recommender systems for social media and real-world applications. He is the Scientific Coordinator for HUA in several EU (H2020, ECSEL, REC) and Qatar (QNFR) projects as well as in national projects.



Georgios Th. Papadopoulos (M) is an Assistant Professor in the area of Computer Graphics and Computational Vision at the Department of Informatics and Telematics of the Harokopio University of Athens in Greece. He received the Diploma and Ph.D. degrees in electrical and computer engineering from the Aristotle University of Thessaloniki (AUTH), Thessaloniki, Greece. He has worked as a Post-doctoral Researcher at the Foundation For Research And Technology Hellas / Institute of Computer Science (FORTH/ICS) and the Centre for Research and Technology Hellas / Information Technologies Institute (CERTH/ITI). He has published over 70 peer-reviewed research articles in international journals and conference proceedings. His research interests include computer vision, artificial intelligence, machine/deep learning, human action recognition, human-computer interaction and explainable artificial intelligence. Dr. Papadopoulos is a member of the IEEE and the Technical Chamber of Greece.