

TD-RD: A Top-Down Benchmark with Real-Time Framework for Road Damage Detection

Xi Xiao¹, Zhengji Li¹, Wentao Wang¹, Jiacheng Xie¹,
Houjie Lin¹, Swalpa Kumar Roy², Tianyang Wang¹✉, Min Xu^{3,4}✉

¹University of Alabama at Birmingham, ²Alipurduar Government Engineering and Management College,

³MBZUAI, ⁴Carnegie Mellon University

✉ Corresponding authors:(mailto:mxu1@cs.cmu.edu), (tw2@uab.edu)

Abstract—Object detection has witnessed remarkable advancements over the past decade, largely driven by breakthroughs in deep learning and the proliferation of large-scale datasets. However, the domain of road damage detection remains relatively underexplored, despite its critical significance for applications such as infrastructure maintenance and road safety. This paper addresses this gap by introducing a novel top-down benchmark that offers a complementary perspective to existing datasets, specifically tailored for road damage detection. Our proposed Top-Down Road Damage Detection Dataset (TD-RD) includes three primary categories of road damage—cracks, potholes, and patches—captured from an top-down viewpoint. The dataset consists of 7,088 high-resolution images, encompassing 12,882 annotated instances of road damage. Additionally, we present a novel real-time object detection framework, TD-YOLOV10, designed to handle the unique challenges posed by the TD-RD dataset. Comparative studies with state-of-the-art models demonstrate competitive baseline results. By releasing TD-RD, we aim to accelerate research in this crucial area. A sample of the dataset will be made publicly available upon the paper’s acceptance.

I. INTRODUCTION

Timely maintenance of road damage can greatly enhance transportation safety, making the development of advanced technologies for efficient detection crucial. Thanks to advancements in deep learning and the availability of large-scale datasets over the past decade, target detection has made remarkable progress. Several benchmarks have been introduced to support road damage detection [2], [15], [10], [?], [11]. However, existing benchmarks often lack multi-view information. The challenge of detecting and localizing road damage requires robust approaches that incorporate multi-view data. To address this gap, we propose the Top-Down Road Damage Dataset (TD-RD), which offers a supplemental camera angle to existing benchmarks. TD-RD consists of 7,088 high-resolution pavement images with clearly identifiable damage instances, selected from 214,872 self-acquired images through rigorous filtering and cleaning processes. The damage instances are classified into three categories: cracks, potholes, and repairs, ensuring balanced representation across classifications. In addition to the TD-RD dataset, we introduce a new real-time detection model, TD-YOLOV10, designed to leverage top-down data for enhanced robustness and accuracy in detection. TD-

YOLOV10 incorporates a self-attention[8] framework and a Multi-Scale Attention with Positional Squeeze-and-Excitation (MAPSE) mechanism to enhance the detection and recognition of road pavement images. MAPSE combines multi-scale and dual attention mechanisms to effectively fuse features at different scales[3], [23], [5], addressing the limitations of traditional convolutional networks by improving complex feature representation. This architecture captures and fuses feature representations across various scales, striking a balance between accuracy and efficiency. We compare TD-YOLOV10 with mainstream detectors using TD-RD and two other public road pavement datasets: CNRDD and CRDDC’22. Our framework demonstrates significant competitiveness in both detection accuracy and efficiency.

In summary, our contributions are as follows: 1) We present the first attempt to explore road damage detection from a top-down perspective, offering a complementary view to existing datasets. 2) We introduce TD-RD, the first benchmark specifically designed for detecting road damage from a top-down perspective. It includes three primary categories of road damage: cracks, potholes, and patches. 3) We developed TD-YOLOV10, a real-time framework for detecting road damage from a top-down perspective. Extensive experiments demonstrated the competitive performance of TD-YOLOV10 on TD-RD, CNRDD, and CRDDC’22.

II. BENCHMARK

A top-down camera viewpoint is crucial for accurate and comprehensive modeling of road surface conditions. This perspective, when combined with information from additional sources, offers a holistic approach to capturing the intricacies of road damage. To this end, we introduce TD-RD, the first fully top-down road damage dataset designed for detection tasks. The dataset was curated using high-speed, high-definition vehicle-mounted cameras operated by professionals. From an initial pool of 214,872 images, a rigorous selection process yielded 7,088 high-quality images, each with a resolution of 3840×2160 pixels, ensuring exceptional clarity and detail. All images were meticulously labeled according to a framework co-developed by experts from the geology and highway engineering sectors. This labeling process identified

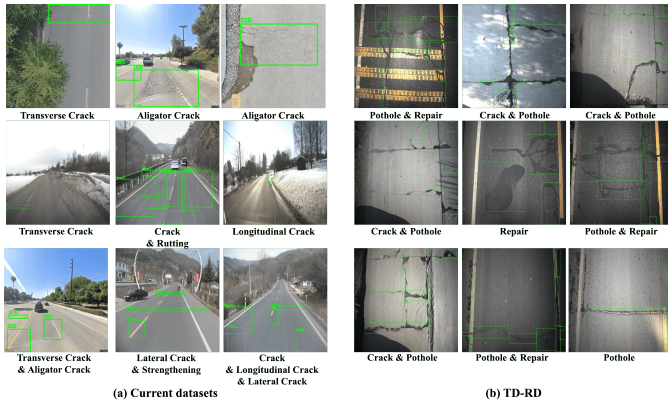


Fig. 1. Annotated Samples from current datasets and TD-RD, which contains annotation distribution and categories.

critical road damage types, including cracks, potholes, and repairs. TD-RD is balanced across these three major categories, featuring 10,342 instances of cracks, 8,763 potholes, and 10,457 repairs. This balanced distribution ensures that models trained on TD-RD achieve robust generalization across diverse road damage types, enhancing their accuracy and reliability in real-world detection tasks.

III. METHOD

The proposed TD-YOLOv10 has three core components: Backbone, Neck, and Detection Head. In the **Backbone**, we integrate the Multi-Scale Attention with Positional Squeeze-and-Excitation (MAPSE) module to capture long-range contextual dependencies across multiple scales while preserving fine-grained feature details. Depthwise Separable Convolution (DSC) layers, as described by [13], reduce computational complexity, accelerating inference and enhancing the model’s generalization and deployment efficiency. The **Neck** incorporates a Visual Global Attention Upsampling (VGAU) module, which facilitates the extraction of global contextual information, aiding in the refinement of crucial features for accurate category classification. The synergy between VGAU and MAPSE enables the model to capture and retain both global and local information, significantly improving detection performance. Finally, the **Detection Head** adopts a multi-scale prediction strategy, predicting bounding boxes at three distinct scales, thereby enabling the accurate detection of objects of varying sizes within pavement damage images.

A. MAPSE-based Feature Extraction

Efficiently capturing global information and long-distance relationships in road pavement images with complex backgrounds is crucial for enhancing semantic discriminability and reducing category confusion. To address this, we introduce the Multi-Scale Attention with Positional Squeeze-and-Excitation (MAPSE) module, inspired by Visual Transformers[9]. The MAPSE module integrates multi-scale feature fusion within the YOLOv10 architecture. The MAPSE module starts by dividing the input image into slices, with each slice undergoing

patch and position embedding to retain spatial context. Feature maps are then processed through a multi-head attention mechanism with varying dilation rates to capture multi-scale features. This is represented as:

$$\text{Dilation}(x, r) = \sum_{i=1}^k w_i x_{i \cdot r} \quad (1)$$

where $\text{Dilation}(x, r)$ represents the dilation operation on input x with dilation rate r , w_i are the weights, $x_{i \cdot r}$ is the input feature map at position i dilated by rate r . The dilation rates are set as $r_1 = 1$, $r_2 = 2$, and $r_3 = 4$ to capture different scales. After self-attention, global average pooling captures channel-wise global information, and fully connected layers learn dependencies:

$$F_{\text{recalibrated}} = \sigma(W_2 \cdot \text{ReLU}(W_1 \cdot F_{\text{global}})) \quad (2)$$

where $F_{\text{recalibrated}}$ is the recalibrated feature map, F_{global} is the global average pooled feature, W_1 and W_2 are learnable weight matrices, ReLU is the Rectified Linear Unit activation function, and σ is the sigmoid activation function. A skip connection bypasses the MAPSE module, adding input features directly to the recalibrated features to preserve original information and improve gradient flow during training:

$$F_{\text{final}} = F_{\text{recalibrated}} + F_{\text{input}} \quad (3)$$

where F_{final} is the final output feature map, F_{input} is the original input feature map, and the addition operation represents the skip connection.

The structure and flow of the MAPSE module are illustrated in Fig. 2. The MAPSE module combines Depthwise Convolution (DWConv), Multi-scale Sliding Window Expansion Attention (SWDA), and a Multi-Layer Perceptron (MLP), enabling the detector to retain underlying semantic information and enrich global feature extraction at the neck layer. By integrating the MAPSE module, our architecture effectively captures long-range dependencies and contextual information, which is crucial for distinguishing complex damage patterns in road images. The innovative use of multi-scale attention and positional squeeze-and-excitation mechanisms directly enhances the model’s performance in road pavement damage detection, as demonstrated by our experimental results.

B. Visual Global Attentional Upsampling

Efficient multi-scale feature representation is crucial for detecting road damage of varying sizes. Traditional convolutional networks often fail to represent these features effectively. To overcome this limitation, we developed the Visual Global Attentional Upsampling (VGAU) module, which enhances multi-scale feature representation without significantly increasing computational costs. As shown in Fig. 2, the VGAU module uses global average pooling to incorporate global context information for semantic discrimination. A 3×3 convolution compresses the number of channels in low-dimensional

TABLE I
COMPARISONS WITH STATE-OF-THE-ARTS ON EFFECTIVENESS. THE BEST RESULTS ARE HIGHLIGHTED IN **BOLD**. THE SECOND BEST RESULTS ARE HIGHLIGHTED IN **RED**, WHILE THE THIRD BEST RESULTS ARE HIGHLIGHTED IN **BLUE**

Model	TD-RD				CNRDD				CRDDC'22			
	mAP(%)	↑ Pre(%)	↑ FLOPs(G)	FPS	mAP(%)	↑ Pre(%)	↑ FLOPs(G)	FPS	mAP(%)	↑ Pre(%)	↑ FLOPs(G)	FPS
YOLOv5-n	81.4	79.8	4.10	139	21.4	33.7	4.10	139	41.4	44.7	4.10	139
YOLOv5-s	85.6	84.6	15.8	111	22.5	30.7	15.8	111	42.1	46.4	15.8	111
YOLOv6-n [12] [arXiv'22]	78.3	76.9	11.4	123	21.4	31.8	11.4	123	42.1	46.4	11.4	123
YOLOv6-s [12] [arXiv'22]	83.0	82.5	45.3	81	24.6	33.8	45.3	81	42.4	46.0	45.3	81
YOLOv7-ti [21] [CVPR'23]	84.5	85.7	13.2	294	25.3	33.5	13.2	294	46.2	49.8	13.2	294
YOLOv8-n [18] [arXiv'24]	82.2	81.9	8.2	385	27.6	38.4	8.2	385	46.0	48.5	8.2	385
YOLOv8-s [18] [arXiv'24]	85.1	86.0	28.4	333	27.6	38.4	28.4	333	46.0	48.5	28.4	333
YOLOv9-s [22] [arXiv'24]	85.2	88.6	30.3	172	29.5	37.4	30.3	172	47.4	49.7	30.3	172
YOLOv10-n [20] [arXiv'24]	82.3	81.4	8.22	357	28.1	35.9	8.22	357	46.5	48.3	8.22	357
YOLOv10-s [20] [arXiv'24]	85.0	82.2	24.5	286	28.8	39.4	24.5	286	47.3	57.3	24.5	286
YOLOS-ti [6] [arXiv'21]	80.8	80.4	21	116	21.3	30.1	21	116	45.3	52.0	24.5	286
YOLOS-s [6] [arXiv'21]	84.7	83.2	179	54	23.6	36.4	179	54	46.8	49.4	179	54
PP-PicoDet [25] [arXiv'21]	85.6	83.4	8.9	196	22.4	31.7	8.9	196	47.0	48.0	8.9	196
RT-DERT [26] [CVPR'23]	87.7	87.7	60	159	29.4	39.5	60	159	48.6	51.7	60	159
Lite-DERT [24] [CVPR'21]	86.1	85.2	151	75	26.3	33.0	151	75	45.3	48.9	151	75
FR-CNN [19] [NIPS'15]	74.6	76.6	94.3	10	20.3	36.3	94.3	10	39.9	46.1	94.3	10
SSD-VGG16 [17] [ECCV'16]	66.5	71.1	60.9	14	18.5	49.9	60.9	14	38.7	46.2	60.9	14
TD-YOLOv10 [Ours]	88.1	88.5	31.8	200	37.0	46.0	31.8	200	48.0	54.1	31.8	200

TABLE II
ABLATION STUDIES CONDUCTED ON EACH COMPONENT. THE BEST RESULTS ARE HIGHLIGHTED IN **BOLD**

Module Settings			TD-RD				CNRDD				CRDDC'22			
DSC	MAPSE	VGAU	mAP(%)	Pre(%)	FLOPs(G)	FPS	mAP(%)	Pre(%)	FLOPs(G)	FPS	mAP(%)	Pre(%)	FLOPs(G)	FPS
	✓		86.2	85.2	27.3	260	32.0	41.5	27.3	260	43.0	49.5	27.3	260
✓	✓		86.8	86.8	28.5	246	33.8	43.0	28.5	246	44.8	51.0	28.5	246
	✓	✓	87.5	87.9	30.0	218	35.5	44.5	30.0	218	46.5	52.5	30.0	218
✓	✓	✓	88.1	88.5	31.8	200	37.0	46.0	31.8	200	48.0	54.1	31.8	200

results on the CRDDC'22 dataset, which features a broader range of crack types and varying image resolutions, underscore the model's robustness and adaptability in addressing diverse and complex road damage scenarios.

B. Ablations

1) *Effectiveness of MAPSE*: Integrating MAPSE led to substantial improvements in both mean Average Precision (mAP) and Precision across all evaluated datasets. The enhanced performance, attributed to MAPSE, stems from its ability to effectively capture long-range dependencies and contextual information. On the TD-RD dataset, the model achieved an impressive mAP of 86.2% and Precision of 85.2%, with a computational cost of 27.3 GFLOPs. For the CNRDD dataset, mAP reached 32.0% with a Precision of 41.5%, while on the CRDDC'22 dataset, mAP and Precision were 43.0% and 49.5%, respectively.

2) *Impact of Combining DSC and MAPSE*: The integration of DSC with MAPSE not only enhances computational efficiency but also sustains high detection accuracy across various benchmarks. On the TD-RD dataset, this combination resulted in an improved mAP of 86.8% and Precision of 86.8%, with a computational overhead of 28.5 GFLOPs. For the CNRDD dataset, the model achieved a mAP of 33.8% and a Precision of 43.0%. Meanwhile, on the CRDDC'22 dataset, which presents a variety of complex scenarios, mAP and Precision reached 44.8% and 51.0%, respectively.

3) *Contribution of VGAU*: The incorporation of VGAU significantly bolstered the model's capacity to capture fine-

grained and contextual information, leading to notable performance gains. On the TD-RD dataset, mAP increased to 87.5% and Precision to 87.9%, with a computational complexity of 30.0 GFLOPs. For the CNRDD dataset, mAP improved to 35.5%, with Precision rising to 44.5%. On the challenging CRDDC'22 dataset, mAP and Precision reached 46.5% and 52.5%, respectively.

VI. CONCLUSION

In this paper, we introduce TD-RD, the first benchmark designed to advance road damage detection by incorporating a top-down perspective information. TD-RD spans a diverse array of road types and damage scenarios, consisting of 7,088 high-resolution images and 12,882 annotated damage instances, categorized with standard bounding boxes and damage types. Our experimental results highlight the limitations of existing methods when confronted with the road damage detection from a top-down view. To this end, we propose TD-YOLOv10, an efficient detector based on the YOLOv10 framework, enhanced with the Multi-Scale Attention with Positional Squeeze-and-Excitation (MAPSE) module and the Vision-based Global Attention Upsampling (VGAU) module. These improvements substantially bolster the model's capacity to capture global context and discern fine-grained damage features, resulting in superior performance on road pavement damage detection tasks. By releasing TD-RD, we aim to promote further research in the field of road disease detection, emphasizing the key role of top-down view information in advancing the field of road disease detection.

REFERENCES

- [1] Amr Abdelraouf, Mohamed Abdel-Aty, and Yina Wu. Using vision transformers for spatial-context-aware rain and road surface condition detection on freeways. *IEEE Transactions on Intelligent Transportation Systems*, 23(10):18546–18556, 2022.
- [2] Deeksha Arya, Hiroya Maeda, Sanjay Kumar Ghosh, Durga Toshniwal, Hiroshi Omata, Takehiro Kashiya, and Yoshihide Sekimoto. Crowdsensing-based road damage detection challenge (crddc-2022), 2022.
- [3] Zhihao Chen, Yiyuan Ge, and Qing Yue. Features reconstruction disentanglement cloth-changing person re-identification. In *International Conference on Intelligent Computing*, pages 390–403. Springer, 2024.
- [4] Stefan Elfving, Eiji Uchibe, and Kenji Doya. Sigmoid-weighted linear units for neural network function approximation in reinforcement learning. *Neural Networks*, 107:3–11, 2018.
- [5] Mengchen Fan, Baocheng Geng, Keren Li, Xueqian Wang, and Pramod K. Varshney. Interpretable data fusion for distributed learning: A representative approach via gradient matching. In *2024 27th International Conference on Information Fusion (FUSION)*, pages 1–8, 2024.
- [6] Yuxin Fang, Bencheng Liao, Xinggong Wang, Jiemin Fang, Jiyang Qi, Rui Wu, Jianwei Niu, and Wenyu Liu. You only look at one sequence: Rethinking transformer in vision through object detection, 2021.
- [7] Munkhjargal Gochoo, Munkh-Erdene Otgonbold, Erkhembayar Ganbold, Jun-Wei Hsieh, Ming-Ching Chang, Ping-Yang Chen, Byambaa Dorj, Hamad Al Jassmi, Ganzorig Batnasan, Fady Alnajjar, Mohammed Abduljabbar, and Fang-Pang Lin. Fisheye8k: A benchmark and dataset for fisheye camera object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, pages 5305–5313, June 2023.
- [8] Kai Han, Yunhe Wang, Hanting Chen, Xinghao Chen, Jianyuan Guo, Zhenhua Liu, Yehui Tang, An Xiao, Chunjing Xu, Yixing Xu, et al. A survey on vision transformer. *IEEE transactions on pattern analysis and machine intelligence*, 45(1):87–110, 2022.
- [9] Kai Han, Yunhe Wang, Hanting Chen, Xinghao Chen, Jianyuan Guo, Zhenhua Liu, Yehui Tang, An Xiao, Chunjing Xu, Yixing Xu, Zhaohui Yang, Yiman Zhang, and Dacheng Tao. A survey on vision transformer. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(1):87–110, 2023.
- [10] Enbo Huang, Zhuo Su, Fan Zhou, and Ruomei Wang. Learning rebalanced human parsing model from imbalanced datasets. *Image and Vision Computing*, 2020.
- [11] Yingrui Ji, Yao Zhu, Zhigang Li, Jiansheng Chen, Yunlong Kong, and Jingbo Chen. Advancing out-of-distribution detection through data purification and dynamic activation function design, 2024.
- [12] Chuyi Li, Lulu Li, Hongliang Jiang, Kaiheng Weng, Yifei Geng, Liang Li, Zaidan Ke, Qingyuan Li, Meng Cheng, Weiqiang Nie, Yiduo Li, Bo Zhang, Yufei Liang, Linyuan Zhou, Xiaoming Xu, Xiangxiang Chu, Xiaoming Wei, and Xiaolin Wei. Yolov6: A single-stage object detection framework for industrial applications, 2022.
- [13] Guoqing Li, Jingwei Zhang, Meng Zhang, Ruixia Wu, Xinye Cao, and Wenzhao Liu. Efficient depthwise separable convolution accelerator for classification and uav object detection. *Neurocomputing*, 490:1–16, 2022.
- [14] Hanchao Li, Pengfei Xiong, Jie An, and Lingxue Wang. Pyramid attention network for semantic segmentation, 2018.
- [15] Zhengji Li, Xi Xiao, Jiacheng Xie, Yuxiao Fan, Wentao Wang, Gang Chen, Liqiang Zhang, and Tianyang Wang. Cycle-yolo: A efficient and robust framework for pavement damage detection, 2024.
- [16] Zhengji Li, Yuhong Xie, Xi Xiao, Lanju Tao, Jinyuan Liu, and Ke Wang. An image data augmentation algorithm based on yolov5s-da for pavement distress detection. In *2022 5th International Conference on Pattern Recognition and Artificial Intelligence (PRAI)*, pages 891–895, 2022.
- [17] Wei Liu, Dragomir Anguelov, Dumitru Erhan, Christian Szegedy, Scott Reed, Cheng-Yang Fu, and Alexander C. Berg. *SSD: Single Shot MultiBox Detector*, page 21–37. Springer International Publishing, 2016.
- [18] Dillon Reis, Jordan Kupec, Jacqueline Hong, and Ahmad Daoudi. Real-time flying object detection with yolov8, 2024.
- [19] Shaoqing Ren, Kaiming He, Ross Girshick, and Jian Sun. Faster r-cnn: Towards real-time object detection with region proposal networks. In C. Cortes, N. Lawrence, D. Lee, M. Sugiyama, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 28. Curran Associates, Inc., 2015.
- [20] Ao Wang, Hui Chen, Lihao Liu, Kai Chen, Zijia Lin, Jungong Han, and Guiguang Ding. Yolov10: Real-time end-to-end object detection, 2024.
- [21] Chien-Yao Wang, Alexey Bochkovskiy, and Hong-Yuan Mark Liao. Yolov7: Trainable bag-of-freebies sets new state-of-the-art for real-time object detectors. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 7464–7475, June 2023.
- [22] Chien-Yao Wang, I-Hau Yeh, and Hong-Yuan Mark Liao. Yolov9: Learning what you want to learn using programmable gradient information, 2024.
- [23] Xi Xiao, Wentao Wang, Jiacheng Xie, Lijing Zhu, Gaofei Chen, Zhengji Li, Tianyang Wang, and Min Xu. Hgtdp-dta: Hybrid graph-transformer with dynamic prompt for drug-target binding affinity prediction, 2024.
- [24] Changqian Yu, Bin Xiao, Changxin Gao, Lu Yuan, Lei Zhang, Nong Sang, and Jingdong Wang. Lite-hrnet: A lightweight high-resolution network. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10440–10450, June 2021.
- [25] Guanghua Yu, Qinyao Chang, Wenyu Lv, Chang Xu, Cheng Cui, Wei Ji, Qingqing Dang, Kaipeng Deng, Guanzhong Wang, Yuning Du, Baohua Lai, Qiwen Liu, Xiaoguang Hu, Dianhai Yu, and Yanjun Ma. Pp-picodet: A better real-time object detector on mobile devices, 2021.
- [26] Yian Zhao, Wenyu Lv, Shangliang Xu, Jinman Wei, Guanzhong Wang, Qingqing Dang, Yi Liu, and Jie Chen. Detsr beat yolos on real-time object detection, 2024.