

# RelightVid: Temporal-Consistent Diffusion Model for Video Relighting

YE FANG<sup>1,2\*</sup> ZEYI SUN<sup>1,3\*</sup> SHANGZHAN ZHANG<sup>4</sup> TONG WU<sup>5</sup> YINGHAO XU<sup>5</sup>  
 PAN ZHANG<sup>1</sup> JIAQI WANG<sup>1</sup> GORDON WETZSTEIN<sup>5</sup> DAHUA LIN<sup>1,6</sup>

<sup>1</sup>Shanghai AI Laboratory <sup>2</sup>Fudan University <sup>3</sup>Shanghai Jiao Tong University <sup>4</sup>Zhejiang University

<sup>5</sup>Stanford University <sup>6</sup>The Chinese University of Hong Kong

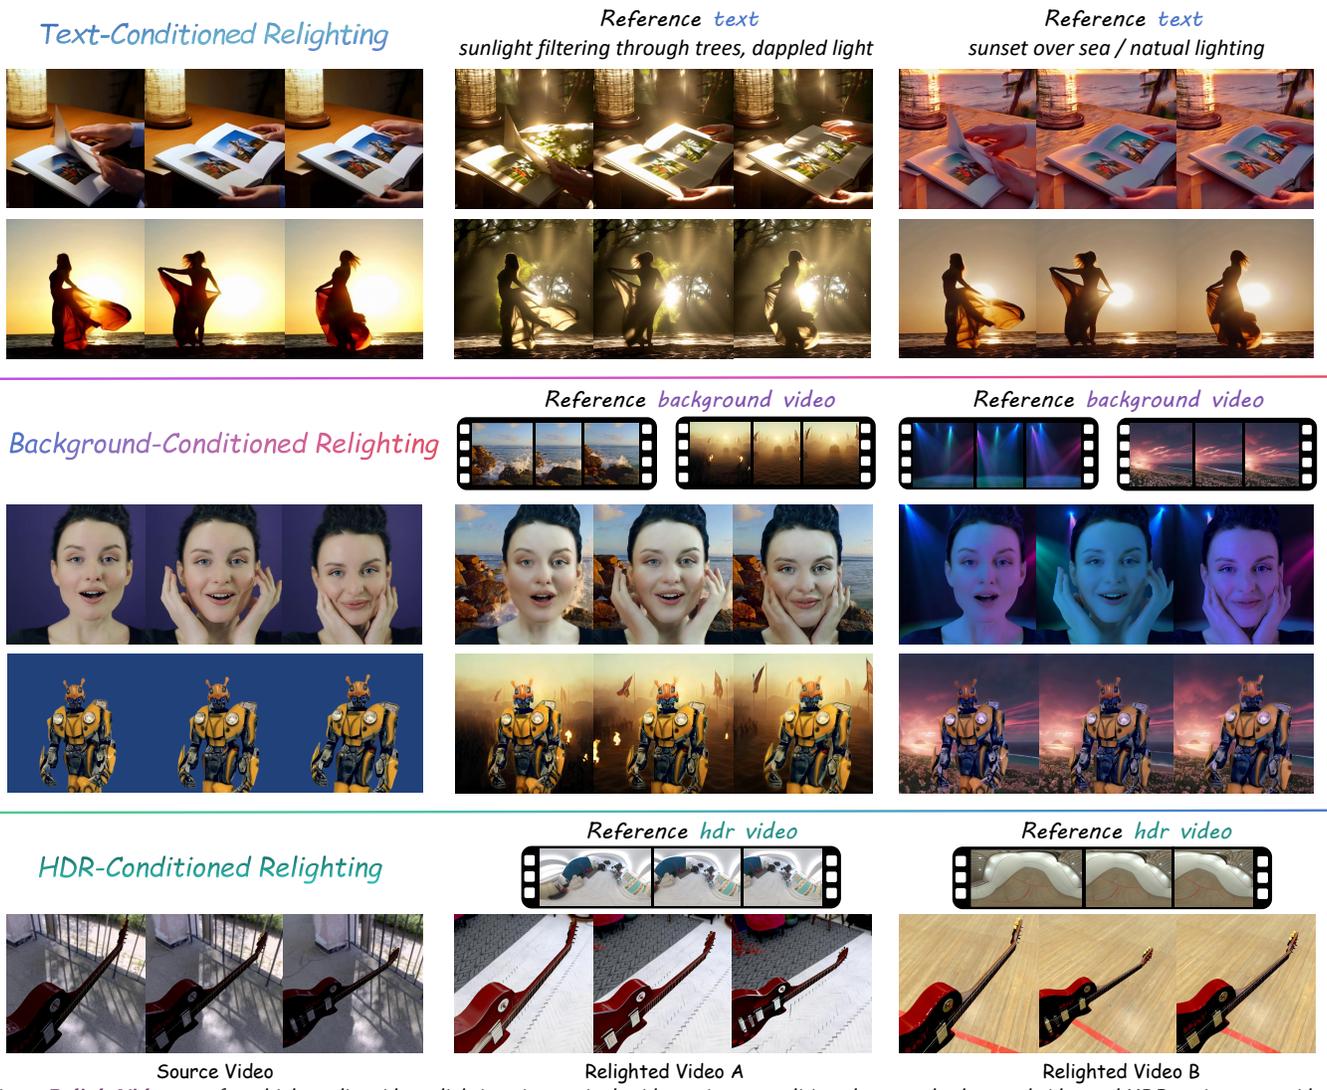


Fig. 1. **RelightVid** can perform high quality video relighting given a single video as input conditioned on text, background video and HDR environment video.

Diffusion models have demonstrated remarkable success in image generation and editing, with recent advancements enabling albedo-preserving image relighting. However, applying these models to video relighting remains challenging due to the lack of paired video relighting datasets and the high demands for output fidelity and temporal consistency, further complicated by the inherent randomness of diffusion models. To address these

challenges, we introduce **RelightVid**, a flexible framework for video relighting that can accept background video, text prompts, or environment maps as relighting conditions. Trained on in-the-wild videos with carefully designed illumination augmentations and rendered videos under extreme dynamic lighting, **RelightVid** achieves arbitrary video relighting with high temporal consistency without intrinsic decomposition while preserving the illumination priors of its image backbone.

\*Equal contribution.

CCS Concepts: • **Computing methodologies** → **Computer vision**; *Image and video editing*;

Additional Key Words and Phrases: Video relighting, video editing, diffusion models, illumination manipulation

## 1 INTRODUCTION

Lighting and its interactions with portraits and objects form the cornerstone of vision and imaging, shaping how we perceive both the physical world and its digital representations. The ability to relight a video—modifying the illumination of foreground subjects as if captured under different lighting scenarios—holds immense potential across various domains such as filmmaking [Richardt et al. 2012], gaming, and augmented reality [Debevec 2008; Li et al. 2022]. By precisely controlling lighting, creators can not only enhance the visual experience but also gain greater artistic flexibility to meet the diverse demands of scenes.

Relighting dynamic foreground subjects in video under varying lighting conditions remains a significant challenge, particularly in maintaining temporal consistency and realistic lighting interactions. While inverse rendering [Cai et al. 2024; Nam et al. 2018; Xia et al. 2016; Zhang et al. 2021a] can decompose intrinsic properties and lighting, it relies on complex inputs like HDR images [Reinhard 2020] or SH coefficients [Ramamoorthi and Hanrahan 2001] for accurate relighting. In practical scenarios, however, users often prefer simpler input, such as textual guidance or reference background videos as conditions, which limits the applicability of the above methods. Additionally, these techniques struggle with generalization, typically limited to portrait or simple object relighting, and fail to model lighting effectively in complex dynamic scenarios.

Recent advancements in diffusion models [Blattmann et al. 2023; Dhariwal and Nichol 2021; Ho et al. 2020; Song et al. 2020] trained on large-scale image and video datasets have demonstrated the ability to learn essential dynamics and physical priors. This enables them to perform physical rendering effects without explicitly relying on traditional physical modeling. Specifically, a growing body of works [Jin et al. 2024; Ren et al. 2024; Zhang et al. 2024] focuses on fine-tuning pre-trained diffusion models for tasks such as single-image relighting or illumination manipulation. Notably, IC-Light [Zhang et al. 2024] has emerged as a prominent approach, leveraging high-quality synthetic data and a consistent lighting loss function to achieve albedo-preserving relighting. However, extending such image-based techniques to videos introduces significant challenges. For example, a direct approach is applying IC-Light on a per-frame basis, but leads to substantial temporal inconsistencies. This stems from the inherent uncertainty in generative models, where the same input can yield multiple plausible outputs. Furthermore, the scarcity of real or synthetic video relighting datasets presents another challenge. These datasets are crucial for fine-tuning models, as they enable the model to learn both the temporal consistency of illumination and the priors for complex dynamic light interactions, ensuring the naturalness and realism of generated relighting video.

To address these challenges, we introduce **RelightVid**, a flexible framework lifting the capabilities of IC-Light [Zhang et al. 2024] to video relighting. First, to overcome the issue of limited data, we introduce **LightAtlas**, a comprehensive video dataset created

through a carefully designed augmentation pipeline. This dataset includes a large collection of real-world video footage and 3D-rendered data, along with corresponding lighting conditions and augmented pairs, providing the model with a rich prior knowledge of lighting in videos. Second, to tackle temporal consistency, we incorporate temporal layers into our model. These layers capture temporal dependencies between frames, ensuring high-quality relighting with strong temporal consistency, while maintaining the albedo-preserving capability of IC-Light. Finally, to enhance applicability and compatibility with varying lighting conditions, we support diverse types of inputs, including background videos, texture prompts, and precise HDR environment maps.

Comprehensive experimental results demonstrate that our approach achieves high-quality, temporally consistent video relighting under multi-modal conditions, significantly outperforming the baseline in both qualitative and quantitative comparisons. We believe **RelightVid** can serve as a versatile tool for video relighting on arbitrary foreground subjects and pave the way for the application of video diffusion models in reverse rendering and generative tasks within the field of graphics.

## 2 RELATED WORK

**Diffusion Models for Illumination Editing.** Recent advancement of text-to-image diffusion models [Dhariwal and Nichol 2021; Ho et al. 2020; Rombach et al. 2022; Song et al. 2020] have demonstrated strong capabilities in learning real-world image priors. Fine-tuned versions of these models have been successfully applied to a wide array of tasks, including image editing [Alaluf et al. 2024; Brooks et al. 2023; Couairon et al. 2022; Hertz et al. 2022; Sun et al. 2024a], geometric prediction [Fu et al. 2025; Ke et al. 2024], 3D generation [Ancukevicius et al. 2023; Chen et al. 2023; Poole et al. 2022; Sun et al. 2024b; Tang et al. 2023] and more recently, illumination manipulation [Deng et al. 2025; Kocsis et al. 2024; Ren et al. 2024; Zeng et al. 2024; Zhang et al. 2024]. Directly applying these models to videos via per-frame relighting often results in significant temporal inconsistencies due to the inherent ambiguity of lighting conditions. In this work, we propose extending IC-Light [Zhang et al. 2024] into a video relighting model, which supports more flexible control based on background video, text, or full environment maps. Through a meticulously designed training pipeline, we achieve high-quality video relighting with enhanced temporal consistency, while preserving the lighting priors learned by IC-Light.

**Video Editing and Video Diffusion Models.** Recent years have seen remarkable breakthrough in video diffusion models [Blattmann et al. 2023; Brooks et al. 2024; Guo et al. 2023; Xing et al. 2025; Yang et al. 2024]. These models, after learning on real world videos, can generate high quality videos that obey real world physical laws, including illuminations. There are also works done by leveraging these models to achieve general video editing in both training [Cheng et al. 2023; Mou et al. 2024; Singer et al. 2025] and training free [Bu et al. 2024; Ku et al. 2024; Ling et al. 2024] ways. While these methods excel in general video editing, achieving high-quality video relighting that preserves critical details such as albedo, lighting consistency, and scene realism remains a significant challenge. Our work represents an early exploration into leveraging video diffusion models to enable high-quality video relighting.

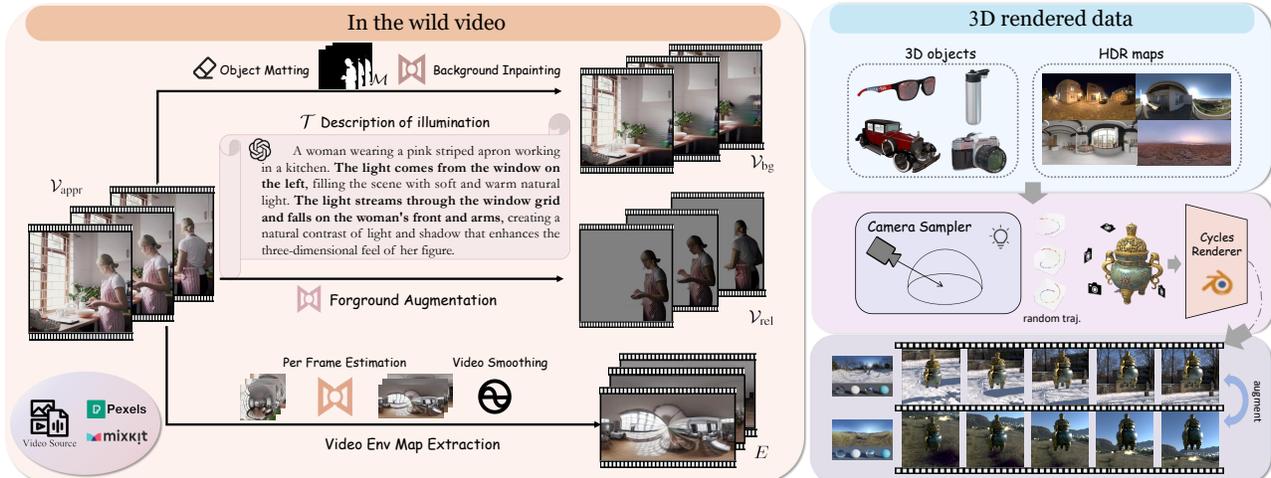


Fig. 2. **LightAtlas Data Pipeline** generates high quality video relighting pairs both based on in the wild videos and 3D rendered data.

**Video Relighting.** Current video relighting methods primarily focus on portrait videos. [Zhang et al. 2021b] propose a neural approach for consistent relighting using a hybrid encoder-decoder with lighting disentanglement and temporal modeling. [Kim et al. 2024] achieves relighting by explicitly predicting normal and shading maps and requiring HDR environment maps as input. [Cai et al. 2024] use NeRF to model the portrait head, achieving high-quality and real-time relighting. These approaches are limited to portraits and rely heavily on explicit inputs, while our work enables relighting for arbitrary subjects with diverse and more practical conditions from a single input video.

### 3 METHODS

We propose an efficient method named **RelightVid** for editing the illumination in videos with consistent temporal performance. In Section 3.1, we first introduce LightAtlas, a high quality video relighting dataset constructed from real video and 3D data renderings. We further present the design and training framework of **RelightVid** in Section 3.2, which supports temporally consistent video relighting under multi-modal conditions.

#### 3.1 LightAtlas Data Collection Pipeline

Training a model for arbitrary video-to-video illumination editing heavily depends on the availability of large-scale paired data. Due to the rarity of extreme dynamic lighting conditions in real-world videos, we utilize both in-the-wild video data to preserve photorealism and 3D-rendered data to effectively augment training under extreme lighting scenarios, as illustrated in fig. 2. Each appearance video  $\mathcal{V}_{\text{appr}} \in \mathbb{R}^{f \times h \times w \times 3}$  is paired with five types of augmented data to facilitate illumination modeling and learning:

$$\mathcal{V}_{\text{appr}} \leftrightarrow \{\mathcal{V}_{\text{rel}}, \mathcal{V}_{\text{bg}}, E, \mathcal{T}, \mathcal{M}\},$$

where  $\mathcal{V}_{\text{rel}} \in \mathbb{R}^{f \times h \times w \times 3}$  represents the relit foreground video,  $\mathcal{V}_{\text{bg}} \in \mathbb{R}^{f \times h \times w \times 3}$  is the background video,  $E \in \mathbb{R}^{f \times 32 \times 32 \times 3}$  denotes the convoluted temporal environment map,  $\mathcal{T}$  is the caption describing illumination changes, and  $\mathcal{M} \in \mathbb{R}^{f \times h \times w}$  represents the foreground mask.

**3.1.1 In-the-wild video.** Generating paired data for in-the-wild videos poses significant challenges due to the complexity of obtaining high-quality and consistent illumination conditions. For real-world appearance videos  $\mathcal{V}_{\text{appr}}$ , we apply a 2D image relighting method (e.g., IC-Light [Zhang et al. 2024]) frame-by-frame to generate augmented relit foreground videos  $\mathcal{V}_{\text{rel}}$  under different illumination settings. To extract the object’s foreground mask, we leverage the powerful object matting tool InSPyReNet [Kim et al. 2022], while the inpainted background videos are obtained using video inpainting tool ProPainter [Zhou et al. 2023]. High Dynamic Range (HDR) environment maps for each frame are extracted from the video using DiffusionLight [Phongthawee et al. 2024], and then smoothed through temporal convolution. Additionally, we use GPT-4V [OpenAI 2023] to generate captions describing the video (focusing on environmental and lighting details) and further filter the captions to retain 20K high-quality meta videos.

Among augmented pairs, the background video, environment map, and caption are utilized as conditions for illumination modeling, with  $\mathcal{V}_{\text{rel}}$  serving as the model input and  $\mathcal{V}_{\text{appr}}$  as the target output. Since the target video is derived from real-world scenarios, it allows the model to learn the real data distribution and the temporal coherence across frames. Although this part of the data is of high photorealism, some input illumination conditions, particularly the environment map (HDR), include noise through estimations. To enhance the precise condition of HDR video, we incorporate auxiliary training data from 3D render engine to provide more precise control and improve the model’s robustness to diverse lighting scenarios. With the input augmentation including brightness scaling and shadow based relighting, we finally generate 200K high quality video editing pairs.

**3.1.2 3D rendered data.** Extracting illumination conditions from real videos inherently introduces noise. To address this limitation, we render dataset using the Cycles renderer in Blender [Blender 2018], utilizing publicly available 3D assets from Objaverse [Deitke et al. 2023] and environment maps from Poly Haven<sup>1</sup>. We select 10K objects with high quality mesh from Objaverse and 1K high quality

<sup>1</sup><https://polyhaven.com/>

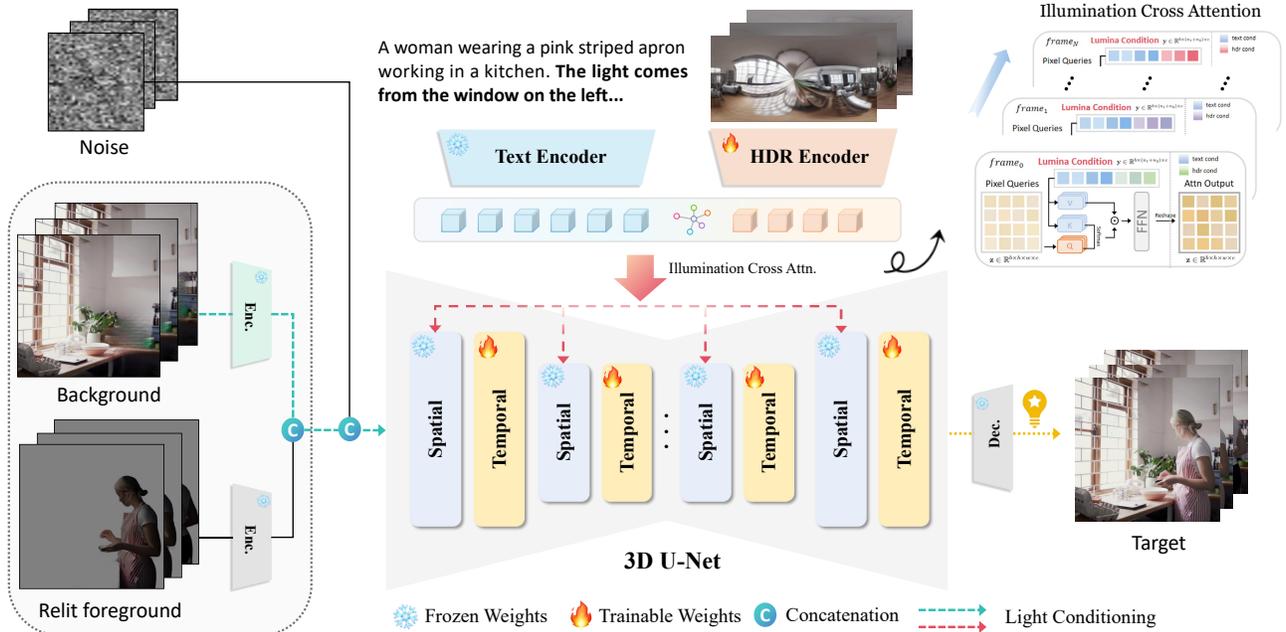


Fig. 3. **Model Design** to lift image diffusion model for temporal consistent video relighting under text prompt, background video and HDR video map.

HDR environment maps. For each object placed in random selected 5 environment maps, we render five videos with random camera trajectories. After augmentation, we select one of the other four lighting conditions as the relighting input, denoted as  $\mathcal{V}_{rel}$ . This results in a dataset of 1M video pairs, with each pair corresponding to environment map variations for illumination modeling. This part of data containing precise HDR video maps serves as a valuable supplement to in-the-wild videos.

### 3.2 Model Design

Given the inherent similarities between image and video relighting tasks, we adopt a pre-trained 2D image relighting diffusion model [Zhang et al. 2024] as our foundational model. By utilizing this model’s weights for initialization, we effectively leverage its image relighting priors and accelerate the training process. However, video relighting introduces additional challenges, including dynamic illumination and motion variations. Maintaining the original relighting quality of the model, while ensuring temporal consistency across frames, are two critical issues that must be addressed.

**3.2.1 Lifting image diffusion model for video relighting.** The overall **RelightVid** pipeline is illustrated in fig. 3. Our approach to address the challenges of lifting image relighting to the video domain is as follows: First, we inflate the 2D image diffusion model into a 3D U-Net, enabling it to accept video tensor with temporal dimension as input while maintaining the core structure of the original model. To further enhance temporal consistency, we integrate temporal attention layers into the image relighting model. During training, the spatial layers are kept frozen, while only the temporal layers are fine-tuned. This strategy preserves the in-the-wild editing capability of IC-Light [Zhang et al. 2024] and enables robust

generalization to out-of-domain cases beyond the domain of our current data pair collection pipeline.

To achieve conditional illumination editing, we encode both the relighted video  $\mathcal{V}_{rel}$  and the background video  $\mathcal{V}_{bg}$  using a VAE encoder to obtain their latent space representations,  $z_{rel}$  and  $z_{bg}$ , respectively. We then add noise for  $t$  steps to obtain the noisy latent  $z_t$ , and concatenate  $z_t$ ,  $z_{rel}$ , and  $z_{bg}$  as input to the diffusion model, where  $z_{bg}$  serves as the background condition for relighting control.

For environment HDR condition enjection, we encode the environment map  $E$  using a 5-layer MLP, decomposing it into LDR and HDR maps  $E_l$  and  $E_h$ . Textual conditions are encoded via a CLIP Text Encoder into  $y$ , which is repeated and concatenated with the temporal HDR latents. This combined information is injected into the spatial layers via cross-attention, enabling precise control over illumination changes.

**3.2.2 Multi-Modal Condition Joint Training.** Our video diffusion model is designed to enable collaborative video relighting by simultaneously leveraging both background visual condition and texture prompts for fine-grained control over illumination. The model comprises a VAE encoder  $\mathcal{E}_i$ , a denoiser 3D U-Net  $\epsilon_\theta$ , a CLIP-Text Encoder  $\mathcal{E}_t$ , an HDR Encoder  $\mathcal{E}_e$ , and a decoder  $\mathcal{D}$ . To achieve this, we introduce a joint training objective that optimizes the model for collaborative conditioning on both background and text modalities:

$$\min_{\theta} \mathbb{E}_{z \sim \mathcal{E}(x), t, \epsilon \sim \mathcal{N}(0,1)} \|\epsilon - \epsilon_\theta(z_t, t, \hat{E})\|_2^2, \quad (1)$$

$$\hat{E} = \{\mathcal{E}_i(z_{rel}), \mathcal{E}_i(z_{bg}), \mathcal{E}_t(y), \mathcal{E}_e(E)\}, \quad (2)$$

where  $t \sim [1, 1000]$  is the diffusion time step, and  $\hat{E}$  represents the encoded conditional latents for the input video  $V_{rel}$ , background video  $V_{bg}$ , environment map  $\hat{E}$ , and the CLIP embedding of the input caption  $y$ . Our key innovation lies in the collaborative editing

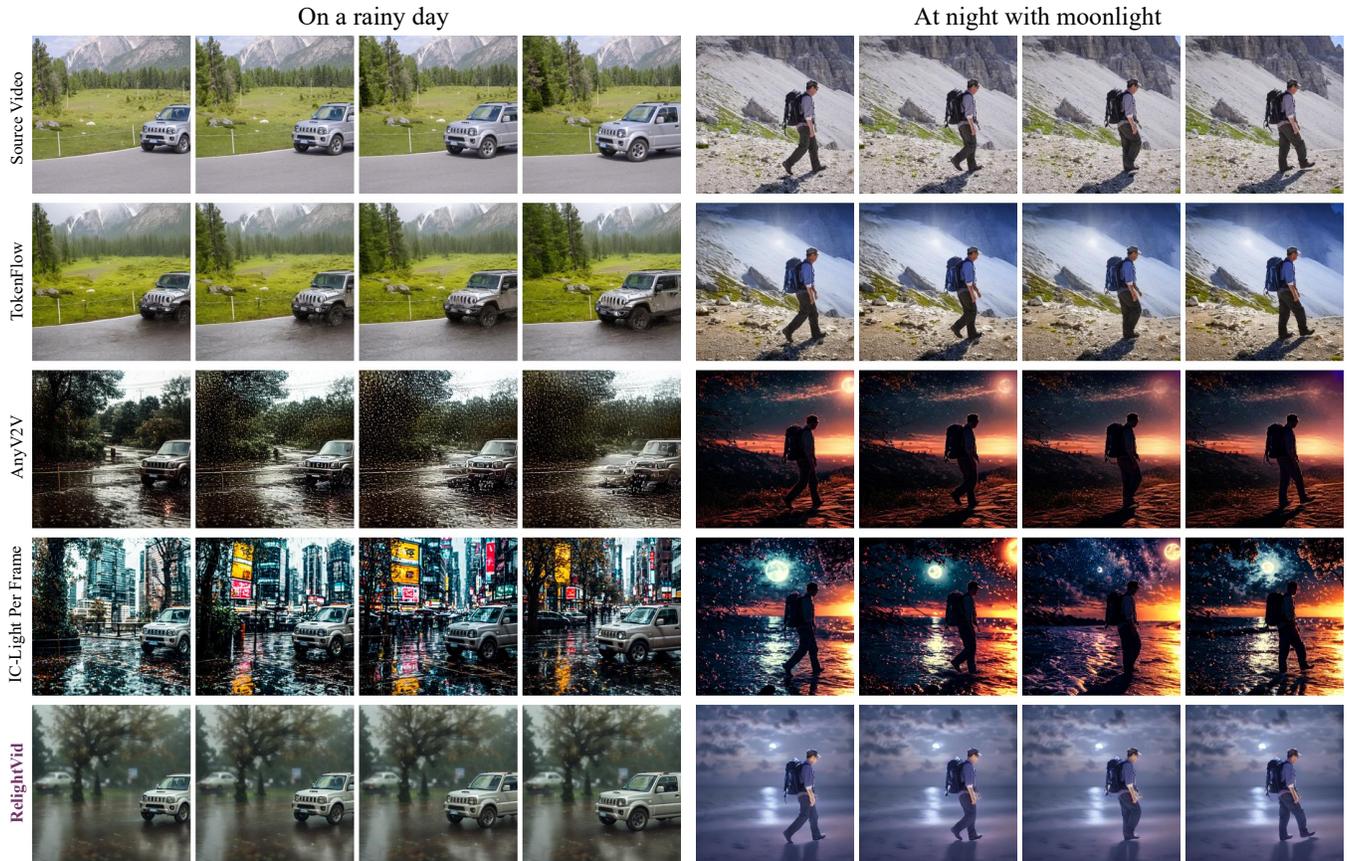


Fig. 4. **Qualitative comparison of text-conditioned video illumination editing.** Given a source video and guidance text, we compare **RelightVid** with other classic text-driven video editing methods, where AnyV2V initially uses ICLight to modify the first frame.

Methods	CLIP-Text $\uparrow$	CLIP-Image $\uparrow$	R-Motion Smoothness $\downarrow$	User Preference			
				VS $\uparrow$	LR $\uparrow$	TA $\uparrow$	IP $\uparrow$
IC-Light [Zhang et al. 2024] Per Frame	<b>0.2512</b>	0.8533	6.293	2.367	2.253	2.719	2.318
TokenFlow [Geyer et al. 2023]	0.2165	0.9811	1.965	2.344	2.613	2.186	2.343
AnyV2V [Ku et al. 2024]+ICLight	0.2372	0.9760	2.256	2.217	2.202	2.236	2.314
<b>RelightVid</b>	0.2493	<b>0.9841</b>	<b>1.683</b>	<b>3.072</b>	<b>2.933</b>	<b>2.859</b>	<b>3.025</b>

Table 1. **Quantitative evaluation result of text conditioned video relighting.** **RelightVid** achieves best result compared to other video editing methods.

framework, which allows the model to dynamically integrate and balance information from both image background and text prompts during the editing process. This enables precise and coherent video editing where background and text conditions work synergistically to guide the output, ensuring that the edited video aligns with both visual and textual context.

**3.2.3 Illumination-Invariant Ensemble.** In a single relighting process given background video condition, background video  $\mathcal{V}_{bg}$  is fixed. Consequently, the relighted foreground  $\mathcal{V}_{rel}$  should ideally be fixed. This ideal output should remain the same regardless of any brightness augmentation applied to the original input. Motivated by this observation, we propose an Illumination-Invariant Ensemble (IIE) strategy to enhance the robustness of video relighting. The core idea behind IIE is to apply brightness augmentations to the

original input video and then average the predicted noise to obtain a more reliable result. The rationale is that different augmented inputs should guide the noisy latent toward the same output video, thereby mitigating the impact of illumination variations.

Specifically, We first apply a series of brightness augmentations directly to the input video  $\mathcal{V}_{in}$ , generating  $N$  augmented versions. The augmented video frames are defined as:

$$\mathcal{V}_{in}^{(i)} = s_i \cdot \mathcal{V}_{in}, \quad i = 1, 2, \dots, N, \quad (3)$$

Where  $\{s_i\}_{i=1}^N$  are brightness scaling factors sampled from a pre-defined range, e.g.,  $s_i \in [0.5, 1.5]$ . These augmented videos are then fed into the model to predict the noise  $\epsilon_t^{(i)}$  at each diffusion step  $t$ . To obtain a more robust denoising result, we compute the averaged noise prediction across all augmented versions:  $\bar{\epsilon}_t = \frac{1}{N} \sum_{i=1}^N \epsilon_t^{(i)}$ .



Fig. 5. **Qualitative comparison of background-conditioned video illumination editing.** Given any foreground appearance and a background video reference, we relight videos and compare our method with the per-frame IC-Light (smoothed) method.

Methods	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	R-Motion Smoothness $\downarrow$	User Preference	
					Video Smoothness $\uparrow$	Lighting Rationality $\uparrow$
IC-Light [Zhang et al. 2024] Per Frame	18.26	0.7608	0.1533	2.508	1.849	1.892
Per Frame + Smoothing	17.71	0.7626	0.1732	2.383	1.836	1.929
<b>RelightVid</b>	<b>18.79</b>	<b>0.7832</b>	<b>0.1412</b>	<b>1.458</b>	<b>2.315</b>	<b>2.180</b>

Table 2. **Quantitative evaluation results of background video conditioned relighting.** **RelightVid** maintains the image relighting ability of IC-Light and significantly improve temporal consistency.

Finally, the averaged noise  $\bar{\epsilon}_t$  is used in the diffusion process to produce the final relighted video output. This strategy effectively improves the model’s robustness under varying illumination conditions, preventing undesirable variations in albedo. The effectiveness of IIE is validated in section 4.2.4.

## 4 EXPERIMENTS

### 4.1 Training Details

We adopt the SD-1.5 [Rombach et al. 2022] version of IC-Light [Zhang et al. 2024] as the image backbone and inject temporal attention layers initialized from AnimateDiff-V2 [Guo et al. 2023]. For the HDR environment map encoder, we initialize its parameters with zeros to minimize its influence at the beginning of training. During training, the cross-attention layers between image features and HDR features, as well as the temporal layers, are made trainable, while the other parts of the UNet are kept fixed. The learning rate is set to  $1 \times 10^{-5}$  with AdamW [Loshchilov 2017] optimizer adopted. Training is conducted on 8 NVIDIA A100-80G GPUs for 5,000 iterations.

### 4.2 Evaluations

**4.2.1 Video Background Conditioned Relighting.** To assess both image quality and temporal consistency of **RelightVid**, we sample 50 in-the-wild videos from the Mixkit dataset, encompassing both static and dynamic lighting conditions. The foreground portrait or object is augmented with diverse relighting transformations, serving as model input for evaluation. We setup a baseline of per-frame relighting via IC-Light [Zhang et al. 2024] with the video smoothing method. For image quality, we adopt PSNR, SSIM [Wang et al. 2004], LPIPS [Zhang et al. 2018] as evaluation metrics. For



Fig. 6. **Synthetic background-condition illumination editing results.** We use the Hunyuan model for long synthetic background videos with strong dynamic lighting, demonstrating the effectiveness and robustness of our method in scenarios with dynamic lighting and long videos editing.

temporal consistency, we adopt Motion Smoothness metric proposed in [Huang et al. 2024] through utilize the motion priors in video frame interpolation model [Li et al. 2023]. We conducted user study comparing our methods and baseline methods across two dimensions: Video Smoothness (The consistency between different frames), and Lighting Rationality (The rationality of lighting on foreground object/human). We invite 41 users including graduate students that expertise in video editing and average users to rank



Fig. 7. **Qualitative results of Illumination-Invariant Ensemble.** IIE helps produce more robust result that better preserve albedo in light editing.

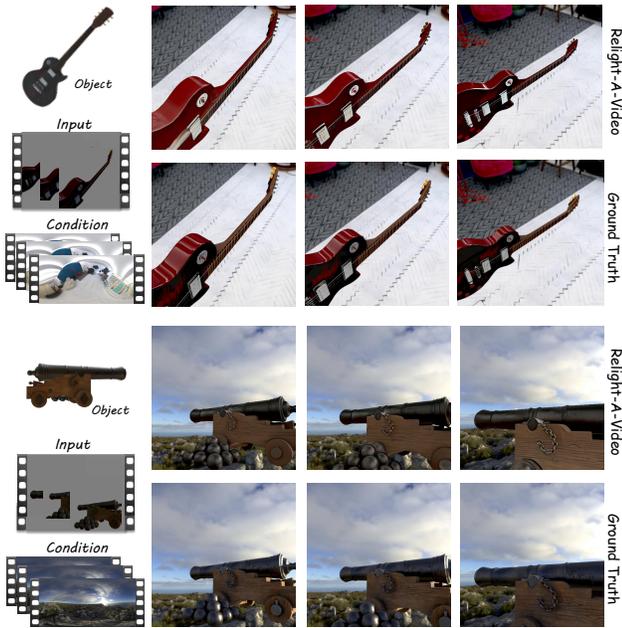


Fig. 8. **HDR-conditioned illumination editing results.**

the results and use Average User Ranking (AUR) as a preference metric.

As shown in table 2, **RelightVid** consistently outperforms all other methods across all evaluated metrics. It not only significantly improves video smoothness but also preserves and subtly enhances the relighting capabilities of IC-Light [Zhang et al. 2024], while intrinsically maintaining the foreground albedo. Qualitative comparisons are provided in fig. 5.

**4.2.2 Text-Conditioned Relighting.** Text-conditioned video relighting represents a versatile setting with wide-ranging applications for real-world users. We compare our method with per-frame IC-Light [Zhang et al. 2024] and two state-of-the-art video editing methods: TokenFlow [Geyer et al. 2023] and AnyV2V [Ku et al. 2024]. TokenFlow directly leverages text prompts for video editing, while AnyV2V conditions on the original video and the first edited frame. For AnyV2V, we use IC-Light [Zhang et al. 2024] to relight the first frame. The evaluation is conducted on the DAVIS dataset [Perazzi et al. 2016], where we randomly sample 10 text relighting prompts

	PSNR	SSIM	R-Motion Smoothness
Single Input	18.79	0.7832	1.458
3-Aug-Input	18.92	0.7907	1.449
5-Aug-Input	19.07	0.7904	1.452

Table 3. **Quantitative results of Illumination Invariant Ensemble.**

with corresponding relighting guidance for each video. We measure text-to-video alignment using the CLIP-Text score and evaluate semantic consistency across frames using the CLIP-Image score.

We conduct user study comparing our method with baselines across four dimensions: **Video Smoothness**, **Lighting Rationality** (as defined in section 4.2.1), and two new metrics: **Text Alignment** (alignment between video content and text prompt) and **ID-Preservation** (consistency of the foreground object’s identity and albedo before and after relighting). A total of 37 participants similar to section 4.2.1 are invited to rank the results.

As reported in table 1, **RelightVid** generally outperforms baseline approaches and state-of-the-art video editing methods. Representative results are visualized in fig. 4. **RelightVid** demonstrates the ability to perform high-quality relighting that faithfully adheres to the given text prompts while preserving the identity and albedo of the foreground object or human.

**4.2.3 HDR-Conditioned Relighting.** In addition to background and textual cues as relighting conditions, we also incorporate HDR video as a more precise condition for relighting. As demonstrated in fig. 8, our model, by injecting an HDR map through a specially designed HDR encoder and leveraging cross-attention interactions with frame features, is able to recover most of the relevant information and apply accurate relighting for the foreground object. This enhanced control is particularly effective in scenarios where the predominant lighting originates from the camera’s direction, where background and text-based cues struggle to address.

**4.2.4 Illumination-Invariant Ensemble (IIE).** We evaluate the performance of the Illumination-Invariant Ensemble (IIE) using the same test set as in the video background-conditioned relighting task, with two augmented foreground videos and the original video as inputs. As demonstrated in fig. 7 and summarized in table 3, the incorporation of IIE significantly enhances the robustness of relighting and improves the preservation of foreground albedo, such as the shirt of the girl and the hammock. However, an increase in the number of augmented inputs may result in an average blurring effect, which can negatively impact the overall performance.

## 5 CONCLUSION

In this work, we propose **RelightVid**, a video diffusion model that supports relighting any foreground object in a video conditioned on a new background video, text, and an HDR map without requiring complex process of intrinsic decomposition. We demonstrate its promising performance across various scenarios and explore key factors behind its success: a carefully designed data generation pipeline and the efficient reuse of prior knowledge from the image backbone. We believe that this model can serve as a versatile tool to fulfill real user requirements and hope this work will inspire future research on video diffusion models for editing and generation.

## REFERENCES

- Yuval Alaluf, Daniel Garibi, Or Patashnik, Hadar Averbuch-Elor, and Daniel Cohen-Or. 2024. Cross-image attention for zero-shot appearance transfer. In *ACM SIGGRAPH 2024 Conference Papers*. 1–12.
- Titas Anciukevičius, Zexiang Xu, Matthew Fisher, Paul Henderson, Hakan Bilen, Niloy J Mitra, and Paul Guerrero. 2023. Renderdiffusion: Image diffusion for 3d reconstruction, inpainting and generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 12608–12618.
- Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. 2023. Stable video diffusion: Scaling latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127* (2023).
- OC Blender. 2018. Blender—A 3D modelling and rendering package. Retrieved. *represents the sequence of Constructs 1 to 4* (2018).
- Tim Brooks, Aleksander Holynski, and Alexei A Efros. 2023. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 18392–18402.
- Tim Brooks, Bill Peebles, Connor Holmes, Will DePue, Yufei Guo, Li Jing, David Schnurr, Joe Taylor, Troy Luhman, Eric Luhman, Clarence Ng, Ricky Wang, and Aditya Ramesh. 2024. Video generation models as world simulators. (2024). <https://openai.com/research/video-generation-models-as-world-simulators>
- Jiazi Bu, Pengyang Ling, Pan Zhang, Tong Wu, Xiaoyi Dong, Yuhang Zang, Yuhang Cao, Dahua Lin, and Jiaqi Wang. 2024. Broadway: Boost your text-to-video generation model in a training-free way. *arXiv preprint arXiv:2410.06241* (2024).
- Ziqi Cai, Kaiwen Jiang, Shu-Yu Chen, Yu-Kun Lai, Hongbo Fu, Boxin Shi, and Lin Gao. 2024. Real-time 3D-aware portrait video relighting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 6221–6231.
- Hansheng Chen, Jiatao Gu, Anpei Chen, Wei Tian, Zhuowen Tu, Lingjie Liu, and Hao Su. 2023. Single-stage diffusion nerf: A unified approach to 3d generation and reconstruction. In *Proceedings of the IEEE/CVF international conference on computer vision*. 2416–2425.
- Jiaxin Cheng, Tianjun Xiao, and Tong He. 2023. Consistent video-to-video transfer using synthetic dataset. *arXiv preprint arXiv:2311.00213* (2023).
- Guillaume Couairon, Jakob Verbeek, Holger Schwenk, and Matthieu Cord. 2022. Diffedit: Diffusion-based semantic image editing with mask guidance. *arXiv preprint arXiv:2210.11427* (2022).
- Paul Debevec. 2008. Rendering synthetic objects into real scenes: Bridging traditional and image-based graphics with global illumination and high dynamic range photography. In *Acm siggraph 2008 classes*. 1–10.
- Matt Deitke, Dustin Schwenk, Jordi Salvador, Luca Weihs, Oscar Michel, Eli VanderBilt, Ludwig Schmidt, Kiana Ehsani, Aniruddha Kembhavi, and Ali Farhadi. 2023. Objaverse: A universe of annotated 3d objects. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 13142–13153.
- Kangle Deng, Timothy Omernick, Alexander Weiss, Deva Ramanan, Jun-Yan Zhu, Tinghui Zhou, and Maneesh Agrawala. 2025. Flashtex: Fast relightable mesh texturing with lightcontrolnet. In *European Conference on Computer Vision*. Springer, 90–107.
- Prafulla Dhariwal and Alexander Nichol. 2021. Diffusion models beat gans on image synthesis. *Advances in neural information processing systems* 34 (2021), 8780–8794.
- Xiao Fu, Wei Yin, Mu Hu, Kaixuan Wang, Yuexin Ma, Ping Tan, Shaojie Shen, Dahua Lin, and Xiaoxiao Long. 2025. Geowizard: Unleashing the diffusion priors for 3d geometry estimation from a single image. In *European Conference on Computer Vision*. Springer, 241–258.
- Michal Geyer, Omer Bar-Tal, Shai Bagon, and Tali Dekel. 2023. Tokenflow: Consistent diffusion features for consistent video editing. *arXiv preprint arXiv:2307.10373* (2023).
- Yuwei Guo, Ceyuan Yang, Anyi Rao, Zhengyang Liang, Yaohui Wang, Yu Qiao, Maneesh Agrawala, Dahua Lin, and Bo Dai. 2023. Animatediff: Animate your personalized text-to-image diffusion models without specific tuning. *arXiv preprint arXiv:2307.04725* (2023).
- Amir Hertz, Ron Mokady, Jay Tenenbaum, Kfir Aberman, Yael Pritch, and Daniel Cohen-Or. 2022. Prompt-to-prompt image editing with cross attention control. *arXiv preprint arXiv:2208.01626* (2022).
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. 2020. Denoising diffusion probabilistic models. *Advances in neural information processing systems* 33 (2020), 6840–6851.
- Ziqi Huang, Yinan He, Jiashuo Yu, Fan Zhang, Chenyang Si, Yuming Jiang, Yuanhan Zhang, Tianxing Wu, Qingyang Jin, Nattapol Chanpaisit, et al. 2024. Vbench: Comprehensive benchmark suite for video generative models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 21807–21818.
- Haian Jin, Yuan Li, Fujun Luan, Yuanbo Xiangli, Sai Bi, Kai Zhang, Zexiang Xu, Jin Sun, and Noah Snively. 2024. Neural Gaffer: Relighting Any Object via Diffusion. *arXiv preprint arXiv:2406.07520* (2024).
- Bingxin Ke, Anton Obukhov, Shengyu Huang, Nando Metzger, Rodrigo Caye Daudt, and Konrad Schindler. 2024. Repurposing diffusion-based image generators for monocular depth estimation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 9492–9502.
- Hoon Kim, Minje Jang, Wonjun Yoon, Jisoo Lee, Donghyun Na, and Sanghyun Woo. 2024. SwitchLight: Co-design of Physics-driven Architecture and Pre-training Framework for Human Portrait Relighting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 25096–25106.
- Taehun Kim, Kunhee Kim, Joonyeong Lee, Dongmin Cha, Jiho Lee, and Daijin Kim. 2022. Revisiting image pyramid structure for high resolution salient object detection. In *Proceedings of the Asian Conference on Computer Vision*. 108–124.
- Peter Kocsis, Julien Philip, Kalyan Sunkavalli, Matthias Nießner, and Yannick Hold-Geoffroy. 2024. Lightit: Illumination modeling and control for diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 9359–9369.
- Max Ku, Cong Wei, Weiming Ren, Huan Yang, and Wenhu Chen. 2024. AnyV2V: A Tuning-Free Framework For Any Video-to-Video Editing Tasks. *Transactions on Machine Learning Research* (2024).
- Zhengqin Li, Jia Shi, Sai Bi, Rui Zhu, Kalyan Sunkavalli, Miloš Hašan, Zexiang Xu, Ravi Ramamoorthi, and Manmohan Chandraker. 2022. Physically-based editing of indoor scene lighting from a single image. In *European Conference on Computer Vision*. Springer, 555–572.
- Zhen Li, Zuo-Liang Zhu, Ling-Hao Han, Qibin Hou, Chun-Le Guo, and Ming-Ming Cheng. 2023. Amt: All-pairs multi-field transforms for efficient frame interpolation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 9801–9810.
- Pengyang Ling, Jiazi Bu, Pan Zhang, Xiaoyi Dong, Yuhang Zang, Tong Wu, Huaian Chen, Jiaqi Wang, and Yi Jin. 2024. MotionClone: Training-Free Motion Cloning for Controllable Video Generation. *arXiv preprint arXiv:2406.05338* (2024).
- I Loshchilov. 2017. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101* (2017).
- Chong Mou, Mingdeng Cao, Xintao Wang, Zhaoyang Zhang, Ying Shan, and Jian Zhang. 2024. ReVideo: Remake a Video with Motion and Content Control. *arXiv preprint arXiv:2405.13865* (2024).
- Giljoo Nam, Joo Ho Lee, Diego Gutierrez, and Min H Kim. 2018. Practical svbrdf acquisition of 3d objects with unstructured flash photography. *ACM Transactions on Graphics (ToG)* 37, 6 (2018), 1–12.
- R OpenAI. 2023. GPT-4 technical report. *arXiv* (2023), 2303–08774.
- Federico Perazzi, Jordi Pont-Tuset, Brian McWilliams, Luc Van Gool, Markus Gross, and Alexander Sorkine-Hornung. 2016. A benchmark dataset and evaluation methodology for video object segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 724–732.
- Pakkapon Phongthawee, Worameth Chinchuthakun, Nontaphat Sinsunthithet, Varun Jampani, Amit Raj, Pramook Khungurn, and Supasorn Suwajanakorn. 2024. Diffusionlight: Light probes for free by painting a chrome ball. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 98–108.
- Ben Poole, Ajay Jain, Jonathan T Barron, and Ben Mildenhall. 2022. Dreamfusion: Text-to-3d using 2d diffusion. *arXiv preprint arXiv:2209.14988* (2022).
- Ravi Ramamoorthi and Pat Hanrahan. 2001. An efficient representation for irradiance environment maps. In *Proceedings of the 28th annual conference on Computer graphics and interactive techniques*. 497–500.
- Erik Reinhard. 2020. High dynamic range imaging. In *Computer Vision: A Reference Guide*. Springer, 1–6.
- Mengwei Ren, Wei Xiong, Jae Shin Yoon, Zhixin Shu, Jianming Zhang, HyunJoon Jung, Guido Gerig, and He Zhang. 2024. Relightful Harmonization: Lighting-aware Portrait Background Replacement. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 6452–6462.
- Christian Richardt, Carsten Stoll, Neil A Dodgson, Hans-Peter Seidel, and Christian Theobalt. 2012. Coherent spatiotemporal filtering, upsampling and rendering of RGBZ videos. In *Computer graphics forum*, Vol. 31. Wiley Online Library, 247–256.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. 2022. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 10684–10695.
- Uriel Singer, Amit Zohar, Yuval Kirstain, Shelly Sheynin, Adam Polyak, Devi Parikh, and Yaniv Taigman. 2025. Video editing via factorized diffusion distillation. In *European Conference on Computer Vision*. Springer, 450–466.
- Jiaming Song, Chenlin Meng, and Stefano Ermon. 2020. Denoising diffusion implicit models. *arXiv preprint arXiv:2010.02502* (2020).
- Zeyi Sun, Ziyang Chu, Pan Zhang, Tong Wu, Xiaoyi Dong, Yuhang Zang, Yuanjun Xiong, Dahua Lin, and Jiaqi Wang. 2024a. X-Prompt: Towards Universal In-Context Image Generation in Auto-Regressive Vision Language Foundation Models. *arXiv preprint arXiv:2412.01824* (2024).
- Zeyi Sun, Tong Wu, Pan Zhang, Yuhang Zang, Xiaoyi Dong, Yuanjun Xiong, Dahua Lin, and Jiaqi Wang. 2024b. Bootstrap3D: Improving 3D Content Creation with Synthetic Data. *arXiv preprint arXiv:2406.00093* (2024).
- Junshu Tang, Tengfei Wang, Bo Zhang, Ting Zhang, Ran Yi, Lizhuang Ma, and Dong Chen. 2023. Make-it-3d: High-fidelity 3d creation from a single image with diffusion prior. In *Proceedings of the IEEE/CVF international conference on computer vision*. 22819–22829.

- Zhou Wang, Alan C Bovik, Hamid R Sheikh, and Eero P Simoncelli. 2004. Image quality assessment: from error visibility to structural similarity. *IEEE transactions on image processing* 13, 4 (2004), 600–612.
- Rui Xia, Yue Dong, Pieter Peers, and Xin Tong. 2016. Recovering shape and spatially-varying surface reflectance under unknown illumination. *ACM Transactions on Graphics (ToG)* 35, 6 (2016), 1–12.
- Jinbo Xing, Menghan Xia, Yong Zhang, Haoxin Chen, Wangbo Yu, Hanyuan Liu, Gongye Liu, Xintao Wang, Ying Shan, and Tien-Tsin Wong. 2025. Dynamicrafter: Animating open-domain images with video diffusion priors. In *European Conference on Computer Vision*. Springer, 399–417.
- Zhuoyi Yang, Jiayan Teng, Wendi Zheng, Ming Ding, Shiyu Huang, Jiazheng Xu, Yuanming Yang, Wenyi Hong, Xiaohan Zhang, Guanyu Feng, et al. 2024. Cogvideox: Text-to-video diffusion models with an expert transformer. *arXiv preprint arXiv:2408.06072* (2024).
- Chong Zeng, Yue Dong, Pieter Peers, Youkang Kong, Hongzhi Wu, and Xin Tong. 2024. Dilightnet: Fine-grained lighting control for diffusion-based image generation. In *ACM SIGGRAPH 2024 Conference Papers*. 1–12.
- Kai Zhang, Fujun Luan, Qianqian Wang, Kavita Bala, and Noah Snavely. 2021a. Physg: Inverse rendering with spherical gaussians for physics-based material editing and relighting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 5453–5462.
- Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. 2024. IC-Light GitHub Page.
- Longwen Zhang, Qixuan Zhang, Minye Wu, Jingyi Yu, and Lan Xu. 2021b. Neural video portrait relighting in real-time via consistency modeling. In *Proceedings of the IEEE/CVF international conference on computer vision*. 802–812.
- Richard Zhang, Phillip Isola, Alexei A Efros, Eli Shechtman, and Oliver Wang. 2018. The unreasonable effectiveness of deep features as a perceptual metric. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 586–595.
- Shangchen Zhou, Chongyi Li, Kelvin CK Chan, and Chen Change Loy. 2023. Propainter: Improving propagation and transformer for video inpainting. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 10477–10486.



Fig. 9. **Qualitative results of background-conditioned long video illumination editing.** Given any length foreground appearance video and a background video reference, we relight videos using long video propagation method.

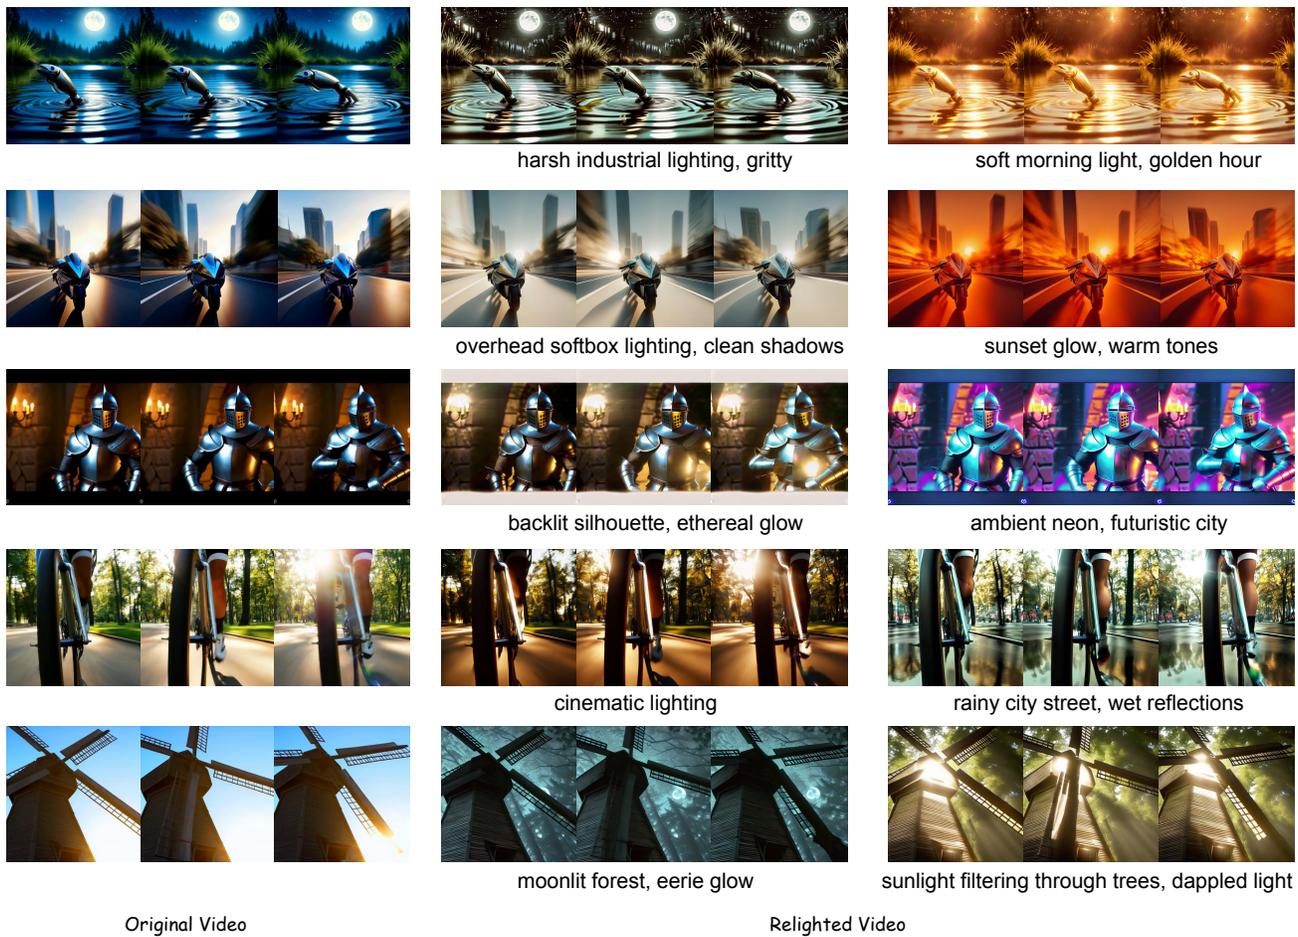


Fig. 10. **More qualitative results of text-conditioned video illumination editing beyond test set.**

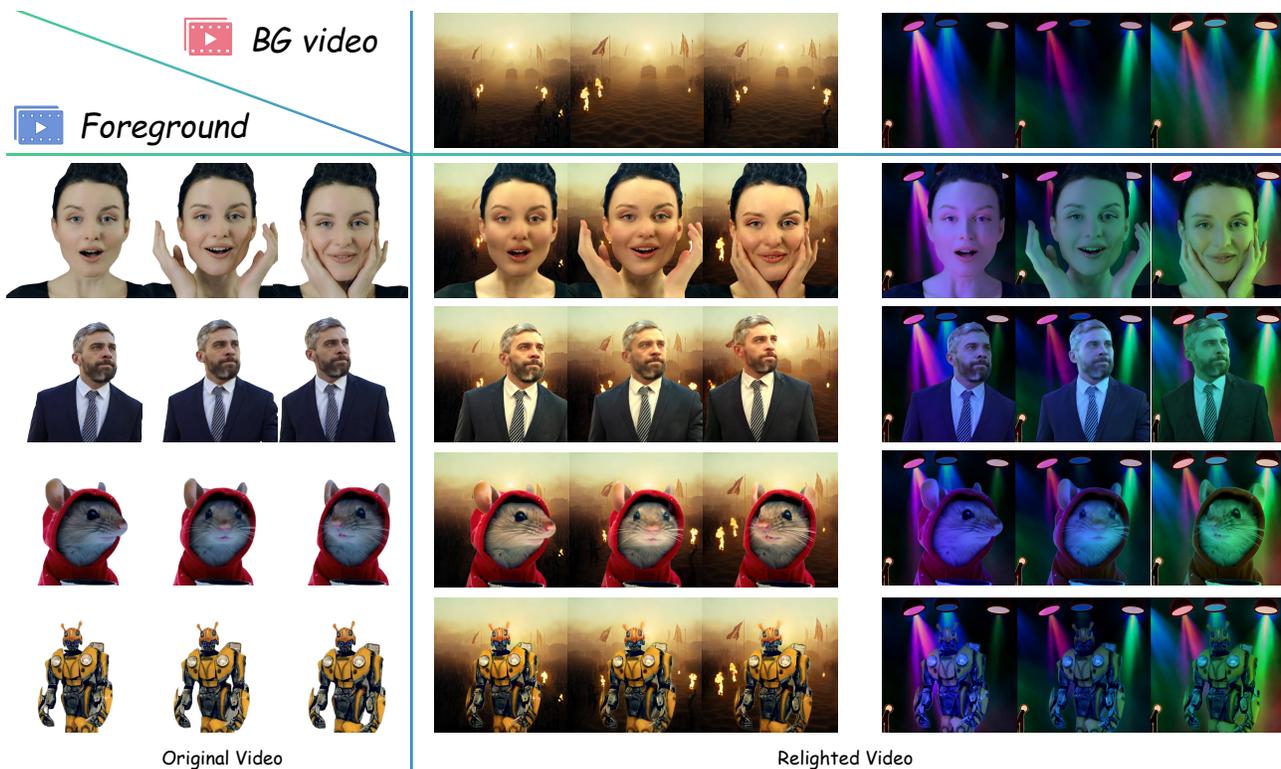


Fig. 11. More qualitative results of background-conditioned video illumination editing beyond test set.

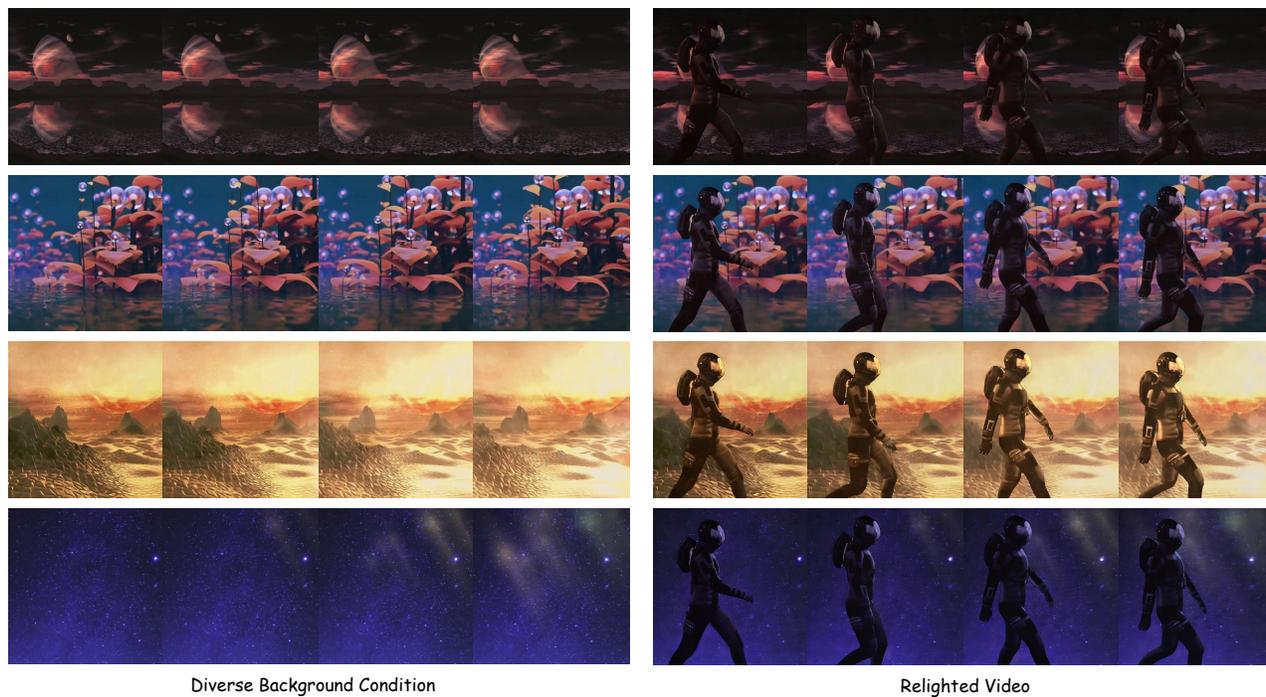


Fig. 12. More qualitative results of background-conditioned video illumination editing beyond test set.