

ITVTON: Virtual Try-On Diffusion Transformer Model Based on Integrated Image and Text

1st Haifeng Ni

East China Normal University

Shanghai, China

haifengni99@gmail.com

Abstract—Recent advancements in virtual fitting for characters and clothing have leveraged diffusion models to improve the realism of garment fitting. However, challenges remain in handling complex scenes and poses, which can result in unnatural garment fitting and poorly rendered intricate patterns. In this work, we introduce ITVTON, a novel method that enhances clothing-character interactions by combining clothing and character images along spatial channels as inputs, thereby improving fitting accuracy for the inpainting model. Additionally, we incorporate integrated textual descriptions from multiple images to boost the realism of the generated visual effects. To optimize computational efficiency, we limit training to the attention parameters within a single diffusion transformer (Single-DiT) block. To more rigorously address the complexities of real-world scenarios, we curated training samples from the IGPair dataset, thereby enhancing ITVTON’s performance across diverse environments. Extensive experiments demonstrate that ITVTON outperforms baseline methods both qualitatively and quantitatively, setting a new standard for virtual fitting tasks.

Index Terms—Virtual try on, Diffusion transformers, Image editing

I. INTRODUCTION

Virtual try-on technology [3–5] has become an essential tool in e-commerce and personal fashion, revolutionizing the consumer shopping experience by generating realistic try-on images and providing innovative marketing opportunities for brands and retailers. Traditional virtual fitting methods, primarily based on generative adversarial networks (GANs) [6], have made significant strides in image realism. However, they still face challenges such as unstable generation quality, limited generalization, and difficulty adapting to complex backgrounds and dynamic human poses.

Recently, diffusion models [7, 8] have emerged as a promising alternative in the field of virtual try-on, thanks to their superior generative capabilities and flexibility. These models transform input data into a simplified prior distribution through iterative noise addition, learning to reverse this process and reconstruct the original data. Unlike traditional GANs, diffusion models excel in terms of quality, stability, and diversity of generated images, capturing subtle data structures more effectively and leading to highly realistic and believable outputs. Additionally, their superior control and optimization during training make them ideal for addressing the challenges of virtual fitting.

Building on these advancements, this paper seeks to integrate recent techniques to enhance the quality and efficiency

of generated images while improving model adaptability to diverse human poses and real-world scenarios. The key contributions of our work are as follows:

- **Flux-Fill model as pre-training base:** We use the Flux-Fill model as the pre-training base to accelerate training and improve performance. We train only the attention parameters in the single diffusion transformer (Single-DiT) block, reducing training time and computational costs while enhancing model stability and output quality.
- **Simplified input representation:** We introduce a simplified input representation by splicing clothing and model images along spatial dimensions and integrating multi-image text descriptions. We eliminate the need for complex preprocessing steps, such as pose estimation or body segmentation, and ensure natural garment coverage through inpainting, which is particularly effective for garments with intricate textures and patterns, resulting in realistic fitting outcomes.
- **Filtering the IGPair dataset for training:** We curate 10,257 image pairs from the IGPair [2] dataset, including topwear, bottom wear, full-body images, and multiple poses of models in the same outfit. We generate corresponding masks to expose the model to a richer set of patterns and features, improving its generalization capability and ensuring high-quality virtual try-on images, even in challenging conditions.

II. RELATED WORK

The virtual try-on task involves generating a composite image of a model wearing a specified garment based on the garment and model images. Early virtual fitting approaches primarily employed generative adversarial networks (GANs) [6] and two-stage strategies. These methods distorted garments to the desired shape and employed GAN-based generators to merge the altered garment with the character’s body. For instance, VITON-HD [1] addresses mismatched garment coverage by simultaneously warping and segmenting the garment. Similarly, GP-VTON [9] incorporates local warping and global resolution to independently model the deformation of various garment regions, achieving a more accurate fit. To ensure accurate garment deformation, certain methods guide the remodeling process by leveraging dense flow graph estimation. However, GAN-based methods suffer from instability due to the adversarial nature of their training

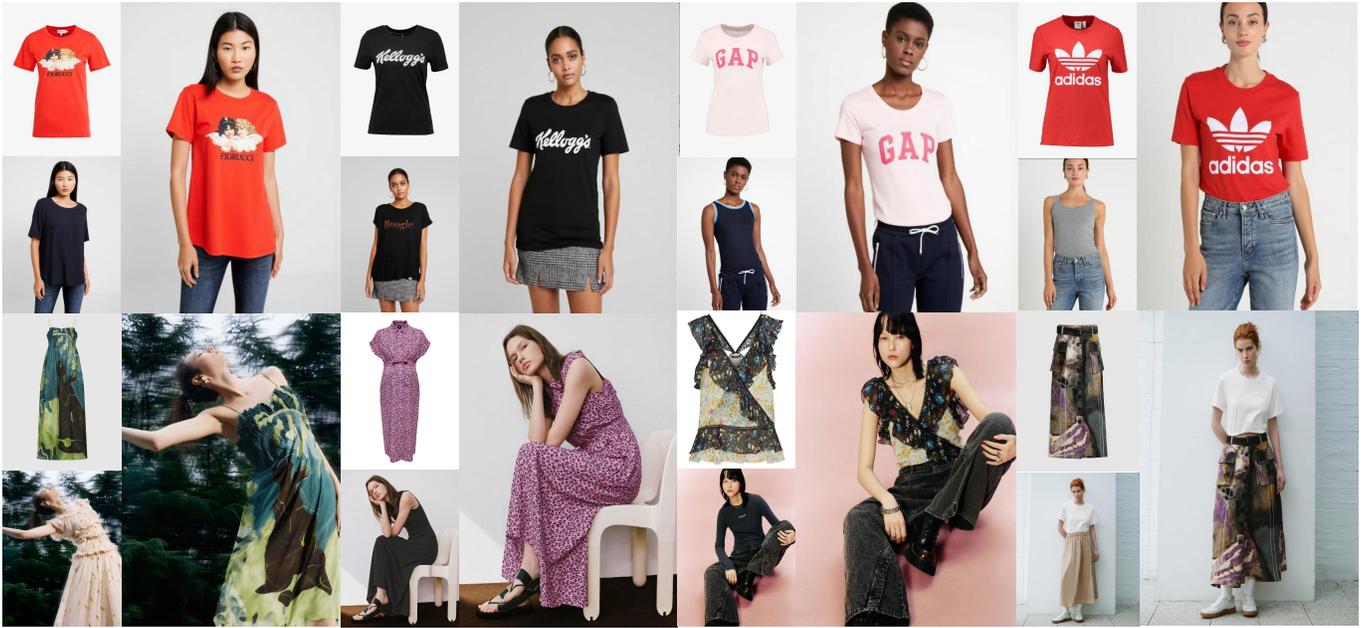


Fig. 1. The ITVTON model is utilized to create virtual try-on images derived from the VITON-HD [1] dataset (first row) and the filtered IGPair [2] dataset (second row). For optimal visual evaluation, it is recommended to examine the images in their enlarged form.

objectives and face challenges in preserving texture details and managing complex backgrounds.

Recently, diffusion-based methods [10] have leveraged pre-trained diffusion models to overcome the limitations associated with warping. For example, LADI-VTON [11] and DCI-VTON [12] explicitly distort garments to align them with the human body, subsequently employing diffusion models to integrate the garments with the body. TryOnDiffusion [13] introduces an architecture with two parallel u-shaped networks (UNet) [14] and demonstrates diffusion-based virtual try-on capabilities by training on a large-scale dataset. Similarly, OOTDiffusion [15] and IDM-VTON [16] employ parallel UNets for clothing feature extraction, enhancing integration through self-attention mechanisms. StableVITON [17] incorporates a zero-initialization cross-attention block to inject intermediate features from a spatial encoder into a UNet decoder. Paint-by-Example [18] trains an image-conditional diffusion model in a self-supervised manner, enabling fine-grained image control. Subsequent works conceptualize virtual try-on as an example-based image-painting problem. These approaches fine-tune restoration diffusion models using virtual try-on datasets to produce high-quality images. CatVTON [19] similarly fine-tunes the restoration diffusion model but eliminates the text encoder and cross-attention block, training only the self-attention block to create a lightweight network structure. IC-LoRA [20] posits that the text-to-image diffusion transformer model [21] is inherently contextually generative, enabling high-quality image generation through integrated captioning of multiple images using small datasets (e.g., 20–100 samples) with task-specific LoRA [22] tuning. In this paper, we achieve high-quality virtual try-on images by fine-tuning a

state-of-the-art restoration model using spatially spliced inputs and multi-image integrated captioning, while training only the attention parameters within the Single-DiT block.

III. PROPOSED METHOD

A. Background on Diffusion Modeling

Stable Diffusion. Stable Diffusion [23] is one of the most commonly-used latent diffusion models. Stable Diffusion employs a variational autoencoder (VAE) that consists of an encoder \mathcal{E} and a decoder \mathcal{D} to enable image representations in the latent space. And a UNet ϵ_θ is trained to denoise a Gaussian noise ϵ with a conditioning input encoded by a CLIP [24] text encoder τ_θ . Given an image \mathbf{x} and a text prompt \mathbf{y} , the training of the denoising UNet ϵ_θ is performed by minimizing the following loss function:

$$\mathcal{L}_{LDM} = \mathbb{E}_{\mathcal{E}(\mathbf{x}), \mathbf{y}, \epsilon \sim \mathcal{N}(0,1), t} [\|\epsilon - \epsilon_\theta(\mathbf{z}_t, t, \tau_\theta(\mathbf{y}))\|_2^2], \quad (1)$$

where $t \in \{1, \dots, T\}$ denotes the time step of the forward diffusion process, and \mathbf{z}_t is the encoded image $\mathcal{E}(\mathbf{x})$ with the added Gaussian noise $\epsilon \sim \mathcal{N}(0,1)$. The conditional input $\tau_\theta(\mathbf{y})$ is integrated into the denoising U-Net via a cross-attention mechanism.

FLUX. FLUX is a type of diffusion model, and its primary distinction from the stable diffusion model lies in its use of a transformer instead of a denoising UNet. FLUX incorporates two text encoders, CLIP ViT-L and T5-XXL [25] Encoder, along with a transformer. The transformer is highly effective in generating images and comprises a 19-layer multimodal diffusion transformer (MM-DiT) block structure and a 38-layer single diffusion transformer (Single-DiT) block structure.

In addition, FLUX employs a rectified flow (RF) [26] sampling method for image generation. The core concept of

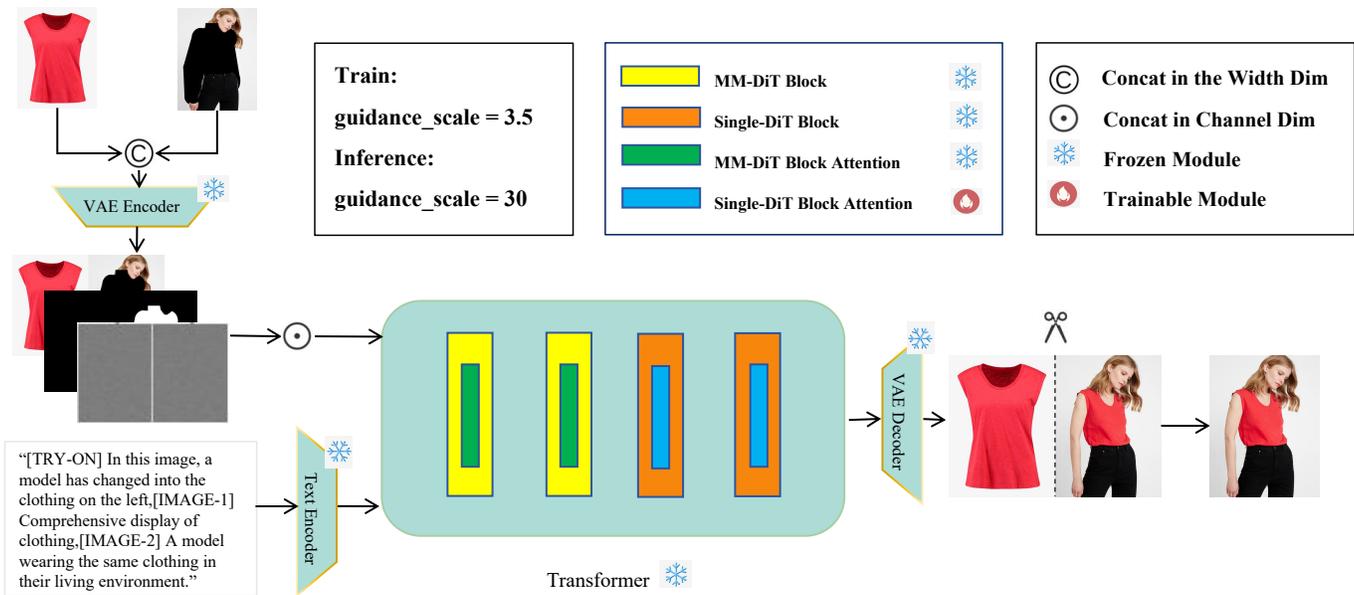


Fig. 2. Overview of ITVTON. Our method achieves high-quality virtual try-on by concatenating clothing images with target person images in the spatial dimension and providing contextual text, separated by label text for a concise summary description (as illustrated in the figure). During training, only the attention parameters within the Single-DiT block are learnable, resulting in a simple yet efficient try-on network.

rectified flow technology involves the introduction of a flow transformation technique, wherein the forward noise addition process is defined as a rectified flow. This approach linearly connects the data distribution with the noise distribution, thereby simplifying the model’s training and inference processes and enhancing generation efficiency.

B. ITVTON

ITVTON directly leverages the FLUX-Fill repair model for diffusion-based virtual fitting tasks. This section outlines the components and principles of our streamlined network (section 1) and investigates parameter-efficient training strategies (section 2).

1) *Simple Networks:* ITVTON employs a simple network architecture that retains the original model structure, modifying only the input to ensure efficient operation without compromising performance.

Given previous approaches, the primary objective has been to achieve detailed alignment between clothing and models. For instance, LADI-VTON [11] initially warps the clothing to match the model’s pose, followed by using a diffusion model to blend the warped clothing with the model. IDM-VTON [16] utilizes parallel U-Nets to extract clothing features and injects attention mechanisms into the generative U-Net to maintain alignment during virtual try-on. However, these methods lack sufficient accuracy or necessitate the incorporation of additional modules for their implementation. Therefore, we directly utilize the original three modules:

VAE. The VAE encoder transforms pixel-level images into a latent representation to optimize computational efficiency. Compared to traditional VAEs, the FLUX series VAE outputs latent features. Before these features are fed into the

diffusion model, a patching operation is performed, stacking 2×2 pixel blocks directly along the channel dimension. This method preserves the original resolution of each pixel block and prevents the loss of critical image feature information. Consequently, we concatenate the clothing and model features along the width dimension, leveraging the robust capabilities of the VAE while ensuring alignment between inputs.

Text Encoder. Two text encoders process textual prompts as input, enabling the generation of more controllable, high-quality images. Inspired by IC-LoRA [20], multi-image integrated text inputs have a positive impact on virtual try-on tasks. Therefore, we utilize multi-image integrated text (text format shown in Fig. 2) as input, enhancing the controllability and quality of the generated images.

Transformer. The transformer synthesizes the final try-on image by integrating features from the latent space. It accepts concatenated clothing and character features, along with noise and masks as image inputs, and receives multi-image integrated titles as text inputs. By seamlessly integrating all this information, the transformer facilitates effective learning and synthesis of the final try-on image.

Ultimately, we achieve a simple and efficient network architecture. This network does not require additional module assistance and can effectively accomplish the try-on task using only the inherent functionalities of the model itself.

2) *Parameter-Efficient Training:* The pre-trained FLUX-Fill model already possesses a robust and comprehensive capability for generating masked areas. An untrained model using the same input method can achieve notable try-on effects, but fine-tuning is necessary to promote precise interactions between human and clothing features.

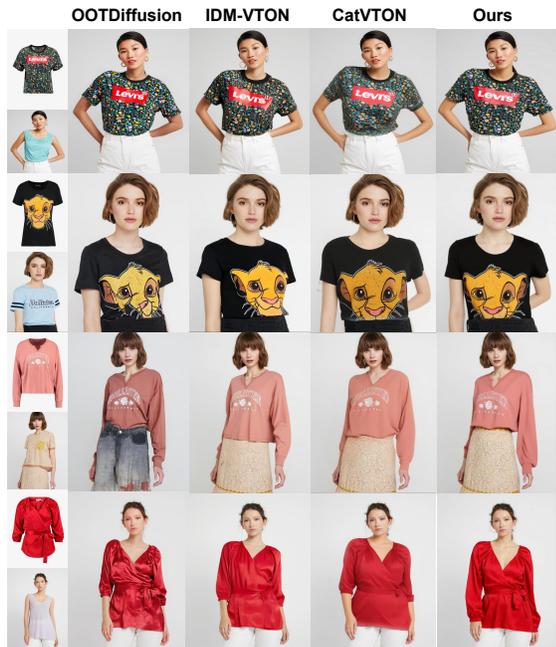


Fig. 3. Qualitative Evaluation on the VITON-HD [1] Dataset. ITVTON exhibits significant advantages in processing complex patterns and text. We recommend zooming in for a detailed inspection.

The converter component of FLUX consists of MM-DiT block and Single-DiT block structures. The MM-DiT block facilitates the fusion of two modal information streams, which are then fed into the Single-DiT block to deepen the model’s architecture and enhance its overall learning capacity. Additionally, a parallel attention mechanism is incorporated within the Single-DiT block to further optimize the model’s performance.

We posit that attention mechanisms are crucial for achieving high-quality results and conducted experiments to identify the most relevant modules. Specifically, we set the trainable components as all attention layers, the attention layer within the MM-DiT block, and the attention layer within the Single-DiT block. Experimental results indicate that training the attention layer in the Single-DiT block is more efficient and yields superior reasoning outcomes.

Therefore, we adopt a parameter-efficient training strategy to fine-tune the attention layer within the Single-DiT block, which comprises 1076.2M parameters. Additionally, during the training process, we employ a 10% probability of dropping the multi-image integrated text prompts to enhance the model’s generalization ability.

IV. EXPERIMENT AND ANALYSIS

A. Datasets

Our experiments utilized two publicly available fashion datasets: VITON-HD [1] and IGPair [2]. The VITON-HD [1] dataset comprises 13,679 image pairs, including 11,647 pairs in the training set and 2,032 pairs in the test set. Each pair consists of a frontal upper-body image of a person paired

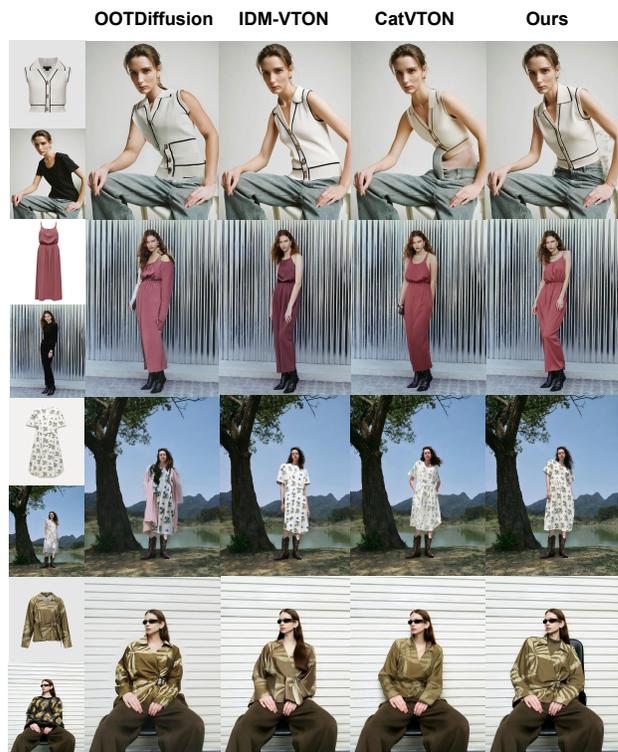


Fig. 4. Qualitative comparison in field scenarios demonstrates that our method generates more natural try-on effects, even in complex scenes and with varied postures.



Fig. 5. Comparison of the effects at different guidance scale settings. During training, a guidance scale of 3.5 yielded models that produced clearer and more accurate results than those generated with a guidance scale of 30.

with an upper-body clothing image, both at a resolution of 768×1024 . The IGPair [2] dataset contains 324,857 image pairs with clothing classified into 18 categories encompassing a broad spectrum of styles, such as casual, formal, sports, fashion, and vintage. For each apparel item, 2 to 5 model images taken from various angles are provided, with a resolution

TABLE I

Methods	<i>SSIM</i> \uparrow	<i>FID</i> \downarrow	<i>KID</i> \downarrow	<i>LPIPS</i> \downarrow
OOTDiffusion [15]	0.8187	9.305	4.086	0.0876
IDM-VTON [16]	0.8499	5.762	0.732	0.0603
CatVTON [19]	<u>0.8704</u>	<u>5.425</u>	<u>0.411</u>	<u>0.0565</u>
ITVTON(Ours)	0.8734	5.064	0.264	0.0530

Quantitative Comparison with Other Methods. We compare metric performance in paired settings on the VITON-HD [1] dataset. The best and second-best results are indicated in bold and underlined, respectively.

of 1024×1280 . From these, we meticulously selected 10,381 image pairs featuring the same model in multiple poses while wearing the same attire. Of these pairs, 10,257 are allocated for training purposes, with the remainder reserved for testing. We employ OpenPose [27–29] and HumanParsing [30] to generate garment-independent masks and uniformly adjust the resolution of all images to 768×1024 pixels.

B. Implementation Details

We trained our models using the inpainting version of the pre-trained FLUX-Fill. To ensure fair comparisons, separate models were trained for the VITON-HD [1] and IGPair [2] datasets, evaluated on their respective test sets as per prior methodologies. Each model was trained with identical hyperparameters: 36,000 steps at a resolution of 384×512 using the AdamW 8-bit optimizer, a batch size of 4, and a constant learning rate of $1e-5$. All experiments were conducted on a single NVIDIA A100 GPU.

C. Qualitative Comparison

We evaluated the visual quality using the VITON-HD [1] dataset. As shown in Fig. 3, it demonstrates the try-on effects of various styles and patterns from the dataset, and compares the try-on variations across different occupations. While other methods encounter issues such as color discrepancies and inconsistent details during virtual try-ons, ITVTON delivers more realistic and detailed outcomes owing to its simplicity and efficiency.

Additionally, we assess ITVTON on selected IGPair [2] datasets and benchmark it against other diffusion-based VTON methods. As shown in Fig. 4, ITVTON demonstrates its capability to accurately recognize and model the shape of complex garments, such as a sheath dress, and seamlessly integrate them with human figures. Notably, it can generate high-quality images even in complex poses (e.g., sitting on the chair). In intricate field scenes, ITVTON effectively handles the integration of backgrounds with clothing, maintaining consistency and realism across diverse and challenging environments.

D. Effectiveness Comparison:

Regarding the paired try-on outcomes of the test dataset, we employed four widely-used metrics to evaluate the similarity between synthetic and real images: structural similarity index (SSIM) [31], learned perceptual image patch similarity

(LPIPS) [32], frechet inception distance (FID) [33], and kernel inception distance (KID) [34].

We conducted a quantitative evaluation of several state-of-the-art open-source virtual try-on methods using the VITON-HD [1] dataset. Comparisons were made in paired settings to assess the similarity between the synthesized results and ground truth, as well as the model’s generalization performance. The results, presented in Table I, show that our method outperforms all others across all metrics. This demonstrates the efficacy of our simplified network architecture and parameter fine-tuning in virtual try-on tasks.

E. Ablation Studies

We conducted ablation studies to examine the impact of various factors: 1) different trainable modules, 2) the inclusion or exclusion of multi-image integrated text cues during training, and 3) the influence of guidance scales on fitting outcomes. For comparison, different versions of the model were trained using the VITON-HD [1] dataset.

Trainable Modules. We evaluated three trainable modules: 1) All Attention Parameters, 2) Attention Parameters in MM-DiT block and 3) Attention Parameters in Single-DiT block, with the number of trainable parameters decreasing in order. Table II shows the evaluation results on the VITON-HD [1] dataset. We observe that training the attention parameters in Single-DiT block works best.

Training with or without multi-image integrated caption cues. Ordinary caption, such as "A model is wearing a top," follow the multi-image integrated text format illustrated in Fig. 2. Two types of text inputs are used for training. Table III demonstrates that incorporating multi-image integrated text during training yields better results.

As shown in Fig. 5, it illustrates that using a guidance scale of 30 for both training and reasoning leads to blurred patterns and details on the garments. Conversely, when a guidance scale of 3.5 is used for training and 30 for reasoning, the patterns and details on the garments are significantly better preserved.

F. Constraints and Social Impacts

Although our model delivers high-quality fitting results, it is subject to certain limitations. The accuracy of the fitting process heavily depends on the precision of the input masks. Inaccurate masks can severely degrade the quality of the generated outputs. Additionally, features of the character within masked regions, such as hairstyles, jewelry, muscle contours, or tattoos, may be altered or misrepresented during the synthesis process.

These constraints highlight the need for accurate preprocessing and further model refinement to ensure consistent, reliable outputs. From a societal perspective, our approach must be deployed responsibly to prevent misuse, such as creating deceptive or unethical modifications to personal images.

V. CONCLUSION

In this paper, we introduce ITVTON, a simple yet efficient virtual try-on diffusion model comprising 1076.2M trainable

TABLE II

Trainable Module	<i>SSIM</i> \uparrow	<i>FID</i> \downarrow	<i>KID</i> \downarrow	<i>LPIPS</i> \downarrow	Trainable Params(M)
All Attention	<u>0.8702</u>	<u>5.155</u>	0.250	<u>0.0557</u>	1611.23
MM-DiT Block Attention	0.8641	5.438	0.332	0.0578	1434.93
Single-DiT Block Attention	0.8734	5.064	<u>0.264</u>	0.0530	1076.2

Ablation results of different trainable module on VITON-HD [1] dataset. Taken together, the results indicate that training the attention parameters within the Single-DiT block achieves the optimal performance.

TABLE III

Trainable Text	<i>SSIM</i> \uparrow	<i>FID</i> \downarrow	<i>KID</i> \downarrow	<i>LPIPS</i> \downarrow
Ordinary Text	0.8737	5.169	0.379	0.0529
Integrated Text	0.8734	5.064	0.264	0.0530

Ablation results trained on different texts on the VITON-HD [1] dataset. When trained with integrated text, the model demonstrates superior FID and KID scores. In contrast, when trained with ordinary text alone, the improvements in SSIM and LPIPS are only marginally better. Therefore, it can be concluded that training with integrated text yields more effective results.

parameters. ITVTON merges clothing and character images along the width dimension. Based on the multi-image integrated text, only fine-tuning is required to generate natural model try-on images. Extensive experiments demonstrate that ITVTON achieves superior qualitative and quantitative results compared to state-of-the-art methods, while maintaining a streamlined and efficient architecture. These findings indicate that ITVTON holds significant potential for broad applications in virtual try-on technology.

REFERENCES

- [1] S. Choi, S. Park, M. Lee, and J. Choo, "Viton-hd: High-resolution virtual try-on via misalignment-aware normalization," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2021, pp. 14 131–14 140.
- [2] F. Shen, X. Jiang, X. He, H. Ye, C. Wang, X. Du, Z. Li, and J. Tang, "Imagdressing-v1: Customizable virtual dressing," 2024. [Online]. Available: <https://arxiv.org/abs/2407.12705>
- [3] C.-Y. Chen, Y.-C. Chen, H.-H. Shuai, and W.-H. Cheng, "Size does matter: Size-aware virtual try-on via clothing-oriented transformation try-on network," in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2023, pp. 7513–7522.
- [4] H. Dong, X. Liang, X. Shen, B. Wang, H. Lai, J. Zhu, Z. Hu, and J. Yin, "Towards multi-pose guided virtual try-on network," in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019.
- [5] B. Gao, J. Ren, F. Shen, M. Wei, and Z. Huang, "Exploring warping-guided features via adaptive latent diffusion model for virtual try-on," in *2024 IEEE International Conference on Multimedia and Expo (ICME)*. IEEE, 2024, pp. 1–6.
- [6] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio, "Generative adversarial networks," *Commun. ACM*, vol. 63, no. 11, p. 139–144, Oct. 2020. [Online]. Available: <https://doi.org/10.1145/3422622>
- [7] F. Shen, H. Ye, S. Liu, J. Zhang, C. Wang, X. Han, and W. Yang, "Boosting consistency in story visualization with rich-contextual conditional diffusion models," *arXiv preprint arXiv:2407.02482*, 2024.
- [8] F. Shen, H. Ye, J. Zhang, C. Wang, X. Han, and W. Yang, "Advancing pose-guided image synthesis with progressive conditional diffusion models," *arXiv preprint arXiv:2310.06313*, 2023.
- [9] Z. Xie, Z. Huang, X. Dong, F. Zhao, H. Dong, X. Zhang, F. Zhu, and X. Liang, "Gp-vton: Towards general purpose virtual try-on via collaborative local-flow global-parsing learning," 2023. [Online]. Available: <https://arxiv.org/abs/2303.13756>
- [10] F. Shen and J. Tang, "Imagpose: A unified conditional framework for pose-guided person generation," in *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [11] D. Morelli, A. Baldrati, G. Cartella, M. Cornia, M. Bertini, and R. Cucchiara, "Ladi-vton: Latent diffusion textual-inversion enhanced virtual try-on," in *Proceedings of the 31st ACM International Conference on Multimedia*, ser. MM '23. New York, NY, USA: Association for Computing Machinery, 2023, p. 8580–8589. [Online]. Available: <https://doi.org/10.1145/3581783.3612137>
- [12] J. Gou, S. Sun, J. Zhang, J. Si, C. Qian, and L. Zhang, "Taming the power of diffusion models for high-quality virtual try-on with appearance flow," in *Proceedings of the 31st ACM International Conference on Multimedia*, ser. MM '23. New York, NY, USA: Association for Computing Machinery, 2023, p. 7599–7607. [Online]. Available: <https://doi.org/10.1145/3581783.3612255>
- [13] L. Zhu, D. Yang, T. Zhu, F. Reda, W. Chan, C. Saharia, M. Norouzi, and I. Kemelmacher-Shlizerman, "Tryondiffusion: A tale of two unets," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2023, pp. 4606–4615.
- [14] O. Ronneberger, P. Fischer, and T. Brox, "U-net: Convolutional networks for biomedical image segmentation," in *Medical Image Computing and Computer-Assisted Intervention – MICCAI 2015*, N. Navab, J. Hornegger, W. M. Wells, and A. F. Frangi, Eds. Cham: Springer International Publishing, 2015, pp. 234–241.
- [15] Y. Xu, T. Gu, W. Chen, and C. Chen, "Ootdiffusion: Outfitting fusion based latent diffusion for controllable virtual try-on," 2024. [Online]. Available: <https://arxiv.org/abs/2403.01779>
- [16] Y. Choi, S. Kwak, K. Lee, H. Choi, and J. Shin, "Improving diffusion models for authentic virtual try-on in the wild," 2024. [Online]. Available: <https://arxiv.org/abs/2403.05139>
- [17] J. Kim, G. Gu, M. Park, S. Park, and J. Choo, "Stableviton: Learning semantic correspondence with latent diffusion model for virtual try-on," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2024, pp. 8176–8185.
- [18] B. Yang, S. Gu, B. Zhang, T. Zhang, X. Chen, X. Sun, D. Chen, and F. Wen, "Paint by example: Exemplar-based image editing with diffusion models," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*,

- June 2023, pp. 18 381–18 391.
- [19] Z. Chong, X. Dong, H. Li, S. Zhang, W. Zhang, X. Zhang, H. Zhao, and X. Liang, “Catvton: Concatenation is all you need for virtual try-on with diffusion models,” 2024. [Online]. Available: <https://arxiv.org/abs/2407.15886>
- [20] L. Huang, W. Wang, Z.-F. Wu, Y. Shi, H. Dou, C. Liang, Y. Feng, Y. Liu, and J. Zhou, “In-context lora for diffusion transformers,” 2024. [Online]. Available: <https://arxiv.org/abs/2410.23775>
- [21] W. Peebles and S. Xie, “Scalable diffusion models with transformers,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2023, pp. 4195–4205.
- [22] E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, “Lora: Low-rank adaptation of large language models,” 2021. [Online]. Available: <https://arxiv.org/abs/2106.09685>
- [23] R. Rombach, A. Blattmann, D. Lorenz, P. Esser, and B. Ommer, “High-resolution image synthesis with latent diffusion models,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2022, pp. 10 684–10 695.
- [24] A. Radford, J. W. Kim, C. Hallacy, A. Ramesh, G. Goh, S. Agarwal, G. Sastry, A. Askell, P. Mishkin, J. Clark, G. Krueger, and I. Sutskever, “Learning transferable visual models from natural language supervision,” in *Proceedings of the 38th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, M. Meila and T. Zhang, Eds., vol. 139. PMLR, 18–24 Jul 2021, pp. 8748–8763. [Online]. Available: <https://proceedings.mlr.press/v139/radford21a.html>
- [25] C. Raffel, N. Shazeer, A. Roberts, K. Lee, S. Narang, M. Matena, Y. Zhou, W. Li, and P. J. Liu, “Exploring the limits of transfer learning with a unified text-to-text transformer,” *Journal of Machine Learning Research*, vol. 21, no. 140, pp. 1–67, 2020. [Online]. Available: <http://jmlr.org/papers/v21/20-074.html>
- [26] P. Esser, S. Kulal, A. Blattmann, R. Entezari, J. Müller, H. Saini, Y. Levi, D. Lorenz, A. Sauer, F. Boesel, D. Podell, T. Dockhorn, Z. English, and R. Rombach, “Scaling rectified flow transformers for high-resolution image synthesis,” in *Forty-first International Conference on Machine Learning*, 2024. [Online]. Available: <https://openreview.net/forum?id=FPnUhsQJ5B>
- [27] Z. Cao, T. Simon, S.-E. Wei, and Y. Sheikh, “Realtime multi-person 2d pose estimation using part affinity fields,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, July 2017.
- [28] T. Simon, H. Joo, I. Matthews, and Y. Sheikh, “Hand keypoint detection in single images using multiview bootstrapping,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, July 2017.
- [29] S.-E. Wei, V. Ramakrishna, T. Kanade, and Y. Sheikh, “Convolutional pose machines,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2016.
- [30] P. Li, Y. Xu, Y. Wei, and Y. Yang, “Self-correction for human parsing,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 44, no. 6, pp. 3260–3271, 2022.
- [31] Z. Wang, A. Bovik, H. Sheikh, and E. Simoncelli, “Image quality assessment: from error visibility to structural similarity,” *IEEE Transactions on Image Processing*, vol. 13, no. 4, pp. 600–612, 2004.
- [32] R. Zhang, P. Isola, A. A. Efros, E. Shechtman, and O. Wang, “The unreasonable effectiveness of deep features as a perceptual metric,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2018.
- [33] M. Heusel, H. Ramsauer, T. Unterthiner, B. Nessler, and S. Hochreiter, “Gans trained by a two time-scale update rule converge to a local nash equilibrium,” in *Advances in Neural Information Processing Systems*, I. Guyon, U. V. Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett, Eds., vol. 30. Curran Associates, Inc., 2017. [Online]. Available: https://proceedings.neurips.cc/paper_files/paper/2017/file/8a1d694707eb0fefe65871369074926d-Paper.pdf
- [34] M. Bińkowski, D. J. Sutherland, M. Arbel, and A. Gretton, “Demystifying mmd gans,” 2021. [Online]. Available: <https://arxiv.org/abs/1801.01401>