

On Oblivious Transfer Capacity of Noisy Multiple Access Channel

Hadi Aghaee and Christian Deppe

Institute for Communications Technology, Technische Universität Braunschweig
Email: (hadi.ghaee, christian.deppe)@tu-bs.de

Abstract

This work investigates the problem of Oblivious Transfer (OT) over a noisy Multiple Access Channel (MAC) involving two non-colluding senders and a single receiver. The channel model is characterized by correlations among the parties, with the parties assumed to be either honest-but-curious or, in the receiver's case, potentially malicious. We propose a multiparty protocol for honest-but-curious parties where the general MAC is reduced to a certain correlation. In scenarios where the receiver is malicious, the protocol achieves an achievable rate region.

Index Terms

Oblivious transfer, Multiple access channel, Bounds for OT capacity.

I. INTRODUCTION

Oblivious Transfer (OT) is a primitive in cryptography in the domain of secure multiparty computations based on the noisy property of communication channels. The simplest model of OT is called 1-out-of-2 OT, wherein a sender (Alice) aims to send two separate messages over a noisy channel to a receiver (Bob) while Bob has to choose one of them. The unselected message should be kept hidden from Bob, and Alice should be unaware of the message selected by Bob. A more general case is 1-out-of- m OT, wherein Alice aims to send m separate messages (strings of bits), and Bob chooses the legitimate message.

OT was first introduced by Rabin [1]. In Rabin's form, Alice sends a message to Bob with the probability of $\frac{1}{2}$ while she remains oblivious to whether or not Bob received the message. This model is called the "Erasure Channel" with the erasure probability equal $\frac{1}{2}$. After that, a basic OT protocol was introduced by Even, Goldreich, and Lempel (EGL) [2]. It is well-known that achieving multi-party security (as a basic model) in noise-free communication is impossible [3]. It has been shown that achieving two-party secure communication over a noiseless channel is possible by randomness sharing [4, 5]. Shared randomness consists of random variables known to all communicating parties but independent of the message being transmitted [6].

Up to now, some primary channels have been studied from the perspective of secure two-party computations obtained from noise. The binary symmetric channel (BSC) has made a more outstanding contribution [7–9]. However, all the cryptogates and channels that can be used for obtaining OT are characterized by Kilian in the case of passive adversaries [10]. It should be mentioned that most of the research works in this field have been done from the perspective of the basics of cryptography, and there are a few sources that study the problem of OT from the information theory point of view. However, the OT capacity of noisy channels is generally unknown. It is known to be non-negligible if the players (sometimes we call senders and receivers as players/parties) are committed to the protocol and implement it faithfully, not turning away from additional information (*honest-but-curious players*). Still, in the case of fully malicious players (active adversaries), non-zero rates have not ever been achieved [11].

As the first step, Nascimento and Winter study the OT capacity of noisy correlations [12], wherein they characterized which noisy channels and distributions are useful for obtaining OT. In [5], they showed that for honest-but-curious players, the OT capacity of noisy resources is positive by achieving a lower bound that coincides with the upper bound of [4]. The OT capacity of the binary erasure channel (BEC) is studied in [13], in which the OT capacity is $C_{OT} = \frac{1}{2}$ with erasure probability $\frac{1}{2}$ that is a property of the channel/system model in the case of honest-but-curious players and a lower bound is calculated in the case of fully malicious players. Ahlswede and Csiszar achieved a lower and upper bound on the OT capacity of noisy channels [4]. The upper bound is general and valid for every noisy channel with honest-but-curious players, while the lower bound is just valid for a special reduced version of a DMC, wherein the channel outputs are separable into two distinct sets: fully erased bits and fully received bits. It can be easily seen that the upper bound in [4] and the lower bound in [5] for a special reduced version coincide. An improved upper bound compared to [4] is proved in [15] based on a monotonicity property of tension region in the channel model.

In this work, we aim to study multi-party secure computations. In other words, bounds for the OT capacity of the two-user Multiple Access Channel (MAC) as one of the primary network models from the perspective of network information theory are studied. The MAC refers to a communication scenario where multiple users send information over a shared channel to a receiver. This setup is typical in communication systems, such as cellular networks, where several devices need to communicate with a base station or an access point. We consider the following system model: Two senders, both send two independent

messages (two strings) over a noisy channel to a receiver. The receiver then has to choose only one string from each sender, and the senders are assumed to be legitimate relative to each other (*non-colluding senders*). This means that there is no criterion of secrecy between them.

This document is organized as follows: Some seminal definitions are presented in Section II. Section III is dedicated to related works and known results. The system model and main results are presented in Sections IV and V, respectively. We have a brief discussion in Section VI.

II. PRELIMINARIES

We use the well-known notation of information theory in addition to the following notations: We use capital letters (e.g., X) to denote random variables, with the specific alphabet \mathcal{X} defined by the context in which X is used. Lowercase letters (e.g., x) represent realizations of the corresponding random variables. Bold uppercase letters (e.g., \mathbf{X}) denote random n -tuples.

1. Notation for Tuples

- Suppose $\mathcal{A} \subset \mathbb{N}$. Then (\mathcal{A}) represents the tuple formed by arranging the elements of \mathcal{A} in increasing order:

$$(\mathcal{A}) = (a_i | a_i \in \mathcal{A}, i = 1, 2, \dots, |\mathcal{A}|), \quad \text{with } a_i < a_{i+1} \text{ for } i \geq 1$$

Example: If $\mathcal{A} = \{1, 3, 2, 9, 4\}$, then $(\mathcal{A}) = (1, 2, 3, 4, 9)$.

- For two sets $\mathcal{A} \subset \{1, 2, \dots, k\}$, and \mathbf{X} , we have:

$$\mathbf{X}|_{\mathcal{A}} = \mathbf{X}|_{(\mathcal{A})} = \{x_i | i \in \mathcal{A}\}.$$

Example: If $\mathbf{X} = (a, b, c, d, e, f, g)$ and $\mathcal{A} = \{6, 3, 1\}$, then $\mathbf{X}|_{\mathcal{A}} = (a, c, f)$.

- When a member i is removed from a set \mathcal{F} , we denote the case by:

$$\mathcal{F} \setminus \{i\}.$$

Example: Given $\mathcal{F} = \{a, b, c, d, e\}$, we have: $\{a, b, d, e\} = \mathcal{F} \setminus \{c\}$.

2. Markov Chains

Random variables X, Y, Z form a Markov chain $X - Y - Z$ when X and Z are conditionally independent given Y . That is, if $X \in \mathcal{X}$, $Y \in \mathcal{Y}$, and $Z \in \mathcal{Z}$, then $X - Y - Z$ implies:

$$\forall x \in \mathcal{X}, \forall y \in \mathcal{Y}, \forall z \in \mathcal{Z} : P_{X,Z|Y}(x, z|y) = P_{X|Y}(x|y) \cdot P_{Z|Y}(z|y)$$

3. Erasure Count Function

Given a sequence $y \in \{0, 1, e\}^n$, where e indicates an erasure. We denote the erasure count function by:

$$\begin{aligned} \Delta(y^n) &= |\{i \in \{1, 2, \dots, n\} : y_i = e\}|, \\ \overline{\Delta}(y^n) &= |\{i \in \{1, 2, \dots, n\} : y_i \neq e\}|, \end{aligned}$$

where y_i is a realization of Y .

4. Information Theoretic Definitions

The min-entropy of a discrete random variable X is

$$H_{\infty}(X) = \min_x \log \left(\frac{1}{P_X(x)} \right).$$

Its conditional version is

$$H_{\infty}(X|Y) = \min_y H_{\infty}(X|Y = y).$$

The zero-entropy and its conditional version are defined as

$$H_0(X) = \log |\{x \in \mathcal{X} : P_X(x) > 0\}|,$$

and

$$H_0(X|Y) = \max_y H_0(X|Y = y).$$

The statistical distance over two probability distributions P_X and P_Y , defined over the same domain \mathcal{X} , is

$$\|P_X - P_Y\| = \frac{1}{2} \sum_{x \in \mathcal{X}} |P_X(x) - P_Y(x)|.$$

For $\epsilon \geq 0$, the ϵ -smooth min entropy is

$$H_\infty^\epsilon(X) = \max_{X': \|P_{X'} - P_X\| \leq \epsilon} H_\infty(X').$$

Similarly,

$$H_\infty^\epsilon(X|Y) = \max_{X'Y': \|P_{X'Y'} - P_{XY}\| \leq \epsilon} H_\infty(X'|Y').$$

Let P_{UVW} be a probability distribution over $\mathcal{U} \times \mathcal{V} \times \mathcal{W}$. For any $\epsilon > 0$ and $\epsilon' > 0$ it holds that [22]:

$$H_\infty^{\epsilon+\epsilon'}(U|V, W) \geq H_\infty(U|W) + H_\infty^\epsilon(V|U, W) - H_0(V|W) - \log\left(\frac{1}{\epsilon'}\right). \quad (1)$$

Also, $H_\infty^\epsilon(U, V|W)$ can be bounded from below and above as [22]:

$$H_\infty^{\epsilon+\epsilon'}(U|V, W) + H_0(V|W) + \log\left(\frac{1}{\epsilon'}\right) \leq H_\infty^\epsilon(U, V|W) \leq H_\infty(U|W) + H_\infty^\epsilon(V|U, W). \quad (2)$$

Combining (1) and (2), concludes:

$$H_\infty^\epsilon(U, V|W) \geq H_\infty(U|W) + H_\infty^\epsilon(V|U, W). \quad (3)$$

Lemma 1. For any random variable such U and V , we have:

$$H_\infty^\epsilon(U|V) - \log\left(\frac{1}{\epsilon}\right) \leq H_\infty(U|V) \leq H_\infty^\epsilon(U|V).$$

Proof. In Appendix A. □

Definition 1. Given a random variable X with alphabet \mathcal{X} and probability distribution p_X , the *Rényi entropy of order two* of a random variable X is given by:

$$H_2(X) = \log_2\left(\frac{1}{P_c(X)}\right).$$

where the *collision probability* $P_c(X)$ is the probability that two independent trials of X produce the same outcome. It is defined as:

$$P_c(X) = \sum_{x \in \mathcal{X}} p_X(x)^2.$$

For a given event \mathcal{E} , the conditional distribution $p_{X|\mathcal{E}}$ is employed to define the *conditional collision probability* $P_c(X|\mathcal{E})$ and the *conditional Rényi entropy of order 2*, $H_2(X|\mathcal{E})$.

Lemma 2. [22, Corollary 2.12] Let $P_{X^n Y^n}$ be independent and identically distributed (i.i.d.) according to P_{XY} over the alphabet $\mathcal{X}^n \times \mathcal{Y}^n$. For any $\epsilon > 0$, we have

$$H_\infty^\epsilon(X^n|Y^n) \geq nH(X|Y) - 4\sqrt{n \log(1/\epsilon)} \log|\mathcal{X}|.$$

Definition 2. A function $h : \mathcal{R} \times \mathcal{X} \rightarrow \{0, 1\}^n$ is a *two-universal hash function* [23] if, for any $x_0 \neq x_1 \in \mathcal{X}$ and for R uniformly distributed over \mathcal{R} , it holds that

$$\Pr(h(R, x_0) = h(R, x_1)) \leq 2^{-n}. \quad (4)$$

Similarly, given two independent hash functions $h_1 : \mathcal{R} \times \mathcal{X} \rightarrow \{0, 1\}^n$ and $h_2 : \mathcal{T} \times \mathcal{Y} \rightarrow \{0, 1\}^m$, for any $x_0 \neq x_1 \in \mathcal{X}$, $y_0 \neq y_1 \in \mathcal{Y}$, and for R, T uniformly distributed over \mathcal{R} and \mathcal{T} , respectively, it holds that

$$\Pr(h_1(R, x_0) = h_1(R, x_1) \cap h_2(T, y_0) = h_2(T, y_1)) \leq 2^{-(n+m)}. \quad (5)$$

An example of a two-universal class is the set of all linear mappings from $\{0, 1\}^n$ to $\{0, 1\}^r$.

A random variable X over \mathcal{X} is said to be ϵ -close to uniform with respect to Z over \mathcal{Z} if

$$\|P_{XZ} - (P_U \times P_Z)\| \leq \epsilon,$$

where U is uniformly distributed over \mathcal{X} .

Lemma 3. [5, 24] (Distributed leftover hash lemma) Let $\epsilon > 0$, $\epsilon' \geq 0$, and let $g_i : \mathcal{T}_i \times \mathcal{X}_i \rightarrow \{0, 1\}^{n_i}$ for $1 \leq i \leq m$ be two-universal hash functions. Assume random variables X_i over \mathcal{X}_i , $1 \leq i \leq m$, where for any subset $\mathcal{S} \subseteq \{1, 2, \dots, m\}$, and $\mathbf{X}|_{\mathcal{S}} = X_{\mathcal{S}(1)}, X_{\mathcal{S}(2)}, \dots, X_{\mathcal{S}(|\mathcal{S}|)}$, we have

$$H_\infty^{\epsilon'}(\mathbf{X}|_{\mathcal{S}}|Z) \geq \sum_{i \in \mathcal{S}} n_i + 2 \log(1/\epsilon),$$

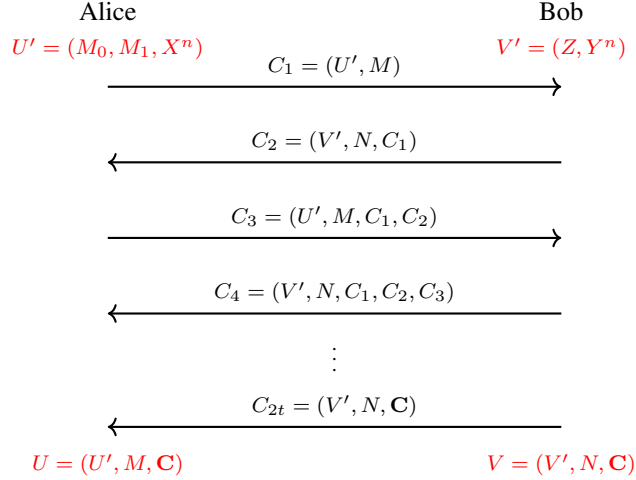


Fig. 1: The general two-party protocol between Alice and Bob from the perspective of source model.

where T_1, \dots, T_m are uniformly distributed over $\mathcal{T}_1 \times \dots \times \mathcal{T}_m$, and are independent of X_1, \dots, X_m , and Z . Then, it holds that the tuple $(g_1(T_1, X_1), \dots, g_m(T_m, X_m))$ is $(2^m \epsilon / 2 + 2^m \epsilon')$ -close to uniform with respect to T_1, \dots, T_m, Z .

We also briefly note that following from [25, Th. 17.3.3], it directly follows from the previously defined $X_i, T_i, g_i(T_i, X_i)$, and Z that

$$I(g_i(T_i, X_i); T_i Z) \leq -\epsilon'' \log \frac{\epsilon''}{2^{n_i} |\mathcal{Z}| |\mathcal{T}_i|},$$

where $\epsilon'' = 2^m \epsilon / 2 + 2^m \epsilon'$ and $I(g_i(T_i, X_i); T_i Z)$ is defined as

$$I(g_i(T_i, X_i); T_i Z) = H(g_i(T_i, X_i)) - H(g_i(T_i, X_i) | T_i Z),$$

which I and H represent the Shannon mutual information and the Shannon entropy, respectively.

Consider a Discrete Memoryless Channel (DMC) with a transition matrix $W = \{W(y|x), x \in \mathcal{X}, y \in \mathcal{Y}\}$. There are two assumptions:

- 1) *Free Resources:* Alice and Bob have unlimited computing power, independent local randomness, and access to a noiseless public communication channel for unlimited rounds.
- 2) *Honest-but-Curious Model:* Both parties follow the protocol honestly but may use all available information to infer what they should remain ignorant about.

The general two-party protocol (Figure 1):

- *Initial Views:* Alice and Bob start with initial knowledge or views U' and V' , respectively.
- *Random Experiments:* Alice generates random variable M , and Bob generates random variable N independently of each other and (U', V') .
- *Message Exchange:* Alice sends Bob a message C_1 as a function of U' and M . Bob responds with C_2 , a function of V' , N and C_1 .
- *Alternating Messages:* In subsequent rounds, they alternately send messages C_3, C_4, \dots, C_{2t} , which are functions of their instantaneous views.
- *Final Views:* At the end of the protocol, Alice's view U is (U', M, C) and Bob's view V is (V', N, C) , where $C = C_1, \dots, C_{2t}$.

There are two models: The channel model and the source model. In the source model, Alice's initial view is $U' = (M_0, M_1, X^n)$ and Bob's initial view is $V' = (Z, Y^n)$ where (M_0, M_1) are binary strings and uniformly distributed on $\{0, 1\}^k$, and $Z \in \{0, 1\}$ is a binary bit.

In the channel model, Alice starts with her initial view $U' = (M_0, M_1)$ and Bob with his initial view $V' = Z$. In this case, Alice and Bob may perform any noisy protocol with n access to the DMC with their initial views, where M_0, M_1 and Z are independent, and M_0, M_1 are uniformly distributed on $\{0, 1\}^k$.

Lemma 4. [21, Corollary 4] Let $p_{X,Y}$ be any probability distribution, where $X \in \mathcal{X}$, $Y \in \mathcal{Y}$, and y is a specific realization of Y . Assume that $H_2(X|Y=y) \geq c$ for some constant c . Let \mathcal{K} be a universal class of functions mapping X to $\{0,1\}^l$, and let κ be sampled uniformly from \mathcal{K} . Then:

$$\begin{aligned} H(\kappa(X)|\kappa, Y=y) &\geq l - \log(1 + 2^{l-c}) \\ &\geq l - \frac{2^{l-c}}{\ln 2}. \end{aligned}$$

Lemma 5. [4, Lemma 3] Let X , Y , and Z be random variables defined on the finite sets \mathcal{X} , \mathcal{Y} , and \mathcal{Z} , respectively. For any $z_1, z_2 \in \mathcal{Z}$ with $p \triangleq \Pr[Z = z_1] > 0$ and $q \triangleq \Pr[Z = z_2] > 0$, the following inequality holds:

$$|H(X|Y, Z = z_1) - H(X|Y, Z = z_2)| \leq 1 + 3 \log |\mathcal{X}| \sqrt{\frac{(p+q) \ln 2}{2pq} I(X, Y; Z)}.$$

Lemma 6. Consider a Multiple Access Channel with two senders and one receiver defined by transition matrix $W(y|x_1, x_2)$. For pair words (x_1^n, x_2^n) and $(\tilde{x}_1^n, \tilde{x}_2^n)$ with Hamming distances $d_H(x_1^n, \tilde{x}_1^n) \geq \delta n$, $d_H(x_2^n, \tilde{x}_2^n) \geq \delta n$, such that

$$\forall x_1 \in \mathcal{X}_1, x_2 \in \mathcal{X}_2, \forall \mathcal{P} \text{ p.d. with } \mathcal{P}(x_1, x_2) = 0, \left\| W_{x_1, x_2} - \sum_{\tilde{x}_1, \tilde{x}_2} p(\tilde{x}_1, \tilde{x}_2) W_{\tilde{x}_1, \tilde{x}_2} \right\| \geq \eta,$$

one has, with $\epsilon = \frac{\delta^4 \eta^2}{2|\mathcal{X}_1|^2 |\mathcal{X}_2|^2 |\mathcal{Z}|}$

$$W_{\tilde{x}_1, \tilde{x}_2}^n(\mathcal{T}_{W, \epsilon}^n(x_1^n, x_2^n)) \leq 2 \exp\left(-\frac{n\epsilon^4}{2}\right),$$

where $\mathcal{T}_{W, \epsilon}^n(x_1^n, x_2^n)$ is the set of joint typical sequences and $W_{x_1^n x_2^n} = W_{x_{1,1} x_{2,1}} \otimes W_{x_{1,2} x_{2,2}} \otimes \dots \otimes W_{x_{1,n} x_{2,n}}$.

Proof. In Appendix B. □

III. RELATED WORKS AND KNOWN RESULTS

As we stated before, a few research works consider the problem of OT from the information theory perspective. Nascimento and Winter [5, 12] simplified the problem of a general noisy correlation (a point-to-point channel) by reducing it to a Slightly Unfair Noisy Symmetric Basic Correlation (SU-SBC). They demonstrated that any non-perfect noisy point-to-point channel or correlation can be transformed into a Slightly Unfair Noisy Channel/Correlation (SUNC/SUCO), and that any SUNC/SUCO can be used to implement a specific SU-SBC. Ultimately, they showed that in this reduced framework, it is possible to achieve $\binom{m}{1}$ -OT^k (1-out-of- m OT with strings' length equal k) at a positive rate, assuming that the sender behaves in an honest-but-curious manner. These papers are significant for several reasons:

- 1) They introduce the concept of the oblivious transfer capacity of a DMC, defined as the supremum of all achievable rates R such that $\frac{k}{n} \geq R - \gamma$, where $\gamma > 0$ and n is the number of channel uses. A positive number R is an achievable OT rate for a given DMC if for $n \rightarrow \infty$ there exist (n, k) protocols with $\frac{k}{n} \rightarrow R$ such that protocols are correct and secure.
- 2) They also address a malicious model where a malicious player can deviate arbitrarily from the channel statistics in up to δn instances. In such cases, the deviating player will be detected by the other party with a certain probability.

Ahlswede and Csiszár analyzed the problem under the honest-but-curious model [4]. They derived a general upper bound for the OT capacity of a point-to-point DMC, which aligns with the lower bound established by Nascimento and Winter [5]. Furthermore, when reduced to a specific erasure channel, they demonstrated a lower bound on the OT capacity. Thus, it remains uncertain what the exact OT capacity of a noisy DMC is in general. In practice, for general channels, a potential way is to first convert the channel into a Generalized Erasure Channel (GEC) via alphabet extension and erasure emulation, followed by the application of a general construction for GEC. As a starting point, we begin with a protocol by Ahlswede and Csiszár originated from the general two-party protocol of Section II:

Two-Party OT Protocol [4]: Consider the following two-party secure computation in the sense of OT: Alice has two strings M_0 and M_1 and aims to send them over the noisy point-to-point channel $\mathcal{W}: \mathcal{X} \rightarrow \mathcal{Y}$ to Bob. Bob has to choose one of them by inputting a bit of $Z \in \{0, 1\}$ to the channel. Alice should be unaware of the unselected string, while Bob has only one string at the end of the protocol (M_Z). Suppose the main channel is an erasure channel assisted by a noiseless channel with unlimited capacity. The OT capacity in this setup is given by $\min(p, 1-p)$, where p is the erasure probability [4, 13]. Let $r < \min(p, 1-p)$. The protocol by Ahlswede and Csiszár [4], based on a technique originally introduced for a BSC in [8, Sec. 6.4], proceeds as follows: Alice starts by transmitting a sequence $\mathbf{X} = X^n \sim \text{Bernoulli}(\frac{1}{2})$ of i.i.d. bits over the channel. Bob observes the channel output \mathbf{Y} . Let E denote the set of indices at which \mathbf{Y} is erased, and let \bar{E} represent the set of indices where \mathbf{Y} is not erased. If $|E| < nr$ or $|\bar{E}| < nr$, Bob aborts the protocol, as there are not enough erased or unerased bits to complete the protocol. From \bar{E} , Bob randomly selects a subset S_Z of cardinality nr . From E , Bob randomly picks a

subset $S_{\bar{Z}}$, also of size nr . Bob then shares the sets S_0 and S_1 with Alice via the public channel, where S_0 and S_1 are either S_Z and $S_{\bar{Z}}$, respectively or vice versa. Alice cannot determine which of S_0 and S_1 corresponds to E (erased positions) and which to \bar{E} (non-erased positions) due to the independent nature of channel erasures. Using S_0 and S_1 , Alice computes keys $\mathbf{X}|_{S_0}$ and $\mathbf{X}|_{S_1}$ and employs these keys to encrypt her strings, which she sends to Bob over the public channel as $M_0 \oplus \mathbf{X}|_{S_0}$ and $M_1 \oplus \mathbf{X}|_{S_1}$. Bob, who only knows the sequence corresponding to \bar{E} , can decrypt only one of these encrypted strings, depending on whether $S_Z = S_0$ or $S_Z = S_1$. This enables Bob to retrieve one of the two keys, M_Z , while he learns nothing about the other key, $M_{\bar{Z}}$. If X is not uniformly distributed over $\{0, 1\}$, the strings $\mathbf{X}|_{S_j}, j \in \{0, 1\}$ are not directly suitable as encryption keys. They need to be transformed into binary strings of length $k < nr$ with a distribution approximately uniform over $\{0, 1\}^k$. It is well-known that for any $\delta > 0$, when n is large, there exists a mapping $\kappa : \{0, 1\}^{nr} \rightarrow \{0, 1\}^k$ with $k = n(H(X) - \delta)$ such that $k - H(\kappa(X^n))$ is exponentially small.

In [28], the author extends the above protocol to pairwise oblivious transfer over a noiseless binary adder channel involving two senders and one receiver, assuming they are non-colluding and honest-but-curious. Each sender has two strings, and Bob has to choose one string from each sender while the unselected strings are hidden from his view. In this system, the output is defined as the sum of the inputs, $Y = X_1 + X_2$, commonly referred to as the Binary Erasure Multiple Access Channel (BE-MAC). This channel uniquely determines the inputs except when they differ, in which case one can not identify the inputs with certainty, effectively resulting in an erasure. Specifically, erasures occur in two out of four possible input scenarios. The OT capacity of this channel is shown to be $R_1 + R_2 \leq \max_{P_{X_1} P_{X_2}} H(X_1, X_2|Y) = \frac{1}{2}$.

IV. SYSTEM MODEL

We assume that the availability of noise is provided in two main forms. Also, we consider the main OT channel with two senders and one receiver:

- 1) *Discrete Memoryless MAC (DM-MAC)*: A two-user MAC $W : \mathcal{X}_1 \times \mathcal{X}_2 \rightarrow \mathcal{Y} : (\mathcal{X}_1 \times \mathcal{X}_2, p(y|x_1, x_2), \mathcal{Y})$, connecting three parties, Alice-1, Alice-2 and Bob, which can be used n times. For an input sequence $x_i^n = x_{i,1}x_{i,2} \dots x_{i,n}$, the output distribution over \mathcal{Y}^n is given by:

$$W_{x_1^n x_2^n}^n = W_{x_{1,1}x_{2,1}} \otimes W_{x_{1,2}x_{2,2}} \otimes \dots \otimes W_{x_{1,n}x_{2,n}}.$$

- 2) *i.i.d. Realizations*: A tuple of random variables (X_1, X_2, Y) , where Alice- i sends X_i and Bob receives Y . The distribution of these variables is given by $P_{X_1 X_2 Y}$, defined over the finite sets \mathcal{X}_i and \mathcal{Y} .

In both cases, the alphabets $\mathcal{X}_1, \mathcal{X}_2$, and \mathcal{Y} are finite.

A key concept when analyzing noisy channels is the idea of *redundant symbols* [29]. We have the following definition for DM-MACs, presented in [5] for the point-to-point channel.

Definition 3. A two-sender DM-MAC $W(y|x_1, x_2)$, characterized by its conditional probability distribution $W(y|x_1, x_2)$ of the output y given inputs x_1 from Alice-1 and x_2 from Alice-2, is said to be *nonredundant* if none of its output distributions $W_{x_1, x_2}(y)$ (induced by fixed inputs (x_1, x_2)) can be expressed as a convex combination of the other output distributions. Formally, this means:

$$\forall i \in \mathcal{T} \setminus \{(x_1, x_2)\}, \forall P(x_1, x_2) \text{ such that } P\{i \in \mathcal{T} \setminus \{(x_1, x_2)\}\} = 0, \quad W_{i \in \mathcal{T} \setminus \{(x_1, x_2)\}} \neq \sum_{x_1, x_2} P(x_1, x_2) W_{x_1, x_2},$$

for any possible distinct input pairs $\mathcal{T} = \{(x_1, x_2), (x'_1, x_2), (x_1, x'_2), (x'_1, x'_2)\} \in \mathcal{X}_1 \times \mathcal{X}_2$.

- *Geometric Interpretation*: In geometric terms, each output distribution W_{x_1, x_2} is a distinct extremal point of the polytope $\mathcal{W} = \text{conv}\{W_{x_1, x_2} : (x_1, x_2) \in \mathcal{X}_1 \times \mathcal{X}_2\}$, where \mathcal{X}_1 and \mathcal{X}_2 are the input alphabets of Senders 1 and 2, respectively. The polytope \mathcal{W} represents the convex hull of all output distributions over the probability simplex on the output alphabet \mathcal{Y} .
- *Constructing a Nonredundant MAC*: To construct a nonredundant version of the MAC, $\bar{W}(y|x_1, x_2)$, we can remove all input pairs (x_1, x_2) for which the output distribution W_{x_1, x_2} is not extremal. This results in a reduced set of input pairs for which W_{x_1, x_2} forms the set of extremal points of \mathcal{W} . The original MAC can still be simulated using the reduced MAC by reconstructing the removed distributions W_{x_1, x_2} as convex combinations of the extremal distributions from \bar{W} .

This process ensures that the MAC retains its original operational capacity while simplifying its representation by eliminating redundancy in its input space.

A more intuitive definition based on the correlations is presented below.

Definition 4. Consider a two-user DM-MAC characterized by random variables X_1, X_2 (inputs from the two senders) and Y (output), with joint distribution/correlation $P(X_1, X_2, Y)$. The correlation is said to be *nonredundant* if:

- For any possible distinct input pairs $\mathcal{T} = \{(x_1, x_2), (x'_1, x_2), (x_1, x'_2), (x'_1, x'_2)\} \in \mathcal{X}_1 \times \mathcal{X}_2$:

$$\Pr\{Y|(X_1, X_2) = i \in \mathcal{T}\} \neq \Pr\{Y|(X_1, X_2) = j \in \mathcal{T} \setminus \{i\}\}.$$

- Symmetrically, the above condition also applies to redundancy in X_1 (for fixed X_2) or X_2 (for fixed X_1), similarly to Y .

Resolving Redundancy: If there is redundancy, the MAC can be made nonredundant by collapsing indistinguishable input pairs (x_1, x_2) that fail the above inequality into a single equivalent pair. Similarly, redundant output symbols y_1, y_2 can be merged into one.

Geometric Interpretation: In the MAC context, redundancy occurs when the joint distribution $P(Y|X_1, X_2)$ does not map injectively over distinct input combinations (x_1, x_2) . This can be resolved by projecting to the set of unique conditional distributions $\Pr(Y|X_1, X_2)$, thereby defining an equivalent nonredundant MAC.

Definition 5. For a DM-MAC with input random variables X_1 and X_2 , and output Y , we define *perfect correlation* as follows:

The MAC is perfectly correlated if, given Y , both X_1 and X_2 can be determined with certainty. This implies:

$$H(X_1, X_2|Y) = 0.$$

Similarly, a MAC can be called *perfect* if its joint output distributions (conditioned on input pairs) have mutually disjoint support. Specifically:

Given the output Y , the pair (X_1, X_2) is uniquely determined. Formally, this means that for all $y \in \mathcal{Y}$, there exists at most one pair (x_1, x_2) such that $P_{Y|X_1, X_2}(y|x_1, x_2) > 0$.

As proved in [5] for point-to-point channels, a perfect DM-MAC (even after removing the redundancy) cannot be used for oblivious transfer, even against passive adversaries. This relates to the concept of noise and the emergence of noisy resources for cryptographic intents. We know that the noise produces uncertainty or entropy. It is the unpredictable aspect of a system that adds complexity. Conceptually, it can be seen as the manifestation of disorder or randomness in communication systems, emphasizing the non-perfect nature of the real world. Noise plays a crucial role in securing communication by hindering an eavesdropper's ability to extract meaningful information from the transmitted message. In a noisy channel, the inherent noise limits the amount of information an unauthorized party can access, regardless of their computational power. This concept is central to Wyner's wiretap channel model [31], which demonstrates how noise can be leveraged to ensure that the legitimate receiver decodes the message accurately. In contrast, experiencing additional noise, the eavesdropper cannot gather sufficient information to reconstruct the message. As is clear, a perfect channel can be simulated by a noiseless channel where the input(s) can be obtained with certainty from the channel output(s). Obviously, such channels cannot be used for cryptographic intents with unconditional security (information-theoretic secrecy).

As is proved in [4, 13], the OT capacity of the point-to-point erasure channel (BEC) with erasure probability $\frac{1}{2}$ is equal $\frac{1}{2}$. Here, we want to investigate whether the OT is possible over a special BE-MAC. We introduce the channel as a correlation between the senders (Alice-1, Alice-2) and the receiver (Bob). Before that, we delve deeper into the *unfairness* in the channel/correlation model. Damgård *et al.* [30], introduced unfairness so that an unfair player could change the communication channel parameters within a certain range. In [5], this concept is limited so that an unfair player who deviates from the channel statistics in δn positions will be caught by the other party with probability $\geq 1 - C_1 \exp(-C_2 \delta^2 n)$, where C_1 and C_2 are two small positive numbers. There are two senders in our channel model. The concept of unfairness can also be extended to the MAC model. To control the fairness of other players in the last n rounds, all players have access to a test unit. When both senders send a pair symbol to Bob over the channel, Bob will ask for the input symbols with probability $\frac{1}{2}$. He will tell both senders his output when he has received the senders' response. If Alice- i is unfair, she tells her input wrong; if Bob is unfair, he tells his output wrong. The test between players is to check out the samples after n uses of the channel for joint typicality relative to $P_{X_1 X_2 Y}$.

Definition 6. Consider a DM-MAC characterized by random variables X_1, X_2 uniformly distributed over $\{0, 1\}$ (inputs from the two senders) and Y (output), with joint distribution $P(X_1, X_2, Y)$. Let $p = \frac{1}{2}$ and \mathcal{Y} of Y be partitioned into two disjoint sets: $\mathcal{Y} = \mathcal{E}_{10} \cup \mathcal{E}_{01}$ of non-zero probability under the distribution of Y . The channel/correlation has the following properties:

- For all $y_{10} \in \mathcal{E}_{10}, y_{01} \in \mathcal{E}_{01}$ and $x_i \in \{0, 1\}, i \in \{1, 2\}$,

$$\Pr\{Y = y_{10}|X_1 = x_1, X_2 = x_2\} = \Pr\{Y = y_{01}|X_1 = x_1, X_2 = x_2\} = \frac{1}{2}.$$

- \mathcal{E}_{10} is the set of received pairs $(X_1 = x_1, X_2 = e)$, and \mathcal{E}_{01} is the set of received pairs $(X_1 = e, X_2 = x_2)$, where e is an erased bit.

Now, we present a more general SU-SBC over DM-MAC.

Definition 7. [SU-SBC $_{p,W,W'}$] Consider a DM-MAC characterized by random variables X_1, X_2 uniformly distributed over $\{0, 1\}$ (inputs from the two senders) and Y (output), with joint distribution $P(X_1, X_2, Y)$. Let $0 < p < 1$ and \mathcal{Y} of Y be partitioned into five disjoint sets: $\mathcal{Y} = \mathcal{U}_{11} \cup \mathcal{U}_{10} \cup \mathcal{E} \cup \mathcal{U}_{01} \cup \mathcal{U}_{00}$ of non-zero probability under the distribution of Y . Note that $\mathcal{E} = \mathcal{E}_{00} \cup \mathcal{E}_{10} \cup \mathcal{E}_{01}$. A *symmetric basic correlation (SBC)* over this channel can be defined as follows:

- For all $y \in \mathcal{E}_{00}$, $\Pr\{Y = y|X_1 = 1, X_2 = 1\} = \Pr\{Y = y|X_1 = 1, X_2 = 0\} = \Pr\{Y = y|X_1 = 0, X_2 = 1\} = \Pr\{Y = y|X_1 = 0, X_2 = 0\} = (1 - p)^2$.

- For all $y \in \mathcal{E}_{10} \cup \mathcal{E}_{01}$, $\Pr\{Y = y|X_1 = 1, X_2 = 1\} = \Pr\{Y = y|X_1 = 1, X_2 = 0\} = \Pr\{Y = y|X_1 = 0, X_2 = 1\} = \Pr\{Y = y|X_1 = 0, X_2 = 0\} = 2p(1-p)$.
- (Symmetry) For all $y_{11} \in \mathcal{U}_{11}, y_{10} \in \mathcal{U}_{10}, y_{01} \in \mathcal{U}_{01}, y_{00} \in \mathcal{U}_{00}$, and $x_i \in \{0, 1\}, i \in \{1, 2\}$

$$\Pr\{Y = y_{i \in \mathcal{T}'}|(X_1 X_2) = j \in \mathcal{T}'\} = \Pr\{Y = y_{i' \in \mathcal{T}' \setminus \{i\}}|(X_1 X_2) = j' \in \mathcal{T}' \setminus \{j\}\},$$

for $\mathcal{T}' = \{00, 10, 01, 11\}$.

- (Non-redundancy) For all $y_{11} \in \mathcal{U}_{11}, y_{10} \in \mathcal{U}_{10}, y_{01} \in \mathcal{U}_{01}, y_{00} \in \mathcal{U}_{00}$, and $x_i \in \{0, 1\}, i \in \{1, 2\}$

$$\Pr\{Y = y_{i \in \mathcal{T}'}|(X_1 X_2) = i\} > \Pr\{Y = y_i|(X_1 X_2) = j \in \mathcal{T}' \setminus \{i\}\},$$

for $\mathcal{T}' = \{00, 10, 01, 11\}$.

- $\Pr\{Y \in \mathcal{E}\} = 1 - p^2$.

From the senders' point of view, it looks like uniform inputs to a DM-MAC, while for Bob, it looks like the output of a distinguishable mixture of three channels: a complete erasure MAC $W''(y|x_1, x_2) : \{0, 1\} \times \{0, 1\} \rightarrow \mathcal{E}_{00}$, a partial erasure channel $W'(y|x_1, x_2) : \{0, 1\} \times \{0, 1\} \rightarrow \mathcal{E}_{01} \cup \mathcal{E}_{10}$ (Definition 6) which erases either x_1 or x_2 , and a channel $W : \{0, 1\} \times \{0, 1\} \rightarrow \mathcal{U}_{11} \cup \mathcal{U}_{10} \cup \mathcal{U}_{01} \cup \mathcal{U}_{00}$, with conditional probabilities $W(y|x_1, x_2) = \frac{1}{p^2} \Pr\{Y = y|X_1 = x_1, X_2 = x_2\}$. If Bob finds $y \in \mathcal{E}_{00}$, he has no information at all about the inputs. If Bob finds $y \in \mathcal{E}_{01}$, he has no information at all about Alice-1's input. Similarly, if he finds $y \in \mathcal{E}_{10}$, he has no information at all about Alice-2's input. For $y \in \mathcal{U}_i$, where $i \in \mathcal{T}' = \{00, 01, 10, 11\}$, he has a (more or less weak) indication that $x_1 x_2 = i$, as the likelihood for $x_1 x_2 = j \in \mathcal{T}' \setminus \{i\}$ is smaller.

The correlation is clearly fully characterized by p, W , and W' . Hence, we denote this distribution as $\text{SBC}_{p,W,W'}$. If it is used slightly unfairly, we denote it as $\text{SU-SBC}_{p,W,W'}$. We reduce the $\text{SU-SBC}_{p,W,W'}$ to the case in which both inputs are erased or both of them are decoded. The new SU-SBC is demonstrated by $\text{SU-SBC}_{p,W}$ since the sub-channel W' defined in Definition 6 is removed.

Definition 8. [$\text{SU-SBC}_{p,W}$] Consider a DM-MAC characterized by random variables X_1, X_2 uniformly distributed over $\{0, 1\}$ (inputs from the two senders) and Y (output), with joint distribution $P(X_1, X_2, Y)$. Let $0 < p < 1$ and \mathcal{Y} of Y be partitioned into five disjoint sets: $\mathcal{Y} = \mathcal{U}_{11} \cup \mathcal{U}_{10} \cup \mathcal{E} \cup \mathcal{U}_{01} \cup \mathcal{U}_{00}$ of non-zero probability under the distribution of Y . A *symmetric basic correlation (SBC)* over this channel can be defined as follows:

- For all $y \in \mathcal{E}$, $\Pr\{Y = y|X_1 = 1, X_2 = 1\} = \Pr\{Y = y|X_1 = 1, X_2 = 0\} = \Pr\{Y = y|X_1 = 0, X_2 = 1\} = \Pr\{Y = y|X_1 = 0, X_2 = 0\} = 1 - p$.
- (Symmetry) For all $y_{11} \in \mathcal{U}_{11}, y_{10} \in \mathcal{U}_{10}, y_{01} \in \mathcal{U}_{01}, y_{00} \in \mathcal{U}_{00}$, and $x_i \in \{0, 1\}, i \in \{1, 2\}$,

$$\Pr\{Y = y_{i \in \mathcal{T}'}|X_1 X_2 = j \in \mathcal{T}'\} = \Pr\{Y = y_{i' \in \mathcal{T}' \setminus \{i\}}|X_1 X_2 = j' \in \mathcal{T}' \setminus \{j\}\},$$

for $\mathcal{T}' = \{00, 10, 01, 11\}$.

- (Non-redundancy) For all $y_{11} \in \mathcal{U}_{11}, y_{10} \in \mathcal{U}_{10}, y_{01} \in \mathcal{U}_{01}, y_{00} \in \mathcal{U}_{00}$, and $x_i \in \{0, 1\}, i \in \{1, 2\}$,

$$\Pr\{Y = y_{i \in \mathcal{T}'}|X_1 X_2 = i\} > \Pr\{Y = y_i|X_1 X_2 = j \in \mathcal{T}' \setminus \{i\}\},$$

for $\mathcal{T}' = \{00, 10, 01, 11\}$.

- $\Pr\{Y \in \mathcal{E}\} = 1 - p$.

From now on, we work only with $\text{SU-SBC}_{p,W}$. We demonstrate how to reduce the general case of non-perfect MACs to $\text{SU-SBC}_{p,W,W'}$. Since redundant channels or correlations can always be transformed into nonredundant ones, we will henceforth assume that all noisy resources under consideration are nonredundant.

Proposition 7. Given a non-perfect noisy DM-MAC $W : \mathcal{X}_1 \times \mathcal{X}_2 \rightarrow \mathcal{Y}$, it can be utilized to obtain a certain SUCO. Similarly, a noisy correlation shared among Alice-1, Alice-2, and Bob can be used to implement an SUCO.

Proof. For any given distribution P_{X_i} possessed by Alice- i , $i \in \{1, 2\}$, the channel generates a joint distribution $P_{X_1 X_2 Y}$. Alice- i sends independent realizations of X_i according to her probability distribution over the channel. Note that the input joint distribution is $P_{X_1 X_2}(x_1, x_2) = P_{X_1}(x_1)P_{X_2}(x_2)$ due to independence of senders' probability distributions. For each received pair message, Bob will ask, with probability $\frac{1}{2}$, for the input symbols, and after receiving, he will tell the senders his received message. If one or both senders are cheaters, then they will give wrong information to Bob, and if Bob is a cheater, then he will give wrong information to the senders. Lemma 6 shows that the probability of cheating (in more than δn positions) tends to zero as $n \rightarrow \infty$. In other words, a cheater can not deviate from the channel statistics in δn positions without being detected because the joint typicality test fails. This shows that any non-perfect noisy MAC $W : \mathcal{X}_1 \times \mathcal{X}_2 \rightarrow \mathcal{Y}$ can be used to obtain a certain SUCO/SUNC. \square

Proposition 8. Given a non-perfect SUCO $P_{X_1 X_2 Y}$, one can use it to implement a certain $\text{SU-SBC}_{p,W}$.

Proof. Given that the slightly unfair correlation is non-perfect, it follows that after removing all redundancy, $H(Y|X_1, X_2) > 0$. Therefore, there exist at least four distinct pairs of symbols $((a, a) \neq (b, b) \neq (a, b) \neq (b, a)) \in \mathcal{X}_1 \times \mathcal{X}_2$ such that:

$$\begin{aligned} & \{y : \Pr(Y = y|(X_1, X_2) = (a, a)) > 0 \text{ and} \\ & \Pr(Y = y|(X_1, X_2) = (a, b)) > 0 \text{ and} \\ & \Pr(Y = y|(X_1, X_2) = (b, a)) > 0 \text{ and} \\ & \Pr(Y = y|(X_1, X_2) = (b, b)) > 0\} \neq \emptyset, \end{aligned}$$

since otherwise, the distributions' equivocation (equivocation about the inputs given the output) would be zero.

Our protocol to achieve $\text{SU-SBC}_{p,W}$ closely follows the approach outlined in [5, 7]. It uses the source coding protocol $P_{X_1 X_2 Y}$ twice for two independent realizations. Let:

$$\Pr((X_1, X_2)(X_1, X'_2) \cup (X_1, X_2)(X'_1, X_2) \cup (X_1, X_2)(X'_1, X'_2) \in \mathcal{L}) = \frac{\alpha}{3},$$

where $\mathcal{L} = \{(a, a)(b, b), (a, a)(a, b), (a, a)(b, a), (b, b)(a, a), (b, b)(a, b), (b, b)(b, a), (a, b)(b, b), (a, b)(a, a), (a, b)(b, a), (b, a)(a, a), (b, a)(a, b), (b, a)(b, b)\}$. As the protocol progresses, if $\{(X_1, X_2)(X_1, X'_2), (X_1, X_2)(X'_1, X_2), (X_1, X_2)(X'_1, X'_2)\} \notin \mathcal{L}$, the senders inform Bob of the value and discard the pair. By the law of large numbers and the i.i.d. distribution of \mathcal{L} , we know that the probability of $i \in \mathcal{L}$ is equal $\frac{\alpha}{12}$, then fewer than $\frac{12}{\alpha}(n + \epsilon n)$ (for some $\epsilon > 0$) realizations of $P_{X_1 X_2 Y}$ are necessary to achieve n realizations of $\text{SBC}_{p,W}$. This constitutes a symmetric basic correlation because the probability of occurrence is equal for each $i \in \mathcal{L}$. Furthermore, Bob's alphabet $\mathcal{Y} \times \mathcal{Y}$ is partitioned into $\mathcal{E}, \mathcal{U}_{00}, \mathcal{U}_{10}, \mathcal{U}_{01}, \mathcal{U}_{11}$, satisfying the definition:

- \mathcal{E} includes all pairs $(z, z')(z, z')$, where $(z, z')(z, z')$ has a positive probability.
- $\mathcal{U}_{00}, \mathcal{U}_{10}, \mathcal{U}_{01}$ and \mathcal{U}_{11} consist of transposes of one another (i.e., swapping the entries) and cannot be empty. If they were, at least one of the members in the above set would be redundant.

Bob cannot behave unfairly beyond what is provided by the SUCO $P_{X_1 X_2 Y}$. However, the senders can introduce bias by attempting actions such as repeating unfair pairs $(x_1, x_2)(x_1, x'_2), (x_1, x_2)(x'_1, x_2)$ or $(x_1, x_2)(x'_1, x'_2)$ for a good pair $i \in \mathcal{L}$. Suppose the senders persist with such strategies for δn times (where $\delta > 0$). In that case, Bob can detect their bias by approximating a typicality test, using Lemma 6 and an extended version of [5, Lemma 6]. This aligns with the definition of $\text{SBC}_{p,W}$. □

V. OT OVER DM-MAC

Consider Alice-1, Alice-2, and Bob connected by a DM-MAC. Alice- i , $i \in \{1, 2\}$ possesses two strings of bits m_{i0}, m_{i1} , each of which with length k_i . They could have OT between themselves (Alice-1→Bob, Alice-2→Bob) as follows: They send their strings over a noisy DM-MAC to Bob, and Bob has to choose one string from the Alice-1's strings (m_{1Z_1}) and one string from Alice-2's strings (m_{2Z_2}) by inputting two bits to the channel Z_1, Z_2 . The unselected messages should be kept hidden from Bob's view, while the selected messages should be kept hidden from Alice's view. After completing a protocol, Bob gets m_{1Z_1}, m_{2Z_2} based on his choices, while Alice- i gets nothing Δ .

Now we consider a reduction from the general non-perfect MAC (Figure 2-(a)) to a MAC made up of $\text{SBC}_{p,W}$ with non-independently distributed noise¹.

Definition 9. Let $n, k_1, k_2 \in \mathbb{N}$. An (n, k_1, k_2) protocol involves interaction among Alice-1, Alice-2, and Bob via the setup illustrated in Figure 2-(b). At each time step $l = 1, 2, \dots, n$, Alice- i transmits a bit $X_{i,l}$ through the MAC. Users alternately exchange messages over a noiseless public channel in multiple rounds, both prior to each transmission and after the final transmission at $l = n$. While the number of rounds may vary, it is finite. Each user's transmission is determined by a function of their input, private randomness, and all prior messages, channel inputs, or channel outputs observed. A positive rate pair (R_1, R_2) is said to be an achievable OT rate pair for the DM-MAC if for $n \rightarrow \infty$ there exist (n, k_1, k_2) protocols satisfying $\frac{k_i}{n} \rightarrow R_i$ such that for *non-colluding* parties, the asymptotic conditions (6)–(8) hold:

$$\lim_{n \rightarrow \infty} \Pr \left[(\hat{M}_{1Z_1}, \hat{M}_{2Z_2}) \neq (M_{1Z_1}, M_{2Z_2}) \right] = 0, \quad (6)$$

$$\lim_{n \rightarrow \infty} I(M_{1\bar{Z}_1}, M_{2\bar{Z}_2}; V) = 0, \quad (7)$$

$$\lim_{n \rightarrow \infty} I(Z_i; U_i)_{i \in \{1, 2\}} = 0, \quad (8)$$

¹The concept of noise could be different in OT over multi-user channels compared to a point-to-point channel. Noise can act independently over the users' links to the receiver in a MAC so that the described $\text{SU-SBC}_{p,W}$ can be defined as $\text{SU-SBC}_{p_1, p_2, W}$, where the channel W in the second one has the conditional probabilities $W(y|x_1, x_2) = \frac{1}{p_1 p_2} \Pr\{Y = y|X_1 = x_1, X_2 = x_2\}$. Also, the sets \mathcal{E}_{01} and \mathcal{E}_{10} could not be unified since their probabilities are not the same. ($1 - p_i$ is the erasure probability for Alice- i messages)

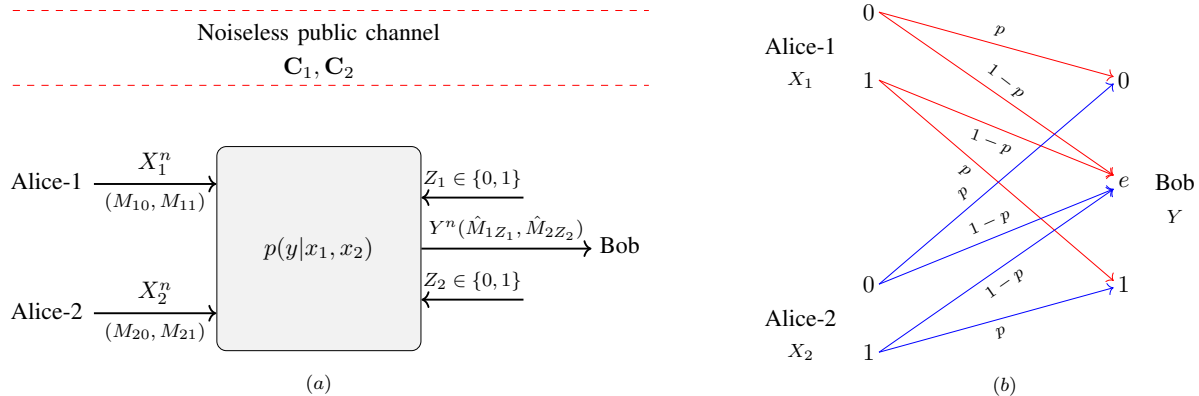


Fig. 2: (a)-OT over a general non-perfect MAC. (b)-The non-perfect MAC model reduced to the $SU-SBC_{p,W,W'}$ described in Definition 7.

where the final view of Alice- i and Bob are $U_i = (M_{i0}, M_{i1}, R_{A_i}, X_i^n, \mathbf{C})$ and $V = (Z_1, Z_2, R_B, Y^n, \mathbf{C})$, respectively, and $\mathbf{C} \triangleq (\mathbf{C}_1, \mathbf{C}_2)$. The supremum of all achievable OT^{k_1, k_2} rate pairs is called the OT capacity region of the MAC. Condition (6) says that Bob correctly learns both $M_{iZ_i}, i \in \{1, 2\}$ with negligible probability of error. Condition (7) says that Bob gains negligible information about the unselected messages, and conditions (8) says that Alice- i gains negligible information about Bob's choices Z_i .

In this section, we present a protocol of symmetric basic correlations (SU-SBC) in the case of honest-but-curious players. For a malicious receiver, the protocol achieves an achievable rate region.

As previously discussed, from Alice's perspective, SU-SBC resembles the uniform input to a binary MAC. On the other hand, from Bob's perspective, it corresponds to the output of a distinguishable mixture of three channels: the complete erasure channel with probability $(1-p)^2$, a partial erasure channel with probability $2p(1-p)$ and a DM-MAC with probability p^2 .

Now, we present an OT protocol over noisy DM-MAC reduced to the noisy correlation (Figure 2-(b)) with non-colluding honest-but-curious parties. We assume that $p < \frac{1}{2}$ and that Alice-1, Alice-2 and Bob are in possession of n realizations $SU-SBC_{p,W}$. Alice- i 's data and Bob's data are denoted by $X_{i,1}, \dots, X_{i,n}$ for $i \in \{1, 2\}$ and Y_1, \dots, Y_n , respectively. The output of the channel W is denoted by Z_1, \dots, Z_n on inputs $X_{i,1}, \dots, X_{i,n}$ for $i \in \{1, 2\}$. The output of the partial erasure channel $W' : X_1 X_2 \rightarrow \mathcal{E}_{10} \cup \mathcal{E}_{01}$ is denoted by Z'_1, \dots, Z'_n on inputs $X_{i,1}, \dots, X_{i,n}$ for $i \in \{1, 2\}$.

Let s_i and r_i , for $i \in \{1, 2\}$ be four parameters and $h_{ij} : \mathcal{R}_{ij} \times \mathcal{X}_i^n \rightarrow \{0, 1\}^{s_i n}$, and $\kappa_{ij} : \mathcal{T}_{ij} \times \mathcal{X}_i^n \rightarrow \{0, 1\}^{r_i n}$, $i \in \{1, 2\}, j \in \{0, 1\}$ be two-universal hash functions. The $\binom{2}{1}$ - OT^{k_1, k_2} rate pair is defined as $(r_1 = \frac{k_1}{n}, r_2 = \frac{k_2}{n})$. Note that the strings are ciphered by $\kappa_{ij} : \mathcal{T}_{ij} \times \mathcal{X}_i^n \rightarrow \{0, 1\}^{r_i n}$, $i \in \{1, 2\}, j \in \{0, 1\}$ and $h_{ij} : \mathcal{R}_{ij} \times \mathcal{X}_i^n \rightarrow \{0, 1\}^{s_i n}$ are used as privacy amplification.

We now prove a lemma that says the above protocol without the hashes $h_{ij} : \mathcal{R}_{ij} \times \mathcal{X}_i^n \rightarrow \{0, 1\}^{s_i n}$ is still correct and secure.

Lemma 9. Protocol 1 satisfies the conditions (6)-(8) even without privacy amplification.

Proof. In Appendix C. □

As a central block of proving the upper bound on OT rate, we want to consider the problem of pre-generated secret key agreement over MAC by public discussion. We use the results in the proof of Theorem 13.

A. Secret Key Agreement over MAC by Public Discussion

Secret key agreement over a simple point-to-point channel is initially addressed in [16] and [6]. In [16], the author considers that Alice aims to share a secret key with Bob in the presence of a passive wiretapper. A noiseless one-way channel assists the main noisy channel with unlimited capacity. Also, it is assumed that Eve can receive all messages sent over the public channel without error, but the wiretapper can not change the messages without being detected.

Protocol 1 OT over noisy DM-MAC (Definition 8)

Parameters:

- $p < \frac{1}{2}$
- $\gamma > 0, \eta > 0$.
- The rate of the protocol is $r_i - \gamma = \frac{k_i}{n}$, and k_i is the length of Alice- i 's strings.

Goal. Alice- i sends two strings m_{i0} and m_{i1} , $i \in \{1, 2\}$ to Bob. At the end of the protocol, Bob gets m_{iZ_i} , $Z_i \in \{0, 1\}$, $i \in \{1, 2\}$ based on his choices while Alice- i gets nothing Δ .

The protocol:

- 1) Alice- i transmits an n -tuple $\mathbf{X}_i = X_i^n$ of i.i.d. Bernoulli($\frac{1}{2}$) bits over the reduced noisy DM-MAC.
- 2) Bob receives the n -tuple $\mathbf{Y} = Y^n$. Bob forms the sets

$$\bar{E}_i := \{j \in \{1, 2, \dots, n\} : Y_j = (\hat{x}_i \neq e, \hat{x}_{\bar{i}})\}$$

$$E_i := \{j \in \{1, 2, \dots, n\} : Y_j = (\hat{x}_i = e, \hat{x}_{\bar{i}})\}$$

If $|\bar{E}_i| < r_i n$ or $|E_i| < r_i n$, Bob aborts the protocol.

- 3) Bob creates the following sets:

$$S_{iZ_i} \sim \text{Unif}\{A \subset \bar{E}_i : |A| = (p - \eta)n\}$$

$$S_{i\bar{Z}_i} \sim \text{Unif}\{A \subset E_i : |A| = (p - \eta)n\}$$

Bob reveals S_{i0} and S_{i1} to Alice- i over the noiseless public channel (only the description of the sets).

- 4) Alice- i randomly and independently chooses functions $\kappa_{i0}, \kappa_{i1}, h_{ij} : \mathcal{R}_{ij} \times \mathcal{X}_i^n \rightarrow \{0, 1\}^{s_{ij}}$, $i \in \{1, 2\}, j \in \{0, 1\}$ from a family \mathcal{K} of two-universal hash functions:

$$\kappa_{i0}, \kappa_{i1} : \{0, 1\}^{r_i n} \rightarrow \{0, 1\}^{k_i}$$

Alice- i finally sends the following information to Bob over the noiseless public channel:

$$h_{i0}, h_{i1}, \kappa_{i0}, \kappa_{i1}, M_{i0} \oplus \kappa_{i0}(\mathbf{X}_i|_{S_{i0}}), M_{i1} \oplus \kappa_{i1}(\mathbf{X}_i|_{S_{i1}})$$

and the total randomness in her possession.

- 5) Bob knows $\kappa_{iZ_i}, \mathbf{X}_i|_{S_{iZ_i}}$ one can decode M_{iZ_i} . At first, he computes $\hat{\mathbf{X}}_i|_{S_{iZ_i}}$ so that:

- $(\hat{\mathbf{X}}_1|_{S_{1Z_1}}, \hat{\mathbf{X}}_2|_{S_{2Z_2}})$ and $\mathbf{Y}|_{S_{1Z_1}, S_{2Z_2}}$ are ϵ -conditional typical according to W , that is, $\mathbf{Y}|_{S_{1Z_1}, S_{2Z_2}} \in \mathcal{T}_{W, \epsilon}^n(\hat{\mathbf{X}}_1|_{S_{1Z_1}}, \hat{\mathbf{X}}_2|_{S_{2Z_2}})$;
- $h_i(R_{iZ_i}, \mathbf{X}_i|_{S_{iZ_i}}) = h_i(R_{iZ_i}, \hat{\mathbf{X}}_i|_{S_{iZ_i}})$, $i \in \{1, 2\}$;

If there is more than one such $(\hat{\mathbf{X}}_1|_{S_{1Z_1}}, \hat{\mathbf{X}}_2|_{S_{2Z_2}})$ or none, Bob outputs an error.

A generalization of the above setting can be found in [17, 18]. Also, the problem of secret key agreement over MAC is studied in [19], in which the authors assumed that each transmitter plays the role of wiretapper for the other transmitter. This is the MAC with confidential message [20]. Consider the following settings: Alice-1 and Alice-2 aim to share secret keys with Bob in the presence of a passive wiretapper. Alice- i , Bob, and Eve govern the input X_i , the output Y , and E , respectively. Furthermore, a public channel with unlimited capacity is available for one-way communication from the senders to Bob. Both resources (MAC and the public channel) are available for communication, but not at the same time. First, the senders are allowed to use the MAC n times, and then they can use the public channel only once.

Alice- i and Bob use a protocol in which, at each step, Alice- i sends a message to Bob depending on X_i and all the messages previously received by Bob and Bob sends a message to Alice- i depending on Y and all the messages previously received by Alice- i . Let $C_{i,k}$, $i \in \{1, 2\}, k \in \{\text{odd}\}$ the use of public channel from Alice- i to Bob, and $C_{i,k}$, $i \in \{1, 2\}, k \in \{\text{even}\}$ the use of public channel from Bob to the senders. Also, all legitimate parties can benefit from randomness statistically independent of X_i, Y , and E .

At the end of round- l , Alice- i computes a key S_i as a function of X_i and $C_i^l \triangleq [C_{i,1}, \dots, C_{i,l}]$, l is even, and Bob computes keys S'_i as a function of Y and C_i^l . The goal is to maximize $H(S_1, S_2)$ while S'_1 and S'_2 agree with very high probability and Eve has negligible information about S_i and S'_i , $i \in \{1, 2\}$:

$$H(C_{i,k}|C_i^{k-1}, X_1, X_2) = 0, \quad \text{For odd } k \quad (9)$$

$$H(C_{i,k}|C_i^{k-1}, Y) = 0, \quad \text{For even } k \quad (10)$$

$$H(S_i|C_i^l, X_i) = 0, \quad (11)$$

$$H(S_1, S_2|C_1^l, C_2^l, X_1, X_2) = 0, \quad (12)$$

$$H(S'_1, S'_2|C_1^l, C_2^l, Y) = 0, \quad (13)$$

$$\Pr\{(S_1, S_2) \neq (S'_1, S'_2)\} \leq \epsilon, \quad (14)$$

$$I(S_i; C_i^l, E) \leq \delta_i, \quad (15)$$

$$I(S_1, S_2; C_1^l, C_2^l, E) \leq \delta', \quad (16)$$

for $i \in \{1, 2\}$, where ϵ , δ_i , and δ' are specified small numbers.

Lemma 10.

$$H(S_1, S_2|S'_1, S'_2) \leq h(\epsilon_1) + h(\epsilon_2) + \log_2(|S_1| - 1) + \log_2(|S_2| - 1). \quad (17)$$

Proof.

$$H(S_1, S_2|S'_1, S'_2) = H(S_1|S'_1, S'_2) + H(S_2|S_1, S'_1, S'_2) \leq H(S_1|S'_1) + H(S_2|S'_2),$$

where the last inequality is due to the fact that S_i is independent of S'_i and S'_i . According to Fano's lemma, conditions (14), (15) implies that $H(S_i|S'_i) \leq h(\epsilon_i) + \log_2(|S_i| - 1)$. $|S_i|$ is the number of distinct values that S_i takes on with non-zero probability. Note that $H(S_1, S_2|S'_1, S'_2) \rightarrow 0$ as $\epsilon_i, \epsilon' \rightarrow 0$. \square

Theorem 11. For every key agreement protocol satisfying (9)-(16), we have:

$$H(S_1) \leq I(X_1; Y|C_1^l, X_2, E) + H(S_1|S'_1) + I(S_1; C_1^l, E),$$

$$H(S_2) \leq I(X_2; Y|C_2^l, X_1, E) + H(S_2|S'_2) + I(S_2; C_2^l, E),$$

$$H(S_1, S_2) \leq I(X_1, X_2; Y|C_1^t, C_2^t, E) + H(S_1, S_2|S'_1, S'_2) + I(S_1, S_2; C_1^t, C_2^t, E),$$

and for the case with constant E :

$$H(S_1) \leq I(X_1; Y|C_1^l, X_2) + H(S_1|S'_1) + I(S_1; C_1^l),$$

$$H(S_2) \leq I(X_2; Y|C_2^l, X_1) + H(S_2|S'_2) + I(S_2; C_2^l),$$

$$H(S_1, S_2) \leq I(X_1, X_2; Y|C_1^t, C_2^t) + H(S_1, S_2|S'_1, S'_2) + I(S_1, S_2; C_1^t, C_2^t).$$

Proof. In Appendix D. \square

Corollary 12. The secret key rate region \mathcal{R}_{SK} of X_1, X_2 , and Y with respect to the constant random variable E is upper bounded as:

$$\mathcal{R}_{\text{SK}} \subseteq \left\{ \begin{array}{l} (R_1, R_2) : R_1 \leq \max_{P_{X_1} P_{X_2}} I(X_1; Y|X_2) \\ R_2 \leq \max_{P_{X_1} P_{X_2}} I(X_2; Y|X_1) \\ R_1 + R_2 \leq \max_{P_{X_1} P_{X_2}} I(X_1, X_2; Y) \end{array} \right\}, \quad (18)$$

for some distribution $p(x_1)p(x_2)$ on $\mathcal{X}_1 \times \mathcal{X}_2$.

Proof. In Appendix E. \square

Now, we present the main theorems of the paper. The OT achievable rate pairs and OT capacity are defined in Definition 9. The OT capacity region is denoted by \mathcal{C}_{OT} .

Theorem 13 (honest-but-curious players). The OT capacity of DM-MAC reduced to the noisy SU-SBC $_{p,W}$ for honest-but-curious parties, is such that:

$$\mathcal{C}_{\text{OT}} \subseteq \left\{ \begin{array}{l} (R_1, R_2) : R_1 \leq \max_{P_{X_1} P_{X_2}} I(X_1; Y|X_2) \\ R_2 \leq \max_{P_{X_1} P_{X_2}} I(X_2; Y|X_1) \\ R_1 + R_2 \leq \max_{P_{X_1} P_{X_2}} I(X_1, X_2; Y) \end{array} \right\}, \quad (19)$$

for some distribution $p(x_1)p(x_2)$ on $\mathcal{X}_1 \times \mathcal{X}_2$.

Proof. In Appendix F. \square

Theorem 14 (honest-but-curious players). The OT capacity of DM-MAC reduced to the noisy SU-SBC_{p,W} for honest-but-curious parties, is:

$$\mathcal{C}_{\text{OT}} = \left\{ \begin{array}{l} (R_1, R_2) : R_1 \leq \max_{P_{X_1} P_{X_2}} I(X_1; Y|X_2) \\ R_2 \leq \max_{P_{X_1} P_{X_2}} I(X_2; Y|X_1) \\ R_1 + R_2 \leq \max_{P_{X_1} P_{X_2}} I(X_1, X_2; Y) \end{array} \right\}, \quad (20)$$

for some distribution $p(x_1)p(x_2)$ on $\mathcal{X}_1 \times \mathcal{X}_2$.

Proof. In Appendix G. □

A rate pair (R_1, R_2) is achievable if there exists a sequence of $\binom{2}{1}$ -OT^{k₁,k₂} protocols satisfying (6)-(8) such that $\lim_{n \rightarrow \infty} (\frac{k_1}{n}, \frac{k_2}{n}) = (R_1, R_2)$.

Theorem 15 (malicious Bob). An achievable rate region for OT (\mathcal{R}_{OT}) over the DM-MAC reduced to the noisy SU-SBC_{p,W} with malicious Bob is:

$$\mathcal{R}_{\text{OT}}(P_{Y|X_1, X_2}) = \bigcup_{P_{X_1} P_{X_2}} \left\{ \begin{array}{l} (R_1, R_2) : R_1 < \frac{1}{2} \max_{P_{X_1} P_{X_2}} \{I(X_1; Y|X_2) + I(X_1; X_2|Y)\} \\ R_2 < \frac{1}{2} \max_{P_{X_1} P_{X_2}} \{I(X_2; Y|X_1) + I(X_1; X_2|Y)\} \\ R_1 + R_2 < \frac{1}{2} \max_{P_{X_1} P_{X_2}} I(X_1, X_2; Y) \end{array} \right\}, \quad (21)$$

for some distribution $p(x_1)p(x_2)$ on $\mathcal{X}_1 \times \mathcal{X}_2$.

If $X_1 \rightarrow Y \rightarrow X_2$ is a Markov chain, then the above achievable rate region is simplified to:

$$\mathcal{R}_{\text{OT}}(P_{Y|X_1, X_2}) = \bigcup_{P_{X_1} P_{X_2}} \left\{ \begin{array}{l} (R_1, R_2) : R_1 < \frac{1}{2} \max_{P_{X_1} P_{X_2}} I(X_1; Y|X_2) \\ R_2 < \frac{1}{2} \max_{P_{X_1} P_{X_2}} I(X_2; Y|X_1) \\ R_1 + R_2 < \frac{1}{2} \max_{P_{X_1} P_{X_2}} I(X_1, X_2; Y) \end{array} \right\}, \quad (22)$$

Proof. In Appendix H. □

VI. CONCLUSION

We investigated bounds on the oblivious transfer capacity of noisy MAC, focusing on secure multiparty computations involving two non-colluding senders and a single receiver. A protocol was proposed that is both correct and secure against honest-but-curious parties. Furthermore, we demonstrated that the protocol remains correct and secure when the receiver is dishonest, although the exact capacity in such scenarios remains undetermined. The OT capacity region for honest-but-curious players was established for a special reduced version with optimal rates, while for a malicious receiver, the study delineates a feasible rate region. The work delves into noisy MACs comprehensively, introducing reductions to symmetric basic correlations (SBCs) as defined in [5] and extending OT protocols to multi-sender configurations. Key contributions include precisely characterizing OT capacity for honest-but-curious settings, leveraging information-theoretic bounds, and significant progress in addressing adversarial behavior.

An intriguing future direction is the study of OT over MACs involving colluding parties. If the senders can collude with the receiver—a scenario closer to practical settings—the secrecy criteria become substantially stricter. Also, in [5], the authors offer a protocol secure and correct against a malicious sender when the correlation is slightly unfair, albeit no longer achieving positive rates. In the MAC setting, if we assume both senders are cheating, it can be conjectured that a similar protocol does not provide positive rates. But what about if just one of the senders is cheating? These challenging cases form the basis of our next research endeavors.

ACKNOWLEDGMENT

The authors hereby acknowledge Andreas Winter, Rémi A. Chou, and Pin-Hsun Lin for discussions during this research project.

APPENDIX

A. Proof of Lemma 1.

1) *Upper bound:* By definition, $H_\infty^\epsilon(X|Y)$ considers the min-entropy over all distributions $P_{X'Y'}$ that are ϵ -close to the original distribution P_{XY} . This means that:

$$H_\infty^\epsilon(X|Y) \geq H_\infty(P_{X'Y'}) \quad \text{for any such } P_{X'Y'}.$$

Since the original distribution P_{XY} satisfies $\|P_{XY} - P_{X'Y'}\|_1 = 0 \leq \epsilon$, it is included in the set of distributions over which the supremum is taken. Therefore:

$$H_\infty^\epsilon(X|Y) \geq H_\infty(P_{X|Y}),$$

where $P_{X|Y}$ is the conditional distribution derived from P_{XY} . From the definition of $H_\infty(X|Y)$:

$$H_\infty(P_{X|Y}) = H_\infty(X|Y).$$

Thus, combining the inequalities:

$$H_\infty^\epsilon(X|Y) \geq H_\infty(X|Y).$$

2) *Lower bound*: The relaxation ensures that the min-entropy $H_\infty^\epsilon(X|Y)$ can only increase compared to $H_\infty(X|Y)$, as it maximizes over a larger set of distributions. For any $P_{X'Y'}$, it holds that:

$$H_\infty^\epsilon(X|Y) = -\log \max_{P_{X'Y'}} \max_y \sum_x P_{X'|Y'=y}(x).$$

This is an optimized version of the standard $H_\infty(X|Y)$. However, we consider the ϵ -closeness in terms of probabilities to connect these values. Using standard smoothing arguments, the worst-case difference in probabilities for any outcome is bounded by ϵ . Specifically:

$$P_{X|Y=y}(x) \cdot \frac{1}{1-\epsilon} \leq P_{X'|Y'=y}(x).$$

Taking logs:

$$-\log P_{X|Y=y}(x) + \log(1-\epsilon) \geq -\log(P_{X'|Y'=y}(x)).$$

Maximizing over all $P_{X'Y'}$:

$$H_\infty(X|Y) \geq H_\infty^\epsilon(X|Y) - \log(1/\epsilon).$$

This accounts for the worst-case adjustment introduced by smoothing.

B. Proof of Lemma 6.

This lemma is an extended version of [5, Lemma 5]. It evaluates the likelihood of passing a "typicality test" when input sequences are fed into a noisy MAC and output sequences are generated. The lemma bounds the probability that the channel's output remains consistent with a typical input-output relationship, even under deviations in the input strings (e.g., due to cheating). In simpler terms, this lemma demonstrates that if someone attempts to manipulate the inputs or outputs, the probability of such manipulations going undetected is exponentially small under specific conditions.

Divide X_1^n and X_2^n into smaller "blocks" where manipulations occurred. Each block contains at least one incorrect symbol. Use the law of large numbers: Since δn positions were changed, the overall likelihood of (X_1^n, X_2^n, Z) remaining jointly typical decreases exponentially:

Define the sets \mathcal{I}_{x_1} and \mathcal{I}_{x_2} :

$$\pi_{x_1} := \pi(x_1|x_1^n) = |\mathcal{I}_{x_1}| \quad \text{and} \quad \pi_{x_2} := \pi(x_2|x_2^n) = |\mathcal{I}_{x_2}|.$$

These sets identify positions where the input symbols x_1 and x_2 appear in X_1^n and X_2^n , respectively. Assume that the sequences $x_1^{\mathcal{I}_{x_1}}$ and $x_2^{\mathcal{I}_{x_2}}$ are manipulated. By Hamming distance properties, the cardinalities satisfy:

$$\pi_{x_1} \geq \frac{1}{|\mathcal{X}_1|} \delta n, \quad \pi_{x_2} \geq \frac{1}{|\mathcal{X}_2|} \delta n.$$

For the MAC output, we analyze the empirical distributions $W_{(\tilde{x}_1, \tilde{x}_2)|_k}$ over positions $\mathcal{I}_{x_1} \cap \mathcal{I}_{x_2}$. For the joint input-output behavior at positions k :

$$\left\| \frac{1}{\pi_{x_1} \pi_{x_2}} \sum_{k \in \mathcal{I}_{x_1} \cap \mathcal{I}_{x_2}} W_{(\tilde{x}_1, \tilde{x}_2)|_k} - W_{x_1, x_2} \right\| \geq \frac{1}{|\mathcal{X}_1| |\mathcal{X}_2|} \delta^2 \eta.$$

Here, $W_{(\tilde{x}_1, \tilde{x}_2)|_k}$ is the empirical output distribution, and W_{x_1, x_2} is the expected output distribution given inputs (x_1, x_2) . The deviation occurs because the joint input behavior (x_1, x_2) does not match the expected channel behavior. By the *pigeonhole principle*, there exists at least one output symbol $z \in \mathcal{Z}$ such that:

$$\left| \frac{1}{\pi_{x_1} \pi_{x_2}} \sum_{k \in \mathcal{I}_{x_1} \cap \mathcal{I}_{x_2}} W_{(\tilde{x}_1, \tilde{x}_2)|_k}(z) - W_{x_1, x_2}(z) \right| \geq \frac{1}{|\mathcal{X}_1| |\mathcal{X}_2| |\mathcal{Z}|} \delta^2 \eta.$$

$W_{(\tilde{x}_1, \tilde{x}_2)|_k}$ is the probability of output z at position k . This inequality ensures at least one output symbol z where the deviation is significant.

Now, consider the number of positions where z occurs in the output sequence Z^n . Define:

$$\pi(z|z^{\mathcal{I}_{x_1}, \mathcal{I}_{x_2}}) := \text{count of } z \text{ in } Z^n \text{ over positions } \mathcal{I}_{x_1} \cap \mathcal{I}_{x_2}.$$

Then:

$$\left| \pi(z|z^{\mathcal{I}_{x_1}, \mathcal{I}_{x_2}}) - \sum_{k \in \mathcal{I}_{x_1} \cap \mathcal{I}_{x_2}} W_{(\tilde{x}_1, \tilde{x}_2)|k} \right| \geq \frac{1}{2|\mathcal{X}_1||\mathcal{X}_2||\mathcal{Z}|} \delta^2 \eta \pi_{x_1} \pi_{x_2}.$$

This bounds the deviation in counts of z compared to the expected behavior.

Refine the bound further by introducing sets:

$$\mathcal{J}_{x_1 x_2 y} = \{k \in \mathcal{I}_{x_1} \cap \mathcal{I}_{x_2} : y_k = y\}, \quad \pi_{x_1 x_2 y} := |\mathcal{J}_{x_1 x_2 y}|.$$

Then:

$$\pi_{x_1 x_2 y} \geq \frac{1}{4|\mathcal{X}_1|^2 |\mathcal{X}_2|^2 |\mathcal{Z}|} \delta^2 \eta^2 \pi_{x_1} \pi_{x_2} \geq \frac{1}{4|\mathcal{X}_1|^3 |\mathcal{X}_2|^3 |\mathcal{Z}|} \delta^4 \eta^2 n.$$

Using the Chernoff bound [5, Lemma 4] completes the proof.

C. Proof of Lemma 9.

- Due to the Chernoff bound, we know that the probability of aborting the protocol by Bob in step 2 tends to zero as $n \rightarrow \infty$. When $|\bar{E}_i| < r_i n$ and $|E_i| < r_i n$, then Bob knows $\mathbf{X}_i|_{S_{iZ_i}}$. Since Bob also knows κ_{iZ_i} , Bob can compute the key $\kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}})$. Then Bob can recover M_{iZ_i} from $M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}})$ sent by Alice- i . Then,

$$\lim_{n \rightarrow \infty} \Pr \left[(\hat{M}_{1Z_1}, \hat{M}_{2Z_2}) \neq (M_{1Z_1}, M_{2Z_2}) \right] = 0.$$

•

$$\begin{aligned} I(M_{1\bar{Z}_1}, M_{2\bar{Z}_2}; V) &= I(M_{1\bar{Z}_1}, M_{2\bar{Z}_2}; Z_1, Z_2, Y^n, \mathbf{C}) \\ &= I(M_{1\bar{Z}_1}, M_{2\bar{Z}_2}; Z_1, Z_2, Y^n, \mathbf{C}_1, \mathbf{C}_2) \\ &= I(M_{1\bar{Z}_1}; Z_1, Z_2, Y^n, \mathbf{C}_1, \mathbf{C}_2) + I(M_{2\bar{Z}_2}; Z_1, Z_2, Y^n, \mathbf{C}_1, \mathbf{C}_2 | M_{1\bar{Z}_1}) \\ &\stackrel{(a)}{=} I(M_{1\bar{Z}_1}; Z_1, Y^n, \mathbf{C}_1) + I(M_{2\bar{Z}_2}; Z_2, Y^n, \mathbf{C}_2 | M_{1\bar{Z}_1}) \\ &\stackrel{(b)}{=} I(M_{1\bar{Z}_1}; Z_1, Y^n, \mathbf{C}_1) + I(M_{2\bar{Z}_2}; Z_2, Y^n, \mathbf{C}_2, M_{1\bar{Z}_1}) \\ &\stackrel{(c)}{=} I(M_{1\bar{Z}_1}; Z_1, Y^n, \mathbf{C}_1) + I(M_{2\bar{Z}_2}; Z_2, Y^n, \mathbf{C}_2), \end{aligned} \quad (23)$$

where (a) follows from the fact that $M_{iZ_i} - (Z_i, Y^n, \mathbf{C}_i) - (Z_{\bar{i}}, \mathbf{C}_{\bar{i}})$ is a Markov chain, (b) is due to the independency of M_{iZ_i} from $M_{\bar{i}Z_{\bar{i}}}$, and (c) is due the Markov chain $M_{2\bar{Z}_2} - (Z_2, Y^n, \mathbf{C}_2) - M_{1\bar{Z}_1}$. Now, it suffices to show that $I(M_{i\bar{Z}_i}; Z_i, Y^n, \mathbf{C}_i)_{i \in \{1,2\}}$ tends to zero as $n \rightarrow \infty$.

$$\begin{aligned} I(M_{i\bar{Z}_i}; Z_i, Y^n, \mathbf{C}_i)_{i \in \{1,2\}} &= I(M_{i\bar{Z}_i}; Z_i, Y^n, S_{i0}, S_{i1}, \kappa_{i0}, \kappa_{i1}, M_{i0} \oplus \kappa_{i0}(\mathbf{X}_i|_{S_{i0}}), M_{i1} \oplus \kappa_{i1}(\mathbf{X}_i|_{S_{i1}})) \\ &= I(M_{i\bar{Z}_i}; Z_i, Y^n, S_{iZ_i}, S_{i\bar{Z}_i}, \kappa_{iZ_i}, \kappa_{i\bar{Z}_i}, M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}}), M_{i\bar{Z}_i} \oplus \kappa_{i\bar{Z}_i}(\mathbf{X}_i|_{S_{i\bar{Z}_i}})) \\ &= I(M_{i\bar{Z}_i}; M_{i\bar{Z}_i} \oplus \kappa_{i\bar{Z}_i}(\mathbf{X}_i|_{S_{i\bar{Z}_i}}) | Z_i, Y^n, S_{iZ_i}, S_{i\bar{Z}_i}, \kappa_{iZ_i}, \kappa_{i\bar{Z}_i}, M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}})) \\ &\quad + I(M_{i\bar{Z}_i}; Z_i, Y^n, S_{iZ_i}, S_{i\bar{Z}_i}, \kappa_{iZ_i}, \kappa_{i\bar{Z}_i}, M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}})) \\ &\stackrel{(a)}{=} I(M_{i\bar{Z}_i}; M_{i\bar{Z}_i} \oplus \kappa_{i\bar{Z}_i}(\mathbf{X}_i|_{S_{i\bar{Z}_i}}) | Z_i, Y^n, S_{iZ_i}, S_{i\bar{Z}_i}, \kappa_{iZ_i}, \kappa_{i\bar{Z}_i}, M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}})) \\ &= H(M_{i\bar{Z}_i} \oplus \kappa_{i\bar{Z}_i}(\mathbf{X}_i|_{S_{i\bar{Z}_i}}) | Z_i, Y^n, S_{iZ_i}, S_{i\bar{Z}_i}, \kappa_{iZ_i}, \kappa_{i\bar{Z}_i}, M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}})) \\ &\quad - H(M_{i\bar{Z}_i} \oplus \kappa_{i\bar{Z}_i}(\mathbf{X}_i|_{S_{i\bar{Z}_i}}) | M_{i\bar{Z}_i}, Z_i, Y^n, S_{iZ_i}, S_{i\bar{Z}_i}, \kappa_{iZ_i}, \kappa_{i\bar{Z}_i}, M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}})) \\ &\stackrel{(b)}{\leq} n(r_i - \lambda') \\ &\quad - H(\kappa_{i\bar{Z}_i}(\mathbf{X}_i|_{S_{i\bar{Z}_i}}) | M_{i\bar{Z}_i}, Z_i, (Y^n|_{S_{i\bar{Z}_i}}, Y^n|_{S_{iZ_i}}), S_{iZ_i}, S_{i\bar{Z}_i}, \kappa_{iZ_i}, \kappa_{i\bar{Z}_i}, M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}})) \\ &\stackrel{(c)}{=} n(r_i - \lambda') - H(\kappa_{i\bar{Z}_i}(\mathbf{X}_i|_{S_{i\bar{Z}_i}}) | Y^n|_{S_{i\bar{Z}_i}}, \kappa_{i\bar{Z}_i}), \end{aligned} \quad (24)$$

where (a) follows from the independency of $M_{i\bar{Z}_i}$ from $(Z_i, Y^n, S_{iZ_i}, S_{i\bar{Z}_i}, \kappa_{iZ_i}, \kappa_{i\bar{Z}_i}, M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}}))$, $i \in \{1, 2\}$, (b) follows since $\kappa_{i\bar{Z}_i}(\mathbf{X}_i|_{S_{i\bar{Z}_i}})$ is $n(r_i - \lambda')$, $i \in \{1, 2\}$ bits long and (c) follows since $\kappa_{i\bar{Z}_i}(\mathbf{X}_i|_{S_{i\bar{Z}_i}}) - (Y^n|_{S_{i\bar{Z}_i}}, \kappa_{i\bar{Z}_i}) - M_{i\bar{Z}_i}, Z_i, Y^n, S_{iZ_i}, S_{i\bar{Z}_i}, \kappa_{iZ_i}, M_{iZ_i} \oplus \kappa_{iZ_i}(\mathbf{X}_i|_{S_{iZ_i}})$, $i \in \{1, 2\}$ is a Markov chain. We know that,

$$H_2(\mathbf{X}_i|_{S_{i\bar{Z}_i}} | Y^n|_{S_{i\bar{Z}_i}} = y^n|_{S_{i\bar{Z}_i}}) = \Delta(y^n|_{S_{i\bar{Z}_i}}) \geq nr_i, i \in \{1, 2\},$$

since the size of the set $S_{i\bar{Z}_i}$ is at least nr_i . Then, from Lemma 4 we have:

$$\begin{aligned} H(\kappa(\mathbf{X}_i|_{S_{i\bar{Z}_i}})|\kappa, Y^n|_{S_{i\bar{Z}_i}} = y^n|_{s_{i\bar{Z}_i}}) &\geq n(r_i - \lambda') - \frac{2^{n(r_i - \lambda') - nr_i}}{\ln 2} \\ &= n(r_i - \lambda') - \frac{2^{-n\lambda'}}{\ln 2}. \end{aligned}$$

Then, Eq. (24) tends to:

$$\begin{aligned} \lim_{n \rightarrow \infty} I(M_{i\bar{Z}_i}; V)_{i \in \{1, 2\}} &\leq \lim_{n \rightarrow \infty} n(r_i - \lambda') - n(r_i - \lambda') + \frac{2^{-n\lambda'}}{\ln 2} \\ &= \lim_{n \rightarrow \infty} \frac{2^{-n\lambda'}}{\ln 2} \\ &= 0. \end{aligned}$$

Then, from Eq. (23), we have $\lim_{n \rightarrow \infty} I(M_{1\bar{Z}_1}, M_{2\bar{Z}_2}; V) = 0$.

$$\begin{aligned} I(Z_i; U_i) &= I(Z_i; M_{i0}, M_{i1}, X_i^n, R_{A_i}, \mathbf{C}_i) \\ &= I(Z_i; M_{i0}, M_{i1}, X_i^n, S_0, S_1, \kappa_{i0}, \kappa_{i1}, M_{i0} \oplus \kappa_{i0}(\mathbf{X}_i|_{S_{i0}}), M_{i1} \oplus \kappa_{i1}(\mathbf{X}_i|_{S_{i1}}), R_{A_i}) \\ &= I(Z_i; M_{i0}, M_{i1}, X_i^n, S_{i0}, S_{i1}, \kappa_{i0}, \kappa_{i1}, \kappa_0(\mathbf{X}_i|_{S_{i0}}), \kappa_1(\mathbf{X}_i|_{S_{i1}}), R_{A_i}) \\ &= I(Z_i; M_{i0}, M_{i1}, X_i^n, S_{i0}, S_{i1}, \kappa_{i0}, \kappa_{i1}, R_{A_i}) \\ &\stackrel{(a)}{=} I(Z_i; X_i^n, S_{i0}, S_{i1}) \\ &\stackrel{(b)}{=} I(Z_i; S_{i0}, S_{i1}) \\ &\stackrel{(c)}{=} 0, \end{aligned}$$

where $R_{A_i} = (R^{(i)} = (R_{i0}, R_{i1}), T^{(i)} = (T_{i0}, T_{i1}))$, (a) follows since $M_{i0}, M_{i1}, \kappa_{i0}, \kappa_{i1} \perp (Z_i, X_i^n, S_{i0}, S_{i1}, R_{A_i})$, (b) follows since $X_i^n \perp (Z_i, S_{i0}, S_{i1})$, and (c) follows since the channel acts independently on each input bit and $|S_{i0}| = |S_{i1}|$.

D. Proof of Theorem 11.

$$\begin{aligned} H(S_i) &= H(S_i|X_{\bar{i}}) \\ &= I(S_i; C_i^l, E|X_{\bar{i}}) + H(S_i|C_i^l, E, X_{\bar{i}}). \end{aligned}$$

Consider the last term of the above expression,

$$\begin{aligned} H(S_i|C_i^l, E, X_{\bar{i}}) &= H(S_i, X_i|C_i^l, E, X_{\bar{i}}) - H(X_i|S_i, C_i^l, E, X_{\bar{i}}) \\ &= H(X_i|C_i^l, E, X_{\bar{i}}) + H(S_i|C_i^l, E, X_i, X_{\bar{i}}) - H(X_i|S_i, C_i^l, E, X_{\bar{i}}) \\ &\stackrel{(a)}{=} H(X_i|C_i^l, E, X_{\bar{i}}) - H(X_i|S_i, C_i^l, E, X_{\bar{i}}) \\ &\stackrel{(b)}{\leq} H(X_i|C_i^l, E, X_{\bar{i}}) - H(X_i|S_i, C_i^l, E, X_{\bar{i}}Y) \\ &= H(X_i|C_i^l, E, X_{\bar{i}}) - H(X_i, S_i|C_i^l, E, Y, X_{\bar{i}}) + H(S_i|C_i^l, E, Y, X_{\bar{i}}) \\ &\stackrel{(c)}{=} H(X_i|C_i^l, E, X_{\bar{i}}) - H(X_i|C_i^l, E, Y, X_{\bar{i}}) + H(S_i|C_i^l, E, Y, X_{\bar{i}}) \\ &\stackrel{(d)}{\leq} I(X_i; Y|X_{\bar{i}}, C_i^l, E) + H(S_i|C_i^l, E, Y) \\ &\stackrel{(e)}{\leq} I(X_i; Y|X_{\bar{i}}, C_i^l, E) + H(S_i|S_i'), \end{aligned}$$

for $i \in \{1, 2\}$, where (a) and (c) follow from the condition (11), (b) is due to the fact that conditioning does not increase the entropy, (d) is due to the fact that $S_i \perp X_{\bar{i}}$, and (e) follows from:

$$\begin{aligned} H(S_i, S_i'|C_i^l, Y, E) &= H(S_i|C_i^l, Y, E) + H(S_i'|S_i, C_i^l, Y, E) \\ &= H(S_i'|C_i^l, Y, E) + H(S_i|S_i', C_i^l, Y, E). \end{aligned}$$

Considering the condition (13), implies that:

$$H(S_i|C_i^l, Y, E) = H(S_i|S_i', C_i^l, Y, E) \leq H(S_i|S_i').$$

Putting everything together completes the proof for the individual rates.

For the joint entropy, by the same reasoning as above, we have:

$$H(S_1, S_2) = I(S_1, S_2; C_1^l, C_2^l, E) + H(S_1, S_2 | C_1^l, C_2^l, E). \quad (25)$$

Consider the last term of the above expression,

$$\begin{aligned} H(S_1, S_2 | C_1^l, C_2^l, E) &= H(S_1, S_2, X_1, X_2 | C_1^l, C_2^l, E) - H(X_1, X_2 | S_1, S_2, C_1^l, C_2^l, E) \\ &= H(X_1, X_2 | C_1^l, C_2^l, E) + H(S_1, S_2 | C_1^l, C_2^l, E, X_1, X_2) - H(X_1, X_2 | S_1, S_2, C_1^l, C_2^l, E) \\ &= H(X_1, X_2 | C_1^l, C_2^l, E) - H(X_1, X_2 | S_1, S_2, C_1^l, C_2^l, E) \\ &\leq H(X_1, X_2 | C_1^l, C_2^l, E) - H(X_1, X_2 | S_1, S_2, C_1^l, C_2^l, E, Y) \\ &= H(X_1, X_2 | C_1^l, C_2^l, E) - H(X_1, X_2, S_1, S_2 | C_1^l, C_2^l, E, Y) + H(S_1, S_2 | C_1^l, C_2^l, E, Y) \\ &= H(X_1, X_2 | C_1^l, C_2^l, E) - H(X_1, X_2 | C_1^l, C_2^l, E, Y) + H(S_1, S_2 | C_1^l, C_2^l, E, Y) \\ &\stackrel{(a)}{\leq} I(X_1, X_2; Y | C_1^l, C_2^l, E) + H(S_1, S_2 | C_1^l, C_2^l, E, Y) \\ &\leq I(X_1, X_2; Y | C_1^l, C_2^l, E) + H(S_1, S_2 | S_1^l, S_2^l), \end{aligned} \quad (26)$$

where (a) follows from (12).

E. Proof of Corollary 12.

Alice-1 and Alice-2 each independently generate uniformly distributed keys S_1 and S_2 , respectively. They then produce channel inputs as stochastic functions of these keys, resulting in $X_1^n = f'_1(S_1)$ and $X_2^n = f'_2(S_2)$. These inputs are sent over the Discrete Memoryless Multiple Access Channel (DM-MAC). The outputs Y^n and E^n are subsequently received by Bob and Eve, respectively. Following this, Alice- i generates $C_i = f_i(S_i, E^n)$. These functions ($C_i, i \in \{1, 2\}$) are then transmitted over the public channel so that the receiver can reconstruct the keys. It is important to note that all the functions mentioned above are stochastic. According to Fano's inequality, for any arbitrarily small $\epsilon \geq 0$, we have:

$$\begin{aligned} H(S_1, S_2 | Y^n, C_1, C_2) &\leq h(\epsilon) + \epsilon(H(S_1) + H(S_2)) \\ &\leq h(\epsilon) + \epsilon(nR_1 + nR_2 + 2n\epsilon) \\ &\leq n\left(\frac{h(\epsilon)}{n} + \epsilon(R_1 + R_2 + 2n\epsilon)\right) \triangleq n\epsilon'. \end{aligned}$$

It is clear that $\epsilon' \rightarrow 0$ if $\epsilon \rightarrow 0$. Also, two security criteria should be fulfilled for arbitrarily small $\epsilon \geq 0$: $I(S_1; E^n C_1) \leq n\epsilon$, $I(S_2; E^n C_2) \leq n\epsilon$ (Condition (15)):

$$\begin{aligned} R_i &\leq \frac{1}{n}H(S_i) + \epsilon \\ &\stackrel{(a)}{\leq} \frac{1}{n}H(S_i | E^n, C_i) + 2\epsilon \\ &= \frac{1}{n}H(S_i | X_i^n, E^n, C_i) + 2\epsilon \\ &\stackrel{(b)}{\leq} \frac{1}{n}H(S_i | X_i^n, E^n, C_i) - \frac{1}{n}H(S_i | Y^n, C_i, C_{\bar{i}}) + 2\epsilon + \epsilon' \\ &\leq \frac{1}{n}H(S_i | X_i^n, E^n, C_i) - \frac{1}{n}H(S_i | Y^n, X_i^n, E^n, C_i, C_{\bar{i}}) + 2\epsilon + \epsilon' \\ &\stackrel{(c)}{=} \frac{1}{n}H(S_i | X_i^n, E^n, C_i) - \frac{1}{n}H(S_i | Y^n, X_i^n, E^n, C_i) + 2\epsilon + \epsilon' \\ &= \frac{1}{n}I(S_i; Y^n | X_i^n, E^n, C_i) + 2\epsilon + \epsilon' \\ &= \frac{1}{n}H(Y^n | X_i^n, E^n, C_i) - \frac{1}{n}H(Y^n | X_i^n, C_i, E^n, S_i) + 2\epsilon + \epsilon' \\ &\leq \frac{1}{n}H(Y^n | X_i^n, E^n) - \frac{1}{n}H(Y^n | X_i^n, X_{\bar{i}}^n, C_i, E^n, S_i) + 2\epsilon + \epsilon' \\ &\stackrel{(d)}{=} \frac{1}{n}H(Y^n | X_i^n, E^n) - \frac{1}{n}H(Y^n | X_i^n, X_{\bar{i}}^n, E^n, S_i) + 2\epsilon + \epsilon' \\ &\stackrel{(e)}{=} \frac{1}{n}H(Y^n | X_i^n, E^n) - \frac{1}{n}H(Y^n | X_i^n, X_{\bar{i}}^n, E^n) + 2\epsilon + \epsilon' \\ &\stackrel{(f)}{\leq} \max_{P_{X_1} P_{X_2}} I(X_i; Y | X_{\bar{i}}, E) + 2\epsilon + \epsilon', \end{aligned} \quad (27)$$

for $i \in \{1, 2\}$, where (a) follows from the security criteria, (b) follows from Fano's lemma, (c) and (d) follow from the fact that $C_i = f_i(S_i, E^n)$, (e) follows from the Markov chain $Y^n - (X_1^n, X_2^n) - (S_1, S_2)$, and (f) follows from the memoryless property of the channel and an argument similar to [16, Theorem 4]. As is mentioned before and proved in [16] for the case of constant random variable E , we can remove the impact of E from the above mutual information quantity. The whole above process can similarly be repeated for the joint entropy $H(S_1, S_2)$. This completes the proof.

F. Proof of Theorem 14

Consider the system model illustrated in Figure 2-(a). To prove the upper bound for $\binom{2}{1} - \text{OT}^{k_1, k_2}$ capacity, consider that (n, k_1, k_2) protocols fulfilling conditions (6)-(8). Condition (7) can be rewritten as:

$$\lim_{n \rightarrow \infty} I(M_{1\bar{Z}_1}, M_{2\bar{Z}_2}; V) = \lim_{n \rightarrow \infty} I(M_{1\bar{Z}_1}; V) + \lim_{n \rightarrow \infty} I(M_{2\bar{Z}_2}; V | M_{1\bar{Z}_1}) \quad (28)$$

$$\begin{aligned} &= \lim_{n \rightarrow \infty} I(M_{1\bar{Z}_1}; V) + \lim_{n \rightarrow \infty} I(M_{2\bar{Z}_2}; V) \\ &= 0, \end{aligned} \quad (29)$$

This means that $\lim_{n \rightarrow \infty} I(M_{i\bar{Z}_i}; V)_{i \in \{1, 2\}} = 0$ and its relaxed version: $I(M_{i\bar{Z}_i}; V)_{i \in \{1, 2\}} = o(n)$:

$$I(M_{i\bar{Z}_i}; V)_{i \in \{1, 2\}} = I(M_{i\bar{Z}_i}; Z_i, Z_{\bar{i}}, R_B, Y^n, \mathbf{C})_{i \in \{1, 2\}} = o(n). \quad (30)$$

$I(Z_i, Z_{\bar{i}}, R_B, Y^n, \mathbf{C}; M_{i\bar{Z}_i})_{i \in \{1, 2\}} = I(Z_i, Z_{\bar{i}}; M_{i\bar{Z}_i})_{i \in \{1, 2\}} + I(R_B, Y^n, \mathbf{C}; M_{i\bar{Z}_i} | Z_i, Z_{\bar{i}})_{i \in \{1, 2\}}$ $\stackrel{(a)}{=}$ $I(R_B, Y^n, \mathbf{C}; M_{i\bar{Z}_i} | Z_i, Z_{\bar{i}})_{i \in \{1, 2\}}$, where (a) follows from the fact that $I(Z_i, Z_{\bar{i}}; M_{i\bar{Z}_i})_{i \in \{1, 2\}} = 0$. So, Condition (30) implies that $I(R_B, Y^n, \mathbf{C}; M_{i\bar{Z}_i} | Z_i, Z_{\bar{i}})_{i \in \{1, 2\}} \rightarrow 0$. Instead of using Condition (30), we have:

$$I(R_B, Y^n, \mathbf{C}; M_{i\bar{Z}_i} | Z_i, Z_{\bar{i}})_{i \in \{1, 2\}} = o(n). \quad (31)$$

Given a DM-MAC $\{\mathcal{W} : \mathcal{X}_1 \mathcal{X}_2 \rightarrow \mathcal{Y}\}$, consider $\binom{2}{1} - \text{OT}^{k_1, k_2}$ protocols that satisfy (6), (8), and (31). According to Lemma 5, Condition (8) implies:

$$H(M_{i\bar{Z}_i} | X_i^n, \mathbf{C}_i, Z_i = \bar{z}_i)_{i \in \{1, 2\}} - H(M_{i\bar{Z}_i} | X_i^n, \mathbf{C}_i, Z_i = z_i)_{i \in \{1, 2\}} \quad (32)$$

$$= H(M_{i\bar{Z}_i} | \mathbf{C}_i, Z_i = \bar{z}_i)_{i \in \{1, 2\}} - H(M_{i\bar{Z}_i} | \mathbf{C}_i, Z_i = z_i)_{i \in \{1, 2\}}$$

$$\stackrel{(a)}{=} H(M_{i\bar{Z}_i} | \mathbf{C}_i, Z_i = \bar{z}_i)_{i \in \{1, 2\}} - H(M_{i\bar{Z}_i} | \mathbf{C}_i, Z_i = z_i)_{i \in \{1, 2\}}$$

$$- H(M_{i\bar{Z}_i} | Z_i = \bar{z}_i)_{i \in \{1, 2\}}$$

$$+ H(M_{i\bar{Z}_i} | Z_i = z_i)_{i \in \{1, 2\}}$$

$$= I(M_{i\bar{Z}_i}; \mathbf{C}_i | Z_i = \bar{z}_i)_{i \in \{1, 2\}} - I(M_{i\bar{Z}_i}; \mathbf{C}_i | Z_i = z_i)_{i \in \{1, 2\}} \quad (33)$$

$$= o(n), \quad (34)$$

where (a) follows from the fact that $H(M_{i\bar{Z}_i} | Z_i = \bar{z}_i) = H(M_{i\bar{Z}_i} | Z_i = z_i) = k_i$.

Suppose $Z_i = z_i$ and $Z_{\bar{i}} = z_{\bar{i}}$ in Eq. (31), then we have $I(R_B, Y^n, \mathbf{C}_i; M_{i\bar{Z}_i} | Z_i = z_i, Z_{\bar{i}} = z_{\bar{i}})_{i \in \{1, 2\}} = o(n)$ combined with (33) and (34) concludes:

$$I(M_{i\bar{Z}_i}; \mathbf{C}_i | Z_i = z_i, Z_{\bar{i}} = z_{\bar{i}})_{i \in \{1, 2\}} = o(n). \quad (35)$$

Conditions (6) and (35) without conditioning on $(Z_i = z_i, Z_{\bar{i}} = z_{\bar{i}})_{i \in \{1, 2\}}$ are akin to those defining a secret key for Alice- i and Bob with weak secrecy (conditions (14) and (15), respectively), ensuring security from an eavesdropper who observes their public communication \mathbf{C}_i . So, k_i would constitute such a secret key by definition, as demonstrated in Corollary 12. Thus, we get:

$$k_i = H(M_{i\bar{Z}_i}) \leq \sum_{l=1}^n I(X_{i,l}; Y_l | X_{\bar{i},l}) + o(n). \quad (36)$$

From the memoryless property of the channel we have: $\frac{k_i}{n} = R_i \leq I(X_i; Y | X_{\bar{i}})$. By a similar calculation for the joint entropy where $k_1 + k_2 = H(M_{1\bar{Z}_1}, M_{2\bar{Z}_2}) \leq \sum_{l=1}^n I(X_{1,l}, X_{2,l}; Y_l) + o(n)$ and from the memoryless property of the channel we have: $\frac{k_1 + k_2}{n} = R_1 + R_2 \leq I(X_1, X_2; Y)$.

G. Proof of Theorem 13.

We must bound three conditional min-entropies to get three bounds on the lower bound:

$$H_{\infty}^{\epsilon}(\mathbf{X}_1 |_{S_{1\bar{Z}_1}} | h_{10}(R_{10}, \mathbf{X}_1 |_{S_{10}}), h_{11}(R_{11}, \mathbf{X}_1 |_{S_{11}}), Y^n, R^{(1)}, T^{(1)}), \quad (37)$$

$$H_{\infty}^{\epsilon}(\mathbf{X}_2 |_{S_{2\bar{Z}_2}} | h_{20}(R_{20}, \mathbf{X}_2 |_{S_{20}}), h_{21}(R_{21}, \mathbf{X}_2 |_{S_{21}}), Y^n, R^{(2)}, T^{(2)}), \quad (38)$$

$$H_\infty^\epsilon(\mathbf{X}_1|_{S_{1\bar{Z}_1}}, \mathbf{X}_2|_{S_{2\bar{Z}_2}} | h_{10}(R_{10}, \mathbf{X}_1|_{S_{10}}), h_{11}(R_{11}, \mathbf{X}_1|_{S_{11}}), h_{20}(R_{20}, \mathbf{X}_2|_{S_{20}}), h_{21}(R_{21}, \mathbf{X}_2|_{S_{21}}), Y^n, R_{A_1}, R_{A_2}). \quad (39)$$

Consider (37). Since the SU-SBC $_{p,W}$ is i.i.d., we have:

$$\begin{aligned} H_\infty^\epsilon(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | h_{10}(R_{10}, \mathbf{X}_1|_{S_{10}}), h_{11}(R_{11}, \mathbf{X}_1|_{S_{11}}), Y^n, R^{(1)}, T^{(1)}) \\ = H_\infty^\epsilon(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}), \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) \end{aligned}$$

Applying (1) for $\epsilon, \epsilon' > 0$, we have:

$$\begin{aligned} H_\infty^{\epsilon+\epsilon'}(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}), \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) \\ \geq H_\infty(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) + H_\infty^\epsilon(h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}) | \mathbf{X}_1|_{S_{1\bar{Z}_1}}, \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) \\ - H_0(h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}) | \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) - \log\left(\frac{1}{\epsilon'}\right). \quad (40) \end{aligned}$$

Note that $H_0(h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}) | \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)})$ limits the number of distinct possible outputs, restricting the amount of information Alice-1 can gain about Bob's choice:

$$H_0(h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}) | \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) \leq s_1 n.$$

Knowing that $H_\infty^\epsilon(h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}) | \mathbf{X}_1|_{S_{1\bar{Z}_1}}, \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) = 0$, Eq. (40) is simplified to:

$$\begin{aligned} H_\infty^{\epsilon+\epsilon'}(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}), \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) &\geq H_\infty(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | \mathbf{Y}|_{S_{1\bar{Z}_1}}) - s_1 n - \log\left(\frac{1}{\epsilon'}\right) \\ &\stackrel{(a)}{\geq} H_\infty^\epsilon(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | \mathbf{Y}|_{S_{1\bar{Z}_1}}) - s_1 n - \log\left(\frac{1}{\epsilon}\right) - \log\left(\frac{1}{\epsilon'}\right), \quad (41) \end{aligned}$$

where (a) follows from Lemma 1. Let V be an i.i.d. random variable so that $V = e$ (erasure) with probability $\frac{1}{2} - \eta$ and $V = Z$ (the output of channel W on input (X_1, X_2)). With negligible error probability and SU-SBC $_{p,W}$ being i.i.d., for $S_{1\bar{Z}_1}$, we have:

$$\begin{aligned} H_\infty^{\epsilon+\epsilon'}(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | \mathbf{Y}|_{S_{1\bar{Z}_1}}) &\geq H_\infty^\epsilon(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | \mathbf{V}|_{S_{1\bar{Z}_1}}) \\ &\stackrel{(a)}{\geq} |S_{1\bar{Z}_1}| H(X_1|V) - 4\sqrt{|S_{1\bar{Z}_1}| \log(1/\epsilon) \log|\mathcal{X}_1|} \\ &\geq (p - \eta)nH(X_1|V) - 4\sqrt{(p - \eta)n \log(1/\epsilon)} \\ &\geq pnH(X_1|V) - \eta nH(X_1|V) - 4\sqrt{(p - \eta)n \log(1/\epsilon)} \\ &\geq pnH(X_1|V) - \eta n - 4\sqrt{(p - \eta)n \log(1/\epsilon)} \\ &\stackrel{(b)}{\geq} pn(1 - 2\eta)H(X_1) + 2\eta nH(X_1|Z) - \eta n - 4\sqrt{(p - \eta)n \log(1/\epsilon)} \\ &\geq pnH(X_1) - 2\eta n - 4\sqrt{n \log(1/\epsilon)}, \quad (42) \end{aligned}$$

where (a) follows from Lemma 2, $|\mathcal{X}_1| = 2$, and (b) follows from this fact that honest Bob doesn't split the erasures received from Alice-1 between S_{10} and S_{11} , with probability exponentially close to one, the total number of non-erased symbols Bob receives from each sender will not exceed $(p + \eta)n$, so the number of non-erasures in $Y|_{S_{1\bar{Z}_1}}$ is at most $|(p - \eta)n - (p + \eta)n| = 2n\eta$.

Putting $\epsilon = \epsilon + \epsilon'$ in (41), then putting (42) to (41), we have:

$$\begin{aligned} H_\infty^{\epsilon+2\epsilon'}(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}), \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) &\geq pnH(X_1) - 2\eta n - 4\sqrt{n \log(1/\epsilon)} - s_1 n - \log\left(\frac{1}{\epsilon}\right) - \log\left(\frac{1}{\epsilon'}\right) \\ &\stackrel{(a)}{=} pnH(X_1) - s_1 n - 2\eta n - 4\sqrt{n\alpha} - n(\alpha + \alpha'), \quad (43) \end{aligned}$$

where (a) follows from setting $\epsilon = 2^{-\alpha n}$ and $\epsilon' = 2^{-\alpha' n}$ (ϵ and ϵ' are negligible in n). For any $\delta \geq (\alpha + \alpha' + 2\eta + 4\sqrt{\alpha}) > 0$, we have:

$$H_\infty^{\epsilon+2\epsilon'}(\mathbf{X}_1|_{S_{1\bar{Z}_1}} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{Z}_1}}), \mathbf{Y}|_{S_{1\bar{Z}_1}}, R^{(1)}, T^{(1)}) \geq pnH(X_1) - s_1 n - \delta n.$$

From Lemma 3, we know that if we set $r_1 < pH(X_1) - s_1$ and appropriately choose the constant δ, η, α and α' , Bob can not obtain non-trivial information about the unselected string. The proof for Alice-2 is the same.

Now we consider (39). Since the $\text{SU-SBC}_{p,W}$ is i.i.d., (39) can be written as:

$$\begin{aligned}
& H_\infty^\epsilon(\mathbf{X}_1|_{S_1\bar{Z}_1}, \mathbf{X}_2|_{S_2\bar{Z}_2} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}), h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}), \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \stackrel{(a)}{\geq} H_\infty(\mathbf{X}_1|_{S_1\bar{Z}_1} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}), h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}), \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \quad + H_\infty^\epsilon(\mathbf{X}_2|_{S_2\bar{Z}_2} | \mathbf{X}_1|_{S_1\bar{Z}_1}, h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}), h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}), \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \stackrel{(b)}{\geq} H_\infty^\epsilon(\mathbf{X}_1|_{S_1\bar{Z}_1} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}), h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}), \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \quad + H_\infty^\epsilon(\mathbf{X}_2|_{S_2\bar{Z}_2} | \mathbf{X}_1|_{S_1\bar{Z}_1}, h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}), h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}), \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) - \log\left(\frac{1}{\epsilon}\right),
\end{aligned}$$

where (a) is due to (3), and (b) is due to Lemma 1. Applying (1) $\epsilon, \epsilon' > 0$ for each terms, we have:

$$\begin{aligned}
& H_\infty^{\epsilon+\epsilon'}(\mathbf{X}_1|_{S_1\bar{Z}_1} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}), h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}), \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \quad + H_\infty^{\epsilon+\epsilon'}(\mathbf{X}_2|_{S_2\bar{Z}_2} | \mathbf{X}_1|_{S_1\bar{Z}_1}, h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}), h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}), \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) - \log\left(\frac{1}{\epsilon}\right) \\
& \stackrel{(a)}{\geq} H_\infty(\mathbf{X}_1|_{S_1\bar{Z}_1} | \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \quad + H_\infty^\epsilon(h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}) | \mathbf{X}_1|_{S_1\bar{Z}_1}, \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \quad - H_0(h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}) | \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) - \log\left(\frac{1}{\epsilon'}\right) \\
& \quad + H_\infty(\mathbf{X}_2|_{S_2\bar{Z}_2} | \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \quad + H_\infty^\epsilon(h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}) | \mathbf{X}_1|_{S_1\bar{Z}_1}, \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \quad - H_0(h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}) | \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) - \log\left(\frac{1}{\epsilon'}\right) \\
& \stackrel{(b)}{\geq} H_\infty^\epsilon(\mathbf{X}_1|_{S_1\bar{Z}_1} | \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}) + H_\infty^\epsilon(\mathbf{X}_2|_{S_2\bar{Z}_2} | \mathbf{X}_1|_{S_1\bar{Z}_1}, \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}) \\
& \quad - s_1n - s_2n - 2\log\left(\frac{1}{\epsilon}\right) - 2\log\left(\frac{1}{\epsilon'}\right), \tag{44}
\end{aligned}$$

where (a) is due to (1) and the independence of X_i from $h_{i,j}$, and (b) is due to the similar simplification as (40)-(41). The first term of (44) can be bounded similarly to (42). For the second term, we have:

$$\begin{aligned}
H_\infty^{\epsilon+\epsilon'}(\mathbf{X}_2|_{S_2\bar{Z}_2} | \mathbf{X}_1|_{S_1\bar{Z}_1}, \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}) & \geq H_\infty^\epsilon(\mathbf{X}_2|_{S_2\bar{Z}_2} | \mathbf{X}_1|_{S_1\bar{Z}_1}, \mathbf{V}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}) \\
& \stackrel{(a)}{\geq} |S_{2\bar{Z}_2}| H(X_2|X_1, V) - 4\sqrt{|S_{2\bar{Z}_2}| \log(1/\epsilon) \log|\mathcal{X}_2|} \\
& \geq (p - \eta)nH(X_2|X_1, V) - 4\sqrt{(p - \eta)n \log(1/\epsilon)} \\
& \geq pnH(X_2|X_1, V) - \eta nH(X_2|X_1, V) - 4\sqrt{(p - \eta)n \log(1/\epsilon)} \\
& \geq pn(1 - 2\eta)H(X_2|X_1) + 2\eta nH(X_2|X_1, Z) - \eta n - 4\sqrt{(p - \eta)n \log(1/\epsilon)} \\
& \geq pnH(X_2) - 2\eta n - 4\sqrt{n \log(1/\epsilon)}, \tag{45}
\end{aligned}$$

where (a) is due to Lemma 2 and this fact that in Protocol 1, $|S_{1Z_1}| = |S_{2Z_2}| = (p - \eta)n$.

Then by putting $\epsilon = \epsilon + \epsilon'$, Eq. (44) is as follows:

$$\begin{aligned}
& H_\infty^{\epsilon+2\epsilon'}(\mathbf{X}_1|_{S_1\bar{Z}_1} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}), h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}), \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) \\
& \quad + H_\infty^{\epsilon+\epsilon'}(\mathbf{X}_2|_{S_2\bar{Z}_2} | \mathbf{X}_1|_{S_1\bar{Z}_1}, h_{1j}(R_{1j}, \mathbf{X}_1|_{S_1\bar{Z}_1}), h_{2j}(R_{2j}, \mathbf{X}_2|_{S_2\bar{Z}_2}), \mathbf{Y}|_{S_1\bar{Z}_1, S_2\bar{Z}_2}, R_{A_1}, R_{A_2}) - \log\left(\frac{1}{\epsilon}\right) \\
& \quad \geq pn(H(X_1) + H(X_2)) - 4\eta n - 8\sqrt{n \log(1/\epsilon)} - s_1n - s_2n - 2\log\left(\frac{1}{\epsilon}\right) - 2\log\left(\frac{1}{\epsilon'}\right) \\
& \stackrel{(a)}{\geq} pn(H(X_1) + H(X_2)) - s_1n - s_2n - 2\delta n, \tag{46}
\end{aligned}$$

for any $\delta \geq (\alpha + \alpha' + 2\eta + 4\sqrt{\alpha}) > 0$, (a) follows from setting $\epsilon = 2^{-\alpha n}$ and $\epsilon' = 2^{-\alpha' n}$ (ϵ and ϵ' are negligible in n).

From Lemma 3, we know that if we set $r_1 + r_2 < p(H(X_1) + H(X_2)) - s_1 - s_2$ and appropriately choose the constant δ, η, α and α' , Bob can not obtain non-trivial information about the unselected strings.

Now, we find the appropriate s_1 and s_2 under which the protocol remains correct and secure. Due to the Chernoff bound, we know that the probability of aborting the protocol by Bob in step (2) tends to zero as $n \rightarrow \infty$. The protocol fails in step (5), if there is more than one pair, such as $(\hat{\mathbf{x}}_1|_{S_1Z_1}, \hat{\mathbf{x}}_2|_{S_2Z_2})$ where $h_i(\mathbf{X}_i|_{S_iZ_i}) = h_i(\hat{\mathbf{X}}_i|_{S_iZ_i})$. We know that if both players are honest, then $\mathbf{Z}|_{S_1Z_1, S_2Z_2} = \mathbf{Y}|_{S_1Z_1, S_2Z_2}$ with probability exponentially close to one and the number of paired sequences $(\hat{\mathbf{x}}_1|_{S_1Z_1}, \hat{\mathbf{x}}_2|_{S_2Z_2})$ jointly typical with $\mathbf{z}|_{S_1Z_1, S_2Z_2}$ can be upper bounded as follows:

- If one of the sequences $\hat{\mathbf{x}}_i|_{S_iZ_i}$ is not typical with $(\mathbf{x}_{\bar{i}}|_{S_{\bar{i}}Z_{\bar{i}}}, \mathbf{z}|_{S_1Z_1, S_2Z_2})$: $2^{|S_iZ_i|(H(X_1, X_2, Z) - H(X_{\bar{i}}, Z) + \delta')}$ $= 2^{np(H(X_i|X_{\bar{i}}, Z) + \delta')}$, $\delta' > 0$. From (4), we know that $p \leq 2^{-s_i n} 2^{pn(H(X_i|X_{\bar{i}}, Z) + \delta')}$, then $s_i > pH(X_i|X_{\bar{i}}, Z)$.
- If both of the sequences $(\hat{\mathbf{x}}_1|_{S_1Z_1}, \hat{\mathbf{x}}_2|_{S_2Z_2})$ are not typical with $\mathbf{z}|_{S_1Z_1, S_2Z_2}$: $2^{|S_iZ_i|(H(X_1, X_2, Z) - H(Z) + \delta')}$ $= 2^{np(H(X_1, X_2, Z) - H(Z) + \delta')}$, $\delta' > 0$. From (5), we know that $p \leq 2^{-(s_1 + s_2)n} 2^{pn(H(X_1, X_2, Z) - H(Z) + \delta')}$, then $s_1 + s_2 > p(H(X_1, X_2, Z) - H(Z) + \delta')$.

The final inner bound is as follows:

$$\begin{aligned} r_1 &< p \max_{P_{X_1} P_{X_2}} (H(X_1) - H(X_1|X_2, Z)) = \max_{P_{X_1} P_{X_2}} I(X_1; Y|X_2), \\ r_2 &< p \max_{P_{X_1} P_{X_2}} (H(X_2) - H(X_2|X_1, Z)) = \max_{P_{X_1} P_{X_2}} I(X_2; Y|X_1), \\ r_1 + r_2 &< p \max_{P_{X_1} P_{X_2}} (H(X_1) + H(X_2) + H(Z) - H(X_1, X_2, Z)) = \max_{P_{X_1} P_{X_2}} I(X_1, X_2; Y). \end{aligned}$$

The lower and upper bounds coincide, then the capacity is proved.

H. Proof of Theorem 13.

The overall structure of the proof is the same as Theorem 13 wherein all parties are honest. Malicious Bob can benefit from the unfairness of the channel and deviate from the channel statistics in δn positions without being detected. He tries to find the unselected strings from both senders. Thus, he could compute sets S_{i0} and S_{i1} so that non-erasures are distributed in both sets. With probability exponentially close to one, the total number of non-erasures Bob receives from each sender will be no larger than $(p + \eta)n$. Thus, for any strategy Bob distributes these non-erasures between two sets S_{i0} and S_{i1} , the number of erasures in $S_{i\bar{z}_i}$ is no less than $(p - \eta)n - \frac{p+\eta}{2}n = \frac{1}{2}(p - 3\eta)n$.

Again, we must bound (37)-(39), to get three bounds on the lower bound. For (37) and (38), all steps are the same until (41). Let V be an i.i.d. random variable so that $V = e$ (erasure) with probability $\frac{1}{2} - \eta$ and $V = Z$ (the output of channel W on input (X_1, X_2)). As the number of erasures in $S_{i\bar{z}_i}$ is no less than $\frac{1}{2}(p - 3\eta)n$ with negligible error probability and $SU-SBC_{p,W}$ being i.i.d., by taking the same steps as (42) for $S_{1\bar{z}_1}$, we have:

$$\begin{aligned} H_{\infty}^{\epsilon + \epsilon'}(\mathbf{X}_1|_{S_{1\bar{z}_1}} | \mathbf{Y}|_{S_{1\bar{z}_1}}) &\geq H_{\infty}^{\epsilon}(\mathbf{X}_1|_{S_{1\bar{z}_1}} | \mathbf{V}|_{S_{1\bar{z}_1}}) \\ &\geq \frac{p}{2}n(H(X_1) + H(X_1|Z)) - 2\eta n - 4\sqrt{n \log(1/\epsilon)}. \end{aligned} \quad (47)$$

Putting $\epsilon = \epsilon + \epsilon'$ in (41), then putting (47) to (41), we have:

$$\begin{aligned} H_{\infty}^{\epsilon + 2\epsilon'}(\mathbf{X}_1|_{S_{1\bar{z}_1}} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{z}_1}}), \mathbf{Y}|_{S_{1\bar{z}_1}}, R^{(1)}, T^{(1)}) &\geq \frac{p}{2}n(H(X_1) + H(X_1|Z)) - 2\eta n - 4\sqrt{n \log(1/\epsilon)} \\ &\quad - s_1 n - \log\left(\frac{1}{\epsilon}\right) - \log\left(\frac{1}{\epsilon'}\right) \\ &\stackrel{(a)}{=} \frac{p}{2}n(H(X_1) + H(X_1|Z)) - 2\eta n - 4\sqrt{n \log(1/\epsilon)} \\ &\quad - s_1 n - 2\eta n - 4\sqrt{n\alpha} - n(\alpha + \alpha'), \end{aligned} \quad (48)$$

where (a) follows from setting $\epsilon = 2^{-\alpha n}$ and $\epsilon' = 2^{-\alpha' n}$ (ϵ and ϵ' are negligible in n). For any $\delta \geq (\alpha + \alpha' + 2\eta + 4\sqrt{\alpha}) > 0$, we have:

$$H_{\infty}^{\epsilon + 2\epsilon'}(\mathbf{X}_1|_{S_{1\bar{z}_1}} | h_{1j}(R_{1j}, \mathbf{X}_1|_{S_{1\bar{z}_1}}), \mathbf{Y}|_{S_{1\bar{z}_1}}, R^{(1)}, T^{(1)}) \geq \frac{p}{2}n(H(X_1) + H(X_1|Z)) - s_1 n - \delta n.$$

From Lemma 3, we know that if we set $r_1 < \frac{p}{2}n(H(X_1) + H(X_1|Z)) - s_1$ and appropriately choose the constant δ, η, α and α' , Bob can not obtain non-trivial information about the unselected string. The proof for Alice-2 is the same.

Now consider (44) for the sum-rate. Similarly, it can be bounded from below:

$$\begin{aligned}
& H_\infty^\epsilon(\mathbf{X}_1|_{S_1\bar{Z}_1}|\mathbf{Y}|_{S_1\bar{Z}_1,S_2\bar{Z}_2}) + H_\infty^\epsilon(\mathbf{X}_2|_{S_2\bar{Z}_2}|\mathbf{X}_1|_{S_1\bar{Z}_1}, \mathbf{Y}|_{S_1\bar{Z}_1,S_2\bar{Z}_2}) - s_1n - s_2n - 2\log\left(\frac{1}{\epsilon}\right) - 2\log\left(\frac{1}{\epsilon'}\right) \\
& \geq \frac{p}{2}n(H(X_1) + H(X_2) + H(X_1|Z) + H(X_2|X_1, Z)) - 4\eta n - 8\sqrt{n\log(1/\epsilon)} - s_1n - s_2n \\
& \quad - 2\log\left(\frac{1}{\epsilon}\right) - 2\log\left(\frac{1}{\epsilon'}\right) \\
& \stackrel{(a)}{\geq} \frac{p}{2}n(H(X_1) + H(X_2) + H(X_1|Z) + H(X_2|X_1, Z)) - s_1n - s_2n - 2\delta n,
\end{aligned}$$

for any $\delta \geq (\alpha + \alpha' + 2\eta + 4\sqrt{\alpha}) > 0$, (a) follows from setting $\epsilon = 2^{-\alpha n}$ and $\epsilon' = 2^{-\alpha' n}$ (ϵ and ϵ' are negligible in n).

Up to now, we proved that if $r_i > \frac{p}{2}n(H(X_i) + H(X_i|Z)) - s_i n - \delta n$ and $r_1 + r_2 > \frac{p}{2}n(H(X_1) + H(X_1|Z) + H(X_2) + H(X_2|X_1, Z)) - s_1n - s_2n - 2\delta n$, then Protocol 1 is private against malicious Bob. Since we proved for $s_i > pH(X_i|X_i^c, Z)$ and $s_1 + s_2 > p(H(X_1, X_2, Z) - H(Z) + \delta')$, Protocol 1 is correct for honest players, Then the above region can be written as:

$$\begin{aligned}
R_1 & < \frac{1}{2} \max_{P_{X_1} P_{X_2}} \{I(X_1; Y|X_2) + I(X_1; X_2|Y)\}, \\
R_2 & < \frac{1}{2} \max_{P_{X_1} P_{X_2}} \{I(X_2; Y|X_1) + I(X_1; X_2|Y)\}, \\
R_1 + R_2 & < \frac{1}{2} \max_{P_{X_1} P_{X_2}} I(X_1, X_2; Y),
\end{aligned}$$

for some distribution $p(x_1)p(x_2)$ on $\mathcal{X}_1 \times \mathcal{X}_2$. This completes the proof.

REFERENCES

- [1] M. O. Rabin, "How to Exchange Secrets by Oblivious Transfer," Aiken Comput. Lab., Harvard Univ., Cambridge, MA, Tech. Memo TR-81 (1981).
- [2] S. Even, O. Goldreich, and A. Lempel, "A Randomized Protocol for Signing Contracts," *Communications Of The ACM*, **28**, 637-647 (1985).
- [3] J. Kilian, "Founding Cryptography on Oblivious Transfer," in *Proc. 20th Annu. ACM Symp. Theory of Computing (STOC)*, Chicago, IL, 20-31 (1988).
- [4] R. Ahlswede and I. Csiszár "On Oblivious Transfer Capacity," *2009 IEEE Information Theory Workshop On Networking And Information Theory*. pp. 1-3 (2009).
- [5] A. C. A. Nascimento and A. Winter, "On the Oblivious-Transfer Capacity of Noisy Resources," *IEEE Transactions On Information Theory*. **54**, 2572-2581 (2008).
- [6] R. Ahlswede and I. Csiszár, "Common Randomness in Information Theory and Cryptography. I. Secret sharing," *IEEE Transactions On Information Theory*. **39**, 1121-1132 (1993).
- [7] C. Crépeau, "Efficient Cryptographic Protocols Based on Noisy Channels," *Advances In Cryptology — EUROCRYPT '97*. pp. 306-317 (1997).
- [8] C. Crépeau and J. Kilian, "Achieving Oblivious Transfer Using Weakened Security Assumptions," *[Proceedings 1988] 29th Annual Symposium On Foundations Of Computer Science*. pp. 42-52 (1988).
- [9] D. Stebila and S. Wolf, "Efficient Oblivious Transfer From any Non-trivial Binary-Symmetric Channel," *Proceedings IEEE International Symposium On Information Theory*, pp. 293- (2002).
- [10] J. Kilian, "More General Completeness Theorems for Secure Two-party Computation," in *Proc. 32nd Annu. ACM Symp. Theory of Computing (STOC)*, Portland, OR, 316-324 (May 2000).
- [11] C. Crépeau, K. Morozov and S. Wolf, "Efficient Unconditional Oblivious Transfer from Almost any Noisy Channel," *Proc. SCN '04, LNCS*. vol. 3352, pp. 47-59 (2005).
- [12] A. C. A. Nascimento, and A. Winter, "On the Oblivious Transfer Capacity of Noisy Correlations," *2006 IEEE International Symposium On Information Theory*. pp. 1871-1875 (2006).
- [13] H. Imai, K. Morozov and A. C. A. Nascimento, "On the Oblivious Transfer Capacity of the Erasure Channel," *2006 IEEE International Symposium On Information Theory*. pp. 1428-1431 (2006).
- [14] E. Nagel, "The Structure of Science: Problems in the Logic of Scientific Explanation,". New York: Harcourt, Brace & World, 1961.
- [15] K. Rao, and V. Prabhakaran, "A New Upper Bound for the Oblivious Transfer Capacity of Discrete Memoryless Channels," *2014 IEEE Information Theory Workshop (ITW 2014)*. pp. 35-39 (2014).
- [16] U. Maurer, "Secret Key Agreement by Public Discussion from Common Information," *IEEE Transactions On Information Theory*. **39**, 733-742 (1993).

- [17] A. Gohari, and V. Anantharam, "Information-Theoretic Key Agreement of Multiple Terminals—Part I," *IEEE Transactions On Information Theory*. **56**, 3973-3996 (2010).
- [18] A. Gohari, and V. Anantharam, "Information-Theoretic Key Agreement of Multiple Terminals—Part II: Channel Model," *IEEE Transactions On Information Theory*. **56**, 3997-4010 (2010).
- [19] S. Salimi, M. Salmasizadeh, M. Aref, and J. Golic, "Key Agreement Over Multiple Access Channel," *IEEE Transactions On Information Forensics And Security*. **6**, 775-790 (2011).
- [20] Y. Liang and H. Poor, "Multiple-Access Channels With Confidential Messages," *IEEE Transactions On Information Theory*. **54**, 976-1002 (2008).
- [21] C. H. Bennett, G. Brassard, C. Crépeau, and U. M. Maurer, "Generalized Privacy Amplification," *IEEE Transactions on Information Theory*, vol. 41, no. 6, pp. 1915–1923, Nov. 1995.
- [22] T. Holenstein, "Strengthening Key Agreement Using Hard-core Sets," Ph.D. dissertation, Dept. Comp. Sci., Swiss Federal Institute of Technology (ETH), Zurich, Switzerland, 2006.
- [23] J. L. Carter and M. N. Wegman, "Universal Classes of Hash Functions," *Journal of Computer and System Sciences*, vol. 18, pp. 143–154, 1979.
- [24] J. Wullschleger, "Oblivious-Transfer Amplification," in *Lecture Notes in Computer Science*. Berlin, Germany: Springer-Verlag, 2007.
- [25] T. M. Cover and J. A. Thomas, *Elements of Information Theory*. New York: Wiley, 1991.
- [26] M. Mishra, B. K. Dey, V. M. Prabhakaran, and S. N. Diggavi, "Wiretapped Oblivious Transfer," *IEEE Transactions on Information Theory*, vol. 63, no. 4, pp. 2560-2595, 2017, doi: 10.1109/TIT.2017.2653180.
- [27] T. Pei, W. Kang, and N. Liu, "Capacity Results for the Wiretapped Oblivious Transfer," *arXiv preprint arXiv:2207.06363*, 2022. [Online]. Available: <https://arxiv.org/abs/2207.06363>
- [28] R. A. Chou, "Pairwise Oblivious Transfer," in *2020 IEEE Information Theory Workshop (ITW)*, 2021, pp. 1–5.
- [29] A. Winter, A. C. A. Nascimento, and H. Imai, "Commitment Capacity of Discrete Memoryless Channels," in *Lecture Notes in Computer Science*, ser. 2898. Berlin, Germany: Springer-Verlag, 2003, pp. 35–51.
- [30] I. B. Damgård, J. Kilian, and L. Salvail, "On the (Im)possibility of Basing Oblivious Transfer and Bit Commitment on Weakened Security Assumptions," in *Lecture Notes in Computer Science*, vol. 1561, Springer-Verlag, 1999, pp. 56–73.
- [31] A. D. Wyner, "The Wire-tap Channel," *The Bell System Technical Journal*, vol. 54, no. 8, pp. 1355–1387, 1975, doi: 10.1002/j.1538-7305.1975.tb02040.x.