

Private Information Retrieval on Multigraph-Based Replicated Storage

Shreya Meel¹, Xiangliang Kong², Thomas Jacob Maranzatto¹, Itzhak Tamo², and Sennur Ulukus¹

¹University of Maryland, College Park, MD, USA

²Tel Aviv University, Tel Aviv-Yafo

Abstract—We consider the private information retrieval (PIR) problem for a multigraph-based replication system, where each set of r files is stored on two of the servers according to an underlying r -multigraph. Our goal is to establish upper and lower bounds on the PIR capacity of the r -multigraph. Specifically, we first propose a construction for multigraph-based PIR systems that leverages the symmetry of the underlying graph-based PIR scheme, deriving a capacity lower bound for such multigraphs. Then, we establish a general upper bound using linear programming, expressed as a function of the underlying graph parameters. Our bounds are demonstrated to be tight for PIR systems on multipaths for even number of vertices.

I. INTRODUCTION

Introduced in [1], private information retrieval (PIR) is the problem of retrieving a specific file in a database from a server, without revealing the identity of the file to the server. While PIR was extensively studied in the computer science community, it is first approached from an information-theoretic perspective by Sun and Jafar in [2] within a non-colluding, multi-server setting. In this framework, the message lengths are assumed to be arbitrarily larger than the number of messages, due to which the download cost dominates the upload cost. Consequently, the *rate* of PIR is formulated as the number of desired message bits retrieved per bit of download. The supremum of all achievable rates, referred to as the *capacity*, is derived in [2] under the fully replicated setting.

Besides the original setting, PIR has been studied under more relaxed assumptions. For example, PIR without the non-colluding assumption, where servers can share their queries to learn the file index, is studied in [3]–[5]. PIR under various threat models, such as the presence of eavesdroppers and Byzantine servers, is investigated in [6]–[8]. The impact of side information available to the user, such as knowledge of database contents [9], [10], and the benefits of cache-aided PIR in achieving improved rates [11], are also explored. Another important variant of PIR that received much attention is the symmetric PIR, [12] which additionally demands database privacy against the user. This resulted in a stream of works, such as [13], [14]. We refer the readers to [15] for a more comprehensive survey on PIR and its variants.

All the aforementioned PIR systems consider fully replicated storage, which may be difficult to achieve in practice. This motivated the study of PIR with non-replicated servers in [16] through a graph-based model. In this model, a graph/hypergraph represents a PIR system, where each

vertex corresponds to a server, and each edge/hyperedge represents a file replicated across the servers associated with that edge/hyperedge. The authors of [16] focus on PIR over simple (2-replicated) graphs and study the robustness of the corresponding PIR system under server collusion. Graph-based PIR is further explored by [17], where bounds on the capacity of some regular graphs are proposed and the exact PIR capacity for cycle graphs is determined. In [18], the authors study the capacity of graph/hypergraph-based PIR when the number of files goes to infinity, with additional server collusion and secure storage constraints. The authors of [19] develop novel upper bounds on PIR capacity and propose improved PIR scheme constructions for complete, star, and bipartite graphs. However, the PIR capacity of these graphs remains unknown except for cases with a small number of vertices. For instance, the PIR capacity of the star graph is unknown beyond the case of 4 files, with the case of 4-files being solved recently in [20].

Note that the structure of a graph determines the number of files stored in each server. Specifically, it restricts the number of servers containing the same file to exactly 2 and sets the number of files stored in a server to the degree of the corresponding vertex in the underlying graph. Although [18] provides insights into scenarios where an arbitrary number of files are stored in each server, their bounds are asymptotic and do not explicitly account for the actual graph structure.

In this work, we aim to go beyond the above limitations of PIR systems modeled by graphs by investigating PIR systems over multigraphs with finite uniform multiplicity $r \geq 2$. In an r -multigraph, each edge of the underlying simple graph is replaced by r multiedges. Consequently, servers sharing a single file in a graph-based PIR system share a set of r files in a multigraph-based PIR system.

As in prior works, our focus lies on deriving bounds for the capacity of multigraph-based PIR systems and constructing schemes that approach these bounds. First, we propose a construction based on any graph-based PIR scheme that satisfies certain properties. As a result, we derive a lower bound on the capacity of multigraphs for which such schemes exist. Next, we establish a general upper bound using linear programming. Our bounds are shown to be tight in the case of multi-paths with an even number of vertices.

II. PROBLEM FORMULATION

Let $\mathcal{S} = \{S_1, S_2, \dots, S_N\}$ denote N non-colluding servers and $\mathcal{W} = \{W_1, W_2, \dots, W_K\}$ denote K independent files. Each $W_i \in \mathbb{F}_2^L$ is a binary vector of length L chosen uniformly at random from \mathbb{F}_2^L , thus $H(W_i) = L$ for every $i \in [K]$, and

$$H(W_1, \dots, W_K) = H(W_1) + \dots + H(W_K) = KL. \quad (1)$$

In the PIR problem, a user privately generates $\theta \in [K]$ and wishes to retrieve W_θ while keeping θ a secret from each server. Let $\mathcal{Q} \triangleq \{Q_i : i \in [N]\}$ denote the set of all queries generated by the user. Since the user has no information on the content of the files, the queries are independent of them, which means that

$$I(W_1, \dots, W_K; Q_1, \dots, Q_N) = 0. \quad (2)$$

Upon receiving its query Q_i from the user, the server S_i generates and replies with an answer A_i , which is a function of Q_i and the files it holds \mathcal{W}_{S_i} . Thus, for any $i \in [N]$,

$$H(A_i | Q_i, \mathcal{W}_{S_i}) = 0. \quad (3)$$

A PIR scheme has two formal requirements, *reliability* and *privacy*. For reliability, the user should be able to retrieve the desired file W_θ from the received answers $A_i, i \in [N]$ with zero probability of error, hence

$$\text{[Reliability]} \quad H(W_\theta | A_{[N]}, Q_{[N]}) = 0. \quad (4)$$

For privacy, each server learns no information about the desired file index θ . That is, for any $i \in [N]$ and $\theta \in [K]$, the following holds

$$\text{[Privacy]} \quad (Q_i^{(1)}, A_i^{(1)}, \mathcal{W}_{S_i}) \sim (Q_i^{(\theta)}, A_i^{(\theta)}, \mathcal{W}_{S_i}). \quad (5)$$

Assume that, the K files are stored such that every pair of servers either share a set of r distinct files, or no files at all. By relabeling the files, we can write \mathcal{W} as

$$\{W_{1,1}, \dots, W_{1,r}, W_{2,1}, \dots, W_{2,r}, \dots, W_{K',1}, \dots, W_{K',r}\} \quad (6)$$

where $K' = K/r$. Then, this model can naturally be described by an r -multigraph $G^{(r)} = (\mathcal{S}, \mathcal{W})$, whose vertex set is the set of servers \mathcal{S} , and an r -subset of files $\{W_{i,1}, \dots, W_{i,r}\} \in \mathcal{W}$ is viewed as the r -multiedge between S_i and S_j if $W_{i,1}, \dots, W_{i,r}$ are stored on servers S_i and S_j . We denote by \mathcal{W}_{S_i} the set of files stored on server S_i , and by $\mathcal{W}_{i,j}$ the set of r files stored on servers S_i and S_j . Hence, an instance of the PIR problem is uniquely defined by a r -multigraph, and any r -multigraph gives rise to an instance of the above PIR problem. Specially, when $r = 1$, it reduces to the PIR problem over simple graphs studied in [16]–[19].

For example, Fig. 1 illustrates a model based on a 2-multi-path over 3 vertices, which consists of three servers $\mathcal{S} = \{S_1, S_2, S_3\}$ and four files $\mathcal{W} = \{W_{1,1}, W_{1,2}, W_{2,1}, W_{2,2}\}$. Accordingly, server S_1 and S_3 store exactly two files, i.e., $\mathcal{W}_{S_1} = \{W_{1,1}, W_{1,2}\}$, $\mathcal{W}_{S_3} = \{W_{2,1}, W_{2,2}\}$, and server S_2 stores all the four files, i.e., $\mathcal{W}_{S_2} = \mathcal{W}$.




Fig. 1. The PIR system corresponding to $\mathbb{P}_3^{(2)}$.

Throughout the paper, we use $G = (V, E)$ to denote a simple graph with vertex set V and edge set E . We use $G^{(r)}$ to denote the multigraph extension of the graph G with multiplicity r . The PIR capacity of the multigraph $G^{(r)}$ is defined as,

$$\mathcal{C}(G^{(r)}) \triangleq \sup_{T'} \frac{L}{\sum_{i=1}^N H(A_i)}, \quad (7)$$

where the supremum is taken over all possible schemes T' on $G^{(r)}$, assuming the file size L can be arbitrarily large.

III. LOWER BOUND ON CAPACITY

A. Motivating Example

We motivate the underlying idea of our general multigraph scheme using the example of the PIR scheme for the path graph \mathbb{P}_3 , which consists of 3 servers, S_1, S_2, S_3 and 2 files. As illustrated in Fig. 2, the files are distributed as follows: W_1 at S_1 , $\{W_1, W_2\}$ at S_2 , and W_2 at S_3 .




Fig. 2. The PIR system corresponding to \mathbb{P}_3

Suppose that each file consists of two bits, and the user wants to privately retrieve W_θ . To do so, the user privately and independently permutes the bits of each $W_i, i \in [2]$, and the corresponding permuted file is denoted as w_i . Let us write $w_1 = (a_1, a_2)$ and $w_2 = (b_1, b_2)$. The user sends queries to retrieve three answer bits from S_1, S_2 and S_3 . The answers downloaded from the servers for $\theta = 1, 2$ are given in Table I. Clearly, the user can decode the desired file in both cases. Also, since the permutation of bits is unknown to the servers, the queries appear uniformly distributed, regardless of the value of θ .

TABLE I
ANSWER TABLE FOR \mathbb{P}_3 .

	S_1	S_2	S_3
$\theta = 1$	a_1	$a_2 + b_1$	b_1
$\theta = 2$	a_1	$a_1 + b_1$	b_2

Now, consider the PIR system corresponding to the multigraph $\mathbb{P}_3^{(2)}$, which is illustrated in Fig. 1. Suppose each file consists of 4 bits. Let the message bits, after the user's private permutation, be denoted as,

$$\begin{aligned} w_{1,1} &= (a_1, a_2, a_3, a_4), & w_{1,2} &= (a'_1, a'_2, a'_3, a'_4), \\ w_{2,1} &= (b_1, b_2, b_3, b_4), & w_{2,2} &= (b'_1, b'_2, b'_3, b'_4). \end{aligned} \quad (8)$$

Then, the answers from each server for different queries are shown in Table II. For each query $\theta = (i, j)$, each server responds with three answer bits. The first answer bit is identical to that in the above scheme for \mathbb{P}_3 with $\theta = i$ and files $\{W_{1,1}, W_{2,1}\}$, and the second answer bit is identical to that in the above scheme for \mathbb{P}_3 with $\theta = i$ and files $\{W_{1,2}, W_{2,2}\}$. The third answer bit is constructed by applying the scheme of \mathbb{P}_3 to carefully-designed sums of message bits.

TABLE II
ANSWER TABLE FOR $\mathbb{P}_3^{(2)}$.

	S_1	S_2	S_3
$\theta = (1, 1)$	a_1 a'_1 $a_4 + a'_2$	$a_2 + b_1$ $a'_2 + b'_1$ $a_3 + a'_1 + b_2 + b'_2$	b_1 b'_1 $b_2 + b'_2$
$\theta = (1, 2)$	a_1 a'_1 $a_2 + a'_4$	$a_2 + b_1$ $a'_2 + b'_1$ $a_1 + a'_3 + b_2 + b'_2$	b_1 b'_1 $b_2 + b'_2$
$\theta = (2, 1)$	a_1 a'_1 $a_2 + a'_2$	$a_1 + b_1$ $a'_1 + b'_1$ $a_2 + a'_2 + b_4 + b'_2$	b_2 b'_2 $b_3 + b'_1$
$\theta = (2, 2)$	a_1 a'_1 $a_2 + a'_2$	$a_1 + b_1$ $a'_1 + b'_1$ $a_2 + a'_2 + b_2 + b'_4$	b_2 b'_2 $b_1 + b'_3$

For example, consider the case when $\theta = (1, 1)$. By the first and second answer bits from all 3 servers, the user can retrieve a_1, a_2 and a'_1, a'_2 , respectively. The third answer bit from S_1 is a new message bit of W_θ , i.e., a_4 added to a'_2 , where the latter is available to the user. From S_3 , the third answer bit is the sum of unused message bits of $W_{2,1}$ and $W_{2,2}$, i.e., $b_2 + b'_2$. The third answer bit from S_2 is the sum of bits from all 4 files stored in S_2 , comprising a new message bit a_3 of W_θ , a'_1 and $b_2 + b'_2$, where a'_1 is retrieved from the second answers of all servers, and $b_2 + b'_2$ is the third answer bit from S_3 . This way, all four bits of W_θ are retrieved.

To understand why privacy holds, note that the query structure seen by each server is identical for all θ . Moreover, the private permutations of message bits, generated by the user, hide the actual bit indices from each server.

B. General Scheme for r -Multigraph

Before stating Theorem 1, we need the following definition.

Definition 1 (Symmetric Retrieval Property) A graph-based PIR scheme is said to satisfy the symmetric retrieval property (SRP) if, for every possible θ , the number of message bits retrieved from the servers where the file W_θ is replicated is equal. For instance, if $\theta = k$ and W_k is replicated across S_{n_1} and S_{n_2} , then half of the total number of bits of W_k is obtained from each of these two servers.

Theorem 1 Let T denote a scheme for the simple graph G , that satisfies SRP and yields the rate $R(G)$. Then, there exists a scheme $T^{(r)}$ for the corresponding r -multigraph $G^{(r)}$ which gives the capacity lower bound,

$$\mathcal{C}(G^{(r)}) \geq R(G) \cdot \left(\frac{1}{2 - \frac{1}{2^{r-1}}} \right). \quad (9)$$

Proof: Let T be the PIR scheme for the graph $G = (\mathcal{S}, \mathcal{W}_0)$, whose vertices are servers in \mathcal{S} and edges are associated with files in

$$\mathcal{W}_0 = \{W_{1,0}, W_{2,0}, \dots, W_{K',0}\}. \quad (10)$$

Suppose T admits L' bits per file and D' downloaded bits. Then, $R(G) = \frac{L'}{D'}$. Next, we construct a PIR scheme $T^{(r)}$ for $G^{(r)}$ based on T .

We require that each file $W_{s,t}$, $(s, t) \in [K'] \times [r]$, consists of $L = 2^{r-1}L'$ bits in $T^{(r)}$. Before sending out the queries, the user first permutes the L bits of each of the rK' files through a private mapping $\sigma_{s,t} : [L] \rightarrow [L]$ independently. We denote $\sigma_{s,t}(W_{s,t}) = w_{s,t}$. Let $\theta = (i, j)$ be the desired file index, and assume that $W_{i,j}$ is stored on servers S_{n_1} and S_{n_2} . Then, as in the motivating example, the scheme $T^{(r)}$ proceeds in r stages. In each stage, we apply T to several graphs on \mathcal{S} , each isomorphic to G , where every edge represents a sum of some of the r files stored on its two associated vertices.

In the following, to simplify the description of the retrieval process, assume without loss of generality that $\theta = (1, 1)$.

In the first stage, for every $t \in [r]$, we apply T to graph $G_{\{t\}} = (\mathcal{S}, \mathcal{W}_{\{t\}})$, where

$$\mathcal{W}_{\{t\}} \triangleq \{W_{1,t}, W_{2,t}, \dots, W_{K',t}\}, \quad (11)$$

and retrieve the first L' bits of the file $W_{1,t}$ stored on S_{n_1} and S_{n_2} . This requires rD' downloaded bits in total and results in

$$w_{1,t}[1 : L'], \quad \forall t \in [r], \quad (12)$$

where $w_{1,1}[1 : L']$ are the desired message bits, and $w_{1,t}[1 : L']$, $t \neq 1$, are the interference bits used for retrieval in the second stage. By the SRP, we can adjust T so that, for each $t \in [r]$, the first half $w_{1,t}[1 : L'/2]$ is retrieved from S_{n_1} , and the latter half $w_{1,t}[L'/2 + 1 : L']$ is retrieved from S_{n_2} .

In the second stage, for every 2-subset $\{j_1, j_2\} \subseteq [r]$, we apply T to graph $G_{\{j_1, j_2\}} = (\mathcal{S}, \mathcal{W}_{\{j_1, j_2\}})$, where

$$\mathcal{W}_{\{j_1, j_2\}} \triangleq \{W_{i, j_1} + W_{i, j_2} : i \in [K']\}, \quad (13)$$

and retrieve L' bits of the file $W_{1, j_1} + W_{1, j_2}$ stored on S_{n_1} and S_{n_2} . Specifically, we have:

- If $1 \in \{j_1, j_2\}$, assume without loss of generality that $j_1 = 1$. Then, we apply T to retrieve

$$w_{1,1}[(j_2 - 1)L' + 1 : j_2L'] + w_{1, j_2}[1 : L']. \quad (14)$$

- If $1 \notin \{j_1, j_2\}$, then we apply T to retrieve

$$w_{1, j_1}[(j_2 - 1)L' + 1 : j_2L'] + w_{1, j_2}[(j_1 - 1)L' + 1 : j_1L']. \quad (15)$$

Similarly, by SRP, we can assume that the first $L'/2$ retrieved bits of $w_{1,1} + w_{1, j_2}$ is from S_{n_2} and the latter $L'/2$ bits is retrieved from S_{n_1} , and for each $\{j_1, j_2\} \subseteq [r] \setminus \{1\}$, the first $L'/2$ retrieved bits of $w_{1, j_1} + w_{1, j_2}$ is from S_{n_1} and the latter $L'/2$ bits is retrieved from S_{n_2} .

Consider the bits of $W_{1, j_1} + W_{1, j_2}$ retrieved in the second stage. Since $w_{1, j_2}[1 : L']$ are known by the first stage, we can retrieve $(r - 1)L'$ bits of the form $w_{1,1}[(j_2 - 1)L' + 1 : j_2L']$,

$2 \leq j_2 \leq r$, for the desired file. Moreover, for each $\{j_1, j_2\} \subseteq [r] \setminus \{1\}$, we also have L' bits from the sum $W_{1,j_1} + W_{1,j_2}$. These $\binom{r-1}{2}L'$ bits are left as interference bits to be used for retrieval in the third stage.

Generally, for $\ell \geq 3$ and every $(\ell - 1)$ -set $B \subseteq [r] \setminus \{1\}$, we uniquely assign it an integer

$$u_B \in \left[\sum_{s=0}^{\ell-2} \binom{r-1}{s} + 1, \sum_{s=0}^{\ell-2} \binom{r-1}{s} + \binom{r-1}{\ell-1} \right], \quad (16)$$

and denote $U_B \triangleq [(u_B - 1)L' + 1 : u_B L']$. Then, in the ℓ -th stage, for every ℓ -subset $A \subseteq [r]$, T is applied to graph $G_A = (\mathcal{S}, \mathcal{W}_A)$, where

$$\mathcal{W}_A \triangleq \left\{ \sum_{t \in A} W_{i,t} : i \in [K'] \right\}, \quad (17)$$

to retrieve the following L' bits of $\sum_{t \in A} W_{1,t}$,

- If $1 \in A$, then we apply T to retrieve

$$w_{1,1|U_{A \setminus \{1\}}} + \sum_{t \in A \setminus \{1\}} w_{1,t|U_{A \setminus \{1,t\}}}. \quad (18)$$

- If $1 \notin A$, then we apply T to retrieve

$$\sum_{t \in A} w_{1,t|U_{A \setminus \{t\}}}. \quad (19)$$

By SRP, for A containing 1, the first $L'/2$ retrieved bits of $\sum_{t \in A} w_{1,t}$ is from S_{n_2} and the latter $L'/2$ bits is retrieved from S_{n_1} , and for A without 1, the first $L'/2$ retrieved bits of $\sum_{t \in A} w_{1,t}$ are from S_{n_1} and latter $L'/2$ bits are from S_{n_2} .

Using the interference bits $\sum_{t \in B} w_{1,t|U_{B \setminus \{t\}}}$ from the $(\ell - 1)$ -th stage, we can retrieve $\binom{r-1}{\ell-1}L'$ bits of form $w_{1,1|U_B}$, for every $B \subseteq [r] \setminus \{1\}$ of size $\ell - 1$. For each $A \subseteq [r] \setminus \{1\}$ of size ℓ , the L' bits from the sum $\sum_{s \in A} w_{1,s|U_{A \setminus \{s\}}}$ are left as interference bits to be used for retrieval in the next stage.

Reliability: The reliability of $T^{(r)}$ follows directly by T .

Privacy: The SRP of T guarantees that, $L'/2$ interference bits of $\sum_{t \in B} w_{1,t|U_{B \setminus \{t\}}}$ are retrieved from S_{n_1} in the $(\ell - 1)$ -th stage and are used to retrieve $L'/2$ message bits in $w_{1,1} + \sum_{t \in B} w_{1,t|U_{B \setminus \{t\}}}$, retrieved from S_{n_2} in the ℓ th stage, and vice versa. This ensures that an equal number of bits from each file is downloaded from every server. That is, the files stored on every server are treated equally in the r -stage process. Thus, the privacy of $T^{(r)}$ follows from the privacy of T in each stage and the random permutations on bits applied independently to the files of \mathcal{W} .

Rate: In each stage $\ell \in [r]$, the user downloads $\binom{r}{\ell}D'$ bits. The resulting download cost D is therefore,

$$D = \sum_{\ell=1}^r \binom{r}{\ell} D' = (2^r - 1)D'. \quad (20)$$

This gives rise to the achievable rate, $\frac{L}{D} = \frac{2^{r-1}L'}{(2^r-1)D'}$, which is equal to (9). ■

Remark 1 The scheme for \mathbb{P}_3 in Section III-A can be extended to general \mathbb{P}_N and is indeed capacity achieving, with

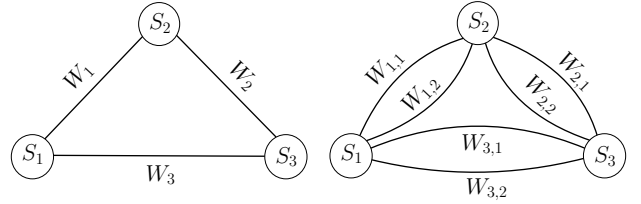


Fig. 3. PIR systems for cycle \mathbb{C}_3 (left) and 2-multicycle $\mathbb{C}_3^{(2)}$ (right).

$\mathcal{C}(\mathbb{P}_N) = \frac{2}{N}$. Specifically, let the PIR system corresponding to \mathbb{P}_N consist of the set of files $\{W_1, \dots, W_{N-1}\}$, where S_1 stores W_1 , S_N stores W_{N-1} , and S_i , $i \in [2 : N-1]$, stores $\{W_{i-1}, W_i\}$. Suppose each W_i consists of 2 bits, which the user randomly and independently permutes into $w_i = (w_i(1), w_i(2))$. To retrieve W_θ , the user downloads, $w_1(1)$ from S_1 , $w_{N-1}(1)$ from S_N , $w_{i-1}(1) + w_i(1)$ from S_i , $i \in [2 : N-1] \setminus \{\theta+1\}$, and $w_\theta(2) + w_{\theta+1}(1)$ from $S_{\theta+1}$.

The above scheme requires N downloaded bits in total, one from each server. The user retrieves $w_\theta(1)$ from S_θ and $w_\theta(2)$ from $S_{\theta+1}$. Clearly, the scheme satisfies the SRP and results in rate $\frac{2}{N}$. Thus, by Theorem 1, this leads to

$$\mathcal{C}(\mathbb{P}_N^{(r)}) \geq \frac{2}{N} \cdot \left(\frac{1}{2 - \frac{1}{2^{r-1}}} \right). \quad (21)$$

Remark 2 Consider the PIR system arising from multicycles $\mathbb{C}_N^{(r)}$, as shown in Fig. 3. The capacity-achieving PIR scheme for \mathbb{C}_N proposed in [17] satisfies the SRP, and the capacity is given by $\mathcal{C}(\mathbb{C}_N) = \frac{2}{N+1}$. Thus, by Theorem 1, we also have

$$\mathcal{C}(\mathbb{C}_N^{(r)}) \geq \frac{2}{N+1} \cdot \left(\frac{1}{2 - \frac{1}{2^{r-1}}} \right). \quad (22)$$

IV. AN UPPER BOUND ON THE PIR CAPACITY

For a graph $G = (V, E)$, let $\Delta(G)$ denote the maximum degree of G , and let $I(G)$ denote its incidence matrix. A matching $M \subseteq E$ of G is a subset of edges such that no two edges share a common vertex. The matching number $\nu(G)$ of G is the maximum size of a matching in G .

Theorem 2 Let $G = (\mathcal{S}, \mathcal{W}_0)$ be a graph with maximum degree $\Delta(G)$. Then, the PIR capacity of $G^{(r)}$ satisfies:

$$\mathcal{C}(G^{(r)}) \leq \min \left(\frac{\Delta(G)}{|E(G)|}, \frac{1}{\nu(G)} \right) \cdot \frac{1}{2 - 2^{1-r}}. \quad (23)$$

Remark 3 When $r = 1$, the result of Theorem 2 coincides with that of Theorem 1 in [19]. The capacity upper bound of Theorem 2 is tight for certain graphs. For example, set $G = \mathbb{P}_N$ with $2 \mid N$, by Theorem 2,

$$\begin{aligned} \mathcal{C}(\mathbb{P}_N^{(r)}) &\leq \min \left(\frac{2}{N-1}, \frac{1}{N/2} \right) \cdot \frac{1}{2 - 2^{1-r}} \\ &= \frac{2}{N} \cdot \frac{1}{2 - 2^{1-r}}, \end{aligned}$$

which matches the lower bound in (21).

For the proof of Theorem 2, we need the following multi-graph version of Lemma 3 in [19].

Lemma 1 *Let $i, j \in [N]$ be two distinct servers that share the set of r files $\mathcal{W}_{i,j} \triangleq \{W_1, W_2, \dots, W_r\} \subseteq \mathcal{W}$, then*

$$\begin{aligned} H(A_i) + H(A_j) &\geq H(A_i | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}) + H(A_j | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}) \\ &\geq \left(1 + \frac{1}{2} + \dots + \frac{1}{2^{r-1}}\right) L. \end{aligned} \quad (24)$$

The proof of Lemma 1 requires the following extension of [2, Lemma 6] by Sun and Jafar, whose proof proceeds similarly to that of [2, Lemma 6].

Lemma 2 *Let $i, j \in [N]$ be two distinct servers that share a set of r files $\mathcal{W}_{i,j} \triangleq \{W_1, W_2, \dots, W_r\} \subseteq \mathcal{W}$, then for any $s \in \{2, \dots, r\}$, it holds that*

$$\begin{aligned} I(\mathcal{W}_{i,j} \setminus W_{[s-1]}; A_i, A_j | \mathcal{W} \setminus \mathcal{W}_{i,j} \cup W_{[s-1]}, \mathcal{Q}, \theta = s-1) \\ \geq \frac{L}{2} + \frac{1}{2} \cdot I(\mathcal{W}_{i,j} \setminus W_{[s]}; A_i, A_j | \mathcal{W} \setminus \mathcal{W}_{i,j} \cup W_{[s]}, \mathcal{Q}, \theta = s), \end{aligned}$$

where $W_{[s]} \triangleq \{W_1, W_2, \dots, W_s\}$.

Proof: [Proof of Lemma 1] We denote Δ as the difference of the following entropies, that is,

$$\begin{aligned} \Delta &\triangleq H(\mathcal{W}_{i,j} | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}, \theta = 1) \\ &\quad - H(\mathcal{W}_{i,j} | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}, \theta = 1, A_{[N]}). \end{aligned} \quad (25)$$

Then,

$$\begin{aligned} \Delta &= H(\mathcal{W}_{i,j} | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}, \theta = 1) \\ &\quad - H(\mathcal{W}_{i,j} | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}, \theta = 1, A_i, A_j) \end{aligned} \quad (26)$$

$$= I(\mathcal{W}_{i,j}; A_i, A_j | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}, \theta = 1) \quad (27)$$

$$\begin{aligned} &= H(A_i, A_j | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}, \theta = 1) \\ &\quad - H(A_i, A_j | \mathcal{W}, \mathcal{Q}, \theta = 1) \end{aligned} \quad (28)$$

$$= H(A_i, A_j | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}, \theta = 1) \quad (29)$$

$$\begin{aligned} &\leq H(A_i | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}, \theta = 1) \\ &\quad + H(A_j | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}, \theta = 1) \end{aligned} \quad (30)$$

$$= H(A_i | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}) + H(A_j | \mathcal{W} \setminus \mathcal{W}_{i,j}, \mathcal{Q}), \quad (31)$$

where (26) and (29) follow by (3), and (31) follows by (5); see also [19, Proposition 2].

On the other hand, denote $\mathcal{W}^c \triangleq \mathcal{W} \setminus \mathcal{W}_{i,j}$, we have

$$\Delta = rL - H(\mathcal{W}_{i,j} | \mathcal{W}^c, \mathcal{Q}, \theta = (i, j, 1), A_i, A_j) \quad (32)$$

$$\begin{aligned} &= rL - H(W_1 | \mathcal{W}^c, \mathcal{Q}, \theta = 1, A_i, A_j) \\ &\quad - H(\mathcal{W}_{i,j} \setminus \{W_1\} | \mathcal{W}^c \cup W_1, \mathcal{Q}, \theta = 1, A_i, A_j) \end{aligned} \quad (33)$$

$$\begin{aligned} &= rL - H(W_1 | \mathcal{W}^c, \mathcal{Q}, \theta = 1, A_{[N]}) \\ &\quad - H(\mathcal{W}_{i,j} \setminus \{W_1\} | \mathcal{W}^c \cup W_1, \mathcal{Q}, \theta = 1, A_i, A_j) \end{aligned} \quad (34)$$

$$\begin{aligned} &= rL \\ &\quad - H(\mathcal{W}_{i,j} \setminus \{W_1\} | \mathcal{W}^c \cup W_1, \mathcal{Q}, \theta = 1, A_i, A_j) \end{aligned} \quad (35)$$

$$\begin{aligned} &= rL - H(\mathcal{W}_{i,j} \setminus \{W_1\} | \mathcal{W}^c \cup W_1, \mathcal{Q}, \theta = 1) \\ &\quad + I(\mathcal{W}_{i,j} \setminus \{W_1\}; A_i, A_j | \mathcal{W}^c \cup W_1, \mathcal{Q}, \theta = 1) \end{aligned} \quad (36)$$

$$= L + I(\mathcal{W}_{i,j} \setminus \{W_1\}; A_i, A_j | \mathcal{W}^c \cup W_1, \mathcal{Q}, \theta = 1), \quad (37)$$

where (32) and (37) follow by (1) and (2), (34) follows since answers in $A_{[N]} \setminus \{A_i, A_j\}$ are functions of \mathcal{Q} and \mathcal{W}^c , and (35) follows by the reliability (4).

Next, starting from $s = 2$ and applying Lemma 2 repeatedly for $s = 3$ to r , we can obtain that

$$\begin{aligned} &I(\mathcal{W}_{i,j} \setminus \{W_1\}; A_i, A_j | \mathcal{W}^c \cup W_1, \mathcal{Q}, \theta = 1) \\ &\geq \frac{L}{2} + \frac{1}{2} \cdot I(\mathcal{W}_{i,j} \setminus \mathcal{W}_{[2]}; A_i, A_j | \mathcal{W}^c \cup \mathcal{W}_{[2]}, \mathcal{Q}, \theta = 2) \\ &\geq \frac{L}{2} + \frac{L}{4} + \frac{1}{4} \cdot I(\mathcal{W}_{i,j} \setminus \mathcal{W}_{[3]}; A_i, A_j | \mathcal{W}^c \cup \mathcal{W}_{[3]}, \mathcal{Q}, \theta = 3) \\ &\geq \dots \geq \left(\frac{1}{2} + \frac{1}{4} + \dots + \frac{1}{2^{r-1}}\right) L. \end{aligned} \quad (38)$$

Then, the result follows by combining (37) and (38). ■

With Lemma 1, we can proceed the proof of Theorem 2.

Proof: [Proof of Theorem 2] Consider the rate of some PIR scheme T for $G^{(r)}$,

$$R = \frac{L}{\sum_{i \in [N]} H(A_i)} = \frac{1}{\sum_{i \in [N]} (H(A_i)/L)} = \frac{1}{\mathbf{1}_N \cdot \boldsymbol{\mu}^T}, \quad (39)$$

where $\mu_i \triangleq \frac{H(A_i)}{L}$ for each $i \in [N]$, $\boldsymbol{\mu} \triangleq (\mu_1, \dots, \mu_N)$, and $\mathbf{1}_N$ is the all-ones row vector of length N . According to Lemma 1, if servers i and j are adjacent, then

$$\mu_i + \mu_j \geq 1 + \frac{1}{2} + \dots + \frac{1}{2^{r-1}} = 2 - \frac{1}{2^{r-1}}. \quad (40)$$

Hence, we can get an upper bound on R via the reciprocal of the optimal value of the following linear program,

$$\begin{aligned} \min \quad &\mathbf{1}_N \cdot \boldsymbol{\mu}^T \\ \text{s.t.} \quad &I(G)^T \cdot \boldsymbol{\mu}^T \geq \left(2 - \frac{1}{2^{r-1}}\right) \cdot \mathbf{1}_{K'} \\ &\mu_i \geq 0, \quad i \in [N], \end{aligned} \quad (41)$$

where $I(G)$ is the incidence matrix of graph G and $K' = |\mathcal{W}_0|$. Its dual problem is

$$\begin{aligned} \max \quad &\left(2 - \frac{1}{2^{r-1}}\right) \cdot \mathbf{1}_{K'} \cdot \boldsymbol{\eta}^T \\ \text{s.t.} \quad &I(G) \cdot \boldsymbol{\eta}^T \leq \mathbf{1}_N \\ &\eta_i \geq 0, \quad i \in [K']. \end{aligned} \quad (42)$$

By the primal-dual theory, any feasible solution to the dual problem provides a lower bound for the primal problem. Below, we provide two feasible solutions to the dual problem:

- The vector $\mathbf{v}_1 = \frac{1}{\Delta} \cdot \mathbf{1}_{K'}$. Thus, by $\mathbf{1}_{K'} \cdot \mathbf{v}_1^T = \frac{K'}{\Delta}$, the rate R is at most $\Delta/K' \cdot (2 - 2^{1-r})^{-1}$.
- The indicator vector $\mathbf{v}_2 \in \{0, 1\}^{K'}$ of a maximum matching $M \subseteq \mathcal{W}_0$ of G , i.e., $|M| = \nu(G)$. Thus, the rate R is at most $1/\nu(G) \cdot (2 - 2^{1-r})^{-1}$.

This completes the proof. ■

ACKNOWLEDGMENT

This work was supported in part by the European Research Council (ERC) under Grant 852953.

REFERENCES

- [1] B. Chor, E. Kushilevitz, O. Goldreich, and M. Sudan, "Private information retrieval," *Journal of the ACM*, vol. 45, no. 6, pp. 965–981, November 1998.
- [2] H. Sun and S. A. Jafar, "The capacity of private information retrieval," *IEEE Transactions on Information Theory*, vol. 63, no. 7, pp. 4075–4088, March 2017.
- [3] —, "The capacity of robust private information retrieval with colluding databases," *IEEE Transactions on Information Theory*, vol. 64, no. 4, pp. 2361–2370, April 2018.
- [4] R. Freij-Hollanti, O. W. Gnilke, C. Hollanti, and D. A. Karpuk, "Private information retrieval from coded databases with colluding servers," *SIAM Journal on Applied Algebra and Geometry*, vol. 1, no. 1, pp. 647–664, 2017.
- [5] H. Sun and S. A. Jafar, "Private information retrieval from MDS coded data with colluding servers: Settling a conjecture by Freij-Hollanti et al." *IEEE Transactions on Information Theory*, vol. 64, no. 2, pp. 1000–1022, December 2017.
- [6] K. Banawan and S. Ulukus, "Private information retrieval through wiretap channel II: Privacy meets security," *IEEE Transactions on Information Theory*, vol. 66, no. 7, pp. 4129–4149, February 2020.
- [7] J. Cheng, N. Liu, W. Kang, and Y. Li, "The capacity of symmetric private information retrieval under arbitrary collusion and eavesdropping patterns," *IEEE Transactions on Information Forensics and Security*, vol. 17, pp. 3037–3050, August 2022.
- [8] K. Banawan and S. Ulukus, "The capacity of private information retrieval from Byzantine and colluding databases," *IEEE Transactions on Information Theory*, vol. 65, no. 2, pp. 1206–1219, September 2018.
- [9] Z. Chen, Z. Wang, and S. A. Jafar, "The capacity of T -private information retrieval with private side information," *IEEE Transactions on Information Theory*, vol. 66, no. 8, pp. 4761–4773, March 2020.
- [10] A. Heidarzadeh, S. Kadhe, S. E. Rouayheb, and A. Sprintson, "Single-server multi-message individually-private information retrieval with side information," in *IEEE ISIT*, July 2019.
- [11] Y.-P. Wei, K. Banawan, and S. Ulukus, "Fundamental limits of cache-aided private information retrieval with unknown and uncoded prefetching," *IEEE Transactions on Information Theory*, vol. 65, no. 5, pp. 3215–3232, November 2018.
- [12] H. Sun and S. A. Jafar, "The capacity of symmetric private information retrieval," *IEEE Transactions on Information Theory*, vol. 65, no. 1, pp. 322–329, June 2018.
- [13] Z. Wang and S. Ulukus, "Symmetric private information retrieval at the private information retrieval rate," *IEEE Journal on Selected Areas in Information Theory*, vol. 3, no. 2, pp. 350–361, June 2022.
- [14] Q. Wang and M. Skoglund, "Symmetric private information retrieval from MDS coded distributed storage with non-colluding and colluding servers," *IEEE Transactions on Information Theory*, vol. 65, no. 8, pp. 5160–5175, March 2019.
- [15] S. Ulukus, S. Avestimehr, M. Gastpar, S. A. Jafar, R. Tandon, and C. Tian, "Private retrieval, computing, and learning: Recent progress and future challenges," *IEEE Journal on Selected Areas in Communications*, vol. 40, no. 3, pp. 729–748, March 2022.
- [16] N. Raviv, I. Tamo, and E. Yaakobi, "Private information retrieval in graph-based replication systems," *IEEE Transactions on Information Theory*, vol. 66, no. 6, pp. 3590–3602, November 2019.
- [17] K. Banawan and S. Ulukus, "Private information retrieval from non-replicated databases," in *IEEE ISIT*, July 2019.
- [18] Z. Jia and S. A. Jafar, "On the asymptotic capacity of X -Secure T -Private information retrieval with graph-based replicated storage," *IEEE Transactions on Information Theory*, vol. 66, no. 10, pp. 6280–6296, July 2020.
- [19] B. Sadeh, Y. Gu, and I. Tamo, "Bounds on the capacity of private information retrieval over graphs," *IEEE Transactions on Information Forensics and Security*, vol. 18, pp. 261–273, November 2023.
- [20] Y. Yao and S. A. Jafar, "The capacity of 4-star-graph PIR," in *IEEE ISIT*, June 2023.