Ke Yuan<sup>1†</sup>, Yaoxin Liu<sup>1†</sup>, Shriyesh Chandra<sup>1†</sup>, Rishav Roy<sup>1†</sup>

<sup>1</sup>New York University

<sup>†</sup>Contribute equally

{ky2591, y15739, sc10670, rr4577}@nyu.edu

# Abstract

This project focuses on analyzing retail market trends using historical sales data, search trends, and customer reviews. By identifying the patterns and trending products, the analysis provides actionable insights for retailers to optimize inventory management and marketing strategies, ultimately enhancing customer satisfaction and maximizing revenue.

## **1. Introduction**

In today's competitive retail industry, understanding consumer behavior and market trends is important for success. This project uses data analysis to bridge the gap between what consumers want and what sellers provide. By examining datasets such as Instacart transactions, Amazon reviews, Google Trends data, Percent Change in Consumer Spending, and Walmart sales, the study identifies key patterns and trends influencing purchasing decisions. These insights help retailers make better decisions, ensuring products are available during busy periods, reducing waste, and improving customer satisfaction. This project highlights how analyzing data can lead to more efficient and effective retail operations.

# 2. Method

We processed and analyzed data collected from various sources, including Amazon Reviews, Walmart, Instacart Market Basket, Percent Change in Spending, and Google Trends, all stored in HDFS (Hadoop Distributed File System). The workflow is divided into three main stages: Storage, Preprocessing, and Analysis/Results.

**Storage**: Data from diverse sources is stored in HDFS, ensuring scalable and efficient data access for large-scale processing.

**Preprocessing**: Utilizing Spark SQL, this stage involves:

- Data Cleaning: Removing inconsistencies and ensuring the data is ready for analysis.
- Data Profiling: Understanding the structure and quality of the datasets.
- Data Transformation: Structuring the data into a suitable format, saved as parquet files for optimized storage and access.

Analysis and Results: This stage leverages Spark MLlib for advanced analytics. The Normalized Dataset is input to Machine Learning Models to derive predictive insights. Results are analyzed through Statistics and presented visually using Visualizations.

Figure 1 shows the data flow diagram of the project.




Figure 1. Design Diagram

# 3. Google Trends Data

The cleaned Google Trends dataset contains weekly data for 162 keywords over the past 2 years. These keywords represent broad product categories (e.g., desk, tea, sofa) of commonly consumed everyday items. The trends data are normalized value from 0-100.

## 3.1. Feature Engineering

Currently, the dataset includes only one feature: the date (yyyy-mm-dd). Therefore, additional features need to be

extracted before applying a machine learning model to predict trends.

Year, Month and Day: As a first step, the date is separated into three features: year, month, and day, to better represent time. Each feature is represented as an integer.

```
val newDs = ds
.withColumn("year", col("date")
    .substr(1, 4).cast("int"))
.withColumn("month", col("date")
    .substr(6, 2).cast("int"))
.withColumn("day", col("date")
    .substr(9, 2).cast("int"))
```

**Season:** Next, a new feature, season, is added based on the month. As a decision tree model requires numerical encoding for each feature, the season feature is manually encoded as 1, 2, 3, and 4 to represent spring, summer, fall, and winter. The reason for not using one-hot encoding is that decision tree models do not require it.

```
def f_season(m: Int): Int = {
    .....
    ....
    ....
    ....
    ....
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ...
    ....
    ...
    ...
    ....
    ...
    ...
    ....
    ....
    ....
    ....
```


**Is\_holiday:** Since holidays have a significant effect on consumer decisions, the is\_holiday feature is important. We select several major holidays, including Christmas, New Year, Thanksgiving, Black Friday, and Valentine's Day. If the date is near any of these chosen holidays, the is\_holiday feature is set to 1, otherwise 0


**day\_of\_week and is\_weekend:** The weekend also has a significant effect on consumer decisions because people generally have more time to shop on weekends. Therefore,

the is\_weekend feature is included in the model. Additionally, the day\_of\_week feature provides deeper insights and is more precise for analysis, so it is also included in the set of features.

```
val newDs4 = newDs3
.withColumn("day_of_week",
    dayofweek(col("date")))
.withColumn("is_weekend",
    when(col("day_of_week") === 1
    || col("day_of_week") === 7, 1)
.otherwise(0))
```

**sin\_season and cos\_season** Both features reflect the cyclical nature of seasons. For example, the transition from December (winter) to January (winter) should not be treated as a large gap, but as a smooth and continuous transition. Using sine and cosine functions helps in encoding this continuity and improved Model Performance.





At this stage, we have 9 features for future analysis, which encapsulate key information from the original date feature.

# 3.2. Prediction

In this problem, the objective is to predict the trends of keywords using several time-related features. However, the trends at a specific point in time are not always strongly influenced by past trends, making it challenging for traditional time series models to capture the relationship. As a result, a decision tree model is selected, as it can effectively handle the complexity of non-linear relationships and is less dependent on the sequential nature of past data compared to other time series-based machine learning models.

$$RMSE = \sqrt{\frac{1}{n}\sum_{i=1}^{n} (y_i - \hat{y}_i)^2}$$

The dataset is split into a training set and a testing set, with 80% used for training and 20% for testing. RMSE is employed as the evaluation metric.

```
val Array(trainingData, testData) =
data.randomSplit(
        Array(0.8, 0.2), seed = 1234L
)
```

An independent machine learning model was trained for each keyword to make predictions, with each model operating independently. This approach was chosen because there is no significant or direct correlation between different keywords. If a single model were used to perform multi-target predictions for all keywords, it could lead to challenges such as increased model complexity, interference between targets, and ultimately suboptimal prediction performance. By training separate models, we aim to better capture the unique patterns and characteristics of each keyword, improving the overall accuracy and reliability of the predictions.

```
// Train and evaluate the model
// for each keyword label
keywordLabels.foreach { label =>
    val dt = new DecisionTreeRegressor()
    .setLabelCol(label)
    .setFeaturesCol("features")
    // Train the model
    val model = dt.fit(trainingData)
    // Make predictions
    val predictions = model
        .transform(testData)
    // Evaluate the model using RMSE
    val evaluator = ...
    .setLabelCol(label)
    .setPredictionCol("prediction")
    .setMetricName("rmse")
```

. . . . . .

}

# 3.3. Result

For the results, we calculate the RMSE on the test set and the predicted value for each keyword on 2024-12-31. Below is a portion of the results:


Table 1. Part of results					
Keywords	RMSE	Prediction on 2024-12-31			
Winter Coat	2.2654	10.0			
Swimsuit	2.6990	16.0			
Thanksgiving Turkey	21.7228	65.0			
Easter Eggs	20.7649	6.1071			

The full set of results can be found here.

A comprehensive analysis of the RMSE values for all predictions indicates that the predictive model demonstrates a high level of accuracy in this task. The average RMSE across all test cases is 2.6561, demostrating the model's reliability and precision in capturing the underlying patterns in the data.

Table 2. RMSE						
Min	Max	Mean	Variance			
0.0	21.7228	2.6561	11.2749			

Keywords with RMSE less than 3.0 and predicted trends value greater than 80.0 are selected for future analysis: **soap** (trends = 84), **shampoo** (trends = 92.43), **camera** (trends = 92), **smartphone** (trends = 92.9), **vacuum** (trends = 91), **microwave** (trends = 90.9) and **laptop** (trends = 90.1). Figure 3 shows the distribution of predicted values on 2024-12-31.



## 4. Instacart Market Basket Analysis

Instacart, a grocery order and delivery app with stores in the United States and Canada, provides a user experience where customers get product recommendations based on their previous orders. Instacart provided transactional data on customer orders over time.

The Instacart data is split and normalized into 6 datasets, each containing key information on orders and products purchased.

- 1. aisles.csv details of aisles
- 2. department.csv Details of Department
- 3. **products.csv** details of a product. Each product is associated with an aisle and a department
- 4. orders.csv consists of order details placed by any user
- 5. **order\_products\_\_prior.csv** consists of all product details for any prior order, that is, the order history of every user
- 6. **order\_products\_\_train.csv** consists of all product details for a train order, that is, current order data for every user. These data contain only 1 order per user.

## 4.1. Data Profiling

Using Spark SQL and the Zeppelin notebook in NYU Dataproc Cluster, we learn the following information from our dataset.

- 1. **Dataset Size**: There are 134 aisles, 21 departments, 50k products, 3.4 million unique orders, 32 million records on order-products history and 1 million unique training records
- Null Checks/Missing Values: None of the dataset has null values, except orders.csv - Orders Dataframe is expected to have null values in the days\_since\_prior\_order column, in case there is no previous order.

# 4.2. Data Pre-processing

The data from the different data frames are merged and joined to convert into a format that would be convenient for further analysis.

These are the pre-processing steps taken:

- 1. Join the smaller tables (aisles, departments and products) to create the productDetails Dataset.
- 2. Merge the data from order\_products\_\_train.csv and order\_products\_\_prior.csv
- 3. Orders table has pre-existing null values in the **days\_since\_prior\_order** column. These can be filled with -1.
- Join the Orders and ProductDetails dataset with the merged training dataset to create a single denormalized dataset.

- 5. Remove any null records created from all the joins
- 6. Remove all the ID columns and the eval\_set column from the final dataset

The resultant denormalized dataset is saved in parquet format for future analysis.

## 4.3. Market Basket Analysis

The cleaned and denormalized data set has the following schema:

cleanDF.printSchema

```
root
    |-- add_to_cart_order: integer (nullable = true)
    |-- reordered: integer (nullable = true)
    |-- order_number: integer (nullable = true)
    |-- order_dow: integer (nullable = true)
    |-- order_hour_of_day: integer (nullable = true)
    |-- days_since_prior_order: double (nullable = true)
    |-- aisle: string (nullable = true)
    |-- department: string (nullable = true)
```

Figure 4. Denormalized Schema for Instacart Data

We perform data analysis on this cleaned data to identify interesting patterns that would prove to be useful to the management team at Instacart to fine-tune their product placements and employee work schedules.

## 4.3.1 Orders vs Hours of the Day

We count the total number of orders for each hour of the day to estimate the number of employees required per shift and ensure efficient staffing. Analysis of the bar graph lets us know that the distribution follows a traditional bell curve with minimal activity during from 12 am to 6 am. Orders increase during the morning and afternoon hours and grad-ually decrease as it gets late.





Figure 5. Orders vs Hours of the Day

# 4.3.2 Frequently ordered product departments and product aisles

We investigate the relationship between the number of items ordered per department/aisle to identify the most profitable product departments/aisles. The analysis has been visualized as a pie chart indicating the percentage of total orders per department/aisle. Since there are over 100 aisles, we pick the top 25 aisles for the pie chart graphic.

**Produce and dairy eggs** are the most common departments. **Fresh fruits and vegetables** are the most common product aisles.






Figure 7. Popular Aisles





Figure 8. Position in cart vs Reorder rate

# 4.3.3 Relationship between position in shopping cart and reorder rate

There is quite an interesting correlation between the item's position in the shopping cart and its reorder rate. Reorder rate can be defined as:



From positions 1 through 50, there is a clear correlation between the reorder rate and the position in the shopping cart.

- Early positions: Higher reorder rates may indicate staple or frequently purchased items.
- Later positions: Lower reorder rates may suggest less critical or experimental purchases.

# 5. Percent Change in Consumer Spending

This dataset measures daily percentage changes in consumer spending across multiple categories, including groceries, health, entertainment, and transportation, over the years 2020 to 2024.

## 5.1. Overview of the dataset

This dataset includes fields that provide high-level insights into consumer spending patterns, such as percentage changes in categories like food service spending, entertainment spending, grocery spending, and more. Table 3 shows a snippet of the dataset.

Table 3. Part of Percent Change in Consumer Spending Dataset

StateCode	Date	AllSpending	
900	2020-01-13	-2.3	
2500	2020-01-13	-0.218	

### 5.2. Data Processing

During the processing of this dataset, we convert daily data from multiple areas daily and calculating a single percentage seasonally and yearly to reflect overall trends at same time. This approach ensures that we maintain both accuracy and proportionality.

```
val yearlyMaxAvg = yearlyAverages
.withColumn(
   "MaxAvgPercent",
   greatest(
      col("YearAvgAllSpending"),
      col("YearAvgFoodService"),
      col("YearAvgEntertainment"),
      col("YearAvgMerchandise"),
      col("YearAvgMerchandise"),
      col("YearAvgGrocery"),
      col("YearAvgHealth"),
      col("YearAvgTransport"),
      col("YearAvgRetailIncGrocery"),
      col("YearAvgRetailExGrocery")
```




Figure 9. Analysis of percentage change Trends

#### 5.3. Analysis of yearly and Economic Trends

Consumer spending patterns vary significantly across seasons and economic conditions. During crises like the COVID-19 pandemic, demand shifted heavily toward essentials such as groceries, reflecting the focus on basic needs. In contrast, stable economic periods saw increased spending on discretionary categories like health, wellness, and entertainment, driven by greater consumer confidence and disposable income.

Figure 9 shows the yearly winner categories by average percentage contribution.

# 6. Walmart Retail Dataset

The Walmart Retail Dataset, obtained from data.world, spans retail order details from 2019 to 2023 and is ap-

proximately 300 MB in size. It includes comprehensive fields such as customer demographics, product details, and transaction information, encompassing cities across multiple U.S. states. The dataset served as a foundation for analytical tasks and data exploration, with Zeppelin utilized to perform functions like data transformation, visualization, and aggregation to derive actionable insights. In its initial state the Dataset had a lot many columns that were not necessary at all in our evaluations. Below provides you a picture of the schema of our Dataframe in its initial stage without any preprocessing being performed:

```
root
I-- city: string (nullable = true)
I-- customer_age: string (nullable = true)
I-- customer_name: string (nullable = true)
l-- customer_seament: string (nullable = true)
I-- discount: string (nullable = true)
I-- order_date: date (nullable = true)
l-- order_id: string (nullable = true)
I-- order_priority: string (nullable = true)
I-- order_quantity: integer (nullable = true)
I-- product_base_margin: string (nullable = true)
I-- product_category: string (nullable = true)
I-- product_container: string (nullable = true)
I-- product_name: string (nullable = true)
I-- product_sub_category: string (nullable = true)
I-- profit: string (nullable = true)
I-- region: string (nullable = true)
 I ---
    sales: string (nullable = true)
 I-- ship_date: string (nullable = true)
 I-- ship_mode: string (nullable = true)
 I-- shipping_cost: string (nullable = true)
 I-- state: string (nullable = true)
 I-- unit_price: string (nullable = true)
 I-- zip_code: string (nullable = true)
```

Figure 10. Schema for our original Walmart Dataset before Pre-Processing Data

#### 6.1. Profiling of Data

Using Spark SQL and the Zeppelin notebook in NYU Dataproc Cluster, we learn the following information from our dataset:

- Schema and Column Stats: Identified column types (e.g., strings, dates, integers) and counted null vs. nonnull values to assess data quality. Discovered columns like profit, sales, and shipping\_cost contained missing data that needed fixing.
- **Invalid Entries:** Noticed around 18k records in the state column with invalid or malformed data (e.g., numeric or special characters), which required cleaning.
- Unique Values: Found 45 unique states and 18 distinct product subcategories. One subcategory was labeled as an unknown category, indicating possible data entry errors or incomplete records.
- Unnecessary Columns: Identified several columns that were not required for the analy-

sis, such as customer\_name, order\_id, and product\_container, which were marked for removal.

## 6.2. Pre-Processing of Data

- Data Cleaning: Replaced or removed null and invalid values. For example, missing values in profit, sales, and shipping\_cost were set to zero.
- Filtering Invalid States: Used regex to filter out invalid state entries (e.g., those containing digits). After dropping these rows, the dataset's record count reduced from approximately 1,030,000 to 1,016,102.
- Schema Refinement: Verified and updated column data types. Automatic schema inference assigned correct types to columns such as dates, integers (e.g., order\_quantity), and strings (e.g., city, state).
- Removal of Non-Essential Columns: Dropped columns that were not essential for either the overall analysis or collaborative insights, such as order\_priority, product\_base\_margin, and unit\_price.

The resultant Processed dataset with only the essential columns was saved in parquet format for future analysis.

# 6.3. Analysis of Walmart Retail Dataset

#### 6.3.1 Statewise Analysis of Sales

From the aggregated results, **California** and **Texas** lead in total order quantity, closely followed by **MA**, **New Jersey**, and **Florida**. These top performers also generate correspondingly high profits, suggesting that they represent substantial market share and sales volume within the dataset.




Figure 11. Statewise Analysis of Sales

#### 6.3.2 Region-Wise Profit Distribution

When grouping by region (East, West, South, Central), the **East** emerges as the highest in total order quantity—over **8.2 million**—and similarly leads in overall profit. The **South** and **Central** regions follow behind, indicating potential regional demand differences and logistical variations that might affect profitability. Here we see that even though according to the State-wise distribution California has the most number of orders, the most profit is observed from the East Region while West Region is around half the profit collected from East. We can conclude that even though the number of orders and number of stores is a lot in California, its contribution to the overall West region does not help with the non presence of Walmart in the West.




Figure 12. Region-Wise Profit Distribution

### 6.3.3 Number of Cities per State

States like **California** (108 unique cities), **Texas** (102), and **MA** (101) have the broadest coverage, reinforcing their leading positions in terms of total orders. The large number of cities suggests a widespread presence of Walmart stores and, in turn, a more extensive customer base.


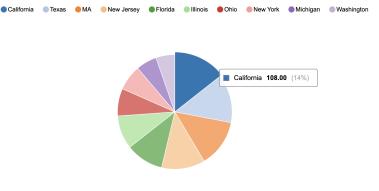


Figure 13. Number of Cities per State

## 6.3.4 Customer Age Group Analysis

Surprisingly, the **60+** age group accounts for the highest order quantity (over **10.9 million**) and the greatest total profit. The **21–40** and **41–60** brackets are fairly close in their total order volumes (~7.4 million each), while the **0–20** segment is notably smaller, pointing to specific demographic trends in purchasing behavior. We can realise from this analysis that the shoppers belonging to a younger demographic prefer to not use Commerce brands in person, unlike people of higher age, who have a high presence at in person stores compared to online shopping and E-Commerce.



(b) Analysis of Profits based on Age Group Figure 14. Analysis of Order Quantity and Profits Based on Age Group

# 6.3.5 Monthly Analysis of Order Quantity

Monthly ordering patterns show a peak in **January** (around **2.34 million** orders), followed by some variability throughout the year. There's a dip in February, and moderate fluctuations continue in subsequent months. This points to potential seasonality and holiday-driven purchasing trends in Q1 and Q4.




Figure 15. Monthly Analysis of Order Quantity

## 7. Amazon Reviews Dataset

The Amazon Customer Reviews is a massive dataset (over 75GB) of amazon product reviews.

Typically it has been used for pre-training Large Language Models and in sentiment analysis. We will look at the Pure IDs (5-Core) segment of the dataset which just focuses on the product ratings (out of 5).

A parent ASIN is a unique Amazon Standard Identification Number (ASIN) that groups together products with variations, such as different colors or sizes. The mapping from ASIN to product is obtained from a large json file (1.25 GB)

## Data Links:

- 1. Pure IDs (5-Core) Amazon Reviews'23
- 2. Hugging Face Mapping Link

In total there are 28 categories of data, each stored in its own zip file. The dataset includes user ratings, and product metadata for categories, that is the parent ASIN key and user\_id along with the review timestamp.

## 7.1. Data Profiling

Using Spark SQL and Zeppelin Notebook on NYU Dataproc Cluster, we learn the following information from our dataset.

- 1. **Dataset Size**: There are approximately 67 million records in the ratings dataset and approximately 35 million records in the asin dataset.
- Null Checks/Missing Values: None of the datasets have any null values
- 3. **Data Summary**: Using the Dataframe API, calculate simple statistics for the Ratings Dataframe. Here are some stats:
  - (a) Ratings range from 1.0 to 5.0
  - (b) 50% of the orders in the dataset have a 5.0 rating
  - (c) Timestamps are in the Unix timestamp format.
- 4. **Unknown Category**: When analysing our dataframe after the join we found that unknown was a category with an ASIN of its own.

## 7.2. Data Pre-processing

The data from the different data-frames are merged and joined to get it into a format that would be convenient for further analysis.

There is one pre-processing step that was done while loading the data. Since we load all the ratings csv files into one single dataframe, it helps to create a column called 'source\_file' which refers to the source of the Dataframe Row.

These are the preprocessing steps taken:

- 1. Join the Ratings and ASIN dataset to create a single denormalized dataset.
- Replace the nulls generated by the "left outer join" between the two datasets. We only have null values in the 'category' column which we can replace using the value from the 'source\_file' column
- Remove the user\_id, source\_file and the parent\_as in column
- 4. Convert the UNIX timestamp to a Date format (YYYY-MM-DD) to get a consistent result that can be used to compare with other datasets as well.
- 5. Handling the unknown category: This category seemed pretty inconclusive for our analysis and thus we planned on removing it entirely from our final combined dataframe.
- 6. The resultant dataset was saved in parquet format for future analysis

## 7.3. Data Analysis

The cleaned and merged dataset has the following structure:

+	++	+
Iratingl	categoryl	datel
+	++	+
5.0 Arts Craf	ts and S12015	-09-031
1 5.01	Books 2018	-06-231
1 5.01	Books 2018	-06-231
I 5.0/Clothing	Shoes an 2016	5-01-13I
I 5.0 Beauty ar	nd Person 2013	-02-191
1 5.01	Electronics/2020	-01-09I
I 5.0(Clothing	Shoes an12012	-09-301
1 5.01	Automotive/2021	-05-201
I 5.0 Arts Craf	ts and S12020	-02-10
5.0 Health an	nd Household∣2010	-01-04I
1 5.01	Automotive/2019	-10-17
I 5.0 Beauty ar	nd Person12020	-12-301
1 5.01	Electronics/2013	-10-241

Figure 16. Sample Data from the cleaned Amazon Dataset

We perform data analysis on this cleaned data to identify interesting patterns that would prove to be useful to the management team at Amazon to fine-tune their inventory management schedules.




Figure 17. Ratings vs Ratings count

#### 7.3.1 Ratings Count

We try to look at the ratings count for all the products at Amazon. We notice that most of the products are reviewed at 5 stars (100 M). All other ratings put together have a count of around 50 M. This tells us that review ratings (out of 5) are not a good indicator of analysis on the Amazon products due to their skewed nature.

## 7.3.2 Category Count

Next, we look at the distribution of ratings across the different categories in the Amazon Dataset. Here we notice that clothing, shoes, jewelry and electronics are among the top most rated categories. A direct correlation can be drawn to the fact that customers mainly purchase clothing items from Amazon in comparison to Health and Household items.

#### 7.3.3 Yearly Reviews Count

Look at the total number of reviews uploaded every year, we find a sudden spike in yearly review counts in 2013 - indicating the year when Amazon became really popular as a site for e-commerce activities. We also notice that reviews have steadily increased upto 2019 after which it hit a plateau. This can mostly be attributed to the fact that almost all households now hold Amazon accounts.

The data in 2023 is incomplete which indicates the sudden drop in review counts.

# 8. Collaborative Analysis

Once we individually analyzed every dataset, we attempted to collate our findings on the few fields common between the datasets. Here are some interesting findings from our analysis.

## 8.1. Orders vs Days of the Week

We count the total number of orders for each day of the week. Weeks are numbered from 0 to 6 with 0 representing


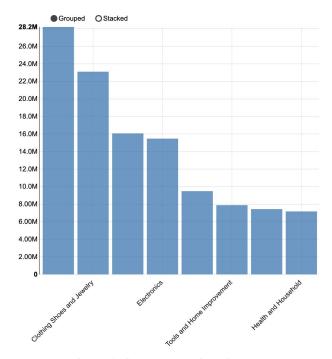


Figure 18. Category vs Ratings Count



Sunday and 6 representing Saturday.

In the **Instacart dataset** we calcuate summaries for all orders and orders that were reordered. Both show a similar trend with the **start of the week being especially busy** as households restock for the week. The counts **decrease during midweek** and start increasing again during the weekend.

The analysis holds true when we take a look at the **Per**centage change in consumer spending for Sundays is higher than any other day.

Finally, we take a look at the **Amazon Reviews Dataset**. Here, we notice that the trend has switched up with a majority of the records getting created during midweek with the weekend counts being lower. This resonates with our previous hypothesis if we understand that the Amazon dataset looks at reviews rather than the actual orders. If we were to extrapolate these results, it would indicate that the orders




Figure 20. Instacart: Orders vs Day of the week




Figure 21. Percent Change: Average Change vs Day of the week

were made during the weekend and reviews are put up during midweek.




Figure 22. Amazon: Review Count vs Day of the Week

# 8.2. Orders vs Month of the Year

If we were to perform a similar analysis with a different temporal domain, we would get further interesting insights.

We can plot the distribution of the order count vs Month of the Week for the Amazon Dataset and the Walmart Dataset. For both these datasets we notice an interesting insight into the shopping habits of consumers.

In both companies, we notice shopping and **order counts spike during the winter holiday months**. While in the case of Walmart, the peak is in January, for Amazon

the orders start to peak from November and continue into the new year through January.




Figure 23. Walmart: Order counts vs Month of the Year




Figure 24. Amazon: Review Counts vs Month of the Year


# 8.3. Correlation Between Reviews and Search Trends for Gift Cards

The analysis explores the correlation between reviews for gift cards on Amazon and Google search trends for the keyword "Amazon Giftcard" over the last 5 years.


The first plot (Figure 25a) illustrates the average number of weekly reviews submitted for gift cards on Amazon. The data shows a significant spike in reviews during the last two weeks of December and the first two weeks of January. This pattern likely indicates that many customers leave reviews for gift cards after the winter holiday season.

The second plot (Figure 25b) highlights weekly Google search trends for the keyword "Amazon Giftcard" from January 2020 onwards. It reveals a noticeable peak in searches during the winter holiday season, typically in December, suggesting a higher interest in purchasing gift cards during this period.

This combined analysis demonstrates a correlation between increased searches for gift cards during December and the subsequent reviews on Amazon, predominantly in late December and early January. The trend aligns with consumer behavior during the holiday season.



(a) Weekly reviews for Gift Cards on Amazon.



(b) Google search trends for "Amazon Giftcard."

Figure 25. Correlation analysis between gift card reviews and Google search trends.

# 9. Conclusions

The results of this project underscore the transformative potential of big data analytics in optimizing retail operations. By integrating and analyzing datasets from diverse sources, such as Amazon reviews, Walmart sales, and Instacart orders, we uncovered actionable insights into consumer behavior, seasonal purchasing trends, and product preferences. These findings enable retailers to enhance inventory management, refine marketing strategies, and improve customer satisfaction.

A key highlight of this analysis is the identification of temporal patterns, such as the surge in gift card searches and reviews during the winter holiday season, and the midweek peak in Amazon review activity. Similarly, the startof-week concentration of Instacart orders aligns with consumer restocking habits, showcasing how purchasing behaviors vary across platforms and timelines. The monthly analysis revealed consistent spikes in retail activity during the holiday months, particularly in December and January, reflecting seasonal consumer demand.

Furthermore, the correlation analysis between consumer actions and external factors, such as holidays and search trends, highlights opportunities for more targeted and efficient decision-making. By leveraging tools like Apache Spark for scalable data processing and visualization, this project showcases the importance of combining advanced analytics with domain knowledge to derive meaningful insights.

Ultimately, this work demonstrates the value of big data in fostering operational efficiency, improving customer experiences, and driving long-term growth in the retail sector. Future work could explore the integration of additional datasets, such as social media sentiment analysis, or the use of real-time analytics to capture emerging trends, enabling proactive and adaptive decision-making in a dynamic marketplace.

# **10.** Acknowledgement

This work was made possible by downloading data from the Google Trends API, Kaggle, Amazon Datasets, Data.world and Data Gov.

Special thanks to the NYU Dataproc team to provide us with a distributed computing platform.

Last but not least, Professor Yang Tang for providing us with the skills to analyze Big datasets using Apache Spark.

# **11. Repository Access**

The complete implementation for this project, including preprocessing, aggregation, analysis, and visualization code, is available on the GitHub repository:

https://github.com/shrishriyesh/
Retail-Market-Analysis

The repository contains detailed notebooks, Scala scripts, and Zeppelin notebooks that demonstrate the methodologies and insights derived from the datasets. It serves as a resource for replicating the results and extending the analysis further.

## References

- 1. Instacart Market Basket Analysis. Kaggle. (n.d.). https://www.kaggle.com/c/ instacart-market-basket-analysis/ data.
- 2. Amazon Reviews Dataset. (n.d.). Via Huggingface Datasets - Amazon Reviews'23. https://amazon-reviews-2023.github. io/dataloading/huggingface.html.
- 3. State of Connecticut Percent Change in Consumer Spending. Data.gov. (2024, December 13). Available here.
- Google. Google Trends Data. Accessed December 13, 2024. https://trends.google.com/ trends/.
- 5. Ahmed Mnif. Walmart Retail Dataset. Data.world. Accessed December 13, 2024. https://data.world/ahmedmnif150/ walmart-retail-dataset.