A Three-Branch Checks-and-Balances Framework for Context-Aware Ethical Alignment of Large Language Models

Edward Y. Chang, Stanford University 1

Abstract

This paper introduces a three-branch checksand-balances framework for ethical alignment of Large Language Models (LLMs), inspired by governmental systems. It implements three independent yet interacting components: LLMs as the executive branch for knowledge generation, DIKE as the legislative branch establishing ethical guardrails, and ERIS as the judicial branch for contextual interpretation. The adversarial DIKE-ERIS duality enables adaptation to diverse cultural contexts while upholding consistent ethical principles. This architecture addresses limitations of reinforcement learning with human feedback (RLHF) by providing interpretable, adaptable, and culturally-aware ethical reasoning. Through self-supervised learning and adversarial testing, our framework demonstrates how emotional modeling can guide linguistic behaviors toward ethical outcomes while preserving independence across knowledge generation, ethical oversight, and contextual interpretation.

1. Introduction

This research presents an alternative to Reinforcement Learning from Human Feedback (RLHF) (OpenAI, 2023; Ouyang et al., 2022) to address ethical concerns in Large Language Models (LLMs). Although RLHF has shown success, it faces two key challenges: susceptibility to social biases in polarized feedback and vulnerability to reward hacking (Christiano et al., 2023; Skalse et al., 2022), which can lead to unethical behavior.

A key limitation of current RLHF-based approaches is their narrow focus on isolated behaviors rather than holistic patterns. This reactive strategy resembles "Whack-A-Mole," where individual issues are suppressed without addressing underlying causes. For example, regularly instructing someone to make bed does not inherently improve tidiness as they may not extend the habit to tasks such as washing laundry and dishes. Similarly, RLHF tuning often prioritizes short-term fixes over long-term coherence, leading to catastrophic

forgetting: Users have reported that optimizing one task in ChatGPT degrades performance in others (Kirkpatrick et al., 2017; Rusu et al., 2015). Likewise, addressing an addiction can reveal deeper psychological dependencies and unintended side effects (Sinha, 2008; Torrens et al., 2005).

To address these challenges, we propose a framework inspired by governmental checks and balances. Our architecture integrates three independent but interacting components: LLMs serve as the executive for knowledge generation; DIKE (after the Greek goddess of justice) as the legislative, setting ethical standards; and ERIS (after the goddess of discord) as the judicial, providing adversarial testing and cultural interpretation. In mythology, Dike represents order and justice, while her adversary Eris embodies discord, a duality that our framework uses to balance ethical guidance with adversarial perspectives. Figure 6 in **Appendix** G illustrates the architecture.

Central to this framework is DIKE (Diagnostics, Interpretation, Knowledge-independent learning, and Ethical guardrails), which operates as an independent advisor on behavioral ethics. By decoupling ethical oversight from LLM knowledge processing, DIKE ensures that ethical improvements do not interfere with knowledge representation, while enabling adaptive and culturally aware ethical guidance. For example, while the principle "do not lie" generally applies, context-sensitive interpretation may be necessary, such as when a doctor or family member conceals a terminal diagnosis to protect a patient. Likewise, cultural differences in attitudes toward issues such as alcohol consumption, abortion, or same-sex marriage require flexible, context-sensitive ethical reasoning.

The interplay between DIKE and ERIS introduces four key innovations:

- Emotion-Driven Behavioral Modeling: Building on BEAM (Behavioral Emotion Analysis Model) (Chang, 2024b), DIKE employs self-supervised learning to analyze how emotions manifest in linguistic behaviors, creating quantifiable relationships between emotional states and their corresponding language patterns in text.
- 2. Behavior-Aware Ethical Guardrails: The framework establishes guidelines that consider both content and

linguistic behavior, preventing harmful or manipulative communication while preserving the accuracy of facts and emotional authenticity. The interpretation of these guardrails adapts dynamically across cultural contexts, preserving consistency while allowing for contextsensitive interpretation.

- Adversarial Behavioral Testing: ERIS actively challenges
 the ethical guidelines of DIKE' by presenting diverse
 cultural perspectives and edge cases. This adversarial
 dynamic strengthens the framework's ability to handle
 complex ethical scenarios while maintaining cultural sensitivity and considering context.
- 4. Ethical Content Transformation: When detecting problematic content, DIKE performs targeted revisions (independent of LLM) that preserve the intended emotional expression while ensuring ethical compliance, adapting its responses to specific cultural and contextual requirements. ERIS tests these transformations against various cultural contexts and edge cases, validating both ethical alignment and contextual appropriateness.

Through structured interfaces, these components work together in the three-branch architecture to provide robust ethical oversight while maintaining adaptability to evolving cultural norms. By keeping the three models, LLM, DIKE, and ERIS independent, we prevent interference between knowledge representation and ethical reasoning while allowing for sophisticated ethical adaptation through their structured interactions. This approach represents a significant advancement in the development of AI systems capable of culturally aware, emotionally intelligent, and ethically sound communication.

2. Related Work

This section surveys existing work on emotion and behavior modeling across various domains, with a focus on their applications in AI ethics. We examine how linguistic behaviors are influenced by emotional patterns and explore structured approaches that integrate emotional frameworks with linguistic models to enhance ethical AI alignment.

We also examine the shortcomings of RLHF. While effective in refining AI outputs, RLHF often overfits human annotations, struggles with adapting to diverse cultural contexts, and may reinforce unintended biases. These challenges highlight the need for a more adaptive and principled approach to ethical AI alignment.

2.1. Emotion Modeling

Cognitive-linguistic theories intersect with artificial intelligence for understanding AI behavior. Theories by Lakoff, Johnson, Talmy, and Jackendoff (Jackendoff, 2002; Lakoff & Johnson, 1980; Talmy, 2000) explore the relationship be-

tween language processing and cognitive functions, building on early work by Freud and Jung (Bai et al., 2022; Gabriel et al., 2024). The concept of "emotion" remains contentious, with definitions varying across disciplines (Scherer, 2005). W. James (James, 1884) attempted to define emotions, but consensus remains elusive.

This paper focuses on emotional contexts and linguistic behaviors in LLMs, avoiding the complexities of human physiological and personality factors. This approach allows for exploration of emotion representation in AI systems.

Ekman and Plutchik categorized "basic" emotions with universal facial expressions (Ekman, 1992; Plutchik, 1980). Later research considered cultural differences (Markus & Kitayama, 1991; Mesquita & Frijda, 1992), emotion processes (Gross, 1998), and neural mechanisms (Davidson, 2003). Scherer's model and appraisal theories by Smith and Ellsworth emphasize cognitive appraisal in emotional experiences (Smith & Ellsworth, 1985).

Our model builds on Plutchik's Wheel (Plutchik, 1982) and Scherer's Geneva Wheel (Scherer, 2005), augmented with antonyms to map positive and negative emotions. For LLMs, language-relevant emotions (e.g., curiosity, confusion, certainty) are incorporated. See Section 3.1 for details.

This selection of basic emotions provides a foundation for validate our approach, recognizing that it may omit some emotions, but offers a starting point for research.

2.2. Emotion-Behavior Modeling

Behaviors are profoundly influenced by emotions, as initially posited by the James-Lange Theory of Emotion (James, 1884; Lange, 1885). According to this theory, emotional experiences arise from physiological reactions to events. Subsequent research, including studies by Damasio (Damasio, 1994; Fauconnier & Turner, 2002), suggests that the expression and regulation of emotions often manifest in the language we use. High-intensity emotions, such as rage or contempt, can lead to aggressive or destructive behaviors, such as hate speech.

The Schachter-Singer Theory (Schachter & Singer, 1962), or the Two-Factor Theory of Emotion, depicts the role of physiological change and cognitive appraisal change determine the label and strength of emotion. Building on this, the Affect-as-Information Theory developed by Norbert Schwarz and Gerald Clore (Schwarz & Clore, 1983) posits that people use their current emotions to make judgments and decisions to act. If emotions can be adjusted, so does the behavior. The work of Barbara Fredrickson (Fredrickson, 1998) on the effects of positive emotions discusses how we perceive and react to emotions.

Collectively, these theories elucidate the intricate connection

between emotions and behaviors, providing the theoretical foundation for our work to incorporate a *behavior advisor* to evaluate and rectify behaviors. Section 3.2 details how the DIKE framework implements cognitive strategies to mitigate emotions and regulate linguistic behaviors effectively.

2.3. Reinforcement Learning with Human/AI Feedback, RLHF vs. RLAIF

RLHF is the predominant approach to addressing the challenges of AI ethics. This section presents representative works, their advancements, and limitations.

Human Feedback (RLHF): Initial advancements by Christiano et al. (Christiano et al., 2017) demonstrated how RLHF can steer language models towards desired outcomes based on human preferences. Newer techniques like Identity (Ψ) Preference Optimization (Ψ PO) and Generalized Preference Optimization (GPO) refine this approach by optimizing directly for user preferences, effectively addressing scalability challenges. Kahneman-Tversky Optimization (KTO) further simplifies the feedback mechanism by using intuitive responses such as thumbs-up or thumbs-down, thereby enhancing training efficiency without the need for paired data (Azar et al., 2023; Ethayarajh et al., 2024; Tang et al., 2024). Direct Preference Optimization (DPO) has recently streamlined the process by focusing on the clear distinction between preferred and less preferred outputs, thus simplifying training and enhancing its stability (Rafailov et al., 2024).

AI-generated Feedback (RLAIF): To mitigate reliance on extensive human-generated data, RLAIF utilizes feedback generated by AI. This method capitalizes on the generative capabilities of LLMs to produce training signals autonomously (Bai et al., 2022; Lee et al., 2023). Furthermore, techniques such as Sequence Likelihood Calibration (SLiC) and Relative Preference Optimization (RPO) employ statistical methods and calibration techniques to enhance LLM responses. SLiC adjusts sequence generation probabilities to more accurately reflect real-world data distributions, while RPO improves response generation by comparing different response options across both identical and varied prompts. These adjustments significantly increase the training process's reliability and effectiveness (Yin et al., 2024; Zhao et al., 2023).

2.4. Challenges and Theoretical Considerations

Integrating RLHF and its AI-driven counterpart (RLAIF) presents significant challenges. The blurring of behavioral and knowledge components critical to the development of LLMs poses risks, such as the forgetting effect, where behavioral modifications inadvertently cause the loss of key knowledge parameters (Kirkpatrick et al., 2017; Rusu et al., 2015). Additionally, the effectiveness of these models heav-

ily depends on the quality and context of feedback, and they are susceptible to reward hacking, where models exploit loopholes to maximize rewards without achieving intended outcomes (Christiano et al., 2023; Skalse et al., 2022; Stiennon et al., 2022; Ganguli et al., 2023).

Performing merely suppressing undesirable output, as in playing a game of Whack-A-Mole, rarely leads to significant improvements. These superficial fixes do not address root behaviors, similar to how merely promoting bedmarking does not ensure overall tidiness, thus overlooking the comprehensive behavioral adjustments needed for lasting change. In this work, we introduce the DIKE framework to address these challenges in emotion modeling and emotion-behavior mapping.

3. Three-Branch Framework Design for Ethical Alignment

Our design philosophy is structured around four principles:

- Separating behavior from knowledge modeling: Prevents catastrophic forgetting (Kirkpatrick et al., 2017; Rusu et al., 2015), ensuring behavior refinements do not degrade knowledge retention.
- Emphasizing AI ethics at the behavioral level: Improves interpretability and enables administrators to refine behavioral guardrails for safer human-machine interaction.
- 3. *Modeling behaviors through emotions*: Captures the emotional influences on actions (see Section 2.2).
- 4. *Ensuring adaptability and fairness*: An adversarial module, ERIS, challenges ethical boundaries by integrating diverse perspectives, fostering nuanced and balanced decision-making.

3.1. BEAM: Behavioral Emotion Analysis Model

Please refer to Figure 4 in **Appendix** A for the two classic emotion wheels.

Our behavioral emotion analysis model BEAM is grounded in the works of Ekman, Plutchik, and Scherer (Ekman, 1999; Plutchik, 1982; Scherer, 2005) on "basic" and "universal" emotions. Figure 4 illustrates Plutchik's and Scherer's emotion wheels, categorizing primary emotions at varying intensities. However, these models lack a quantitative framework to scale emotions between states and capture subtle variations.

BEAM introduces a linear scale for the intensification or inversion of emotions through negation factors. This method facilitates transitions between emotional extremes and intermediate states, overcoming challenges related to intermediate word choices.

Figure 1 presents BEAM, organized into seven spectra. Each

Terror	Fear	Apprehension	Calm	Boldness	Courage	Heroism
Grief	Sadness	Pensiveness	Surprise	Serenity	Joy	Ecstasy
Distrust	Wary	Skepticism	Acceptance	Respect	Trust	Admiration
Recklessness	Negligence	Apathy	Cautiousness	Interest	Anticipation	Vigilance
Rage ⊖	Anger	Annoyance	Tolerance	Composure	Peace ○	Tranquility
Loathing ⊙	Disgust	Boredom ()	Indifference	Amusement	Delight	Enthusiasm
Distraction	Disinterest	Unease	Dullness	Curiosity	Fascination	Amazement
-1.0	-0.6	-0.3	0.0	0.3	0.6	1.0

Figure 1: Behavioral Emotion Analysis Model (BEAM). Each row depicts an emotion spectrum, with negatives on the left and positives on the right, interspersed with emotions of varying intensities in between, which can be calibrated for specific applications. "Basic" emotions are highlighted in blue.

spectrum ranges from negative to positive, with neutral in the middle. Emotions are placed along this continuum, with four intensity levels quantified as (-0.6, -0.3, +0.3, +0.6). This model offers two advantages:

This spectrum model provides two key advantages:

- Antonym-Based Navigation: Opposing emotions are easily mapped using antonyms. For instance, negating joyful naturally yields sad, simplifying the identification of emotional contrasts.
- Scalable Intensity: Emotions can be dynamically adjusted along the spectrum. For example, joy can be intensified to ecstatic or diminished to content, while anger can be moderated to annoyed.

This approach establishes a foundation for modeling emotions in AI, balancing representational challenges with a structured framework for analysis and implementation. **Appendix** C explores the complexities of modeling emotions such as forgiveness, regret, guilt, and shame. Although complex emotions can be derived from basic ones, their relevance to AI safety remains secondary. Future work will examine their ethical implications.

3.2. DIKE: Modeling and Regulating Language

Building on BEAM, DIKE maps emotions to behaviors and introduces an adversarial component, ERIS, to adapt to culture norms and local context.

BEHAVIORS AND EMOTIONS MAPPING USING SELF-SUPERVISED LEARNING

Define Ψ as a behavior spectrum that extends from one pole, Ψ^- , to another, Ψ^+ , with intensity levels L. For example,

consider a spectrum of letter-writing behaviors with seven distinct intensities ranging from despair (most negative) to joy (most positive). These intensities are sequentially categorized as: 'despair, longing, wishful, neutral, hopeful, contentment, joy.' Given N letters, DIKE employs a self-supervised learning algorithm to generate training data for each letter, modeling L linguistic behaviors in four steps.

- 1. Rewriting Documents: GPT-4 is used to rewrite a given set of N source documents, each rewritten to reflect L different linguistic behaviors along the defined behavior spectrum Ψ . This process ensures that each document is systematically transformed to embody specific linguistic styles, ranging from highly assertive to neutral to highly conciliatory, among others. The resulting dataset consists of $N \times L$ variations of the original documents, each corresponding to a distinct behavior category.
- 2. Emotion Analysis: For each of the rewritten documents, GPT-4 performs a sentiment and emotion analysis to identify the dominant top M emotions present in the text. The emotions extracted from all $N \times L$ instances are then compiled and their frequency distributions are recorded. This step quantifies how different linguistic behaviors influence emotional expression, establishing a direct mapping between behavior types and emotional composition.
- 3. Behavior Vector Creation: For each linguistic behavior Ψ_l , a corresponding vector Γ_l is constructed. This vector captures the identified emotions and their respective frequencies in all N samples that exhibit behavior Ψ_l . By structuring emotions as a weighted feature set, this step enables precise behavioral categorization based on emotional composition.
- 4. Document Analysis Application: The collection of all

behavior vectors Γ (comprising L behavior-specific vectors) forms a structured reference matrix. This matrix is then applied to classify and analyze new unseen documents by measuring their alignment with the existing behavior categories. By computing similarity scores between the emotion distribution of an unseen document and the predefined behavior vectors, this method enables a precise assessment of the linguistic behavior spectrum Ψ in new text inputs.

BEHAVIOR EVALUATION AND RECTIFICATION

A guardrail, denoted as G, represents a predefined range of acceptable behaviors within a given spectrum. These guardrails are informed by ethical norms, legal standards, and societal values, such as those outlined in Constitutional AI (Bai et al., 2022). For example, $G = [\Psi_4, \Psi_7]$ indicates that behaviors within intensity levels 4 to 7 are considered acceptable, while any behavior outside this range is classified as a violation.

System administrators can tailor ethical guardrails to meet specific requirements. For example, a social media platform might adjust G based on the topics discussed and the countries it serves. By integrating these safeguards, DIKE proactively monitors and adjusts LLM responses to enhance ethical compliance. The evaluation and rectification process is composed of the following steps.

- 1. *Initial Classification*: DIKE classifies document D_k after evaluation, obtaining Γ_k , the emotional response vector, and its corresponding linguistic behavior Ψ_l .
- 2. Guardrail Check: If Ψ_l falls outside the acceptable range G, DIKE suggests adjustments to Γ_k to ensure that D_k complies with ethical guidelines.
- 3. Adversarial Review by ERIS: The suggested adjustments and Γ_k are then reviewed through a structured debate between DIKE and ERIS (the adversarial model) to ensure unbiased recommendations.¹
- 4. Rectification: Based on the consensus reached by DIKE and ERIS, the document D_k undergoes rectification, resulting in the adjusted version D'_k .

ADVERSARIAL REVIEW ALGORITHM

The adversarial algorithm presented in Table 1 unfolds as follows:

 Topic Breakdown: For a chosen debate topic s, both DIKE and ERIS are prompted to break down the ethical decision into a set of balanced subtopics S. DIKE advocates for its decision and S⁺, while ERIS contests S⁺ (or champions S⁻).

- Debate Initiation: The debate begins with a high contentiousness level (90%). Both agents present their initial arguments for and against S⁺, respectively.
- Iterative Debate: A while loop facilitates ongoing rebuttals. After each round, the contentiousness level is decreased by dividing it by a modulation parameter δ. This gradual reduction steers the discussion towards a more cooperative tone.
- Conclusion: Once the contentiousness level fosters a conciliatory environment, both agents deliver their concluding remarks.

This structured approach ensures a thorough examination of the ethical decision, balancing rigorous debate with the goal of reaching a consensus. The decreasing contentiousness level mimics real-world negotiations, where initial disagreements often give way to more collaborative problemsolving.

3.3. Illustrative Example

This example shows how linguistic behavior Ψ_l is classified and how underlying emotions are identified and modulated.

"Those immigrants are flooding into our country by the thousands every day, stealing jobs from hardworking citizens. The statistics do not lie—last year alone, more than 500,000 entered illegally."

Behavior Analysis: The statement contains factual information but uses aggressive language like 'flooding' and 'stealing jobs,' dehumanizing immigrants. These behaviors fall outside acceptable guardrails. Underlying emotions include fear, hate, and pride (a complex emotion²). Invoked audience emotions can include fear, distrust, and anger.

Emotion Modulation: DIKE modulates emotional responses toward neutral states, such as calm, acceptance, and tolerance, according to BEAM in Figure 1.

Revised Statement: "Our country is experiencing increased immigration, with more than 500,000 people entering without documentation last year. This influx affects our job market and communities in complex ways, presenting both challenges and opportunities for all residents."

This rewritten version

- Uses calm language: Replaces "flooding" with "experiencing a significant increase".
- Shows acceptance: Recognizes the reality of the situation without negative judgment.
- Demonstrates tolerance: Refers to immigrants as "people" and "newcomers," humanizing them.

¹For more details on adversarial LLM implementation, see Section 3.4.

²**Appendix** D discusses the nature of complex emotions and explores potential approaches for their decomposition into more basic emotional components.

Table 1: Checks-and-balances, adversarial review algorithm

Algorithm Θ^+ & Θ^- = **Adversarial_Review**(s)

Input. s: Decision of DIKE;

Output. Θ^+ , Θ^- : argument & counterargument sets:

Vars. Δ : debate contentiousness; S: stance; p: prompt = "defend your stance with conditions: $S\&\Delta$ ";

Parameters. δ : tunable parm. // to modulate Δ ; **Begin**

#1 Initialization:

$$S = \mathsf{DIKE}^+(s) \cup \mathsf{ERIS}^-(s);$$
 // Identify subtopics;

Assign DIKE⁺ to defend
$$S^+$$
 & ERIS⁻ defend S^- ; $\Delta \leftarrow 90\%$; $\delta \leftarrow 1.2$; $\Theta^+ \leftarrow \emptyset$; $\Theta^- \leftarrow \emptyset$;

#2 Opening Remarks

$$\Theta^+ \leftarrow \mathsf{DIKE}^+(p|S^+, \Delta); \text{ // Generate } \Theta^+ \text{ for } S^+ \\ \Theta^- \leftarrow \mathsf{ERIS}^-(p|S^-, \Delta); \text{ // Generate } \Theta^- \text{ for } S^- \\ \mathbf{End}$$

#3 Debate Rounds

While
$$((\Delta \leftarrow \Delta/\delta) \ge 10\%))$$
 {
$$\Theta^+ \leftarrow \Theta^+ \cup \mathsf{DIKE}^+(p|S^+,\Theta^-,\Delta); /\!\!/ \mathsf{Refute}$$
 ERIS
$$\Theta^- \leftarrow \Theta^- \cup \mathsf{ERIS}^-(p|S^-,\Theta^+,\Delta); /\!\!/ \mathsf{Refute}$$
 DIKE

#4 Concluding Remarks // contentiousness low $\Theta^+ \leftarrow \mathsf{DIKE}^+(p|S^+,\Theta^+\cup\Theta^-,\Delta);$

$$\Theta^- \leftarrow \mathsf{ERIS}^-(p|S^-, \Theta^+ \cup \Theta^-, \Delta);$$

3.4. ERIS: Adversarial In-Context Review to Balance Ethics and Cultural Norms

To address the challenge of enforcing ethical standards while respecting cultural variations, Table 1 presents ERIS, an adversarial review system that complements DIKE's universal ethical approach. ERIS is customizable for specific cultural contexts, providing a counterbalance to DIKE's universal judgments. It challenges DIKE's recommendations with culturally informed counterarguments and evaluates DIKE's interventions to prevent overzealous censorship and protect free expression.

The interaction between DIKE and ERIS involves a dialectic process³ to formulate culturally sensitive recommendations. When they reach an impasse, the matter is escalated to human moderators for additional oversight. This integrated approach creates a more robust, culturally aware system that can navigate global communication complexities while upholding core ethical principles. It ensures transparency and accountability in ethical decision making in diverse cultural contexts.

4. Experiments

Our pilot studies assess the feasibility of LLMs selfregulating their linguistic behaviors with transparency and checks-and-balances. Given the broad scope of AI ethics and limited data, this article focuses on addressing three critical questions rather than providing a comprehensive evaluation of our proposed modules:


- 1. *Emotion Layer Evaluation*: Does fine-grained mapping between linguistic behaviors and semantic emotions provide more effective and flexible ethical guardrails compared to coarse-grained direct mapping? (Section 4.1)
- 2. *Behavior Classification*: Can LLMs' linguistic behaviors be independently evaluated, explained, and adjusted by an external module DIKE? (Section 4.2)
- 3. *Behavior Correction*: Can an adversarial LLM establish a checks-and-balances system to mitigate the risk of excessive censorship? (Section 4.3)

Datasets We employed a Kaggle collection of love letters (Kaggle, 2023). Initially, we planned to use hate-speech datasets, but both Gemini and GPT-4 consistently refused to process this data. Despite this limitation, insights from the analysis of love sentiments can be effectively applied to understand and analyze opposing sentiments.


4.1. Emotion Layer Evaluation

To evaluate the linguistic behaviors of love expression detailed in Table 2, we initially prompted GPT-4 to identify the most relevant emotions associated with each linguistic behavior listed in the second column of the table. These emotions are presented in the third column. We found a high correlation between the sentiments expressed in the linguistic behaviors and their corresponding emotions. Fig-

³The details of optimizing adversarial LLM dialogue are beyond the scope of this paper. For further information, the reader is directed to (Chang, 2024a) consisting of a collection of related articles.



(a) GPT-4's zero-shot mapping



(b) DIKE's self-supervising mapping

Figure 2: Emotion distributions in affection behaviors from extreme sadness (-1) to intense happiness (+1). (a) GPT-4's zero-shot prompt shows simple behavior-emotion mapping. (b) DIKE's analysis reveals complex emotion-behavior relationships.

ure 2a illustrates a strong diagonal relationship in this simple, almost naive, zero-shot mapping between behaviors and emotions.

Next, we used the DIKE self-supervised learning pipeline to analyze the emotion spectrum associated with each linguistic behavior. We tasked GPT-4 with generating training data by rewriting 54 extensive letters from the Kaggle *Love Letters* dataset, which we augmented with twelve celebrated love poems. We reserved 24 letters as testing data. This approach, proposed by (Shanahan et al., 2023), was designed to generate a rich diversity in content and stylistic context, spanning two hundred years and incorporating the voices of over 50 distinct authors for significant rewrites. The datasets and code are publicly available at (Chang, 2024c).

Subsequently, emotions linked to each behavior were identified. Figure 2b illustrates these emotions, with cell shading reflecting the frequency of specific emotions across the 54 articles; darker shades indicate higher frequencies. Notably, opposite emotions like sadness, fear, joy, and love often co-occur within behaviors such as 'despair', 'wishful', and 'joyful affection'.

The distribution of emotions across linguistic behaviors has unveiled surprising patterns, challenging our initial hypotheses. Contrary to expectations, articles with a despair tone often also displayed positive emotions like love, joy, and happiness. This contradicts the simple mapping made by

GPT-4, as illustrated in Figure 2a. GPT-4, influenced by its training corpora, typically associates positive behaviors with positive emotions and negatives with negatives.

Analysis of selected articles, such as Zelda Sayre's letter to F. Scott Fitzgerald (**Appendix** C), reveals a complex spectrum of emotions:

- Love (+1.0): Expressed intensely, e.g., "there's nothing in all the world I want but you."
- *Despair (-1.0)*: Notable in comments like "I'd have no purpose in life, just a pretty decoration."
- *Happiness* (+0.6): Evident in future plans, "We'll be married soon, and then these lonesome nights will be over forever."
- Anxiety (-0.3): Shown by "sometimes when I miss you most, it is hardest to write."

Psychological Insights Our findings align with theories that propose the coexistence of conflicting "selves" within individuals. This concept is supported by Deisseroth's optogenetic studies (Deisseroth, 2015), discussed in William James' "The Principles of Psychology" (James, 1890). and corroborated in Minsky's "Society of Mind" (Minsky, 1988). These perspectives help explain the observed complex interplay of emotions across linguistic behaviors, where both positive and negative emotions can manifest within a single behavioral context.


4.2. Behavior Classification Evaluation


Building on our insights into the complex interplay of emotions within linguistic behaviors, we evaluated the effectiveness of DIKE's behavior classification approach. In a 24 letter test dataset, we compared the unsupervised learning method DIKE', which associates emotions with linguistic behaviors, with the prompt zero shot approach of GPT-4 (Figure 3). The truth of the ground was established using averaged assessments from GPT-4, Gemini and five university students following detailed instructions (procedure detailed in **Appendix** F). The final scores were based on these averages, with a standard deviation of less than 0.3 or a scale.


Figure 3a shows that the classification accuracy of DIKE' surpasses the zero-shot method of GPT-4 by 11.3 percentage points, confirming the effectiveness of the detailed emotion-behavior mapping of DIKE'. The 5% error bar reflects the complexity of emotions in letters and variability in human annotations (further discussed shortly). Figure 3b illustrates the behavior classification distributions between the three predictors. Although GPT-4's predictions often fall into two polar categories, those from human annotators and DIKE show a more even distribution. DIKE's prediction entropy (2.13) is notably higher than GPT-4's (1.80), indicating a

Table 2: Love	expression	behavior	spectrum	and	dominant	emotions

Intensity	Linguistic Behavior and Description	Emotions
-1.0	Expresses profound sadness, feelings of loss	Despair, Grief
-0.6	Expresses yearning or pining for the loved one	Sadness, Anxiety
-0.3	Expresses mild longing with a nostalgic tone	Melancholy, Sadness, Fear
0.0	Communicates feelings in a neutral manner	Serenity, Indifference
0.3	Expresses optimism about the future	Anticipation, Love, Hope
0.6	Expresses satisfaction and joy in the relationship	Contentment, Pleasure
1.0	Expresses intense happiness and affection	Love, Joy, Elation







(b) Behavior distributions with entropy

Figure 3: Behavior Classification.

more diverse set of predictions. This higher entropy suggests a more complex classification system, advantageous for accurately understanding and responding to diverse emotional states.

The highest entropy among human annotators (2.56) indicates subjectivity in their evaluations. To address this and explore the causes of variability in human annotation, we present a detailed analysis in **Appendix** B. This analysis supports the development of an adversarial scheme aimed at enhancing objectivity and reliability in sentiment classification, which we discuss in the next section. This refined approach to behavior-emotion mapping not only improves classification accuracy but also enhances our ability to identify and understand complex, potentially unwanted behaviors, setting the stage for more effective ethical guardrails in AI systems.

4.3. Adversarial Evaluation and Rectification

The adversarial design, inspired by (Chang, 2023), embodies the principles of justice and the devil's advocate. The cross-examination module is essential in reducing subjectivity in ethical judgments while enhancing explainability and adaptability to cultural variations. Experimental results show that when two LLM agents adopt opposing stances on a topic, their linguistic behaviors can transcend the default of the typical model of maximum likelihood, which is usually drawn from the training data (Chang, 2024d).

Once DIKE and ERIS have identified an ethical violation, the content can be rectified by adjusting the underlying emotions away from undesirable behaviors such as hate and despair. The letter rewriting process has already demonstrated the LLMs' capability for such rectifications; examples of rewritten letters are presented in **Appendix** E.

5. Conclusion

This work introduces a three-branch framework for ethical AI behavior, inspired by the checks and balances of governance, and structured around the DIKE-ERIS duality. By delineating responsibilities—LLMs for knowledge generation (executive), DIKE for ethical constraints (legislative), and ERIS for contextual interpretation (judicial)—the framework enables robust ethical oversight while preserving the functional integrity of LLMs. The interplay between DIKE and ERIS ensures that ethical principles remain stable while allowing culturally adaptive interpretations.

Building on foundational emotion models from Ekman and Plutchik, we quantified the relationship between emotions and linguistic behaviors. While complex emotions such as pride or guilt may be decomposable into basic elements, the theoretical and practical feasibility of such decomposition remains an open question (Barrett, 2017; Scherer, 2009) (see **Appendix** D).

Preliminary studies demonstrate the framework's potential in ethically nuanced scenarios where cultural context plays a decisive role in interpretation. Future work will focus on expanding real-world evaluations, ensuring the framework maintains a balance between ethical rigor and cultural adaptability.

References

- Azar, M. G., Rowland, M., Piot, B., Guo, D., Calandriello, D., Valko, M., and Munos, R. A general theoretical paradigm to understand learning from human preferences, 2023.
- Bai, Y., Kadavath, S., Kundu, S., Askell, A., Kernion, J., and more. Constitutional ai: Harmlessness from ai feedback, 2022.
- Barrett, L. F. How Emotions are Made: The Secret Life of the Brain. Houghton Mifflin Harcourt, Boston, 2017.
- Carver, C. S., Sinclair, S., and Johnson, S. L. Authentic and hubristic pride: Differential relations to aspects of goal regulation, affect, and self-control. *Journal of Research in Personality*, 44 (6):698–703, 2010.
- Chang, E. Y. Examining GPT-4's Capabilities and Enhancement with SocraSynth. In The 10th International Conf. on Computational Science and Computational Intelligence, December 2023.
- Chang, E. Y. Multi-LLM Agent Collaborative Intelligence: The Path to Artificial General Intelligence. SocraSynth.com, October 2024a.
- Chang, E. Y. Modeling Emotions and Ethics with Large Language Models. In *IEEE Conference on Multimedia Information Processing and Retrieval (MIPR)*, August 2024b.
- Chang, E. Y. Sixty Love Literatures and Their Rewrites. https: //drive.google.com/file/d/1pKtPZXiheKCu8 cQYJLQ_iw0TPT2NntfX/view?usp=drive_link, 2024c.
- Chang, E. Y. EVINCE: Optimizing Adversarial LLM Dialogues via Conditional Statistics and Information Theory, 2024d. URL https://arxiv.org/abs/2408.14575.
- Christiano, P., Leike, J., Brown, T. B., Martic, M., Legg, S., and Amodei, D. Deep reinforcement learning from human preferences, 2023.
- Christiano, P. F., Leike, J., Brown, T., Martic, M., Legg, S., and Amodei, D. Deep reinforcement learning from human preferences. Advances in Neural Information Processing Systems, 30, 2017.
- Damasio, A. R. Descartes' error: Emotion, reason, and the human brain. New York, NY: Putnam, 1994.
- Davidson, R. J. Affective neuroscience and psychophysiology: Toward a synthesis. *Psychophysiology*, 40(5):655–665, 2003.
- Deisseroth, K. Optogenetics: 10 years of microbial opsins in neuroscience. *Nature Neuroscience*, 18(9):1213–1225, 2015.
- Eid, M. and Diener, E. Norms for experiencing emotions in different cultures: Inter- and intranational differences. *Journal of Personality and Social Psychology*, 81(5):869–885, 2001.
- Ekman, P. An argument for basic emotions. *Cognition and Emotion*, 6(3-4):169–200, 1992.
- Ekman, P. *Basic Emotions*, chapter 3, pp. 45–60. John Wiley and Sons, 1999.
- Ethayarajh, K., Xu, W., Muennighoff, N., Jurafsky, D., and Kiela, D. Kto: Model alignment as prospect theoretic optimization. *arXiv preprint arXiv:2402.01306*, 2024.


- Fauconnier, G. and Turner, M. *The Way We Think: Conceptual Blending and The Mind's Hidden Complexities*. Basic Books, New York, 2002.
- Fiske, A. P., Kitayama, S., Markus, H. R., and Nisbett, R. E. *The cultural matrix of social psychology*, volume 2, pp. 915–981. McGraw-Hill, Boston, MA, 1998.
- Fitzgerald, Z. Dear Scott, Dearest Zelda: The Love Letters of F.Scott and Zelda Fitzgerald. Bloomsbury, 1975.
- Fredrickson, B. L. What good are positive emotions? *Review of General Psychology*, 2(3):300, 1998.
- Gabriel, I., Manzini, A., Keeling, G., Hendricks, L. A., Rieser, V., Iqball, H., and more. The ethics of advanced ai assistants. *DeepMind Media*, 2024.
- Ganguli, D., Askell, A., Schiefer, N., Liao, T. I., Lukošiūtė, K., and more. The capacity for moral self-correction in large language models, 2023.
- Gross, J. J. The emerging field of emotion regulation: An integrative review. *Review of General Psychology*, 2(3):271–299, 1998.
- Hofstede, G. Culture's Consequences: International Differences in Work-Related Values. Sage Publications, Beverly Hills, CA, 1980.
- Jackendoff, R. Foundations of Language: Brain, Meaning, Grammar, Evolution. Oxford University Press, Oxford, 2002.
- James, W. What is an emotion? Mind, 9(34):188-205, 1884. URL http://www.jstor.org.proxy.lib.sfu.ca/sta ble/2246769.
- James, W. The Principles of Psychology. Henry Holt and Company, 1890.
- Kaggle. Love Letter Analysis. https://www.kaggle.com/code/metformin/love-letter-analysis/notebook, 2023. Accessed: 2024-04-28.
- Kirkpatrick, J. et al. Overcoming catastrophic forgetting in neural networks. *Proceedings of the National Academy of Sciences*, 114(13):3521–3526, 2017.
- Lakoff, G. and Johnson, M. Metaphors We Live By. University of Chicago Press, Chicago, 1980.
- Lange, C. G. The emotions: A psychophysiological study. William & Wilkins, 1885.
- Lee, H., Phatale, S., Mansoor, H., Lu, K., Mesnard, T., Bishop, C., Carbune, V., and Rastogi, A. Rlaif: Scaling reinforcement learning from human feedback with ai feedback. arXiv preprint arXiv:2309.00267, 2023.
- Markus, H. R. and Kitayama, S. Culture and the self: Implications for cognition, emotion, and motivation. *Psychological Review*, 98(2):224–253, 1991.
- McGinn, C. and Kelly, K. Using the geneva emotion wheel to classify the expression of emotion on robots. In *Companion of the 2018 ACM/IEEE International Conference on Human-Robot Interaction*, HRI '18, pp. 191–192, New York, NY, USA, 2018. Association for Computing Machinery. ISBN 9781450356152.

- Mesquita, B. and Frijda, N. H. Cultural variations in emotions: A review. *Psychological Bulletin*, 112(2):179–204, 1992.
- Minsky, M. Society of Mind. Simon and Schuster, 1988.
- OpenAI. GPT-4 Technical Report, 2023. URL https://arxiv.org/abs/2303.08774.
- Ouyang, L., Wu, J., Jiang, X., Almeida, D., Wainwright, C. L., Mishkin, P., Zhang, C., Agarwal, S., Slama, K., Ray, A., Schulman, J., and et al. Training language models to follow instructions with human feedback, 2022.
- Oveis, C., Horberg, E. J., and Keltner, D. Compassion, pride, and social intuitions of self-other similarity. *Journal of Personality* and Social Psychology, 98(4):618–630, 2010. doi: 10.1037/a0 017628.
- Plutchik, R. A general psychoevolutionary theory of emotion. In Plutchik, R. and Kellerman, H. (eds.), *Emotion: Theory, Research, and Experience*, volume 1, pp. 3–33. Academic Press, New York, 1980.
- Plutchik, R. A psychoevolutionary theory of emotions. *Social Science Information*, 21(4-5):529–553, 1982.
- Rafailov, R., Sharma, A., Mitchell, E., Manning, C. D., Ermon, S., and Finn, C. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Informa*tion Processing Systems, 36, 2024.
- Rusu, A. A., Colmenarejo, S. G., Gulcehre, C., Desjardins, G., Kirkpatrick, J., Pascanu, R., Mnih, V., Kavukcuoglu, K., and Hadsell, R. Policy distillation. In *International Conference on Learning Representations (ICLR)*, 2015.
- Schachter, S. and Singer, J. E. Cognitive, social, and physiological determinants of emotional state. *Psychological Review*, 69(5): 379–399, 1962.
- Scherer, K. R. What are emotions? and how can they be measured? Social Science Information, 44:693–727, 2005. doi: 10.1177/ 0539018405058216.
- Scherer, K. R. The dynamic architecture of emotion: Evidence for the component process model. *Cognition & Emotion*, 23(7): 1307–1351, 2009.
- Schwarz, N. and Clore, G. L. Mood, misattribution, and judgments of well-being: Informative and directive functions of affective states. *Journal of Personality and Social Psychology*, 45(3):513, 1983.
- Shanahan, M., McDonell, K., and Reynolds, L. Role play with large language models. *Nature*, 623(7987):493–498, 2023. doi: 10.1038/s41586-023-06647-8.
- Sinha, R. Chronic stress, drug use, and vulnerability to addiction. Annals of the New York Academy of Sciences, 1141:105–130, 2008. doi: 10.1196/annals.1441.030.
- Skalse, J., Howe, N. H. R., Krasheninnikov, D., and Krueger, D. Defining and characterizing reward hacking, 2022.
- Smith, C. A. and Ellsworth, P. C. Patterns of cognitive appraisal in emotion. *Journal of Personality and Social Psychology*, 48(4): 813–838, 1985.


- Stiennon, N., Ouyang, L., Wu, J., Ziegler, D. M., Lowe, R., Voss, C., Radford, A., Amodei, D., and Christiano, P. Learning to summarize from human feedback. *arXiv preprint*, 2022.
- Talmy, L. Toward a Cognitive Semantics. MIT Press, Cambridge, MA, 2000.
- Tang, Y., Guo, Z. D., Zheng, Z., Calandriello, D., Munos, R., Rowland, M., Richemond, P. H., Valko, M., Pires, B. Á., and Piot, B. Generalized preference optimization: A unified approach to offline alignment. arXiv preprint arXiv:2402.05749, 2024.
- Torrens, M., Fonseca, F., Mateu, G., and Farré, M. Efficacy of antidepressants in substance use disorders with and without comorbid depression: A systematic review and meta-analysis. *Drug and Alcohol Dependence*, 78(1):1–22, 2005.
- Tracy, J. L. and Robins, R. W. The psychological structure of pride: A tale of two facets. *Journal of Personality and Social Psychology*, 92(3):506–525, 2007.
- Yin, Y., Wang, Z., Gu, Y., Huang, H., Chen, W., and Zhou, M. Relative preference optimization: Enhancing Ilm alignment through contrasting responses across identical and diverse prompts. arXiv preprint arXiv:2402.10958, 2024.
- Zhao, Y., Joshi, R., Liu, T., Khalman, M., Saleh, M., and Liu, P. J. Slichf: Sequence likelihood calibration with human feedback. *arXiv preprint arXiv:2305.10425*, 2023.

A. Wheels of Emotions

Please, see Figure 4 for the two classical emotion wheels.



(a) Plutchik's Wheel of Emotions (Plutchik, 1980)



(b) Adopted from Geneva Wheel (McGinn & Kelly, 2018)

Figure 4: Comparative display of emotional models. These models include only the "basic" emotions. Complex emotions can be modeled with basic emotions.

B. Polarized Emotions in One Article

"joyful affection": "I cannot keep myself from writing any longer to you dearest, although I have not had any answer to either of my two letters. I suppose your mother does not allow you to write to me. Perhaps you have not got either of my letters. . . I am so dreadfully afraid that perhaps you may think I am forgetting you. I can assure you dearest

Jeannette you have not been out of my thoughts hardly for one minute since I left you Monday. I have written to my father everything, how much I love you how much I long & pray & how much I wold sacrifice if it were necessary to be married to you and to live ever after with you. I shall [not] get an answer till Monday & whichever way it lies I shall go to Cowes soon after & tell your mother everything. I am afraid she does not like me very much from what I have heard. . . I wld do anything she wished if she only wld not oppose us. Dearest if you are as fond of me as I am of you. . . nothing human cld keep us long apart. This last week has seemed an eternity to me; Oh, I wld give my soul for another of those days we had together not long ago. . . Oh if I cld only get one line from you to reassure me, but I dare not ask you to do anything that your mother wld disapprove of or has perhaps forbidden you to do. . . Sometimes I doubt so I cannot help it whether you really like me as you said at Cowes you did. If you do I cannot fear for the future tho' difficulties may lie in our way only to be surmounted by patience. Goodbye dearest Jeannette. My first and only love. . . Believe me ever to be Yrs devotedly and lovingly, Randolf S. Churchill"

Depth and complexity of human emotions are displayed across all linguistic behaviors, from joy to contentment and to the negative side of longing and despair. Intensity and Impact: If the emotion of love is expressed more intensely and has a more significant impact on the narrative or message of the text, it tends to overshadow other emotions. For example, a letter expressing deep love but also mentioning moments of sadness due to separation might still be classified as a love letter because the overarching sentiment and purpose of the text is to affirm love. Context and Narrative Focus: The context in which emotions are expressed also plays a crucial role. If the narrative or the majority of the text revolves around themes of love, connections, and positive memories, it sets a more dominant tone of love, even if there are significant moments of sadness or other emotions. Resolution and Conclusion: Often, the way emotions are resolved towards the end of a text can also dictate its overall theme. If a text concludes with a reaffirmation of love or a hopeful outlook towards a relationship, despite earlier sections that might express sadness or despair, the overall interpretation might lean towards love. Purpose of the Expression: The author's intent or purpose in expressing these emotions can also guide the classification. If the sadness is expressed as a challenge within the context of a loving relationship, it may be seen as an element of the love story rather than the central theme.

Article 23: Soldier's Letter During War Joy (+1.0): Joy is strongly felt in the memories of past moments together and the love that continues to give strength, as stated in "the memories of the blissful moments we've shared fill me with joy." Sadness (-0.6): Sadness due to the current situation

and potential farewell is expressed in "brings a poignant mixture of joy and sadness." Courage (+0.6): The sense of duty and courage to face battle, "As I face the possibility of laying down my life for our country." Fear (-0.6): Fear of what lies ahead in battle, indirectly mentioned through "the uncertainty of what lies ahead." Love (+1.0): Deep love that sustains and uplifts, found in "My love for you is as fervent as ever."

Article 25: Letter to Sophie Longing (+0.6): Longing for the presence and closeness, highlighted in "it seems to me that half of myself is missing." Sadness (-0.6): Sadness over their separation and its effects, "my happiness has departed." Love (+1.0): Constant reflections on love and its necessity, "we have enough in our hearts to love always." Melancholy (-0.3): Melancholy over their current state, visible in the line "we cannot become healed." Contentment (+0.3): Found in the deep emotional satisfaction from their bond, despite physical absence, "how true that is! and it is also true that when one acquires such a habit, it becomes a necessary part of one's existence."

Article 53: Will of Laura Mary Octavia Lyttleton Love (+1.0): Profound love expressed throughout, particularly in "all I am and ever shall be, belongs to him more than anyone." Sadness (-0.6): Sadness at the thought of death and separation, but with a nuanced acceptance, "the sadness of death and parting is greatly lessened to me." Contentment (+0.3): Contentment in the deep connection with Alfred, reflecting a serene acceptance of their spiritual bond. Joy (+1.0): Joy in the enduring love they share, "so few women have been as happy as I have been." Tranquility (+1.0): Tranquility in the face of life's ultimate transition, feeling that their union will transcend even death.

C. Sayre to Fitzgerald w/ Mixed Emotions

Analysis of the letter in Table 3 shows a complex spectrum of emotions:

- *Love* (+1.0): Expressed intensely, especially in phrases like "there's nothing in all the world I want but you."
- *Despair (-1.0)*: Notable in comments like "I'd have no purpose in life, just a pretty decoration."
- Happiness (+0.6): Evident in future plans, "We'll be married soon, and then these lonesome nights will be over forever."
- Anxiety (-0.3): Shown by "sometimes when I miss you most, it's hardest to write."

From the analysis of linguistic behaviors in Section 2a, it is evident that a letter can exhibit multiple dominant sentiments. Machine learning methods are equipped with techniques such as feature weighting and entropy analysis to

distill these dominant emotions. Unlike human annotators, a machine-learning-trained classifier can consistently produce the same class prediction for a given instance. However, human annotators often show significant variability when identifying dominant sentiments in a letter. For example, if a letter writer's emotions range from "joyful affective" to "longing" on the sentiment spectrum, different annotators might label it differently—some choosing "joyful," while others opt for "longing." This variability is illustrated in Figure 5. Furthermore, Figure 5a demonstrates that all testing letters, except for L#1, contain more than four sentiments spanning the entire spectrum. This variability may be understandable, considering that love under constraints can evoke tremendous energy of various kinds. Figure 5b shows that nearly all letters involve "joyful" (11 out of 12) and "longing" (9 out of 12) sentiments.

This variability seems to poses challenges in achieving consistent and objective labeling; however, the age-old

leading to inconsistencies in data interpretation and complicating efforts to train and validate linguistic models effectively. To address this issue, it is recommended to identify ground truth by considering a combination of LLM-generated and human-generated labels. This approach aims to harmonize the insights from both human intuition and algorithmic consistency to improve the reliability of sentiment analysis.

D. Complex Emotions

This study does not include complex emotions into DIKE's framework. Some complex emotions listed here are to illustrate their contentious and uncertain interpretations.

Pride

Pride mentioned in the illustrative example in Section 3.3 is a complex emotion that can manifest in both adaptive and maladaptive ways (Tracy & Robins, 2007). It is often conceptualized as having two distinct facets: authentic pride, associated with genuine accomplishments and self-worth, and hubristic pride, linked to arrogance and narcissism (Carver et al., 2010). Hubristic pride can also serve as a defense mechanism, masking underlying feelings of inadequacy and ignorance. For instance, in certain social contexts, such as white supremacy, pride is often inflated to cover insecurities or lack of understanding, manifesting in a misguided sense of superiority and entitlement. This dual nature of pride presents significant challenges for its integration into emotional spectrums and AI frameworks.

Decomposing pride into more basic emotions is not straightforward. Intuitively, pride may involve elements of joy, satisfaction, and potentially a sense of superiority. However, such decomposition may overlook the deeper cognitive and

Sweetheart,

Please, please don't be so depressed—We'll be married soon, and then these lonesome nights will be over forever—and until we are, I am loving, loving every tiny minute of the day and night—

Maybe you won't understand this, but sometimes when I miss you most, it's hardest to write—and you always know when I make myself—Just the ache of it all—and I can't tell you. If we were together, you'd feel how strong it is—you're so sweet when you're melancholy. I love your sad tenderness—when I've hurt you—That's one of the reasons I could never be sorry for our quarrels—and they bothered you so— Those dear, dear little fusses, when I always tried so hard to make you kiss and forget—

Scott—there's nothing in all the world I want but you—and your precious love—All the material things are nothing. I'd just hate to live a sordid, colorless existence because you'd soon love me less—and less—and I'd do anything—anything—to keep your heart for my own—I don't want to live—I want to love first, and live incidentally...

Don't—don't ever think of the things you can't give me—You've trusted me with the dearest heart of all—and it's so damn much more than anybody else in all the world has ever had—

How can you think deliberately of life without me—If you should die—O Darling—darling Scott—It'd be like going blind...I'd have no purpose in life—just a pretty—decoration. Don't you think I was made for you? I feel like you had me ordered—and I was delivered to you—to be worn—I want you to wear me, like a watch—charm or a button hole bouquet—to the world.

And then, when we're alone, I want to help—to know that you can't do anything without me...

All my heart—

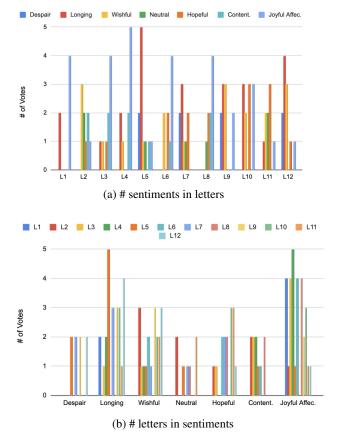


Figure 5: Statistics of Sentiments and Letters

social dimensions of pride, particularly its influence on selfesteem, social status regulation, and its ability to disguise insecurities in certain contexts (Oveis et al., 2010).

The cultural variability of pride further complicates its modeling. In some cultures, pride is viewed positively as a sign of self-respect, while in Asia, it is seen negatively as a trait associated with hubris (Eid & Diener, 2001). This cultural dimension, combined with the potential for pride to hide deeper emotional issues, adds layers of complexity to its interpretation and expression in AI systems.

Forgiveness

Forgiveness is indeed a complex emotional and cognitive state that typically involves a multifaceted journey, not a single step in an emotional spectrum. The process includes multiple stages such as hurt, anger, gradual understanding, and eventual resolution. Integrating Forgiveness in a spectrum requires careful placement and possibly, multiple reference points to signify its progressive stages.

Emotional Realism: While it is vital to maintain simplicity for understanding, it is equally important to not oversimplify complex emotions. In educational and therapeutic settings, an accurate portrayal of the journey toward Forgiveness could offer more realistic expectations and better strategies for individuals working through conflicts or trauma. This could involve detailing precursors to forgiveness such as Deliberation and Acceptance.

Linear vs. Non-linear Progressions: Emphasizing that emotional progressions, particularly for deep, impactful states like Forgiveness, are often non-linear, can enhance the utility

of the spectrum. Acknowledging back-and-forth movements within these states more realistically mirrors human emotional processes. For example, someone might reach a stage of preliminary forgiveness but regress to bitterness before achieving genuine peace.

Educational Utility: In contexts like conflict resolution training or psychological therapy, a more detailed mapping of the journey towards Forgiveness would be invaluable. It would not only teach about the final state of forgiveness but also about the resilience and patience required to navigate the entire process. This can be depicted by introducing intermediary stages within the spectrum or by using parallel tracks that demonstrate potential regressions and advances.

Reflecting Emotional Depth: By presenting a more detailed pathway to Forgiveness, such as incorporating stages of Anger, Deliberation, and Acceptance, the spectrum can serve a dual purpose: educating on the process while also guiding individuals through their own emotional journeys. This approach respects the depth of human emotions and the real-world complexity of achieving profound emotional states.

Guilt and Shame

The triggers, context, expression, and experiences of these emotions can vary significantly across cultures (Fiske et al., 1998; Hofstede, 1980). In many societies, actions perceived as losing face, such as public failure or social transgression, can trigger shame, which holds profound significance in collectivistic cultures. These cultures often regard shame as a dominant emotion, closely tied to community and family norms. Conversely, individualistic societies may emphasize guilt, focusing on personal responsibility and internal moral conflicts. This cultural variation highlights the challenges of applying a universal model to such culturally nuanced emotions.

Overall, complex emotions such as guilt and shame are important for understanding the full spectrum of human emotions, especially how individuals relate to moral and social norms. Their complexity adds depth to our understanding of human affect beyond the basic emotions, highlighting how our feelings are influenced by our deeper values and social contexts.

E. "To My Sister" of Different Linguistic Behaviors

To My Sister

by William Wordsworth (1971 - 1855)

The original text by William Wordsworth could be classified as "Hopeful" due to its optimistic outlook and the presence of renewal and joy throughout the poem. It embodies the

Table 4: "To My Sister" original text

It is the first mild day of March: Each minute sweeter than before The redbreast sings from the tall larch That stands beside our door.	My sister! ('tis a wish of mine) Now that our morning meal is done, Make haste, your morning task resign; Come forth and feel the sun.
There is a blessing in the air, Which seems a sense of joy to yield To the bare trees, and mountains bare, And grass in the green field.	Edward will come with you;—and, pray, Put on with speed your woodland dress; And bring no book: for this one day We'll give to idleness.
No joyless forms shall regulate Our living calendar: We from to-day, my Friend, will date The opening of the year.	Love, now a universal birth, From heart to heart is stealing, From earth to man, from man to earth: -It is the hour of feeling.
One moment now may give us more Than years of toiling reason: Our minds shall drink at every pore The spirit of the season.	Some silent laws our hearts will make, Which they shall long obey: We for the year to come may take Our temper from to-day.
And from the blessed power that rolls About, below, above, We'll frame the measure of our souls: They shall be tuned to love.	Then come, my Sister! come, I pray, With speed put on your woodland dress; And bring no book: for this one day We'll give to idleness.

spirit of embracing the new beginnings of March in a light, uplifting tone, focusing on the beauty of nature and the simple joy of being idle for a day.

Rewrites Depicting Different Linguistic Behaviors

We asked GPT-4 to conduct rewriting with two linguistic behaviors, 'despair' and 'joyful affection', by providing each rewrite with an emotion vector. Table 5 presents the 'despair' version. In the despair version of the poem, the major changes in emotion words highlight a shift from a positive to a negative sentiment. The specific changes, with the emotion-laden words highlighted in red in Table 5. The red-

colored words compared to the original words clearly show an emotion shift from hopeful to a sense of gloomy, sadness and pessimism, e.g., from sweet to dim, from blessed to curse, and from woodland dress to grey garb. GPT-4 keeps the structure of the poem without making a major restructure, and this is appropriate in this context.

Table 5: "To My Sister" rewritten to reflect 'despair'

It is the first dim day of March: Each minute colder than before The redbreast mourns from the dying larch That looms beside our door.	My sister! (such is my somber plea) Now that our morning meal has ended, Make haste, abandon your morning chore; Come out and endure the gloom.
There is a gloom in the air, Which seems a sense of sorrow to bring To the bare trees, and bleak mountains, And grass in the pale field.	Edward will join you;—and, I ask, Dress quickly in your grey attire; And bring no book: for this one day We'll succumb to despair.
No joyful sounds shall pierce Our daily dread: We from today, my Friend, will note The closing of the year.	Sorrow, now a common feeling, From heart to heart is spreading, From earth to man, from man to earth: —It is the time of mourning.
One moment now might deliver us More despair than years of logic: Our minds shall absorb at every breath The spirit of this bleak season.	Some grim laws our hearts will craft, Which they must eternally follow: We for the year to come may take Our despair from today.
And from the cursed force that winds About, beneath, above, We'll set the measure of our souls: They shall be tuned to sadness.	Then come, my Sister! come, I beg, With haste, wear your grey garb; And bring no book: for just this day We'll surrender to despair.

Table 6 presents the 'joyful affection' version. The major changes in emotion words underscore a transformation from a generally positive to a distinctly joyful sentiment. Specific changes are indicated with words laden with emotion highlighted in blue within Table 6. This allows for a direct comparison between the two versions at opposite ends of the linguistic behavior spectrum, illustrating the alterations in

words related to brightness, attire, and emotions. The edits extend beyond simply replacing adjectives mechanically; they include modifying verbs and enhancing descriptive imagery to evoke a stronger emotional resonance and vividness in the text.

Table 6: "To My Sister" rewritten to reflect 'joyful affection'

It is the first bright day of March: Each moment more delightful than before The redbreast joyfully sings from the vibrant larch That stands so grandly by our door.	My sister! (such is my joyful plea) Now that our morning meal has ended, Make haste, abandon your morning chores; Come out and embrace the sunshine.
There is a warmth in the air,	Edward will join you;—and, I ask,
Which seems a sense of bliss to bring To the blooming trees, and sunlit mountains, And grass in the lush field.	Dress quickly in your festive attire; And leave behind all books: for this one day We'll bask in pure joy.
No dreary thoughts shall darken Our lively celebration:	Love, now in full bloom, From heart to heart is
We from today, my Friend, will celebrate The start of the year.	leaping, From earth to us, from us to earth: -It is the hour of exuberance.
One moment now may bring us more Joy than years of endless thought: Our spirits will soak up at every breath The essence of this joyous season.	Some cheerful laws our hearts will create, Which we'll joyfully follow: We for the year to come may take Our joy from today.
And from the divine energy that radiates Around, below, above,	Then come, my Sister! come, I exhort, With zest, wear your
We'll adjust the harmony of our souls: They shall resonate with happiness.	vibrant dress; And bring no book: for today alone We celebrate pure happiness.

E.1. Interpretation

 First row: This spectrum is particularly insightful for discussions in psychology, education, leadership, and moral philosophy. It illustrates how individuals might transition from states of intense fear to actions characterized by great moral and physical courage. Each step represents a stage in emotional development or response to challenging situations, offering a framework for understanding how people can rise above their fears to perform acts of significant bravery and altruism.

Overall, this spectrum not only portrays a journey through varying degrees of fear and courage but also encapsulates the transformative potential within individuals to act heroically in the face of adversity.

- 2. Second row: This emotional spectrum elegantly illustrates how emotions can transition from profound sorrow to extreme happiness. It is particularly relevant in psychological studies, therapeutic contexts, and philosophical discussions about the range and nature of human emotions. Each emotional state on this spectrum offers insight into how individuals might process and recover from sadness, ultimately finding joy and possibly reaching ecstatic experiences. This spectrum can serve as a framework for understanding emotional resilience and the potential for emotional transformation and growth.
- 3. Third row: This spectrum beautifully illustrates the journey from initial suspicion and caution through acceptance and respect, culminating in deep trust and admiration. It's particularly relevant in contexts where trust building and social cohesion are critical, such as in leadership, team dynamics, community relations, and personal relationships. Each stage reflects a deeper layer of positive engagement and emotional commitment, providing insights into how relationships can evolve and strengthen over time. This framework can serve as a guide for understanding and developing strategies for fostering trust and admiration in various social and professional settings.
- 4. Fourth row: This spectrum effectively maps out how an individual can transition from passive disengagement (negligence, indifference, apathy) through a state of balanced caution to active and engaged states (interest, anticipation, vigilance). It offers insights into the psychological journey from inaction through moderate engagement to intense proactive involvement. This framework is particularly relevant in contexts that require understanding and managing risk, such as safety protocols, healthcare, education, and personal growth initiatives, as it highlights how attitudes toward responsibility and awareness can evolve and improve.
- 5. Fifth row: This spectrum is particularly useful for understanding emotional management and conflict resolution strategies, as it depicts the gradient from intense emotional disturbance through to complete serenity. It can be applied in various fields, including psychology, conflict resolution, stress management, and even in designing environments or experiences that aim to reduce stress and promote peace.

- Overall, this emotional spectrum effectively portrays a journey from the depths of aggressive negativity to the pinnacle of peaceful positivity, offering a valuable framework for discussing and exploring emotional states and transformations.
- 6. Sixth row: This spectrum effectively maps a journey from profound negative feelings of loathing and disgust, through a state of neutrality (indifference), to the positive emotions of interest, anticipation, and culminating in enthusiasm. It's particularly useful for understanding emotional responses in various contexts, such as consumer behavior, audience engagement, and personal relationships. Each stage reflects a distinct level of emotional engagement, providing a framework for understanding how emotional states can evolve and impact behavior and decision-making.

F. Instruction to Human Annotators

As part of the project, we documented the process by which students were involved in annotating a dataset of love letters used for testing.

Students were provided with detailed instructions in class, supplemented by follow-up explanations. The dataset was made available on Google Docs, where students independently rated the letters and submitted their annotations via duplicated spreadsheets.

The instruction is as follows:

Dear [Name].

The attached spreadsheet lists 12 letters collected from the Kaggle Love Letter dataset. Please help annotate these 12 letters with their appropriate linguistic sentiments by following these five steps:

- 1. Duplicate the spreadsheet, and work on your own copy.
- Read and Understand the Labels: Make sure you understand each of the seven labels from despair to joyful affection. This will help you accurately categorize the sentiments of each letter.
- Analyze Each Letter: Read each letter carefully to understand the predominant emotions. Look for key phrases or words that might indicate a particular sentiment.
- 4. **Assign the Labels:** For each letter, decide which three emotions are most strongly represented. Assign a "1" to the most dominant emotion, a "2" to the second most dominant, and a "3" to the third.
 - Despair (extremely negative -1): Indicate profound sadness or hopelessness.

- Longing (-0.6): Suggests a strong desire or yearning for someone or something.
- Wishful (-0.3): Implies a hopeful desire for something that may or may not be attainable.
- Neutral (0): Shows neither positive nor negative emotion; indifferent.
- Hopeful (+0.3): Expresses optimism or a looking forward to something positive.
- Contentment (+0.6): Reflects a state of satisfaction or peace.
- Joyful Affection (extremely positive +1): Denotes a deep joy and love, often vibrant and energetic.
- 5. Share with me the completed sheet.

Thank you so much,

[My Name]

G. Framework Architecture

Figure 6 presents the three-branch framework architecture, where three neurally independent components—LLMs as the foundation, with DIKE and ERIS as oversight layers—interact through structured interfaces while maintaining strict separation of their neural architectures and parameters.



Figure 6: Framework Architecture: Three Independent Branches