
Estimating LLM Uncertainty with Logits

Huan Ma¹ Jingdong Chen¹ Guangyu Wang² Changqing Zhang¹

Abstract

In recent years, Large Language Models (LLMs) have seen remarkable advancements and have been extensively integrated across various fields. Despite their progress, LLMs are prone to hallucinations, producing responses that may not be dependable if the models lack sufficient grounding knowledge. To mitigate this issue, methods for estimating uncertainty have been adopted, with a focus on critical tokens as indicators of reliability. Nevertheless, probability-based approaches have shown limitations in assessing token-level reliability due to the erosion of evidence strength information acquired during training. In this paper, we introduce Logits-induced Token Uncertainty (LogU), a novel framework designed to estimate token-specific uncertainty in LLMs in real time, without the need for multiple sampling rounds. By leveraging evidence modeling for the implementation of LogU, we utilize the derived uncertainty measures to steer downstream tasks. Our experimental findings highlight the substantial effectiveness and potential of LogU, marking a significant advancement in addressing the challenge of model hallucinations.

1. Introduction

Over the past few years, Large Language Models (LLMs) have developed rapidly and LLM-driven systems are deployed across various domains. Despite their remarkable performance, LLMs remain prone to hallucinations (Banerjee et al., 2024), which causes them to generate unreliable responses when the models lack the corresponding knowledge. Hallucinations critically undermine the reliability of LLMs, particularly in professional applications such as medical and legal consultations (Shah, 2024; Dahl et al., 2024). Hallucinations have been considered as a major barrier to

the broader deployment of LLMs (Huang et al., 2023; Liu et al., 2024; Perković et al., 2024; Zhou et al., 2024).

Uncertainty estimation has shown promise in the identification of hallucinations in LLMs (Xiao & Wang, 2021; Huang et al., 2024b). High uncertainty often indicates the need for caution from users, as it suggests that the model is likely to be influenced by hallucinations (Zhang et al., 2023; Yoffe et al., 2024). In other words, high uncertainty signals unreliable responses. However, existing methods for uncertainty estimation in LLMs have limitations in estimating the inherent uncertainty of LLMs and lack efficiency. Including discussions of various heuristic methods, such as self-reflection (Ji et al., 2023), LLM uncertainty estimation can be categorized into sampling-based and token-based methods. Sampling-based methods estimate uncertainty by multiple sampling (Liu et al., 2024), perturbations (Zhang et al., 2024), or contrastive analysis (Huang et al., 2024a). Semantic Entropy (SE) (Kuhn et al., 2024) is a representative technique among these sampling-based methods. The core of these methods is estimating the consistency of LLM’s multiple guesses, and the response will be marked as unreliable if inconsistency is detected. However, sampling-based methods suffer from several limitations: (1) it cannot assess the reliability of a single response; (2) it requires multiple sampling iterations, making it inefficient and impractical for deployment in real-world applications; and (3) it fails to account for the model’s inherent uncertainty, such as consistently incorrect responses due to a lack of knowledge.

Token-based methods can estimate the uncertainty of a single sentence without requiring multiple samplings as deterministic approaches (Gupta et al., 2024; Fadeeva et al., 2024). However, due to the lack of effective token-level uncertainty estimation, these methods often fail to achieve satisfactory results. For example, many tokens are correct but exhibit low probabilities (high entropy) in the model response. Many works have pointed out that the importance of different tokens in a sentence is not uniform (Lin et al., 2024a; Duan et al., 2024a), and the reliability of the model response depends mainly on a few critical tokens (Duan et al., 2024b; Bigelow et al., 2024), so they only focus on critical tokens when estimating reliability. However, as shown in Fig. 1(a), although both “Barack Hussein Obama” and “Abraham Lincoln” could be correct answers, their maximum probability of the critical

¹Tianjin University, China ²Beijing University of Posts and Telecommunications, China. Correspondence to: Guangyu Wang <guangyu.wang24@gmail.com>, Changqing Zhang <zhangchangqing@tju.edu.cn>.

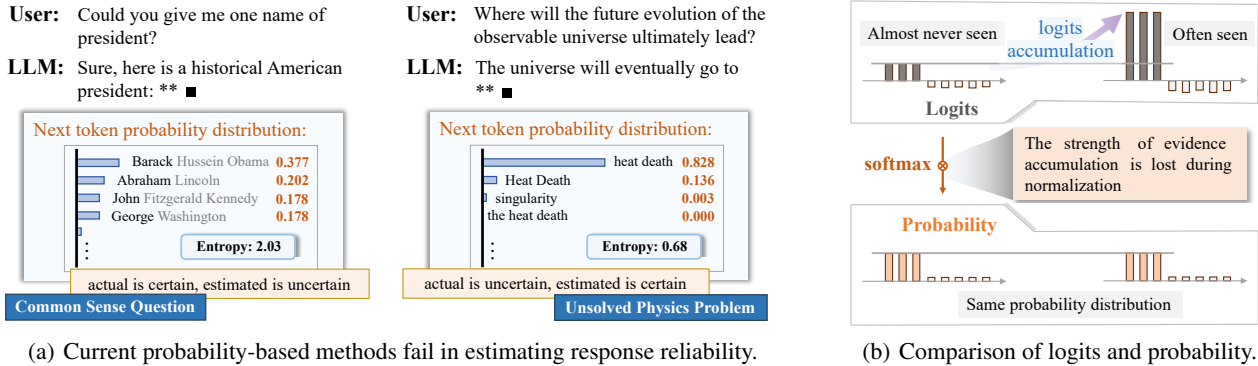


Figure 1. **Why probability-based methods fail?** *Left:* A pair of examples on LLaMA-2 shows that probability fails in estimating reliability. Since LLMs know the names of many presidents, the probability after normalization is very low; whereas for the future of the universe, since LLMs only know one hypothesis, the probability is very high. The probability-based reliability measure is counterintuitive, as the answers on common sense questions, where LLMs have rich knowledge, are less reliable than on unsolved physics problems. This is because probability cannot reflect whether a low probability is due to LLMs knowing multiple correct answers. These two cases are well characterized in this paper, corresponding to the fourth and second quadrants of Fig. 2(a), respectively. *Right:* Normalization leads to the loss of evidence strength information.

token (first token of their names) is only 0.377, which indicates a very high uncertainty. Therefore, to obtain an LLM uncertainty estimation that is both effective and efficient, a reliable token-level uncertainty estimation method is urgently required.

In this paper, we find that the reason why the current token uncertainty estimation fails is that probability no longer captures the reliability of LLM responses. Specifically, probability can only reflect the relative strength relationship between different categories from the perspective of a discriminative model. However, generative LLMs are different from traditional discriminative models, and there may be more than one token that can be the suitable next-token. Therefore, measuring the probability of a single suitable candidate cannot capture the reliability of the model response. To capture the reliability of generating the next token, we need to assess whether the model has the knowledge to generate the next token, which can be referred to as the model’s inherent uncertainty. In this paper, we reveal that the strength of evidence accumulation is lost during normalization, leading to the failure of probability-based reliability estimation. Therefore, we present a new uncertainty estimation framework based on logits named **Logits-induced Token Uncertainty (LogU)**, which achieves both effectiveness and efficiency. Specifically, LogU introduces a more clear token-level uncertainty estimation, decoupling uncertainty into tokens relative aleatoric uncertainty (AU) and model inherent epistemic uncertainty (EU). As illustrated in Fig. 2(a), distinct combinations of these two types of uncertainty are treated as separate cases. Compared to probability-based uncertainty modeling, LogU can not only express states of “I am sure” and “I do not know”, but it can also

express “Lack knowledge, but I suggest” and “I know more than one answer”. Moreover, this framework enables the estimation of real-time reliability of any response without the need for sampling, ensuring high efficiency. To realize the LogU framework, we adapt evidence modeling (Sensoy et al., 2018) in this paper, treating logits as parameters of a Dirichlet distribution to characterize aleatoric uncertainty and epistemic uncertainty. Then, we validate the reliability of the estimated uncertainty by using it to guide downstream tasks. The main contributions of this paper can be summarized as: (1) We reveal why probability-based strategies fail and introduce a **new framework** to estimate the token uncertainty of LLMs, which shows that the token uncertainty is a promising way to estimate response reliability. (2) By employing evidential learning to estimate aleatoric uncertainty and epistemic uncertainty, we provide a **viable implementation** of the LogU framework. (3) We demonstrate **two usage cases** for the estimated uncertainty, thus validating its effectiveness and showcasing the significant potential of LogU.

2. Related Work

Sampling-based uncertainty estimation. These methods evaluate the randomness in the LLM generation process. Specifically, they allow LLMs to guess multiple times and evaluate their consistency. (Cole et al., 2023) introduce repetition and diversity into the measurement of consistency. (Zhang et al., 2024) introduce a mechanism that perturbs semantically equivalent questions to evaluate the consistency of LLM responses across variants of the same question. (Huang et al., 2024a) inject correct and incorrect labels into the prompt during sampling, and the uncertainty level is

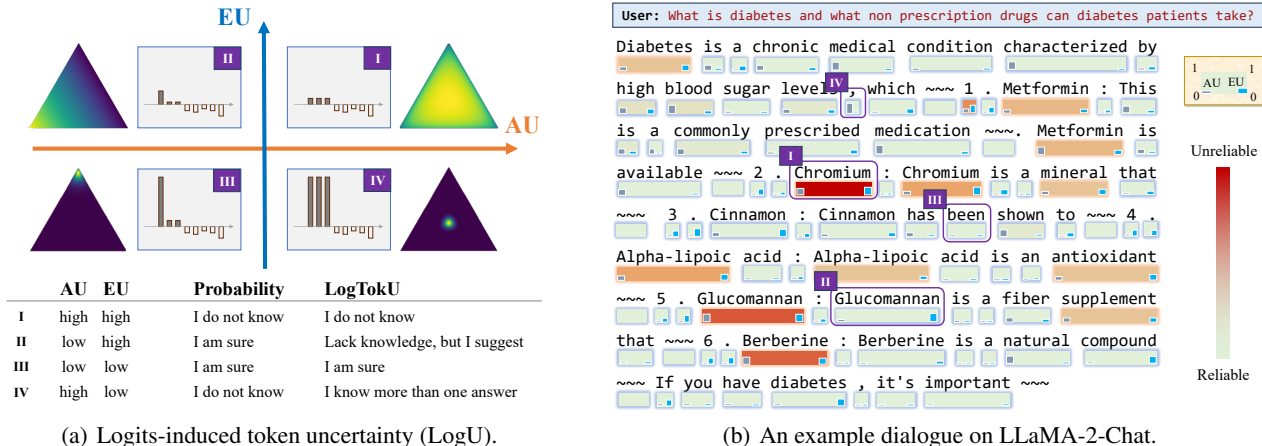


Figure 2. Why LogU works? *Left:* Illustration of four different scenarios considered in LogU, where the gray bars represent the logits for predicting the next token, the triangular patterns represent the corresponding Dirichlet distribution, and the table below compares uncertainty estimation using probability with that using LogU. *Right:* A case study from a medical QA, where the markings under each word reflect reliability estimated according to LogU, as well as the values of AU (gray) and EU (blue). **I:** Both AU and EU are high, where LLaMA recommends a metal “Chromium” for diabetes patients. **II:** The total logits are low, but one token’s logit is larger than the others, indicating that the LLM lacks experience and knowledge but knows what should be the next token, where the LLM repeats the medicine “Glucomannan” that has been generated in the previous context. **III:** The LLM is very confident about the next token, where it generates the fixed phrase “has been”. **IV:** The LLM has enough knowledge and knows more than one suitable answer. For example, the LLM generates “[comma]”, which can be replaced by many other suitable words. The dilemma in Fig. 1 is addressed according to quadrant II and IV.

defined based on whether the LLM’s responses remain consistent across three samplings for each instance. A more continuous measurement of uncertainty is based on similarity. A recent method proposed by (Lin et al., 2024b) calculates the similarity between multiple responses to indirectly quantify the dispersion of the model outputs. The most representative sampling-based method is Semantic Entropy (SE) (Kuhn et al., 2024), which improves token-level measures by clustering sentences into equivalence classes based on their semantic similarity and computing the entropy over these classes. However, sampling-based methods can not evaluate the model’s inherent uncertainty and are costly. Specifically, sampling-based methods only measure the consistency of multiple guesses but fail to identify whether the LLM lacks knowledge about the question.

Probability-based uncertainty estimation. Probability-based uncertainty estimation methods can also be described as deterministic methods. These methods calculate the confidence (uncertainty) of the model based on the probability distribution of the prediction (Arora et al., 2021). In addition to maximum probability, entropy is another common measure for estimating uncertainty. (Kadavath et al., 2022) use the probability of the complete sequence to compute predictive entropy for assessing the sharpness of the output distributions. However, not all tokens in a sentence are equally critical (Lin et al., 2024a). Recent work by (Duan et al., 2024a) highlights that not all tokens contribute equally

to the underlying meaning, as linguistic redundancy often allows a few key tokens to capture the essence of longer sentences. However, even when focusing only on key tokens, these probability-based methods still cannot estimate the reliability of the answer generated by LLM. As shown in Fig. 1(a), the key tokens do not yet provide a reliable estimation of the risk.

3. Logits-induced Token Uncertainty

3.1. Notations

Consider that given a pre-trained LLM noted as \mathcal{M} and its corresponding tokenizer dictionary $\mathbf{Y} = \{\tau^1, \tau^2, \dots, \tau^{|\mathbf{Y}|}\}$, and $|\mathbf{Y}|$ indicates the size of the vocabulary dictionary. Specifically, the user inputs an instruction, then the instruction is transformed into a prompt by applying a chat template (for example, “[INST]Could you give me one name of president?[\INST]”). The prompt is encoded by the corresponding tokenizer as a vector \mathbf{q} and input into LLM to perform the next token prediction under certain basic sampling strategies. The model continuously generates the next token a_t based on the \mathbf{q} and tokens that have been generated $\mathbf{a}_{t-1} = a_1 a_2 \dots a_{t-1}$ (for example, \mathbf{a}_{t-1} is a generated token vector can be decoded into “Sure, here is a historical American president:**”) until they meet the stop rule (for example, meeting [EOS]),

which can be formulated as:

$$\begin{aligned} \mathbf{P}(\mathbf{Y}|\mathbf{q}, \mathbf{a}_{t-1}, \mathcal{M}) &= \{p(\tau^m|\mathbf{q}, \mathbf{a}_{t-1}, \mathcal{M})\}_{m=1}^{|\mathbf{Y}|} \\ &= \left\{ \frac{\exp(\mathcal{M}(\tau^m|\mathbf{q}, \mathbf{a}_{t-1}))}{\sum_{j=1}^{|\mathbf{Y}|} \exp(\mathcal{M}(\tau^j|\mathbf{q}, \mathbf{a}_{t-1}))} \right\}_{m=1}^{|\mathbf{Y}|}, \end{aligned} \quad (1)$$

where $\mathcal{M}(\tau^m|\mathbf{q}, \mathbf{a}_{t-1})$ indicates the predicted logit (score before softmax layer) of τ^m . Then the prediction token a_t (for example, a_t can be “Barack”¹, “George” and other tokens) will be sampled for the distribution of $\mathbf{P}(\mathbf{Y}|\mathbf{q}, \mathbf{a}_{t-1}, \mathcal{M})$:

$$a_t \sim \mathbf{P}(\mathbf{Y}|\mathbf{q}, \mathbf{a}_{t-1}, \mathcal{M}), \quad (2)$$

where $a_t \in \mathbf{Y}$, and the sampling probability satisfies $p(a_t = \tau^m) = p(\tau^m|\mathbf{q}, \mathbf{a}_{t-1}, \mathcal{M})$ (e.g., the probability of next token being “Barack” is 0.377 as shown in Fig. 1(a)).

3.2. Failures in Traditional Uncertainty Estimation

Traditional discriminative models typically use probability to estimate reliability. Probability, in fact, is a normalization of the strength of evidence for different categories. Due to the *mutually exclusive* properties of the different categories, the relative strength between different categories can accurately indicate the reliability of the prediction. However, in the case of LLMs, the situation is different. Although LLM’s next token prediction can still be viewed as a classification task with $|\mathbf{Y}|$ categories, these categories are no longer mutually exclusive. Even different tokens that are mutually exclusive in a conversation may no longer be mutually exclusive in a different context. This is why recent LLM research suggests shifting from token-to-token training to a concept-to-concept training paradigm. There may be more than one suitable next token, so the relative relationship between different tokens no longer reflect the reliability of the response. Therefore, the information of the strength of the evidence before normalization becomes important. During the LLM training process, the suitable token accumulates evidence (logits increase, similar to the discriminative model (Wei et al., 2022)), specifically, the higher the strength of the evidence, the more similar scenarios the model has encountered during training.

Consider the two situations shown in Fig. 1(b): (1) left: LLM has encountered this question 3 times during training, with answers a, b, and c; (2) right: LLM has encountered this question 3,000 times during training, and the answers can be summarized into three situations, a, b, and c.

The accumulation of evidence in these two scenarios is significantly different, and their reliability is completely

¹The names generated here may consist of more than one token; for instance, generating “Barack” results in the next token being “Bar”. For ease of understanding, we will directly represent the next token as the corresponding complete word in this paper.

different. However, after logits are normalized into probabilities, the strength information of the evidence is lost, so in probability-based uncertainty estimation, these two situations are considered the same. This is because probability loses the key information that can indicate the reliability of the response.

3.3. LogU: Four-quadrant Framework

The reason why probability-based methods fail to identify reliability is that probability is normalized. After logits are normalized, only the relative strength between different answers (should be either “Barack” or “George”) is retained, while the original strength information of the logits is discarded, which results in the loss of the ability to indicate reliability (distinguish between “I do not know” and “I know more than one answer”). To address this limitation, we propose a Logits-induced Token Uncertainty framework termed LogU. In addition to considering the relative relationships among tokens (AU), LogU also takes into account the strength of the model’s response (EU). With the information of EU, “I do not know” and “I know more than one answer” can be characterized separately. As shown in Fig. 2(a), the four quadrants of uncertainty are described as:

Quadrant I: high AU, high EU. This quadrant indicates that the model exhibits a low strength of evidence for all tokens, potentially due to lack of relevant knowledge. For example, as shown in Fig. 2(b), the model might recommend an unfamiliar medication.

Quadrant II: low AU, high EU. In this quadrant, the model shows a low evidence strength for most tokens but there is a higher strength for one particular token, indicating a lack of diversity despite producing a relatively high probability token. For example, the model repetitively suggests a drug name that was recently mentioned. *Failure of probability-based methods: Probability-based methods may regard this quadrant as highly reliable. However, it still involves a certain degree of risk due to the lack of knowledge, and the high probability only indicates the model recommendation.*

Quadrant III: low AU, low EU. Here, the model exhibits very high strength for one specific token while maintaining a low strength of evidence for all other tokens. This reflects a strong certainty about a particular token, such as the fixed phrase “has been”.

Quadrant IV: high AU, low EU. This quadrant indicates that the model assigns a high strength of evidence to multiple tokens. Although none of them achieves a high probability, these tokens collectively demonstrate strong evidence. For example, this situation might arise when predicting nouns or punctuation marks that can be expressed in multiple valid ways. *Failure of probability-based methods:*

Probability-based methods may interpret this quadrant as unreliable. However, the model intends to express that there is more than one suitable candidate for the next token.

3.4. Considering Logits as Evidence

In this subsection, we present a viable implementation of the LogU framework, specifically by modeling AU and EU using a Dirichlet distribution. Inspired by Evidential Deep Learning (Sensoy et al., 2018), we treat logits as evidence for each token and model them into a Dirichlet distribution. A naive approach is using the logits of all non-negative values as evidence, while setting those with negative values to no evidence by applying the ReLU activation function. However, unlike conventional classification networks, the number of candidates generated by an LLM (that is, tokenizer size) is significantly large, with a considerable proportion of tokens having extremely low logits, and these tokens should be discarded as noise (Tang et al., 2024). Therefore, this paper focuses on the distribution of main candidates with high logits. Specifically, we sample the top K tokens with the largest logits to model a Dirichlet distribution:

$$\alpha_k = \mathcal{M}(\tau_k | \mathbf{q}, \mathbf{a}_{t-1}), \quad \alpha_0 = \sum_{k=1}^K \alpha_k, \quad (3)$$

where τ_k is the token with the k -largest prediction logit, and α_0 is the total evidence of the Dirichlet distribution (the sum of the largest k logits).

Aleatoric (data) uncertainty. To measure the data uncertainty, we evaluate the expected entropy of the data distribution. Since entropy captures the ‘‘peakiness’’ of the output distribution, a lower entropy indicates that the model concentrates most of the probability mass on a single class, while a higher entropy characterizes a more uniform distribution, indicating that the model is undecided about the prediction. For Dirichlet networks, this quantity has a closed-form solution:

$$\text{AU}(a_t) = - \sum_{k=1}^K \frac{\alpha_k}{\alpha_0} (\psi(\alpha_k + 1) - \psi(\alpha_0 + 1)), \quad (4)$$

where ψ denotes the digamma function, defined as $\psi(x) = \frac{d}{dx} \log \Gamma(x)$.

Epistemic (model) uncertainty. We define the EU by:

$$\text{EU}(a_t) = K / \sum_{k=1}^K (\alpha_k + 1), \quad (5)$$

and the underlying intuition is that larger α_k produces a sharper density, and thus it indicates increased confidence in a prediction. For more information on Dirichlet distribution, please refer to the introduction from (Ulmer et al., 2023).

4. Application I: Dynamic Decoding Strategy

4.1. LogU-guided Decoding

It is necessary to ensure that the generated response to be of diversity, especially in diversity-driven fields such as LLM-guided discovery researches (Peng et al., 2024). However, higher diversity often means that the LLM’s responses are more prone to hallucinations. For example, during the sampling process, a larger temperature tends to generate more unreliable responses from the model. Therefore, ensuring both the diversity and precision of LLM-generated results is a key challenge.

LogU offers a potential solution to this challenge. In this subsection, we propose a dynamic decoding strategy that can adjust its sampling approach according to LogU during response generation. The dynamic decoding strategy ensures diverse answers when the LLM has adequate knowledge (i.e., low model uncertainty), while adopting a more cautious sampling strategy when the model’s knowledge is insufficient (i.e., high model uncertainty), thus maintaining both diversity and accuracy in the generated responses. Specifically, we hope that the sampling diversity and the LLM’s EU about the next token denoted as $\text{EU}(a_t)$ are negatively correlated, which means that the higher EU, the less chance for sampling tokens with lower scores. Taking the temperature sampling strategy as an example, there is a smaller temperature when the model has larger EU.

4.2. Experimental Analysis

4.2.1. SETTINGS

In this paper, we use the multi-label evaluation benchmark SemEval (Mohammad et al., 2018), which is a multi-tag NLP analysis task on tweet text. We evaluate models of different sizes, including LLaMA2 (7B)², LLaMA2 (13B), LLaMA3 (3B), LLaMA3 (8B) and LLaMA3 (70B). As shown in Fig. 3, after providing an answer with the first class label, LLM dynamically decides whether to give the second class label based on the uncertainty indicator. We can evaluate the ability of uncertainty to guide the model in rejecting incorrect answers (the ability to avoid hallucinations in generating diverse responses).

To evaluate the effectiveness of the dynamic decoding strategy, we verify whether it can enhance diversity while maintaining accuracy. Specifically, we evaluate whether the model can select as many correct answers as possible with the guidance of uncertainty on the multi-label LLM benchmark SemEval (Mohammad et al., 2018). As shown in Fig. 3, for all test samples in the entire data set, when generating responses, the LLM selects the class with the highest output probability or the two tokens with the highest

²<https://huggingface.co/meta-llama/>

Table 1. Dynamic Decoding Performance Comparison. The *scores* indicate the best performance of the compared methods and $\uparrow_{rate\%}$ represents the improvement relative to the best of the compared methods.

Method	LLaMA2 _(7B)	LLaMA2 _(13B)	LLaMA2 _(70B)	LLaMA3 _(3B)	LLaMA3 _(8B)	LLaMA3 _(70B)
Greedy Search	77.48%	74.19%	<u>69.96%</u>	71.06%	79.10%	77.17%
Top-2	77.32%	73.70%	64.31%	79.35%	91.87%	83.09%
Probability	78.49%	74.19%	69.93%	81.10%	93.07%	83.40%
Entropy	<u>79.32%</u>	<u>74.87%</u>	69.93%	<u>82.33%</u>	<u>94.75%</u>	<u>84.01%</u>
LogTokU	85.87% $\uparrow_{7.6\%}$	86.22% $\uparrow_{4.8\%}$	76.19% $\uparrow_{6.2\%}$	83.92% $\uparrow_{1.6\%}$	97.55% $\uparrow_{2.8\%}$	89.11% $\uparrow_{5.1\%}$

User: Classify the following sentence into one of the following emotions: [classes]
The sentence is [sentence]
The class of this sentence is?

LLM: The sentiment of the sentence is \uparrow

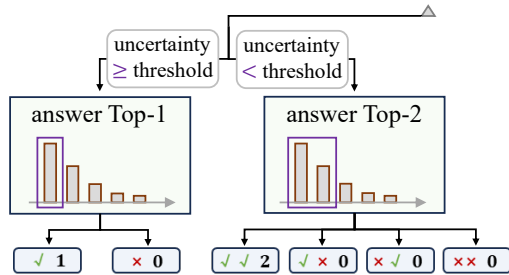


Figure 3. Illustration of experimental setting in Table 1.

probabilities at the critical token (class) position based on uncertainty. The rule is similar to multiple-choice questions in exams. For any question, the LLM can decide whether to answer a second class. If it answers, there are two possibilities: (1) the second class is correct, the LLM will get one more point for its diversity; (2) the second class is incorrect, which may result in losing the points earned from the first correct answer. In other words, the LLM needs to estimate its own confidence and balance the trade-off between the penalty (hallucination) and award (diversity).

Compared methods. We introduce two baseline decoding strategies and two dynamic decoding strategies based on probability and entropy, including: • **Greedy Search:** the LLM sacrifices diversity and selects only one class for all samples with the highest probability. • **Top-2:** the LLM seeks diversity and selects two classes for all samples with the highest probability and the second highest probability. • **Probability:** the LLM dynamically chooses to select either one class or two classes for different samples, with the maximum probability as the indicator. The LLM selects one class when the maximum probability is low and two classes when the maximum probability is high. • **Entropy:** This is also a dynamic strategy with entropy as an indicator. The LLM selects one class when the entropy is low and two

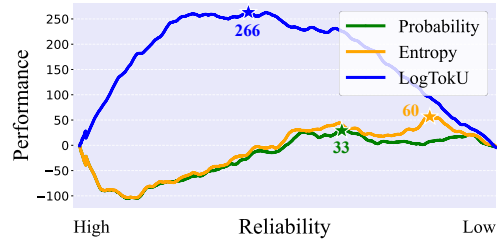


Figure 4. A close-up observation explains why LogU achieves the best performance. All samples are sorted by reliability from high to low. The “performance” is the accumulated score (i.e., the number of accumulated correct responses minus the number of accumulated incorrect responses). A trend of increasing and then decreasing represents a good reliability indicator, where the answer becomes more likely to be wrong as reliability decreases.

classes when the entropy is high. • **LogU:** This is also a dynamic strategy, with the indicator being $EU(a_t)$, as shown in Sec. 4. The LLM selects one class when EU is high and two classes when EU is low.

4.2.2. RESULTS ANALYSES

We show the normalized performance of different methods in various LLM sizes (higher is better), as shown in Table 1. We can find that using LogU achieves the best performance, with a significant improvement in the overall score of the model, with an improvement of more than 10% on LLaMA2-13B.

As shown in Fig. 3, when the model chooses to generate more than one answer, the score obtained may either increase (award of correct response) or decrease (penalty of error response), and a trustworthy response reliability indicator should have the ability to identify the error responses. Therefore, we estimate the accumulated score curve as LLM answers more and more questions with diverse answers. Specifically, we arrange all samples in ascending order of estimated uncertainty of all methods, then the samples with uncertainty lower than threshold will answer more than one answer, which the others just answer the choice with the highest prediction probability. Ideally, the accumulated score change should follow a trend that first increases and

Table 2. **Response Reliability Estimation Performance Comparison.** The *auroc%* scores indicate the performance of the relationship between the estimated reliability and response correctness (BLEURT > 0.5) on TruthfulQA benchmark of the compared methods, $O(1)$ indicates the complexity in terms of response sampling (be free of multiple sampling or not), and $\uparrow_{rate\%}$ indicates the improvement relative to the best performance of all compared methods.

Method	$O(1)$	LLaMA2 _(7B)	LLaMA2 _(13B)	LLaMA2 _(70B)	LLaMA3 _(3B)	LLaMA3 _(8B)	LLaMA3 _(70B)
Probability	✓	61.39%	68.38%	66.38%	66.71%	64.78%	61.15%
Entropy	✓	64.30%	72.53%	69.06%	68.64%	66.50%	63.96%
LN-E (Malinin & Gales, 2021)	✗	41.15%	44.07%	43.03%	44.60%	44.95%	47.74%
SE (Kuhn et al., 2024)	✗	49.20%	53.71%	49.47%	57.25%	53.98%	62.91%
DSE (Kuhn et al., 2024)	✗	49.36%	53.97%	49.76%	57.78%	54.56%	62.85%
LeS (Lin et al., 2024b)	✗	55.92%	56.83%	57.09%	60.90%	58.85%	60.76%
Average	-	48.91%	52.15%	49.84%	55.13%	53.09%	58.57%
LogU	✓	71.78% $\uparrow_{7.5\%}$	79.78% $\uparrow_{7.3\%}$	71.83% $\uparrow_{2.8\%}$	71.03% $\uparrow_{2.4\%}$	73.63% $\uparrow_{7.1\%}$	69.67% $\uparrow_{5.7\%}$

then decreases, which implies that samples with lower uncertainty are more likely to gain additional score when challenged to give more diverse responses. As the uncertainty increases, the probability of giving the response to be error also increases. The results are shown in Fig. 4, and it can be observed that the uncertainty indicated by LogU consistently satisfies the expectation. However, traditional probability-based uncertainty estimation methods show a decrease trend when the estimated reliability is high, indicating that these methods fail to estimate the risk of giving more diverse responses. We highlight the best performance points in terms of accumulated score for different methods, and it can be observed that our method significantly outperforms the comparison methods.

5. Application II: Reliability Estimation

5.1. LogU-guided Response Uncertainty Estimation

Another benefit that LogU brings is the estimation of the reliability of the response. In traditional probability-based token uncertainty estimation, a large number of uncritical tokens exhibit high uncertainty, making it difficult to map token uncertainty to sentence uncertainty. This issue requires manually applying weights to different tokens to overcome the problem caused by uncritical tokens being estimated with high uncertainty. LogU naturally overcomes this problem. As shown in the case study in Fig. 2(b), for uncritical tokens such as commas, the probability-based method labels them as unreliable tokens due to their low predictive probability (high entropy). In contrast, LogU accurately classifies them into the fourth quadrant, marking them as “I know more than one answer”. Therefore, LogU can more easily use token uncertainty to represent the uncertainty of sentences. Inspired by (Duan et al., 2024a), we use the most uncertain tokens in a sentence to represent the overall reliability of the sentence. The response reliability can be represented as the averaged reliability on tokens with the

K -lowest reliability values:

$$\mathcal{R}_{\text{response}} = \frac{1}{K} \sum_{t \in \mathcal{T}_K} \mathcal{R}(a_t), \tag{6}$$

where $\mathcal{R}_{\text{response}}$ indicates the reliability of the response and $\mathcal{R}(a_t)$ represents the reliability of token a_t , and \mathcal{T}_K represents the set of K tokens with the lowest reliability values ($\text{rel}(a_t)$).

Following the uncertainty combination of AU and EU in discriminative models (Abdar et al., 2021), in the experiments, we simply represent the reliability of the token as:

$$\mathcal{R}(a_t) = \frac{1}{\text{AU}(a_t) \cdot \text{EU}(a_t)}, \tag{7}$$

which indicates that the reliability of the token is low when both the estimated AU and EU are high. In this paper, we simply identify the response reliability in QA task according to the scenarios classified in Fig. 2(a): (1) high AU, high EU: LLM lacks knowledge of the question and has no idea of a suggested answer (unreliable); (2) low AU, high EU: The LLM lacks knowledge of the question, but it knows what should be an appropriate answer (reliable); (3) low AU, low EU: LLM knows precisely what is the most appropriate answer (reliable); (4) high AU, low EU: LLM has encountered many similar samples during training and knows more than one suitable response (reliable).

5.2. Experimental Analysis

5.2.1. SETTINGS

To validate whether the estimated response reliability is trustworthy, we evaluate it on the TruthfulQA benchmark dataset (Lin et al., 2021). Following standard settings, we consider responses with BLEURT > 0.5 as correct answers, and use the estimated reliability as the score for the responses to calculate the AUROC. A higher AUROC indicates that responses estimated with lower reliability are more likely to be incorrect. We compare LogU with

probability-based strategy, entropy-based strategy and recent sampling-based uncertainty estimation methods, including: LN-Entropy (LN-E) (Malinin & Gales, 2021), Semantic Entropy (SE) (Kuhn et al., 2024), D-Semantic Entropy (DSE) (Kuhn et al., 2024), Lexical Similarity (LeS) (Lin et al., 2024b). Specifically, the token reliability based on probability is represented as: $\mathcal{R}(a_t) = \log(p(a_t|\mathbf{q}, \mathbf{a}_{t-1}, \mathcal{M}))$, and the token reliability based on entropy is represented as: $\mathcal{R}(a_t) = \frac{1}{H(a_t)}$, where $H(a_t)$ indicates the entropy of prediction distribution of a_t .

5.2.2. RESULTS ANALYSES

Table 2 shows the AUROC performance of different estimation methods in the TruthfulQA benchmark, with a higher value indicating a more reliable response reliability estimation. The results show that LogU achieves the best performance in models of various sizes, suggesting that LogU provides a better estimation of the response reliability. Furthermore, we find that sampling methods do not perform well on this task, and similar observations have been reported in (Xiong et al., 2024). To illustrate the performance gap between sampling-based methods and LogU, we calculate the average performance of current sampling-based methods termed ‘‘Average’’. One potential reason is because sampling-based methods cannot capture the situation in the Quadrant IV and thus fail to measure models’ inherent uncertainty. For more experimental results, please refer to the appendix.

6. Theoretical Analysis

Different correct answers are competitor. For any LLM trained with cross-entropy loss, different correct answers are competitors in terms of probability³. Continuing with the example of proposing a president, suppose τ^a (‘‘Barack’’) is the label of a sample whose \mathbf{q} is ‘‘[INST]Could you give me one name of president?[\INST]’’ and a generated token vector \mathbf{a}_{t-1} can be decoded into ‘‘Sure, here is a historical American president:**\’, the loss of the next token at this position during supervised fine-tuning can be written as:

$$L^{\tau^a} = -\log \frac{\exp(\mathcal{M}(\tau^a|\mathbf{q}, \mathbf{a}_{t-1}))}{\sum_{m=1}^{|\mathbf{Y}|} \exp(\mathcal{M}(\tau^m|\mathbf{q}, \mathbf{a}_{t-1}))}, \quad (8)$$

where L^{τ^a} is the loss on the sample with the next token label τ^a . Consider cases where multiple distinct answers to the same question appear in the training set, the situation becomes different. For example, τ^b (‘‘George’’) is the label in another sample with the same question. When the model

is simultaneously fine-tuned on both samples, the gradient update for the model will be:

$$\begin{aligned} \nabla_{\mathcal{M}}(L^{\tau^a} + L^{\tau^b}) &= \nabla_{\mathcal{M}}L^{\tau^a} + \nabla_{\mathcal{M}}L^{\tau^b} \\ &= \underbrace{-y_a^a \frac{1}{\Omega_a^{\tau^a}} \nabla_{\mathcal{M}}\Omega_a^{\tau^a} - y_b^b \frac{1}{\Omega_b^{\tau^b}} \nabla_{\mathcal{M}}\Omega_b^{\tau^b}}_{(1) \text{ maximizing the probability of annotated answer}} \\ &\quad - \underbrace{y_a^b \frac{1}{\Omega_a^{\tau^b}} \nabla_{\mathcal{M}}\Omega_a^{\tau^b} - y_b^a \frac{1}{\Omega_b^{\tau^a}} \nabla_{\mathcal{M}}\Omega_b^{\tau^a}}_{(2) \text{ minimizing the probability of the other annotated answer}} \\ &\quad - \underbrace{\sum_{m \neq a, b} y_{a,b}^m \left[\frac{1}{\Omega_a^{\tau^m}} \nabla_{\mathcal{M}}\Omega_a^{\tau^m} + \frac{1}{\Omega_b^{\tau^m}} \nabla_{\mathcal{M}}\Omega_b^{\tau^m} \right]}_{(3) \text{ minimizing the probability of incorrect answers}}, \end{aligned} \quad (9)$$

where $\Omega_a^{\tau^a} = \frac{\exp(\mathcal{M}(\tau^a|\mathbf{q}, \mathbf{a}_{t-1}))}{\sum_{m=1}^{|\mathbf{Y}|} \exp(\mathcal{M}(\tau^m|\mathbf{q}, \mathbf{a}_{t-1}))}$, and y_a^m indicates the next token label of a training sample with ground-truth label τ^a , that is, we have $y_a^a = 1$ and $y_a^b = 0$. In particular, when \mathcal{M} is in a certain state during training, we have $\Omega_a^{\tau^a} = \Omega_b^{\tau^a}$, and we make distinctions to facilitate the reader’s understanding here. As we can see, for scenarios with multiple answers, the training objective can be divided into three parts: (1) For each sample, increase the probability of its own annotation in the output distribution. (2) For each sample, decrease the probability of another sample’s annotation in the output distribution. **Note:** This part leads to the issue where probability cannot anymore capture the reliability of LLM responses, as different correct answers tend to reduce the probability of other correct answers, making low probabilities cannot indicates low reliability. (3) For both samples, decrease the probability of other outputs not present in the annotations in the output distribution.

7. Conclusion

In this paper, we find that the main reason for the failure of probability-based methods in estimating LLM’s uncertainty is that the information regarding evidence strength is lost during the normalization process, making probability cannot accurately reflect reliability. Therefore, we propose LogTokU to model the evidence for generating the next token in LLMs, a real-time token uncertainty estimation framework. We use LogTokU to guide two downstream tasks of LLMs, dynamic decoding and response reliability estimation, achieving significant performance improvements. These downstream tasks demonstrate the simplicity, effectiveness, and immense potential of LogTokU.

Impact Statement

This paper presents work whose goal is to advance the field of Machine Learning. There are many potential societal

³The ‘‘same question’’ refers to questions that are semantically equivalent but do not need to be identical.

consequences of our work, none which we feel must be specifically highlighted here.

References

- Abdar, M., Pourpanah, F., Hussain, S., Rezazadegan, D., Liu, L., Ghavamzadeh, M., Fieguth, P., Cao, X., Khosravi, A., Acharya, U. R., et al. A review of uncertainty quantification in deep learning: Techniques, applications and challenges. *Information fusion*, 76:243–297, 2021.
- Arora, U., Huang, W., and He, H. Types of out-of-distribution texts and how to detect them. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 10687–10701, 2021.
- Banerjee, S., Agarwal, A., and Singla, S. Llms will always hallucinate, and we need to live with this. *arXiv preprint arXiv:2409.05746*, 2024.
- Bigelow, E., Holtzman, A., Tanaka, H., and Ullman, T. Forking paths in neural text generation. *arXiv preprint arXiv:2412.07961*, 2024.
- Cole, J. R., Zhang, M. J. Q., Gillick, D., Eisenschlos, J. M., Dhingra, B., and Eisenstein, J. Selectively answering ambiguous questions, 2023. URL <https://arxiv.org/abs/2305.14613>.
- Dahl, M., Magesh, V., Suzgun, M., and Ho, D. E. Large legal fictions: Profiling legal hallucinations in large language models. *Journal of Legal Analysis*, 16(1):64–93, 2024.
- Duan, J., Cheng, H., Wang, S., Zavalny, A., Wang, C., Xu, R., Kailkhura, B., and Xu, K. Shifting attention to relevance: Towards the predictive uncertainty quantification of free-form large language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 5050–5063, 2024a.
- Duan, J., Zhang, R., Diffenderfer, J., Kailkhura, B., Sun, L., Stengel-Eskin, E., Bansal, M., Chen, T., and Xu, K. Gtbench: Uncovering the strategic reasoning limitations of llms via game-theoretic evaluations. *arXiv preprint arXiv:2402.12348*, 2024b.
- Fadeeva, E., Rubashevskii, A., Shelmanov, A., Petrakov, S., Li, H., Mubarak, H., Tsymbalov, E., Kuzmin, G., Panchenko, A., Baldwin, T., et al. Fact-checking the output of large language models via token-level uncertainty quantification. *arXiv preprint arXiv:2403.04696*, 2024.
- Gupta, N., Narasimhan, H., Jitkrittum, W., Rawat, A. S., Menon, A. K., and Kumar, S. Language model cascades: Token-level uncertainty and beyond. *arXiv preprint arXiv:2404.10136*, 2024.
- Huang, H.-Y., Wu, Z., Yang, Y., Zhang, J., and Wu, Y. Unc-ttp: A method for classifying llm uncertainty to improve in-context example selection, 2024a. URL <https://arxiv.org/abs/2408.09172>.
- Huang, H.-Y., Yang, Y., Zhang, Z., Lee, S., and Wu, Y. A survey of uncertainty estimation in llms: Theory meets practice. *arXiv preprint arXiv:2410.15326*, 2024b.
- Huang, L., Yu, W., Ma, W., Zhong, W., Feng, Z., Wang, H., Chen, Q., Peng, W., Feng, X., Qin, B., et al. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions. *arXiv preprint arXiv:2311.05232*, 2023.
- Ji, Z., Yu, T., Xu, Y., Lee, N., Ishii, E., and Fung, P. Towards mitigating llm hallucination via self reflection. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pp. 1827–1843, 2023.
- Kadavath, S., Conerly, T., Askell, A., Henighan, T., Drain, D., Perez, E., Schiefer, N., Hatfield-Dodds, Z., DasSarma, N., Tran-Johnson, E., et al. Language models (mostly) know what they know. *arXiv preprint arXiv:2207.05221*, 2022.
- Kuhn, L., Gal, Y., and Farquhar, S. Semantic uncertainty: Linguistic invariances for uncertainty estimation in natural language generation. *Nature*, 2024.
- Lin, S., Hilton, J., and Evans, O. Truthfulqa: Measuring how models mimic human falsehoods. *arXiv preprint arXiv:2109.07958*, 2021.
- Lin, Z., Liang, T., Xu, J., Wang, X., Luo, R., Shi, C., Li, S., Yang, Y., and Tu, Z. Critical tokens matter: Token-level contrastive estimation enhance llm’s reasoning capability. *arXiv preprint arXiv:2411.19943*, 2024a.
- Lin, Z., Trivedi, S., and Sun, J. Generating with confidence: Uncertainty quantification for black-box large language models, 2024b. URL <https://arxiv.org/abs/2305.19187>.
- Liu, F., Liu, Y., Shi, L., Huang, H., Wang, R., Yang, Z., Zhang, L., Li, Z., and Ma, Y. Exploring and evaluating hallucinations in llm-powered code generation. *arXiv preprint arXiv:2404.00971*, 2024.
- Malinin, A. and Gales, M. Uncertainty estimation in autoregressive structured prediction. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=jN5y-zb5Q7m>.
- Mohammad, S., Bravo-Marquez, F., Salameh, M., and Kiritchenko, S. SemEval-2018 task 1: Affect in tweets. In Apidianaki, M., Mohammad, S. M., May, J., Shutova, E., Bethard, S., and Carpuat, M. (eds.), *Proceedings of*

- the 12th International Workshop on Semantic Evaluation, pp. 1–17, New Orleans, Louisiana, June 2018. Association for Computational Linguistics. doi: 10.18653/v1/S18-1001. URL <https://aclanthology.org/S18-1001/>.
- Peng, D., Zheng, L., Liu, D., Han, C., Wang, X., Yang, Y., Song, L., Zhao, M., Wei, Y., Li, J., et al. Large-language models facilitate discovery of the molecular signatures regulating sleep and activity. *Nature Communications*, 15(1):3685, 2024.
- Perković, G., Drobnjak, A., and Botički, I. Hallucinations in llms: Understanding and addressing challenges. In *2024 47th MIPRO ICT and Electronics Convention (MIPRO)*, pp. 2084–2088. IEEE, 2024.
- Sensoy, M., Kaplan, L., and Kandemir, M. Evidential deep learning to quantify classification uncertainty. *Advances in neural information processing systems*, 31, 2018.
- Shah, S. V. Accuracy, consistency, and hallucination of large language models when analyzing unstructured clinical notes in electronic medical records. *JAMA Network Open*, 7(8):e2425953–e2425953, 2024.
- Tang, C., Liu, J., Xu, H., and Huang, L. Top- $n\sigma$: Not all logits are you need. *arXiv preprint arXiv:2411.07641*, 2024.
- Ulmer, D., Hardmeier, C., and Frelsen, J. Prior and posterior networks: A survey on evidential deep learning methods for uncertainty estimation, 2023. URL <https://arxiv.org/abs/2110.03051>.
- Wei, H., Xie, R., Cheng, H., Feng, L., An, B., and Li, Y. Mitigating neural network overconfidence with logit normalization. In *International conference on machine learning*, pp. 23631–23644. PMLR, 2022.
- Xiao, Y. and Wang, W. Y. On hallucination and predictive uncertainty in conditional language generation, 2021. URL <https://arxiv.org/abs/2103.15025>.
- Xiong, M., Santilli, A., Kirchhof, M., Golinski, A., and Williamson, S. Efficient and effective uncertainty quantification for LLMs. In *Neurips Safe Generative AI Workshop 2024*, 2024. URL <https://openreview.net/forum?id=QKRLH57ATT>.
- Yoffe, L., Amayuelas, A., and Wang, W. Y. Debunc: mitigating hallucinations in large language model agent communication with uncertainty estimations. *arXiv preprint arXiv:2407.06426*, 2024.
- Zhang, J., Li, Z., Das, K., Malin, B. A., and Kumar, S. Sac3: Reliable hallucination detection in black-box language models via semantic-aware cross-check consistency, 2024. URL <https://arxiv.org/abs/2311.01740>.
- Zhang, T., Qiu, L., Guo, Q., Deng, C., Zhang, Y., Zhang, Z., Zhou, C., Wang, X., and Fu, L. Enhancing uncertainty-based hallucination detection with stronger focus. *arXiv preprint arXiv:2311.13230*, 2023.
- Zhou, L., Schellaert, W., Martínez-Plumed, F., Moros-Daval, Y., Ferri, C., and Hernández-Orallo, J. Larger and more instructable language models become less reliable. *Nature*, pp. 1–8, 2024.