

The Kernighan-Lin Search Algorithm*

Ali Dasdan
KD Consulting
Saratoga, CA, USA
alidasdan@gmail.com

February 4, 2025

Abstract

The traveling salesman problem (TSP) and the graph partitioning problem (GPP) are two important combinatorial optimization problems with many applications. Due to the NP-hardness of these problems, heuristic algorithms are commonly used to find good, or hopefully near-optimal, solutions. Kernighan and Lin have proposed two of the most successful heuristic algorithms for these problems: The Lin-Kernighan (LK) algorithm for TSP and the Kernighan-Lin (KL) algorithm for GPP. Although these algorithms are problem specific to TSP and GPP, they share a problem-agnostic mechanism, called variable depth search, that has wide applicability for general search. This paper expresses this mechanism as part of a general search algorithm, called the Kernighan-Lin Search algorithm, to facilitate its use beyond the TSP and GPP problems. Experimental comparisons with other general search algorithms, namely, genetic algorithms, hill climbing, and simulated annealing, on function optimization test suites confirm that the new algorithm is very successful in solution quality and running time.

1 Introduction

The traveling salesman problem (TSP) and the graph partitioning problem (GPP) are two important combinatorial optimization problems. These problems are encountered in many situations, for example, the first phase in VLSI physical design involves partitioning of the circuit elements into some number of blocks for subsequent phases; this partitioning phase yields a substantial reduction in the complexity of the VLSI layout problem. These problems are also served as test-beds to evaluate the performance of new (heuristic) algorithms.

Since TSP and GPP are NP-hard problems, heuristic algorithms are used to obtain good, or hopefully near-optimal, solutions. Brian Kernighan and

*This paper is a slightly edited version of an AI class project report submitted at the University of Illinois at Urbana-Champaign on May 12, 1995.

Shen Lin, who worked at the famed Bell Labs at the time, proposed a heuristic algorithm for each problem. The algorithm for TSP has been referred to as the Lin-Kernighan (LK) algorithm [29], and the algorithm for GPP has been referred to as the Kernighan-Lin (KL) algorithm [18]. These algorithms are iterative improvement algorithms (also called local search algorithms) in that they iteratively improve a given initial solution in search of a locally optimal solution.

There are a large number of other approaches (sometimes called “metaheuristics” [34]) to solve these problems such as genetic algorithms [11], simulated annealing [13, 14], mean-field annealing, tabu search, and integer programming, e.g., see [24, 25, 30, 34]. However, the LK and KL algorithms have remained to be among the best approaches when solution quality and running time are considered together.

A big part of the success of the LK and KL algorithms seems to be a mechanism called “variable depth search”, which usually lead to better solutions than those possible with a vanilla hill climbing algorithm. In this paper, I present this mechanism as a general local search algorithm and apply to function optimization problems to experimentally prove the generality of the approach and facilitate its use beyond TSP and GPP. I will refer to this algorithm as the Kernighan-Lin Search (KLS) algorithm.

This paper also presents the results of experiments done on a standard test suite of seven test cases (popular in the genetic algorithms community in 1990s) in comparison to other optimization algorithms: Genetic algorithms (GAs), simulated annealing (SA), and hill climbing (or hill-climbing). I also implemented and tested two new versions of the KLS algorithm by incorporating problem-specific knowledge into the KLS algorithm.

The experimental results support the initial intuition about the performance of the KLS algorithm. The KLS algorithm performed very well on all the test cases. When its solution quality and running time are considered together, it usually outperforms the simulated annealing algorithm.

The rest of the paper is organized as follows. A very short overview the related work and how this paper came about in § 2 and § 3. The fundamentals of the local search strategy and my knowledge representation for the experiments are introduced in § 4 and § 5. These sections are the basis of the following four sections on the specific algorithms: Hill Climbing in § 6, the proposed Kernighan-Lin search algorithms in § 7, simulated annealing in § 8, and genetic algorithms in § 9. These sections are followed by the experimental framework in § 10 and the experimental results and discussion in § 11. The paper ends with the conclusions and future work in § 12.

2 Related Work¹

The technical literature on metaheuristics is vast, e.g., see [2, 24, 20, 25, 30, 34] for overviews.

¹This section was originally written in 1995 but got revised with new references in 2025.

Variable depth search was proposed by Kernighan and Lin and used in [18] for graph partitioning and in [29] for traveling salesman problem. In the latter reference, the variable depth search is introduced as “a general approach to heuristics that we believe to be of wide applicability,” and its “considerable success” with graph partitioning, citing the former reference, is also celebrated. It is interesting that it took almost two decades for variable depth search mechanism to be used for problems other than these two.

The complexity of finding good solutions using local search techniques, including the KL and LK algorithms, is explored in [15, 22] under a new complexity class called “polynomial local search” (PLS).

Early references recognizing the benefits of variable depth search include [2] and [25] as a part of very-large neighborhood search techniques, [19] as part of the iterated local search metaheuristic, [31] as a special case of the cyclic transfers metaheuristic, [9] as a special case of the ejection chains metaheuristic, [12] and [21] to improve the performance of genetic algorithms.

Papers related to this work include the short survey of applications in [2], the applications in [12] and [21] to improve the performance of genetic algorithms, and the applications to the vehicle routing problems in [33, 32], the quadratic assignment problem in [28] and more recently in [10, 21, 23], the maximum clique problem in [17], and nurse rostering in [3].

Given this paper was originally published in 1995, it may also be considered as an early reference for the variable depth search mechanism and its general applications.

For further study, interested readers should consult these references together with a huge number of references available on Arxiv, Google Scholar, and generic search engines. A search query containing the phrase “variable depth search” can help filter irrelevant results.

3 Historical Note

My own experience with metaheuristics was due to two studies I completed during my masters graduate work in early 1990s: New algorithms for multiway graph and hypergraph partitioning [6] and genetic synthesis of unsupervised learning algorithms [7, 8]. The code for the former was open sourced in [4, 5]. This experience involved the Kernighan-Lin algorithm and its variants; search and optimization algorithms such as local search, simulated annealing, genetic algorithms, neural networks; and combinatorial optimization problems.

I originally submitted this paper as a class project report for the artificial intelligence class taught by Professor Gerald DeJong ² at the University of Illinois at Urbana-Champaign on May 12, 1995. Unfortunately I did not get around to submitting a paper for publication and had lost the paper copy of the report for many years. Recently I discovered the lost paper copy and immediately scanned it into the pdf format. This paper is a slightly updated version of the original

²Prof. DeJong is one of the pioneers of machine learning with the explanation-based learning approach.

class project report. Since I do not have the software code used in this work anymore, I was not able to replicate the experiments on the current computers.

It is been 30 years since this paper was originally written. It is my hope that the main part of this paper, namely, the KLS algorithm, may serve as an early reference (from 1995) for iterative improvement algorithms using variable depth search.

4 Local Search Preliminaries

A combinatorial optimization (minimization) problem can be specified by identifying a set of *solutions* S and a *cost function* $f(S)$ that assigns a *cost* to each solution S . The goal is to find a solution of the *optimal cost* S^* , i.e., a solution with the minimum possible cost for minimization problems. There may be more than one such solution.

Many combinatorial optimization problems are hard in that it takes a great amount of time, usually exponential in the size of the problem, to find a solution to even very small problem instances. As a result, we resort to heuristic algorithms to find good solutions that are hopefully close to the optimal solution. These heuristic algorithms (or heuristics) usually run in a low-order polynomial time.

The methods used for designing heuristics tend to be rather problem specific. *Local search* is one of the few general heuristics. It is usually based on trial-and-error. Local search is the basis of the Kernighan-Lin Search (KLS) algorithm and the other algorithms discussed in this paper.

The first choice that must be made in order to apply a local search algorithm to a certain problem is the choice of a knowledge representation in which the problem and its solutions are encoded in some form, as will be explained in the next section.

The second choice is to define a suitable *neighborhood structure* on the knowledge representation; this structure specifies a neighborhood of solutions around each given solution. These neighbor solutions are in some sense close to that given solution, and each can be obtained by perturbing the given solution in one step on the knowledge representation. Each such perturbation is called a *move*. If the perturbation leads to a solution with a higher cost, then the move is an *uphill move*; otherwise, it is a *downhill move*. A solution S in a neighborhood structure is *locally optimal* (locally minimal in this work) if none of its neighbors has a lower cost. If a locally optimal solution is the best solution to the problem, it is called the (*globally*) *optimal solution*, which is very hard to find in most cases given the NP-hardness of the problem.

The third choice for a local search algorithm is the choice of devising an algorithm to generate an initial solution to the problem. This algorithm must be a low-order polynomial time algorithm. Initial solutions are almost always generated randomly though such initial solutions can have a very bad cost.

Starting from a given initial solution S , a local search algorithm tries to find a better solution in $N(S)$, the neighborhood of S . If a better neighbor is

found, a search starts for a better neighbor of that one, and so on. Since the set of solutions is finite, this search must halt, that is, the algorithm must come up with a locally optimal solution. Since the local search algorithms iteratively improve an initial solution in search of a locally optimal one, they are also called *iterative improvement algorithms*.

A neighbor solution S' in the neighborhood $N(S)$ of a solution S can be found in three different ways:

1. the first descent method: S' is the first solution in $N(S)$ that has a lower cost than that of S ,
2. the *steepest descent* method: all the solutions in $N(S)$ are examined and S' is the solution with the best (lowest) cost, and
3. S' is a solution randomly chosen among those in $N(S)$.

The hill climbing algorithm and the KLS algorithm use variations of the steepest descent method, and the simulated annealing and genetic algorithms use variations of the third method. Obviously, the steepest descent method takes more time than the other two. The main difference between the hill climbing algorithm and the KLS algorithm is that the former will choose the first lower cost solution while the latter will traverse a path of moves over all the solutions in the neighborhood, even uphill moves, and then choose the solution on the path from the first solution that leads to the maximum cost reduction (called the maximum gain). The reason for calling the KLS method “variable depth” is because it is not known in advance which solution on the path will lead to the maximum gain; in other words, the depth of the chosen solution from the starting solution on the path is variable per neighborhood.

5 Knowledge Representation

Since I implemented the hill climbing algorithm, the KLS algorithm, and the simulated annealing algorithm myself, I used the same representation for all of them. Since I used a third-party genetic algorithms software package for the genetic algorithm, I had to adapt the representation imposed by this package but the representation was the same. Note that the representation of solutions is also called the *encoding* of the solutions.

Consider a function $f(x_1, x_2, \dots, x_n)$ of n variables, where each variable is also called a *coefficient*. Each coefficient is a real number. The function f gives the cost of a solution that is obtained by using these n coefficients. These coefficients can also be considered as the parameters of the problem. I encoded each coefficient using l bits where l depends on the problem at hand. Thus, the code that I used for f is simply a concatenation of the individual codes for the coefficients, i.e, the code for f is a linear bit string of length nl . I assume that each solution thus encoded is a feasible solution to the problem, which holds for all the test functions I experimented with. Since each bit can take two values, the code for f can encode 2^{nl} solutions, which gives the size of the search space.

Each coefficient thus coded is an integer in $[0, 2^l - 1]$. To map each coefficient x_i into a real number in $[L, U]$, where L is the lower bound and U is the upper bound on every coefficient, I used the following linear mapping:

$$x_i = L + \text{int}(x_i) \frac{(U - L)}{(2^l - 1)} \quad (1)$$

where $\text{int}(x_i)$ is the integer value of the l bits encoding the coefficient x_i . This is also the mapping used in GAUCSD [27].

Let S be the code for $f(x_1, x_2, \dots, x_n)$ as described above. This code encodes a solution for f . Also let $S(j)$ denote the j th bit of S . Then, we can perturb S to generate the neighbor solutions in $N(S)$ by flipping a single bit of S in each step. Each bit flipping defines a move, and each move generates a solution in the neighborhood. A neighbor solution S' obtained by flipping the j th bit of S has the j th bit value of $S'(j) = 1 - S(j)$. Since there are nl bits in S , there are nl moves and correspondingly nl neighbor solutions in $N(S)$.

Note that in reality there are 2^{nl} settings of nl bits. This obviously defines the entire search space and it is too large, i.e., exponential, to search in the neighborhood of a given solution. Actually searching the entire search space is what amounts to an exhaustive search, and it invalidates the purpose of using any of the algorithms in this paper. The goal for effective local search is to define a neighborhood that is small enough for efficiency and large enough for coverage. This is the case for our neighborhood definition in that since we are using nl bit flips as the moves, our neighborhood size is reduced from exponential to polynomial.

The cost difference $\Delta f = f(S) - f(S')$ that results from the j th move (the j th bit flip) is called the *gain* of that move and denoted by g . The gain of a move can be negative or positive. A positive gain means that the move produced a better solution, and a negative gain means that the move produced a worse solution. Thus, a move with positive gain is a downhill move, and a move with negative gain is an uphill move.

6 Hill Climbing

Hill climbing or the hill climbing algorithm corresponds exactly to the local search strategy with the steepest descent method. Since all the problems in this work are minimization problems, the hill climbing algorithm here is actually a hill “descent” algorithm, akin to gradient descent. The hill climbing algorithm used in this work is given in Fig. 1.

In step 1 in Fig. 1, an initial solution S is generated randomly. Each bit of S is set to 0 or 1 with equal probability. This initialization scheme was also employed for the other algorithms.

Step 8 of the algorithm, locking the move, is necessary to test every solution in the neighborhood at most once in each iteration of the repeat loop. After every iteration of the for loop in step 4, the number of possible solutions to test

Algorithm: Hillclimbing.
Input: Problem-specific features
Output: A locally minimum solution.

```

1 Generate an initial solution  $S$ 
2 Repeat
3   Compute gains of all the moves on  $S$ 
4   For  $nl$  (the size of  $N(S)$ ) iterations Do
5     Select the best move with gain  $g$ , leading to the solution  $S'$ 
6     If  $g \leq 0$  ( $S'$  is worse) Then exit
7     Set  $S = S'$  (update the current solution)
8     Lock the move
9     Update gains of the remaining moves
10  Until  $g \leq 0$ 
11 Return  $S$ 

```

Figure 1: The hill climbing algorithm.

Algorithm: Kernighan-Lin.
Input: Problem-specific features
Output: A locally minimum solution.

```

1 Generate an initial solution  $S$ 
2 Repeat
3   Compute gains of all the moves on  $S$ 
4   For  $nl$  (the size of  $N(S)$ ) iterations Do
5     Select the best move with gain  $g$ , leading to the solution  $S'$ 
7     Set  $S = S'$  (update the current solution temporarily)
8     Lock the move
9     Update gains of the remaining moves
10  Find  $k$  to maximize  $G = \sum_{i=1}^k g_i$  where  $g_i$  is the gain of the  $i$ th temporary move
11  If  $G \leq 0$  (no decrease in the cost) Then exit
12  Perform the  $k$  moves permanently and set  $S$  to the final solution thus obtained
13 Until  $G \leq 0$ 
14 Return  $S$ 

```

Figure 2: The Kernighan-Lin search algorithm.

decreases by one. The hill climbing algorithm only allows downhill moves. This often leads it to getting stuck in poor local optima.

7 Kernighan-Lin Search (KLS)

As discussed earlier in this paper, the Kernighan-Lin Search (KLS) algorithm is a generalization of the variable depth search mechanism of the Kernighan-Lin and Lin-Kernighan algorithms. The KLS algorithm is given in Fig. 2. The steps of the KLS algorithm match those of the hill climbing algorithm except for the steps 7, 10, and 12 in the former.

The key point or mechanism in the KLS algorithm is as follows: In step 7, the solution update is done *temporarily* since we do not know how many moves

are necessary to get the best solution starting from the initial solution S . This number of moves is obtained in step 10 by finding the maximum prefix sum of the gain sequence. The k moves yielding the maximum gain sum in step 10 are made permanent in step 12.

Note that since k is not known in advance, it is the *variable* in “variable depth search” and it can be at most nl , the total number of moves available in the neighborhood structure starting from a given solution in the neighborhood. The KLS algorithm, unlike the hill climbing algorithm, does not stop when it gets a negative gain in step 5; this negative gain may be included in the maximum prefix computed in step 10. Thus, the KLS algorithm sometimes employs uphill moves, which seems to be a key reason behind its success.

Step 8, locking the move, is to prevent cycling, i.e., visiting the same moves again, during neighborhood search. This mechanism is also present in the hill climbing algorithm. As shown in [6], locking can actually be relaxed or removed altogether to yield even better solutions. In this paper, we will not discuss this extension further.

To incorporate problem-specific knowledge into the KLS algorithm, I also designed two additional versions of the KLS algorithm. The first version (called the KLS1 algorithm) is based on the fact that the coefficients optimizing each function are integers. The definition of a move is different in the KLS1 case. A move can either increase or decrease a coefficient by 1 provided that the value of the coefficient is still between the upper and lower bounds. If both moves are possible, the one yielding higher gain is selected.

The second version (called the KLS2 algorithm) is based on the fact that all the test functions in my test suite are symmetric in that the coefficients optimizing them are equal. Thus, instead of applying moves to each coefficient, I applied moves only the first coefficient and copied the first coefficient to the others. The moves were bit flips as in the KLS algorithm.

Both of these versions led to a drastic reduction in the size of the search space for each function. However, their performances differed greatly, as will be shown in the experimental results section.

8 Simulated Annealing (SA)

The simulated annealing (SA) algorithm [13, 14] is also a local search algorithm, but it allows occasional uphill moves to avoid getting trapped in poor local optima. The uphill moves are determined by both the gain of the current move and a control parameter called temperature. The simulated annealing algorithm used in this work is given in Fig. 3.

Although not fully shown in Fig. 3, the simulated annealing algorithm actually contains nearly a dozen parameters together with the temperature. The tests in both step 3 and step 4 are determined using some of these parameters. I used the simulated annealing algorithm and the parameter setting suggested in [13, 14]. For an explanation of these parameters, refer to the same references.

Algorithm: Simulated Annealing.
Input: Problem-specific features
Output: A locally minimum solution.

```

1 Generate an initial solution  $S$ 
2 Get an initial temperature  $T$ 
3 While not yet frozen Do
4   For some number of iterations Do
5     Select a random move with gain  $g$ , leading to the solution  $S'$ 
6     Let  $\Delta = f(S') - f(S)$  ( $= -g$ )
7     If  $\Delta \leq 0$  (downhill move) Then
8       Set  $S = S'$  (update the current solution)
9     If  $\Delta > 0$  (uphill move) Then
10      Set  $S = S'$  (update the current solution) with probability  $e^{-\Delta/T}$ 
11    Set  $T = rT$  where  $r$  is the cooling ratio
12 Return  $S$ 

```

Figure 3: The simulated annealing algorithm.

9 Genetic Algorithm (GA)

Genetic Algorithms (GAs) [11] are search and optimization algorithms working by mimicking the process of natural evolution as a means of advancing toward the optimum. They can search large and complex spaces effectively. They are robust in that they adapt to a wide variety of environments.

To implement the genetic algorithm in this work, I used the GAucsd software package [27], which provides a genetic algorithm for function minimization. This package in particular and genetic algorithms in general have lots of parameters or knobs to tune for good performance. Since [26] provides robust settings after extensive experiments on the same test suite as mine, I used the settings suggested there. For reference, the list of the parameters and their settings is also given in Table 1. The meaning of each parameter is explained in [27].

10 Experimental Framework

Except for the genetic algorithm, I implemented the hill climbing, KLS, and simulated annealing algorithms all in the C programming language. All the experiments were carried out on a SUN SPARCstation (a high end workstation computer in early 1990s). I performed tests on seven functions. The first five functions (F1 through F5) are called De Jong’s test suite [1, 16]. This test suite was a standard test suite in the genetic algorithms community in 1990s. The last two functions (F6 and F7) are from [26]. These two functions were specifically designed to optimize the control parameters of genetic search. The task for all the functions is the minimization. The properties of these functions are listed below:

1. F1 is an instance of the “parabola”, as illustrated in Fig. 4(a). It is a continuous, convex, unimodal, quadratic, low-dimensional, and deterministic

Parameter	Setting
Structure Length	problem specific
Total Trials	60000 (about 2000 generations)
Population Size	30
Crossover Rate	0.850
Mutation Rate	0.005
Generation Gap	1.000
Max. Generations without Evaluation	2
Maximum Bias	0.990
Convergence Threshold	0.950
Scaling Window	-1
Sigma Scaling	1
DPE Time Constant	0
Max Convergence	the same as Structure Length
Options	Abelcu
Coding	Gray coding (not binary)

Table 1: Parameter settings for GAucsd.

function. Its minimum value is zero at the origin. It contains three coefficients and each coefficient is coded in 10 bits. This function is defined as

$$f_1(x) = \sum_{i=1}^3 x_i^2 \quad (2)$$

where $-5.12 \leq x_i \leq 5.12$ for each i .

2. F2 is an instance of “Rosenbrock’s saddle”, as illustrated in Fig. 4(b). It is a continuous, non-convex, unimodal, quartic, low-dimensional, and deterministic function. Its minimum value is zero at $(1, 1)$. It contains two coefficients and each coefficient is coded in 12 bits. This function is defined as

$$f_2(x) = 100(x_1^2 - x_2)^2 + (1 - x_1)^2 \quad (3)$$

where $-2.048 \leq x_i \leq 2.048$ for each i .

3. F3 is an instance of the “step function”, as illustrated in Fig. 5(a). It is a discontinuous, non-convex, unimodal, low-dimensional, and deterministic function. Its minimum value is -30 but I added 30 to the output to move the minimum value to 0. It contains five coefficients and each coefficient is coded in 10 bits. This function is defined as

$$f_3(x) = \sum_{i=1}^5 \lfloor x_i \rfloor \quad (4)$$

where $-5.12 \leq x_i \leq 5.12$ for each i . In my implementation

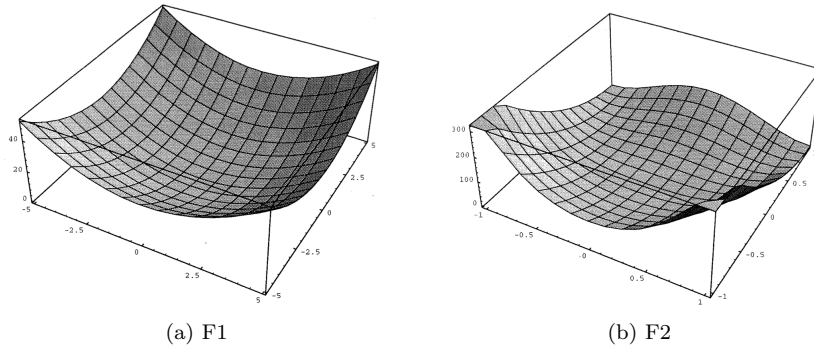


Figure 4: Three-dimensional illustrations of the functions F1 and F2 in our test suite.

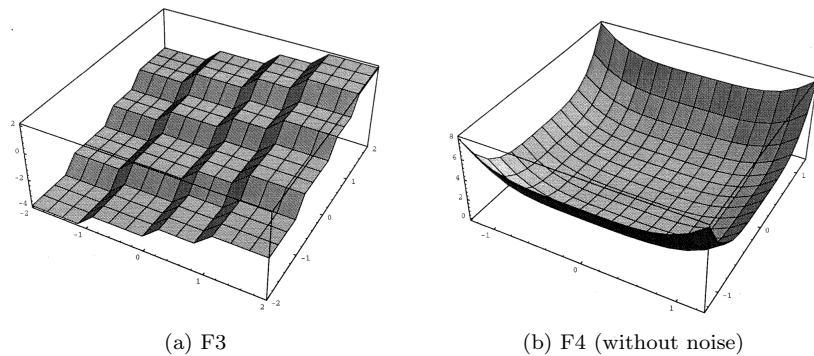


Figure 5: Three-dimensional illustrations of the functions F3 and F4 in our test suite.

4. F4 is an instance of the “quartic with noise”, as illustrated in Fig. 5(b). It is a continuous, convex, unimodal, quartic, high-dimensional, and stochastic function (with Gaussian noise). Its expected minimum value is zero but it may go as low as -4 , depending on the Gaussian noise generated, i.e., four standard deviations away from the zero mean in the negative direction. It contains 30 coefficients and each coefficient is coded in 8 bits. This function is defined as

$$f_4(x) = \sum_{i=1}^{30} ix_i^4 + \text{Gauss}(0, 1) \quad (5)$$

where $-1.28 \leq x_i \leq 1.28$ for each i , and $\text{Gauss}(0, 1)$ is a random number drawn from the standard normal distribution with a mean of 0 and a standard deviation of 1.

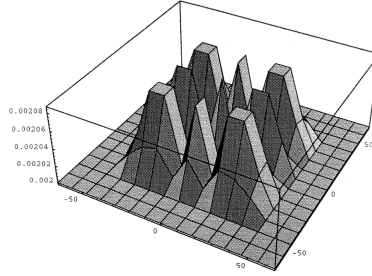


Figure 6: Three-dimensional illustration of the function F5 in our test suite.

5. F5 is an instance of “Shekel’s foxholes”, as illustrated in Fig. 6. It is a continuous, non-convex, multimodal, non-quadratic, high-dimensional, and deterministic function. Its minimum value is 1. It contains 25 coefficients and each coefficient is coded in 17 bits. This function is defined as

$$f_5(x) = \left(\frac{1}{500} + \sum_{j=1}^{25} \left(j + \sum_{i=1}^2 (x_i - a_{ij})^6 \right)^{-1} \right)^{-1} \quad (6)$$

where $-65.536 \leq x_i \leq 65.536$ for each i , and a is an array of integers, where $a_{1j} = (-32, -16, 0, 16, 32, -32, -16, \dots, 0, 16, 32)$ and $a_{2j} = (-32, -32, -32, -32, -32, -16, -16, \dots, 32, 32, 32)$.

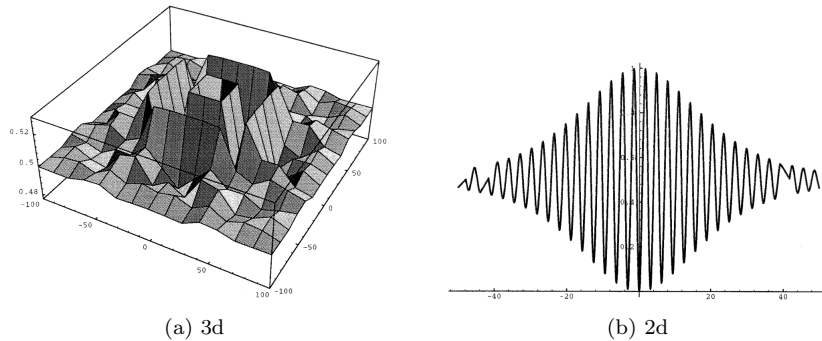


Figure 7: Three- and two-dimensional illustrations of the function F6 in our test suite.

6. F6 is an instance of the “sine envelope sine wave”, as illustrated in three- and two-dimensions in Fig. 7(a) and (b), respectively. It is a continuous, non-convex, multimodal, low-dimensional, and deterministic function. Its minimum value is zero. It contains two coefficients and each coefficient is

coded in 22 bits. This function is defined as

$$f_6(x) = 0.5 + \frac{\sin^2(\sqrt{x_1^2 + x_2^2}) - 0.5}{(1.0 + 0.001(x_1^2 + x_2^2))^2} \quad (7)$$

where $-100.0 \leq x_i \leq 100.0$ for each i .

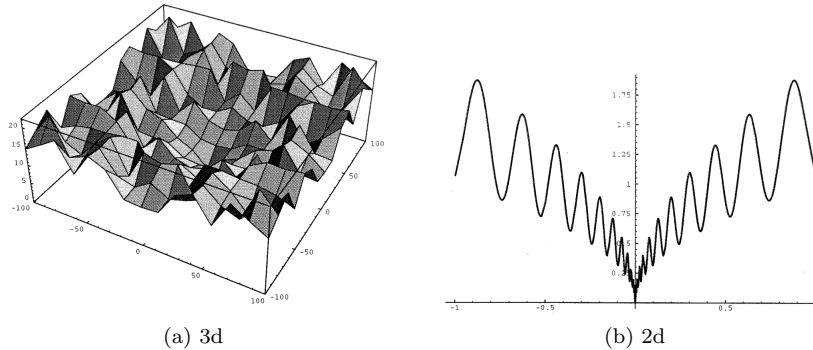


Figure 8: Three- and two-dimensional illustrations of the function F7 in our test suite.

7. F7 is an instance of the “stretched V sine wave”, as illustrated in three- and two-dimensions in Fig. 8(a) and (b), respectively. It is a continuous, non-convex, multimodal, low-dimensional, and deterministic function. Its minimum value is zero. It contains two coefficients and each coefficient is coded in 22 bits. This function is defined as

$$f_7(x) = (x_1^2 + x_2^2)^{0.25}(\sin^2(50(x_1^2 + x_2^2)^{0.1}) + 1.0) \quad (8)$$

where $-100.0 \leq x_i \leq 100.0$ for each i .

For all the algorithms (including the genetic algorithm) compared in this work, the same coding and function implementations were used. Each algorithm was run 50 times on each function, starting from different random seeds. The running time of each algorithm was measured by the UNIX `time` command.

A note on the search space size reduction using the KLS1 and KLS2 versions of the KLS algorithm follows: The size of the search space for F1 in the KLS algorithm is 2^{30} . In the case of the KLS1 algorithm, the size reduces to about $11^3 \approx 2^{10}$, and in the case of the KLS2 algorithm, the size also reduces to 2^{10} . The reductions are more significant some of the other test functions.

11 Results and Discussion

The test results are summarized in Table 2 for F1 and F2, Table 3 for F3 and F4, Table 4 for F5 and F6, and Table 5 for F7. For the solution quality (Cost

Results on F1						
Algorithm	Cost				Time (s)	
	Avr	Std	Min	Max	Avr	Std
KLS2	0.00	0.00	0.00	0.00	0.00	0.00
SA	0.00	0.00	0.00	0.00	13.26	0.63
GA	0.00	0.00	0.00	0.00	5.54	-
KLS	0.00	0.00	0.00	0.00	0.00	0.00
KLS1	0.00	0.00	0.00	0.00	0.00	0.00
Hill	0.00	0.00	0.00	0.00	0.00	0.00

Results on F2						
Algorithm	Cost				Time (s)	
	Avr	Std	Min	Max	Avr	Std
KLS2	0.00	0.00	0.00	0.00	0.00	0.00
GA	0.01	0.01	0.00	0.04	8.58	-
KLS	0.16	0.28	0.00	0.79	0.00	0.00
SA	0.45	0.45	0.00	1.00	11.08	1.73
Hill	1.58	2.18	0.00	10.04	0.00	0.00
KLS1	8.64	27.87	0.00	109.00	0.00	0.00

Table 2: Solution quality (cost) and running time (time) for each algorithm to minimize the functions F1 and F2 with the minimum values of 0 and 0, respectively. For both functions, all the algorithms hit the minimum values. For F1, the average solution quality of each algorithm is the same. For both cases, the algorithms are ranked from the best to the worst on the average solution quality.

in the tables), these tables give the average (Avr) cost, the standard deviation (Std) of the costs, the minimum (Min) cost, and the maximum (Max) cost in 50 runs; and for the running time (Time in the tables), these tables give the average and standard deviation of the running times in 50 runs. In each table, the algorithms are ranked from the best to the worst in terms of their solution qualities.

The results for simulated annealing (SA) and genetic algorithm (GA) in Table 4 and Table 5 contain “-”s since the running times were very large in those cases. For example, I had to kill the process for the SA algorithm on F5 after about 22 hours. For ranking of those runs with any results, I assumed that the solution quality was also the worst.

A value of 0.00 for running time means that the running time is less than one second. All the figures are given up to two significant digits after the decimal point to facilitate their interpretation. Also, the standard deviation figures for the genetic algorithm could not be obtained, hence, “-” in these tables, since the GAucsd package does all the runs together.

The running times of the SA and GA algorithms are usually the largest. The running times of the hill climbing algorithm is the smallest as expected since it

Results on F3						
Algorithm	Cost				Time (s)	
	Avr	Std	Min	Max	Avr	Std
GA	0.00	0.00	0.00	0.00	15.16	-
SA	5.00	0.00	5.00	5.00	7.28	0.45
KLS	5.08	0.27	5.00	6.00	0.00	0.00
KLS2	5.90	1.92	5.00	10.00	0.00	0.00
Hill	7.54	0.92	6.00	9.00	0.00	0.00
KLS1	16.10	8.23	0.00	31.00	0.00	0.00

Results on F4						
Algorithm	Cost				Time (s)	
	Avr	Std	Min	Max	Avr	Std
KLS1	-0.41	0.57	-1.57	0.84	1.40	0.66
KLS2	-1.88	0.43	-2.66	-1.03	0.00	0.00
SA	-2.31	0.34	-3.14	-1.69	114.88	4.60
KLS	-2.56	0.35	-3.37	-1.59	33.44	11.71
GA	-2.96	0.23	-3.45	-2.56	40.66	-
Hill	4.21	2.94	-0.88	15.58	0.00	0.00

Table 3: Solution quality (cost) and running time (time) for each algorithm to minimize the functions F3 and F4 with the minimum value of 0 (after my change to the original F3) and the expected minimum value of 0, respectively. For both cases, the algorithms are ranked from the best to the worst on the average solution quality. Due to the statistical nature of F4, the solution quality is measured as the distance from the expected minimum value of zero.

employs the smallest number of moves. The running times of the KLS, KLS1, and KLS2 algorithms are in between. The running time of the KLS algorithm like the SA algorithm on F5 is very large since the landscape of F5 contains many close hills and valleys, making it harder for local search algorithms. Note that as expected, the running times of the KLS1 and KLS2 algorithms are much smaller than that of the KLS algorithm since they explore smaller search spaces.

As for the solution quality, refer to Table 6, which shows the solution quality rank of each algorithm on each function as well as the average arithmetic and geometric rank of each algorithm over all functions. KLS2 has the top rank on both average rankings whereas KLS is the second best on the average arithmetic ranking and the fourth best on the average geometric ranking. SA and GA are in the middle with KLS1 and hill climbing at the bottom ranks.

Overall, excluding KLS2’s problem structure advantage, if the algorithms are grouped into tiers with respect to the solution quality, it seems SA followed by GA are the top tier; KLS is in the next tier, and hill climbing is in the bottom tier; with respect to the running times, the tier ranking is almost the reverse. All in all, the performance of KLS confirms the premise of the variable depth search approach, as predicted by Kernighan and Lin; moreover, the approach leads to

Results on F5						
Algorithm	Cost				Time (s)	
	Avr	Std	Min	Max	Avr	Std
GA	1.00	0.00	1.00	1.00	25.80	-
KLS2	1.93	3.17	1.00	12.67	0.00	0.00
KLS	2.98	3.13	1.00	11.72	107.04	50.67
KLS1	4.37	3.68	1.00	12.67	1.50	1.27
Hill	6.62	5.70	1.00	18.30	1.14	0.35
SA	-	-	-	-	-	-

Results on F6						
Algorithm	Cost				Time (s)	
	Avr	Std	Min	Max	Avr	Std
SA	0.01	0.00	0.00	0.01	65.32	6.04
KLS	0.02	0.03	0.00	0.13	0.00	0.00
KLS2	0.07	0.11	0.00	0.31	0.00	0.00
Hill	0.20	0.15	0.00	0.47	0.00	0.00
KLS1	0.47	0.05	0.31	0.50	0.00	0.00
GA	-	-	-	-	-	-

Table 4: Solution quality (cost) and running time (time) for each algorithm to minimize the functions F5 and F6 with minimum values of 1 and 0, respectively. For both cases, the algorithms are ranked from the best to the worst on the average solution quality.

algorithms (like KLS, KLS1, KLS2) that provide a great tradeoff between the solution quality and the running time.

In addition to these general observations, as the performance of KLS2 shows, taking advantage of the problem structure can lead to algorithms that can beat even the top tier algorithms. At the same time, as the performance of KLS1 shows, this is not always true. What matters is how the problem structure is taken advantage of. Learning from these, it seems advisable to try different knowledge representations and move definitions when a problem structure offers clues to specialization.

12 Conclusions

In this paper, a generalization of the variable depth search mechanism of the Kernighan-Lin and Lin-Kernighan algorithms, called the KLS algorithm, is presented. The KLS algorithm was evaluated in comparison with the hill climbing algorithm, the simulated annealing algorithm, and the genetic algorithm for function optimization on a standard test suite consisting of seven functions. The experimental results indicate that the KLS algorithm is a good candidate for combinatorial optimization based on the solution quality and the running time combined.

Results on F7						
Algorithm	Cost				Time (s)	
	Avr	Std	Min	Max	Avr	Std
KLS2	0.00	0.00	0.00	0.00	0.00	0.00
SA	0.01	0.01	0.00	0.02	23.70	4.57
KLS	0.16	0.59	0.00	2.51	0.04	0.20
Hill	3.38	3.51	0.01	10.65	0.00	0.00
KLS1	8.44	2.07	2.00	11.31	0.00	0.00
GA	-	-	-	-	-	-

Table 5: Solution quality (cost) and running time (time) for each algorithm to minimize the function F7 with a minimum value of 0. The algorithms are ranked from the best to the worst on the average solution quality.

Solution quality ranks on each function									
Algorithm	Functions							Average	
	F1	F2	F3	F4	F5	F6	F7	Arithmetic	Geometric
KLS2	1	1	4	2	2	3	1	2.00	1.74
SA	1	4	2	3	6	1	2	2.71	2.25
GA	1	2	1	5	1	6	6	3.14	2.34
KLS	1	3	3	4	3	2	3	2.71	2.52
KLS1	1	6	6	1	4	5	5	4.00	3.22
Hill	1	5	5	6	5	4	4	4.29	3.83

Table 6: The rank of each algorithm on each function F1 to F7. The last columns show the average arithmetic and geometric ranks for each algorithm where lower rank is better. The algorithms are ranked in ascending order of the average geometric rank.

Future work on the KLS algorithm may include the application of the algorithm to various combinatorial optimization problems and the design of its new versions that incorporate more knowledge-intensive approaches in the search process. Since the problem of learning while searching is very difficult [1], the KLS algorithm may suffer from the same problems that the other local search algorithms suffer.

Acknowledgments

I thank Dr. Yakup Genc for generating the three- and two-dimensional plots of the functions in my test suite. I thank Professor DeJong for his comments and grading on my class project report. Finally, I thank the authors and maintainers of the open-source Tesseract and Pytesseract software packages for optical character recognition. I used these packages to convert most of the text of this paper from the scanned copy of the 1995 class report.

References

- [1] D. H. Ackley. A connectionist machine for genetic hillclimbing. Technical Report CS-89-107, Carnegie Mellon Univ., 1989.
- [2] R. K. Ahuja, O. Ergun, J. B. Orlin, and A. P. Punnen. A survey of very large-scale neighborhood search techniques. *Discrete Applied Mathematics*, 123(1–3):75–102, Nov 2002.
- [3] E. K. Burke, T. Curtois, R. Qu, and G. V. Berghe. A time pre-defined variable depth search for nurse rostering. Technical Report NOTTCS-TR-2007-6, Univ. of Nottingham, 2007.
- [4] A. Dasdan. Graph partitioning algorithms. <https://github.com/alidasdan/graph-partitioning-algorithms>. Accessed on 2025-01-30.
- [5] A. Dasdan. Hypergraph partitioning algorithms. <https://github.com/alidasdan/hypergraph-partitioning-algorithms>. Accessed on 2025-01-30.
- [6] A. Dasdan and C. Aykanat. Two novel circuit partitioning algorithms using relaxed locking. *IEEE Trans. on CAD of Integrated Circuits and Systems*, 16(2):169–178, 1997.
- [7] A. Dasdan and K. Oflazer. Genetic synthesis of unsupervised learning algorithms. Technical Report BU-CEIS-9305, Bilkent Univ., 1993.
- [8] A. Dasdan and K. Oflazer. Genetic synthesis of unsupervised learning algorithms. In *Proc. of the Turkish Conf. on Artificial Intelligence and Neural Networks*, pages 213–20, Jun 1993.
- [9] F. Glover. Ejection chains, reference structures and alternating path methods for traveling salesman problems. *Discrete Applied Mathematics*, 65:223–53, Apr 1996.
- [10] E. F. G. Goldberg and M. C. Goldberg. An experimental study of variable depth search algorithms for the quadratic assignment problem. *Pesquisa Operacional*, 32(31):165–95, Apr 2012.
- [11] D. E. Goldberg. *Genetic algorithms in search*. Addison-Wesley, Reading, MA, 1989.
- [12] W. A. Greene. A kernighan-lin local improvement heuristic that solves some hard problems in genetic algorithms. In *Genetic and Evolutionary Computation Conference*, pages 1582–3, Jun 2003.
- [13] D. S. Johnson, C. R. Aragon, L. A. McGeoch, and C. Schevon. Optimization by simulated annealing: An experimental evaluation; part i, graph partitioning. *Operations Research*, 37(6):865–92, Nov–Dec 1989.

- [14] D. S. Johnson, C. R. Aragon, L. A. McGeoch, and C. Schevon. Optimization by simulated annealing: An experimental evaluation; part ii, graph coloring and number partitioning. *Operations Research*, 39(3):378–406, Jun 1991.
- [15] D. S. Johnson, C. H. Papadimitriou, and M. Yannakakis. How easy is local search? *J. of Computer and System Sciences*, 37(1):79–100, Aug 1988.
- [16] K. A. De Jong. *Analysis of the behavior of a class of genetic adaptive systems*. Phd thesis, University of Michigan, Ann Arbor, MI, 1975.
- [17] K. Katayama, M. Sadamatsu, and H. Narihisa. Iterated k-opt local search for the maximum clique problem. In *Proc. of the European Conf. on Evolutionary Computation in Combinatorial Optimization*, pages 84–95, 2007.
- [18] B. W. Kernighan and S. Lin. An efficient heuristic procedure for partitioning graphs. *Bell System Technical J.*, 49(2):291–307, Feb 1970.
- [19] H. R. Lourenco, O. C. Martin, and T. Stutzle. Iterated local search. Arxiv at <https://arxiv.org/abs/math/0102188>, Feb 2001.
- [20] R. Marti, P. Panos, and M. G. C. Resende, editors. *Handbook of heuristics*. Springer, Cham, 2018.
- [21] P. Merz and B. Freisleben. Greedy and local search heuristics for unconstrained binary quadratic programming. *J. of Heuristics*, 8:197–213, 2002.
- [22] C. H. Papadimitriou, A. A. Schaffer, and M. Yannakakis. On the complexity of local search. In *Proc. 22nd Annual ACM Symp. Theory of Computing*, pages 438–45, Apr 1990.
- [23] G. Paul. A variable depth sequential search heuristic for the quadratic assignment problem. Arxiv at <https://arxiv.org/abs/0912.5473>, Dec 2009.
- [24] D. Pisinger and S. Røpke. Large neighborhood search. In F. Glover and G. Kochenberger, editors, *Handbook on Metaheuristics*, pages 321–53. Kluwer, 2002. Also available at <https://arxiv.org/abs/math/0102188>.
- [25] D. Pisinger and S. Røpke. Large neighborhood search. In M. Gendreau, editor, *Handbook of Metaheuristics*, pages 399–420. Springer, 2 edition, 2010.
- [26] J. D. Schaffer, R. A. Caruana, L. J. Eshelman, and R. Das. A study of control parameters affecting online performance of genetic algorithms for function optimization. In *Proc. of the Int. Conf. on Genetic Algorithms*, pages 51–60, Jun 1989.
- [27] N. N. Schraudolph and J. J. Grefenstette. A user’s guide to GAUCSD 1.4. Technical Report CS92-249, Univ. of California, San Diego, 1992.

- [28] J. Skorin-Kapov. Tabu search applied to the quadratic assignment problem. *INFORMS J. on Computing*, 2(1):33–45, Feb 1990.
- [29] S. Lin and B. W. Kernighan. An efficient heuristic algorithm for the traveling-salesman problem. *Operations Research*, 21(2):498–516, Mar–Apr 1973.
- [30] K. Sörensen, M. Sevaux, and F. Glover. A history of metaheuristics. In M. G. C. Resende R. Martí, P. M. Pardalos, editor, *Handbook of Heuristics*, pages 791–808. Springer, Cham, 1 edition, Jan 2018. Also available at <https://arxiv.org/abs/1704.00853>.
- [31] P. M. Thompson and J. B. Orlin. The theory of cyclic transfers. Working Paper OR-200-89, MIT, Aug 1989.
- [32] L. J. J. van der Bruggen, J. K. Lenstra, and Schuur P. C. A variable depth approach for the single-vehicle pickup and delivery problem with time windows. *Transportation Science*, 27(3):298–311, Aug 1993.
- [33] L. J. J. van der Bruggen, J. K. Lenstra, and P. C. Schuur. A variable depth approach for the single-vehicle pickup and delivery problem with time windows. COSOR Memorandum 90-48, Eindhoven Univ. of Tech., Dec 1990.
- [34] Wikipedia. Metaheuristic. <https://en.wikipedia.org/wiki/Metaheuristic>. Accessed on 2025-01-30.