

Multimodal Inverse Attention Network with Intrinsic Discriminant Feature Exploitation for Fake News Detection

Tianlin Zhang¹, En Yu¹, Yi Shao¹, Shuai Li², Sujuan Hou¹ and Jiande Sun¹

¹School of Information Science and Engineering, Shandong Normal University

²School of Control Science and Engineering, Shandong University

taylorzhang19951019@gmail.com, isenn.yu@gmail.com, yi.shao.mail@gmail.com, shuaili@sdu.edu.cn, sujuanhou@sdu.edu.cn, jiandesun@hotmail.com

Abstract

Multimodal fake news detection has garnered significant attention due to its profound implications for social security. While existing approaches have contributed to understanding cross-modal consistency, they often fail to leverage modal-specific representations and explicit discrepant features. To address these limitations, we propose a Multimodal Inverse Attention Network (MIAN), a novel framework that explores intrinsic discriminative features based on news content to advance fake news detection. Specifically, MIAN introduces a hierarchical learning module that captures diverse intra-modal relationships through local-to-global and local-to-local interactions, thereby generating enhanced unimodal representations to improve the identification of fake news at the intra-modal level. Additionally, a cross-modal interaction module employs a co-attention mechanism to establish and model dependencies between the refined unimodal representations, facilitating seamless semantic integration across modalities. To explicitly extract inconsistency features, we propose an inverse attention mechanism that effectively highlights the conflicting patterns and semantic deviations introduced by fake news in both intra- and inter-modality. Extensive experiments on benchmark datasets demonstrate that MIAN significantly outperforms state-of-the-art methods, underscoring its pivotal contribution to advancing social security through enhanced multimodal fake news detection.

1 Introduction

The rapid evolution of information technology and social networks has shifted news consumption from traditional media to online platforms, enabling individuals to act as publishers and accelerating the delivery of fast, diverse, and personalized information. However, it has also enabled the spread of misinformation, frequently driven by misinterpretations, exaggerations, or deliberate falsifications, which pose significant risks to social security and stability [Shu *et al.*, 2017]. Moreover, advancements in GenAI models [Ouyang *et al.*, 2022;



Figure 1: Typical types of fake news. (a)/(b) fabricated fake news where either the text or image is authentic while the other is manipulated to create fake content. Specifically, in (a), Objects in the news image simultaneously feature a fish’s body alongside a pig’s ears and snout, highlighting categorical inconsistencies between regions; The overall semantics of the news text conflict with specific phrases when placed in the realistic context. (c) mismatched text and images from unrelated real news sources, creating inconsistent narratives.

Li *et al.*, 2022] have further lowered the barriers to creating and distributing fake news, exceeding the capacity of human judgment to identify disinformation effectively [Wang *et al.*, 2024b]. While relevant security departments have established verification mechanisms to combat fake news, the vast amount of content has made manual verification increasingly unfeasible [Zhou and Zafarani, 2020]. Consequently, the development of automated fake news detection techniques has emerged as a critical research focus to safeguard the reliability and integrity of public information.

Research on fake news detection has evolved from relying exclusively on text-based approaches [Yu *et al.*, 2017; Wu *et al.*, 2024] to incorporating multimodal content, driven by the increasing prevalence of multimedia content on social media platforms [Yu *et al.*, 2022]. However, the lack of a systematic categorization of news content poses a substantial barrier to advancing effective multimodal fake news detection methods. To address this limitation, this study introduces a novel perspective that classifies multimodal fake news into two distinct categories: a) **fabricated fake news** encompasses cases where textual and visual content appear consistent but involve deliberate manipulations or synthetic generation in one or more modalities. It presents a more formidable detection challenge, particularly given the rapid advancements in generative AI technologies [Zhao *et al.*, 2023; Li *et al.*, 2023], as demonstrated in Figures 1 (a) and (b); b) **mismatched fake news** refers to instances where textual

and visual content are semantically or logically inconsistent. These inconsistencies constitute a form of misinformation capable of distorting public perception and influencing behavior, as illustrated in Figure 1 (c).

On the one hand, detecting fabricated fake news is highly challenging, yet research in this area remains limited. While some methods leverage external knowledge to improve content understanding, they often rely heavily on the timeliness and relevance of such knowledge, introducing potential biases that may undermine performance [Wu *et al.*, 2023; Zhang *et al.*, 2024b]. Therefore, it derives the main research question of our study, **RQ 1: How to exploit the intrinsic discriminative information within each modality to identify fabricated fake news without relying on external knowledge?** On the other hand, despite recent advancements in detecting mismatched fake news, current methods still face notable limitations. These methods can be broadly categorized into auxiliary task-based approaches [Zhou *et al.*, 2020; Chen *et al.*, 2022] and attention mechanism-based approaches [Qian *et al.*, 2021; Wei *et al.*, 2022]. The former quantifies the similarity between modality representations in a shared subspace or fuses multimodal representations, while the latter captures cross-modal feature similarities to identify inconsistencies. However, both approaches often fail to extract explicit inconsistency or distinguish the inter-modal relationships into consistency and inconsistency features, leading to confusion in the model. Thus, our second research question can be summarized as, **RQ 2: How to effectively detect inconsistencies in mismatched fake news while avoiding the overemphasis on cross-modal similarities and implicit pseudo-consistency?**

To address these research questions, we propose the Multimodal Inverse Attention Network (MIAN), which leverages unimodal and multimodal intrinsic discriminative information through hierarchical interaction and explicit inconsistency without relying on external knowledge. Specifically, to capture the intrinsic discriminant features of each modality, we build a hierarchical learning module consisting of two aspects: 1) Local-to-Local, which focuses on the contextual associations within the local features; and 2) Local-to-Global, which models the relationships between global and local features. This module fully explores unimodal information from news text and images and produces refined modality-specific representations to aid MIAN in detecting fabricated fake news, i.e., targeting for **RQ 1**. To fuse multimodal features, we propose a cross-modal interaction module that facilitates interaction between the enhanced local features from different modalities, enabling effective detection of mismatched fake news, i.e., targeting for **RQ 2**. Additionally, both the hierarchical learning module and the cross-modal interaction module equip our designed inverse attention mechanism, allowing MIAN to extract explicit inconsistency features that are crucial for fake news detection. Overall, the contributions of this research can be summarized as:

- We propose MIAN, a multimodal framework that leverages intrinsic discriminant information to improve news content-based fake news detection while offering a novel perspective for capturing discriminative relationships.

- We design a hierarchical learning module that enhances unimodal features through hierarchical relationships and a cross-modal interaction module that enables deep integration of inter-modal dependencies, improving both intra- and inter-feature learning.
- We present an inverse attention mechanism to detect inconsistencies across multiple levels, enabling the model to effectively identify diverse fake news. Extensive experiments demonstrate that MIAN outperforms state-of-the-art methods in accuracy.

2 Related Work

2.1 News Content-based Methods

The lack of correlation between textual and visual content in news is a key characteristic of certain types of multimodal fake news. Consequently, several studies have focused on measuring multimodal consistency to verify the credibility of news. Zhou *et al.* [Zhou *et al.*, 2020] utilized a pre-trained image captioning model to convert images into text which achieved cross-modal semantic space alignment, then assessed the multimodal consistency between the original text and the generated image captions. Similarly, Xue *et al.* [Xue *et al.*, 2021] employed shared weights to enforce the alignment of textual and visual representations within a shared semantic space, calculating the similarity of the transformed multimodal representations. To mitigate the semantic gap between modalities, Jiang *et al.* [Jiang *et al.*, 2023] leveraged CLIP [Radford *et al.*, 2021] to extract features from news text and images, subsequently using cosine similarity to guide multimodal fusion. Chen *et al.* [Chen *et al.*, 2022] introduced cross-modal contrastive learning as an auxiliary task, and then used the Kullback-Leibler (KL) divergence to measure the ambiguity score between the latent distributions of text and image sampled from the autoencoder. Qi *et al.* [Qi *et al.*, 2021] measured multimodal entity inconsistency by calculating the similarity between entities in the news text and the corresponding visual content.

In the fusion of multimodal information, the news text and images are not simply modeled through operations such as addition or concatenation. Instead, their high-level semantic interactions are leveraged as crucial features, capturing the intricate relationships between modalities. Qian *et al.* [Qian *et al.*, 2021] extracted text features at different hierarchical levels and fused them with visual features using a contextual transformer to learn cross-modal contextual features and supplementary information. Wu *et al.* [Wei *et al.*, 2022] extracted spatial and frequency domain features from images and progressively fused them with textual features through stacked cross-attention mechanisms [Lu *et al.*, 2019]. However, their approaches primarily focus on exploring inter-modal relationships, often neglecting the role of inherent modal properties in fake news detection. Moreover, capturing high-level semantic interactions based on latent consistency cues between modalities is typically performed in a black-box manner.

2.2 External Knowledge-based Methods

Due to limitations in text length or the emergence of novel terms, discrepancies in understanding news content may

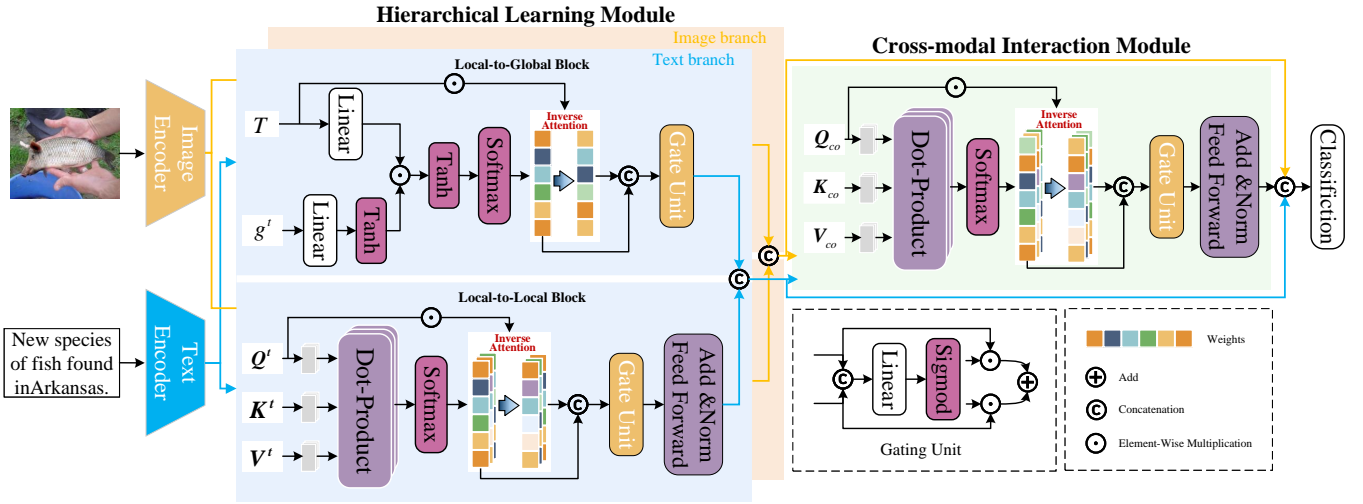


Figure 2: The proposed framework, MIAN, aims to detect fake news by fully leveraging both textual and visual content in news articles. Given a news piece, the model first utilizes modality-specific encoders to extract unimodal embeddings. Next, we apply a hierarchical learning module with different attention mechanisms in the Local-to-Global and Local-to-Local Blocks to capture and enhance hierarchical feature interactions. The enhanced unimodal features are then input into a co-attention mechanism to generate multimodal fused features. Throughout the various attention mechanisms, we incorporate an inverse attention module to explicitly extract inconsistencies between different targets. Finally, all enhanced unimodal and multimodal features are fused for fake news detection.

arise. As a result, several studies have incorporated external knowledge extracted from social media [Zhang *et al.*, 2021], knowledge graphs [Zhang *et al.*, 2019; Dun *et al.*, 2021] or internet retrieval [Zhang *et al.*, 2024a; Qi *et al.*, 2024] to enhance the performance of fake news detection. Zheng *et al.* [Zheng *et al.*, 2022] employed an attention mechanism to combine social graph features, composed of user and comment data, with textual and visual features of news, generating discriminative features for fake news detection. Wu *et al.* [Wu *et al.*, 2023] performed the deep fusion of text and image features based on three distinct reading patterns while leveraging the relationship between news comments and content to capture semantic inconsistencies. Zhang *et al.* [Zhang *et al.*, 2023] leveraged news text entities as prompts to guide a large-scale vision-language model in generating image entities that enhance the semantic knowledge of the content. Zhang *et al.* [Zhang *et al.*, 2024b] converted news images and externally relevant knowledge into pure textual representations, which were then combined with the original text and fed into a prompt-based large language model to predict the authenticity of the news. While some methods enhance the representation of news content by incorporating external knowledge, this simultaneously introduces the risk of noise, which is crucial for the accuracy of fake news detection. These challenges significantly hinder the progress of multimodal fake news detection.

3 Methodology

3.1 Overview

News content-based fake news detection aims to leverage both textual and associated visual information to evaluate the authenticity of news. Given a dataset of fake news detection $D = \{X, Y\}$, where $X = [X^T, X^V]$ represents the text X^T

and images X^V components of the news X and $Y \in \{0, 1\}$ denotes the corresponding label indicating whether the news is Fake (0) or Real (1). The objective of this model is to learn a mapping function $F : (X^T, X^V) \rightarrow Y$ on the training instances of D , aiming to map the input space (X^T, X^V) to the label vector Y . Subsequently, based on the test instances, F is utilized to predict the corresponding labels.

Our MIAN aims to fully learn intrinsic discriminant feature both in intra- and inter-modality for fake news detection, with the detailed architecture illustrated in Figure 2. We first extract unimodal embeddings from the news text and images using modality-specific encoders. For multimodal news, the text content is represented as a text embedding with m tokens $\mathbf{T} = \{t_1, t_2, \dots, t_m\}$, $\mathbf{T} \in \mathbb{R}^{m \times d}$, where each token $t_i \in \mathbb{R}^d$ is a d -dimensional vector learned from pre-trained BERT [Devlin *et al.*, 2018]. Meanwhile, we employ pre-trained ViT [Dosovitskiy *et al.*, 2020] to learn a visual embedding of image content and gain u outputs $\mathbf{O} = \{o_1, o_2, \dots, o_u\}$, $\mathbf{O} \in \mathbb{R}^{u \times d}$. We then present a hierarchical learning module with two blocks, the Local-to-Global Block and the Local-to-Local Block, which enables multi-granularity interaction to enhance unimodal representation for text and image contents respectively, the detail description is in Section 3.2. Subsequently, MIAN fuses the enhanced multimodal representations using a co-attention mechanism in the cross-modal interaction module, the more detailed description is given in Section 3.3. Additionally, to enable the model to explicitly learn inconsistency features, we design the inverse attention mechanism and integrate it into both the hierarchical learning module and the cross-modal interaction module, the specifics are discussed in Section 3.4. Finally, the enhanced modality-specific representations acquired from the hierarchical learning modules in both the text and image branches,

along with the fused representation from the cross-modal interaction module, are concatenated to form the final news representation, which is then fed into the classifier to evaluate the news authenticity.

3.2 Hierarchical Learning Module (HLM)

To comprehensively explore the internal relationships within news text and image representations and produce enhanced unimodal features, we propose the Hierarchical Learning Module (HLM). After acquiring modality-specific embeddings from pre-trained encoders for text and images, HLM further models intra-modal associations at different levels from two aspects: the Local-to-Local Block, which captures contextual interactions among local features, and the Local-to-Global Block, which establishes dependency relationships between local and global features.

Local-to-Local Block. We employ a multi-head attention mechanism [Vaswani *et al.*, 2017] to learn consistent relationships between tokens and capture intrinsic structural features, thereby generating context-aware refined local representations within each unimodal branch. Specifically, for the text modality, given the text embedding T , we first preform different multi-head linear transformations to derive the query, key, and value matrices: $Q_t^i = TW_{ll-q}^i$, $K_t^i = TW_{ll-k}^i$ and $V_t^i = TW_{ll-v}^i$, and then concatenate the outputs from the attention mechanism.

$$Att_t^i = softmax\left(\frac{Q_t^i K_t^{i\top}}{\sqrt{d_k}}\right) \quad (1)$$

$$h_t^i = Att_t^i V_t^i \quad (2)$$

$$\bar{R}_t = [h_t^1, \dots, h_t^n] W_{cat} \quad (3)$$

Where all W are learnable parameters, and d_k denotes the dimensionality. The n weighted values are concatenated using $[\cdot]$. Finally, a series of residual connections and feedforward operations are applied to produce the context-aware local-to-local enhanced features.

$$\hat{R}_t^{ll} = LN(T + W_{fc1}^{fc1} \bar{R}_t) \quad (4)$$

$$R_t^{ll} = LN\left(\hat{R}_t^{ll} + ReLU\left(W_{fc2}^{fc2} \hat{R}_t^{ll} + b\right)\right) \quad (5)$$

where W_{fc1}^{fc1} , W_{fc2}^{fc2} and b are learnable parameters. $LN(\cdot)$ and $ReLU(\cdot)$ refer to layer normalization and activation function.

Similarly, the ViT encoder transforms the segmented image into a sequential representation of local features, enabling the application of the self-attention mechanism. Following a similar process as described above, we derive R_o^{ll} .

Local-to-Global Block. This block refines local features by integrating global context, using the global features to bridge fine-grained local information with overarching semantics. Specifically, for the visual modality, given the image embedding O , we construct the global feature, which encapsulates the overall semantics of the image, from two complementary perspectives. On the one hand, $g^{mean} = 1/n \sum_{i=1}^n o_i$, which summarizes the spatial information of the entire image. On

the other hand, we use the $[cls]$ token g^{cls} output from the modality-specific encoder, which summarizes the semantic information of the target objects in the image. Finally, these two representations are concatenated to form the global feature.

$$g_o = [g^{mean}, g^{cls}] \quad (6)$$

In this block, the global features act as the query guidance vector, while the local features function as the matched vectors. Their inner product is computed to quantify the similarity between the global and local features. The resulting similarity scores are normalized using a softmax function, ensuring that the attention weights across all regions sum to 1. Specifically, the attention weights for consistency between the global high-level semantic features and the word-level semantic features of the text are computed using the following formula:

$$h_o = tanh(W_o^1 O \odot tanh(W_o^2 g_o)) \quad (7)$$

$$att_o^{lg} = softmax(W_o^3 h_o) \quad (8)$$

$$R_o^{lg} = att_o^{lg} O \quad (9)$$

where all W are learnable parameters, h_o represents the hidden state of the text attention function, and \odot represents the elementwise multiplication. The process of calculating the weighted relationship R_t^{lg} between global and local information in the news text branch is similar to that in the image branch.

Finally, we concatenate the enhanced modality-specific features output by the Local-to-Local Block and Local-to-Global Block in each modality branch to form the hierarchical enhanced representations. Specifically, for the text modality, the representation is $R_t = [R_t^{ll}, R_t^{lg}]$, and for the visual modality, it is $R_o = [R_o^{ll}, R_o^{lg}]$.

3.3 Cross-modal Interaction Module (CIM)

To fuse multimodal representations, we propose the Cross-modal Interaction Module (CIM), which leverages co-attention mechanism to capture inter-modal dependencies and effectively integrate the hierarchical enhanced representations of news text and images. Specifically, to obtain the text features enriched with image information, given the hierarchical enhanced representations R_t and R_o from the HLM, we also apply different multi-head linear transformations $Q_t^{co} = R_t W_{t-co-q}$, $K_t^{co} = R_t W_{t-co-k}$ and $V_t^{co} = R_t W_{t-co-v}$ to derive the query, key, and value matrices, respectively. Due to the similarity of operations with the Local-to-Local Block and space constraints, the specific details of the multi-head attention mechanism are omitted here.

$$Att_{t \rightarrow o}^{co} = softmax\left(\frac{Q_t^{co} K_t^{co\top}}{\sqrt{d_k}}\right) \quad (10)$$

$$\bar{R}_{t \rightarrow o}^{co} = Att_{t \rightarrow o}^{co} V_t^{co} \quad (11)$$

$$\hat{R}_t^{co} = LN(R_t + W_{co}^{fc1} \bar{R}_{t \rightarrow o}^{co}) \quad (12)$$

$$R_t^{co} = LN\left(\hat{R}_t^{co} + ReLU\left(W_{co}^{fc2} \hat{R}_t^{co} + b\right)\right) \quad (13)$$

Similarly, after applying the above process, the fused features R_o^{co} are obtained, which capture the influence of the image on the text.

3.4 Inverse Attention

Exploring intrinsic relationships between modalities remains a significant challenge in multimodal fake news detection, particularly for cases involving mismatched textual and visual content. While the widely adopted cross-attention mechanism has shown promise in modeling cross-modal interactions, it often falls short in effectively capturing inconsistencies between cross-modal features.

Specifically, cross-attention calculates the similarity between query and key vectors to identify which key vectors each query vector should attend to, and then applying the resulting similarity weights to compute a weighted sum of value vectors. While this mechanism effectively emphasizes similar content across modalities, it may inadvertently enable the network to learn implicit pseudo-consistencies, leading to confusion in fake news detection. To address this limitation, we propose the inverse attention mechanism, which amplifies dissimilar features to enhance the learning of explicit inconsistency signals. The detailed explanation of the inverse attention mechanism employed in CIM is as follows:

$$\mathbf{Att}_{t \rightarrow o}^{co-ic} = \text{softmax}(\mathbf{A} - \mathbf{Att}_{t \rightarrow o}^{co}) \quad (14)$$

$$\bar{\mathbf{R}}_{t \rightarrow o}^{co-ic} = \mathbf{Att}_{t \rightarrow o}^{co-ic} \mathbf{V}_t^{co} \quad (15)$$

where, \mathbf{A} is the introduced scalar matrix, which is used to subtract from the attention matrix $\mathbf{Att}_{t \rightarrow o}^{co}$. The matrix $\mathbf{Att}_{t \rightarrow o}^{co-ic}$ represents the inverse attention weights, where the values corresponding to inconsistent vectors are larger. $\bar{\mathbf{R}}_{t \rightarrow o}^{co-ic}$ denotes the desired explicit inconsistency features. Given the consistency feature $\bar{\mathbf{R}}_{t \rightarrow o}^{co}$ and the inconsistency features $\bar{\mathbf{R}}_{t \rightarrow o}^{co-ic}$, which provide distinct information for fake news detection, we employ a gating unit to combine them effectively:

$$g = \sigma \left(\mathbf{W}_g \left[\bar{\mathbf{R}}_{t \rightarrow o}^{co}, \bar{\mathbf{R}}_{t \rightarrow o}^{co-ic} \right] + b_g \right) \quad (16)$$

$$\mathbf{R}_{t \rightarrow o}^{co} = g \cdot \bar{\mathbf{R}}_{t \rightarrow o}^{co} + (1 - g) \cdot \bar{\mathbf{R}}_{t \rightarrow o}^{co-ic} \quad (17)$$

where, \mathbf{W}_g and b_g represent learnable parameters, while $[\cdot]$ denotes the concatenation operation. The function σ is the sigmoid function, and g is the gate weight computed during the process.

Given that inconsistencies can also arise within the content of fake news texts or images, the inverse attention mechanism is integrated into both the Local-to-Global and Local-to-Local modules. Specifically, during the computation of \mathbf{R}_t^{ll} , \mathbf{R}_o^{ll} , \mathbf{R}_t^{lg} , and \mathbf{R}_o^{lg} , similar operations to those described in Equations 14 and 15 are applied. This strategy enhances the model’s ability to learn inconsistency features both in intra- and inter-modality, thereby improving its effectiveness in detecting various types of fake news.

Notably, since interactions are performed at the token level, the values of individual elements directly influence the computation of inconsistency weights, particularly when processing textual embeddings. To mitigate the impact of irrelevant or missing information, we introduce a positional mask. Furthermore, due to the potential ambiguity in expression arising from the sequence order of text and the positional information

of objects in images, and since the attention mechanism lacks an inherent notion of sequence order, we also incorporate positional encoding information. The specific formulation is as follows:

$$PE_{(pos, 2i)} = \sin \left(\frac{pos}{10000^{\frac{2i}{d}}} \right) \quad (18)$$

$$PE_{(pos, 2i+1)} = \cos \left(\frac{pos}{10000^{\frac{2i}{d}}} \right) \quad (19)$$

where, pos , i and d represent the position index, dimension index, and the dimension of the positional encoding, respectively.

Loss function. Finally, we concatenate the enhanced modal-specific features, enriched with intra-modal inconsistency signals, and the multimodal fused features, capturing inter-modal inconsistencies, to construct the news representation \mathbf{R}_n . This representation is subsequently input into a multi-layer perceptron-based classifier to predict confidence scores, $\hat{y} = MLP(\mathbf{R}_n)$. We define the loss function L using cross-entropy as follows:

$$L = -y \log(\hat{y}) - (1 - y) \log(1 - \hat{y}). \quad (20)$$

4 Experiments

The experiments in this study aim to address several key challenges in fake news detection by exploring the following research questions:

- **Q1:** Can MIAN effectively improve the performance of fake news detection?
- **Q2:** Does each component contribute to improving detection?
- **Q3:** Can the proposed designs improve the accuracy of detecting specific types of fake news?

4.1 Configurations

Dataset. Our experiments are evaluated on four real-world datasets: Weibo17, Weibo21, GossipCop, and PolitiFact, which cover almost all publicly available datasets used for supervised learning. These datasets used in the experiments not only cover multiple domains but also include specific domain datasets where fake news frequently occurs. The detailed descriptions of these datasets are referred to Appendix A.

Baselines. To evaluate the effectiveness and performance of the proposed method in multimodal fake news detection. The baseline methods include classic models that leverage deep neural networks for extraction such as EANN [Wang *et al.*, 2018] and Spotfake [Singhal *et al.*, 2019], as well as methods exploring cross-modal relationships such as CAFE [Chen *et al.*, 2022], CMC [Wei *et al.*, 2022], BMR [Ying *et al.*, 2023] and MSACA [Wang *et al.*, 2024a], and integrating external knowledge for enhanced detection accuracy such as MRHF [Wu *et al.*, 2023]. The detailed descriptions of these methods are referred to Appendix B.

Implementation. All experiments were implemented using the Pytorch toolkit on an NVIDIA A100 GPU. We pad the sequence length of news text to 196 for all datasets, denoted as

Datasets	Methods	Acc.	Fake News			Real News		
			Pre.	Rec.	F1	Pre.	Rec.	F1
Weibo17	CAFE [Chen <i>et al.</i> , 2022]	0.840	0.855	0.830	0.842	0.825	0.851	0.837
	CMC [Wei <i>et al.</i> , 2022]	0.908	<u>0.940</u>	0.869	0.899	0.876	<u>0.945</u>	0.907
	BMR [Ying <i>et al.</i> , 2023]	<u>0.918</u>	0.882	0.948	0.914	0.942	0.870	0.904
	MRHF [Wu <i>et al.</i> , 2023]	0.907	0.939	0.869	0.903	0.879	0.931	0.904
	MSACA [Wang <i>et al.</i> , 2024a]	0.903	0.935	0.873	0.903	0.872	0.935	0.902
	RaCMC [Yu <i>et al.</i> , 2024]	0.915	0.910	<u>0.924</u>	<u>0.917</u>	0.921	0.906	0.914
	MIAN	0.936	0.950	0.920	0.935	<u>0.923</u>	0.952	0.937
Weibo21	EANN [Wang <i>et al.</i> , 2018]	0.870	0.902	0.825	0.862	0.841	0.912	0.875
	SpotFake [Singhal <i>et al.</i> , 2019]	0.851	0.953	0.733	0.828	0.786	0.964	0.866
	CAFE [Chen <i>et al.</i> , 2022]	0.882	0.857	<u>0.915</u>	0.885	0.907	0.844	0.876
	BMR [Ying <i>et al.</i> , 2023]	<u>0.929</u>	0.908	0.947	<u>0.927</u>	<u>0.946</u>	0.906	0.925
	MIAN	0.938	0.924	0.947	0.936	0.950	0.928	0.939
GossipCop	EANN [Wang <i>et al.</i> , 2018]	0.864	0.702	0.518	0.594	0.887	0.956	0.920
	SpotFake [Singhal <i>et al.</i> , 2019]	0.858	0.732	0.372	0.494	0.866	0.962	0.914
	CAFE [Chen <i>et al.</i> , 2022]	0.867	0.732	0.490	0.587	0.887	0.957	0.921
	CMC [Wei <i>et al.</i> , 2022]	0.893	<u>0.826</u>	<u>0.657</u>	<u>0.692</u>	<u>0.920</u>	<u>0.963</u>	0.935
	BMR [Ying <i>et al.</i> , 2023]	<u>0.895</u>	0.752	0.639	0.691	0.920	0.965	<u>0.936</u>
	MSACA [Wang <i>et al.</i> , 2024a]	0.887	0.816	0.538	0.646	<u>0.897</u>	0.971	0.933
	RaCMC [Yu <i>et al.</i> , 2024]	0.879	0.745	0.563	0.641	0.902	0.954	0.927
MIAN	0.923	0.834	0.872	0.853	0.956	0.941	0.948	
PolitiFact	HMCAN [Qian <i>et al.</i> , 2021]	0.864	0.738	0.933	0.824	0.960	0.828	0.889
	CAFE [Chen <i>et al.</i> , 2022]	0.898	0.895	0.872	<u>0.883</u>	0.900	0.918	0.909
	LII [Singhal <i>et al.</i> , 2022]	0.907	<u>0.895</u>	0.872	<u>0.883</u>	0.900	0.918	0.909
	CMC [Wei <i>et al.</i> , 2022]	0.893	0.826	0.657	0.692	0.920	<u>0.963</u>	0.935
	RaCMC [Yu <i>et al.</i> , 2024]	<u>0.922</u>	0.833	0.926	0.877	0.967	0.921	<u>0.943</u>
	MIAN	0.953	0.971	<u>0.919</u>	0.944	<u>0.941</u>	0.980	0.960

Table 1: Results of comparison among different approaches on Weibo17, Weibo21, GossipCop and PolitiFact Datasets. The best performance is highlighted in bold and the follow-up is highlighted in underlined.

$m = 196$, and put the processed text into the BERT¹. Images were resized to 224×224 pixels and subsequently divided into $u = 14 \times 14$ patches, which were then input into the vit-patch16-224². The multi-head attention used in both the Local-to-Local Block and the Cross-modal Interaction Module consists of 2 layers with 12 heads. The initial learning rate was set to $2e^{-6}$, and we utilized the StepLR decay strategy with a decay step of 20 and a decay rate of 0.5 to help the model converge better.

4.2 Overall Performance

Table 1 presents the performance results of the proposed method and the comparison methods on the public datasets. Although our method does not achieve the highest precision or recall, it outperforms the other comparison methods in terms of accuracy and F1 score, demonstrating its superior balance and overall performance, thus resolving **Q1**.

EANN and SpotFake, as early classic methods, simply concatenate the multimodal features obtained from modal-specific encoders to represent news, and do not perform well. This is likely due to their failure to further explore unimodal features and the lack of cross-modal interactions. CAFE and BMR highlight the importance of unimodal features in decision-making, with BMR achieving suboptimal results on certain datasets, suggesting that unimodal news content contributes to fake news detection. HMCAN and MSACA at-

¹<https://huggingface.co/google-bert/bert-base-uncased>

²<https://huggingface.co/google/vit-base-patch16-224>

Datasets	w/o models	Acc.	Fake F1	Real F1
Weibo17	MIAN	0.936	0.935	0.937
	w/o intra-ig	0.906	0.902	0.909
	w/o intra-ig-ic	0.910	0.907	0.912
	w/o intra-ll-ic	0.913	0.910	0.916
	w/o inter-ic	0.908	0.905	0.910

Table 2: The ablation experiment on the F1 score of the variant structure design on the Weibo17 dataset.

tempt to extract multi-level unimodal features from modal-specific encoders but do not yield strong performance, indicating that when exploring unimodal features, it is crucial to consider their specific role in the fake news detection task and fully leverage the interactions between them. Moreover, HMCAN exhibits a significantly higher F1 score for real news compared to fake news, which could be due to the use of a co-attention mechanism to model cross-modal information, where the model overemphasizes modal consistency and overlooks the stronger inconsistencies present in fake news.

Additionally, we provide the t-SNE visualization of the features for real and fake news in Figure 3. Since the LII model also generates discriminative features through enhanced intra- and inter-modal methods, it serves as a comparison model to MIAN. It demonstrates that the features learned by the proposed model are more discriminative.

Methods	Real	Fake		Avg.
	0	4	5	
HMCAN	0.776	0.804	0.968	0.822
CAFE	0.907	0.794	0.938	0.842
LII	0.909	0.840	0.941	0.773
MIAN	0.920	0.843	0.972	0.870

Table 3: Performance comparison to different models in terms of accuracy on the True, False Connection, and Manipulation Content classes of the Fakeddit dataset.

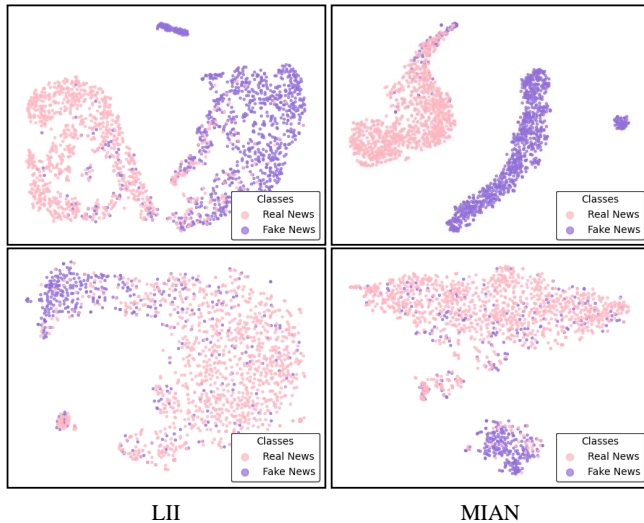


Figure 3: t-SNE visualization of the mined features on the test sets of Wei17 (first row) and GossipCop (second row).

4.3 Ablation Studies

Impact of each component. In order to address Q2, we evaluate MIAN against its variants by systematically removing specific components. Specifically, w/o intra-lg refers to eliminating the Local-to-Global Block, thereby removing the interaction between global and local features within both text and image branches. w/o intra-lg-ic and w/o intra-ll-ic refer to removing the inconsistency features generated by inverse attention at different levels within the same modality (Local-to-Global and Local-to-Local, respectively). w/o inter-ic refers to excluding inconsistent information between modalities.

Table 2 presents the results of the ablation experiments comparing various method variants, demonstrating the following key findings: (1) In the multimodal fake news detection task, comprehensive and in-depth unimodal information is essential. Extracting features from text or images aids the model in understanding the news content more effectively. (2) The loss of inconsistency information at any stage significantly impacts the accuracy of the detection results, particularly for fake news. Other metrics and results on the GossipCop dataset can be found in the Appendix C.1.

Impact of different types. To further validate the effectiveness of the proposed method in identifying both fabricated news and mismatched news, we introduce the Fakeddit dataset [Nakamura *et al.*, 2019], which includes multiple fake news categories. In this dataset, label 0 represents real

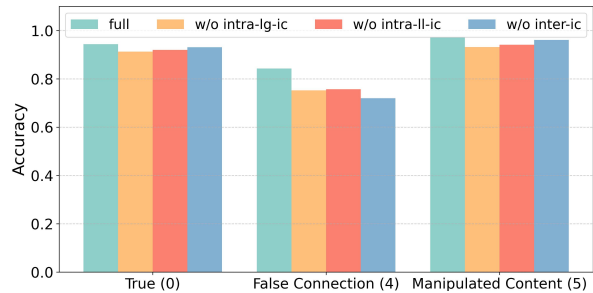


Figure 4: The performance of different variants of the proposed model in terms of accuracy on the True, False Connection, and Manipulation Content classes in the Fakeddit dataset.

news, label 4 corresponds to False Connection, and label 5 denotes Manipulation Content, all of which align with the focus of our study. This experiment answers Q3, demonstrating that our specific design significantly enhances the accuracy of detecting various types of news.

For the comparative experiments, three representative methods were selected for comparison with our approach: HMCAN, which employs a co-attention mechanism to fuse multimodal information; CAFE, which utilizes the semantic differences between modalities as auxiliary tasks; and LII, which simultaneously leverages both intra-modal and inter-modal relationships. The results, presented in Table 3, demonstrate that our method achieves superior performance.

Furthermore, the ablation study, shown in Figure 4, reveals that removing unimodal modeling or inconsistency feature extraction results in notable accuracy degradation in categories 5 (Manipulated Content) and 4 (False Connection). This indicates that the proposed modules effectively identify both fabricated news and mismatched news. The details of the comparison and ablation experiments on other categories of the Fakeddit dataset can be found in Appendix C.2.

5 Conclusion & Limitations

In this paper, we propose MIAN, a novel multimodal fake news detection method that effectively identifies various types of fake news. MIAN explores hierarchical interactions within news text and image contents to generate enhanced unimodal representations, and then utilizes a co-attention mechanism to model inter-modal dependencies for multimodal feature fusion. Additionally, we introduce an inverse attention mechanism from a new perspective to explicitly learn and extract intra- and inter-modal inconsistencies. Experimental results demonstrate that the proposed method achieves optimal accuracy and effectively detects different types of fake news.

Despite the promising results, our method currently relies on a single image per news article, which could lead to information bias between the two modalities. Future work could address this by extending the approach to incorporate multiple images per news article.

References

- [Chen *et al.*, 2022] Yixuan Chen, Dongsheng Li, Peng Zhang, Jie Sui, Qin Lv, Lu Tun, and Li Shang. Cross-modal ambiguity learning for multimodal fake news detection. In *Proceedings of the ACM Web Conference 2022*, pages 2897–2905, 2022.
- [Devlin *et al.*, 2018] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [Dosovitskiy *et al.*, 2020] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- [Dun *et al.*, 2021] Yaqian Dun, Kefei Tu, Chen Chen, Chunyan Hou, and Xiaojie Yuan. Kan: Knowledge-aware attention network for fake news detection. In *Proceedings of the AAAI conference on artificial intelligence*, volume 35, pages 81–89, 2021.
- [Jiang *et al.*, 2023] Ye Jiang, Xiaomin Yu, Yimin Wang, Xiaoman Xu, Xingyi Song, and Diana Maynard. Similarity-aware multimodal prompt learning for fake news detection. *Information Sciences*, 647:119446, 2023.
- [Li *et al.*, 2022] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *International conference on machine learning*, pages 12888–12900. PMLR, 2022.
- [Li *et al.*, 2023] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, pages 19730–19742. PMLR, 2023.
- [Lu *et al.*, 2019] Jiasen Lu, Dhruv Batra, Devi Parikh, and Stefan Lee. Vlbart: Pretraining task-agnostic vision-and-language representations for vision-and-language tasks. *Advances in neural information processing systems*, 32, 2019.
- [Nakamura *et al.*, 2019] Kai Nakamura, Sharon Levy, and William Yang Wang. r/fakeddit: A new multimodal benchmark dataset for fine-grained fake news detection. *arXiv preprint arXiv:1911.03854*, 2019.
- [Ouyang *et al.*, 2022] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- [Qi *et al.*, 2021] Peng Qi, Juan Cao, Xirong Li, Huan Liu, Qiang Sheng, Xiaoyue Mi, Qin He, Yongbiao Lv, Chenyang Guo, and Yingchao Yu. Improving fake news detection by using an entity-enhanced framework to fuse diverse multimodal clues. In *Proceedings of the 29th ACM International Conference on Multimedia*, pages 1212–1220, 2021.
- [Qi *et al.*, 2024] Peng Qi, Zehong Yan, Wynne Hsu, and Mong Li Lee. Sniffer: Multimodal large language model for explainable out-of-context misinformation detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13052–13062, 2024.
- [Qian *et al.*, 2021] Shengsheng Qian, Jinguang Wang, Jun Hu, Quan Fang, and Changsheng Xu. Hierarchical multimodal contextual attention network for fake news detection. In *Proceedings of the 44th international ACM SIGIR conference on research and development in information retrieval*, pages 153–162, 2021.
- [Radford *et al.*, 2021] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- [Shu *et al.*, 2017] Kai Shu, Amy Sliva, Suhang Wang, Jiliang Tang, and Huan Liu. Fake news detection on social media: A data mining perspective. *ACM SIGKDD explorations newsletter*, 19(1):22–36, 2017.
- [Singhal *et al.*, 2019] Shivangi Singhal, Rajiv Ratn Shah, Tanmoy Chakraborty, Ponnurangam Kumaraguru, and Shin’ichi Satoh. Spofake: A multi-modal framework for fake news detection. In *2019 IEEE fifth international conference on multimedia big data (BigMM)*, pages 39–47. IEEE, 2019.
- [Singhal *et al.*, 2022] Shivangi Singhal, Tanisha Pandey, Saksham Mrig, Rajiv Ratn Shah, and Ponnurangam Kumaraguru. Leveraging intra and inter modality relationship for multimodal fake news detection. In *Companion Proceedings of the Web Conference 2022*, pages 726–734, 2022.
- [Vaswani *et al.*, 2017] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [Wang *et al.*, 2018] Yaqing Wang, Fenglong Ma, Zhiwei Jin, Ye Yuan, Guangxu Xun, Kishlay Jha, Lu Su, and Jing Gao. Eann: Event adversarial neural networks for multimodal fake news detection. In *Proceedings of the 24th acm sigkdd international conference on knowledge discovery & data mining*, pages 849–857, 2018.
- [Wang *et al.*, 2024a] Jiandong Wang, Hongguang Zhang, Chun Liu, and Xiongjun Yang. Fake news detection via multi-scale semantic alignment and cross-modal attention. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 2406–2410, 2024.
- [Wang *et al.*, 2024b] Li Wang, Xiangtao Meng, Dan Li, Xuhong Zhang, Shouling Ji, and Shanqing Guo. Deep-faker: a unified evaluation platform for facial deepfake and

- detection models. *ACM Transactions on Privacy and Security*, 27(1):1–34, 2024.
- [Wei *et al.*, 2022] Zimian Wei, Hengyue Pan, Linbo Qiao, Xin Niu, Peijie Dong, and Dongsheng Li. Cross-modal knowledge distillation in multi-modal fake news detection. In *ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 4733–4737. IEEE, 2022.
- [Wu *et al.*, 2023] Lianwei Wu, Pusheng Liu, and Yanning Zhang. See how you read? multi-reading habits fusion reasoning for multi-modal fake news detection. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 13736–13744, 2023.
- [Wu *et al.*, 2024] Lianwei Wu, Linyong Wang, and Yongqiang Zhao. Unified evidence enhancement inference framework for fake news detection. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24*, pages 6541–6549, 2024.
- [Xue *et al.*, 2021] Junxiao Xue, Yabo Wang, Yichen Tian, Yafei Li, Lei Shi, and Lin Wei. Detecting fake news by exploring the consistency of multimodal data. *Information Processing & Management*, 58(5):102610, 2021.
- [Ying *et al.*, 2023] Qichao Ying, Xiaoxiao Hu, Yangming Zhou, Zhenxing Qian, Dan Zeng, and Shiming Ge. Bootstrapping multi-view representations for fake news detection. In *Proceedings of the AAAI conference on Artificial Intelligence*, volume 37, pages 5384–5392, 2023.
- [Yu *et al.*, 2017] Feng Yu, Qiang Liu, Shu Wu, Liang Wang, Tieniu Tan, et al. A convolutional approach for misinformation identification. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-17*, pages 3901–3907, 2017.
- [Yu *et al.*, 2022] En Yu, Jianhua Ma, Jiande Sun, Xiaojun Chang, Huaxiang Zhang, and Alexander G Hauptmann. Deep discrete cross-modal hashing with multiple supervision. *Neurocomputing*, 486:215–224, 2022.
- [Yu *et al.*, 2024] Xinquan Yu, Ziqi Sheng, Wei Lu, Xi-angyang Luo, and Jiantao Zhou. Racmc: Residual-aware compensation network with multi-granularity constraints for fake news detection. *arXiv preprint arXiv:2412.18254*, 2024.
- [Zhang *et al.*, 2019] Huaiwen Zhang, Quan Fang, Shengsheng Qian, and Changsheng Xu. Multi-modal knowledge-aware event memory network for social media rumor detection. In *Proceedings of the 27th ACM international conference on multimedia*, pages 1942–1951, 2019.
- [Zhang *et al.*, 2021] Xuexiao Zhang, Juan Cao, Xirong Li, Qiang Sheng, Lei Zhong, and Kai Shu. Mining dual emotion for fake news detection. In *Proceedings of the web conference 2021*, pages 3465–3476, 2021.
- [Zhang *et al.*, 2023] Qiang Zhang, Jiawei Liu, Fanrui Zhang, Jingyi Xie, and Zheng-Jun Zha. Hierarchical semantic enhancement network for multimodal fake news detection. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 3424–3433, 2023.
- [Zhang *et al.*, 2024a] Fanrui Zhang, Jiawei Liu, Jingyi Xie, Qiang Zhang, Yongchao Xu, and Zheng-Jun Zha. Escnet: Entity-enhanced and stance checking network for multi-modal fact-checking. In *Proceedings of the ACM on Web Conference 2024*, pages 2429–2440, 2024.
- [Zhang *et al.*, 2024b] Qiang Zhang, Jiawei Liu, Fanrui Zhang, Jingyi Xie, and Zheng-Jun Zha. Natural language-centered inference network for multi-modal fake news detection. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24*, volume 2024, pages 2542–2550, 2024.
- [Zhao *et al.*, 2023] Liang Zhao, En Yu, Zheng Ge, Jinrong Yang, Haoran Wei, Hongyu Zhou, Jianjian Sun, Yuang Peng, Runpei Dong, Chunrui Han, et al. Chatspot: Bootstrapping multimodal llms via precise referring instruction tuning. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24*, pages 1743–1752, 2023.
- [Zheng *et al.*, 2022] Jiaqi Zheng, Xi Zhang, Sanchuan Guo, Quan Wang, Wenyu Zang, and Yongdong Zhang. Mfan: Multi-modal feature-enhanced attention networks for rumor detection. In *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence, IJCAI-22*, volume 2022, pages 2413–2419, 2022.
- [Zhou and Zafarani, 2020] Xinyi Zhou and Reza Zafarani. A survey of fake news: Fundamental theories, detection methods, and opportunities. *ACM Computing Surveys (CSUR)*, 53(5):1–40, 2020.
- [Zhou *et al.*, 2020] Xinyi Zhou, Jindi Wu, and Reza Zafarani. Similarity-aware multi-modal fake news detection. In *Pacific-Asia Conference on knowledge discovery and data mining*, pages 354–367. Springer, 2020.

A Datasets

The dataset descriptions are as follows:

1. *Weibo17*: The Weibo17 dataset consists of news posts collected from May 2012 to January 2016. The authenticity of the news is determined by the authoritative Chinese news agency Xinhua News Agency for real news, and by the official debunking system of Sina for fake news. Each post in the Weibo17 dataset includes three components: textual content, accompanying images, and social context. The proposed method in this study does not utilize external knowledge such as social context information, focusing solely on the textual and visual information of the news. Hence, all other components except the required two modalities are filtered out.
2. *Weibo21*: The Weibo21 dataset consists of news posts collected from December 2014 to March 2021, covering nine domains including Science, Military, Education, Disasters, Politics, Health, Finance, Entertainment, and Society. The fake news is publicly confirmed on the official platform of Weibo Community Management Center, while the real news is verified by NewsVerify8. Each post in the Weibo21 dataset includes news content, news images, user comments, publication time, and domain labels. Therefore, the processing procedure is similar to Weibo17.
3. *GossipCop*: The GossipCop is an entertainment news website dedicated to providing news reports and gossip information about celebrities, stars, movies, television, music, and other aspects of the entertainment industry. Additionally, the website verifies rumors and fake news in entertainment news and reveals the truth behind them. They verify or debunk various rumors and news reports in the entertainment industry through investigation, interviews with relevant individuals, and verification of reliable sources. The GossipCop dataset is collected from the website’s publications from July 2000 to December 2018. The proposed method in this study applies deep learning techniques to analyze this dataset.
4. *PolitiFact*: The PolitiFact is a non-profit, independent news organization dedicated to fact-checking political statements and verifying their accuracy. They investigate and evaluate statements and claims made by politicians, government agencies, political organizations, and the media to reveal the truth and debunk misinformation. The PolitiFact dataset is collected from the website’s publications from May 2002 to July 2018. The proposed method in this study leverages deep learning techniques for analyzing this dataset.

In the experiments, except for the Weibo17 dataset, which retains the same data splitting scheme as the baseline, the remaining datasets are divided into training and testing sets in a 9:1 ratio. Additionally, detailed statistical information on the preprocessed datasets is presented in Table 4.

B Baselines

1. EANN [Wang *et al.*, 2018]: It proposes a model consist-

Datasets	Train set		Test set		Total
	Fake	Real	Fake	Real	
Weibo17	4168	4301	464	478	9411
Weibo21	4038	4176	450	464	9128
GossipCop	3743	10355	417	1152	15667
PolitiFact	337	444	38	51	870

Table 4: The statistics of datasets

- ing of a features extractor, a fake news detector, and a time discriminator, which is capable of extracting time-invariant features. This method utilizes adversarial neural networks to remove event-specific features from the fused textual-image features, enabling the transferability to newly emerging fake news. By effectively extracting and leveraging time-invariant features, EANN demonstrates improved performance in detecting fake news across different time periods.
2. Spotfake [Singhal *et al.*, 2019]: In this algorithm, the pre-trained language models, such as BERT, is applied to extract textual content, while VGG19 is set up to obtain image features.
 3. HMCAN [Qian *et al.*, 2021]: It proposes a novel approach for modeling contextual information in a hierarchical multimodal setting. This method combines multi-level textual features extracted from 12 layers of BERT with visual features extracted from ResNet. By utilizing a co-attention mechanism, HMCAN hierarchically models the contextual information across different modalities.
 4. LII [Singhal *et al.*, 2022]: It proposes a novel structure that effectively identifies and suppresses information from weaker modalities while extracting relevant information from stronger modalities for each sample. It utilizes a modality-wise relation learning module to learn feature representations within each modality and capture the relations between different modalities.
 5. CAFE [Chen *et al.*, 2022]: It addresses the ambiguity problem in multimodal data by evaluating the cross-modal ambiguity learning using Kullback-Leibler divergence. This method dynamically controls the importance of cross-modal features and unimodal features by leveraging the learned ambiguity scores. By incorporating the ambiguity scores, CAFE effectively manages the trade-off between cross-modal and unimodal information, resulting in improved performance in handling the ambiguity in multimodal data.
 6. CMC [Wei *et al.*, 2022]: It proposes a cross-modal knowledge distillation method for improving the performance of multimodal fake news detection. It achieves information fusion and sharing across different modalities through knowledge transfer and modality alignment.
 7. BMR [Ying *et al.*, 2023]: It introduces textual, image pattern, image semantics, and multimodal consistency information to make predictions from multiple perspectives. It dynamically weighs the importance of each

perspective and achieves adaptive weighting and guided feature fusion through the Improved Multi-gate Mixture-of-Expert network.

8. MSACA [Wang *et al.*, 2024a]: It propose the Multi-scale Semantic Alignment and Cross-modal Attention (MSACA) network, which addresses the challenge of aligning text and image modalities at multiple scales. The model constructs hierarchical multi-scale image representations, enhances semantic consistency between text and image embeddings, and employs a cross-modal attention mechanism to select the most discriminative features.
9. MRHF [Wu *et al.*, 2023]: It introduces Multi-reading Habits Fusion Reasoning Networks (MRHFR) to address the limitations of shallow multimodal fusion and modality inconsistency in fake news detection. The model incorporates a cognition-aware fusion layer, inspired by three cognitive reading habits, to deeply integrate multimodal features, and a coherence constraint reasoning layer to measure and resolve semantic inconsistencies between modalities.
10. RaMCM [Yu *et al.*, 2024]: It introduces a multiscale residual-aware compensation module to effectively fuse cross-modal features, and a multi-granularity constraints module that refines classification by amplifying differences between real and fake news at both the news and feature levels. This approach improves feature alignment for real news and separation for fake news, enhancing the overall detection performance.

C Supplementary Experiments

C.1 The detailed experiments

We conducted ablation experiments on the Weibo17 and GossipCop datasets, and the results are shown in table 5. In the ablation experiments on both datasets, our model demonstrated strong performance on Weibo17 and GossipCop, particularly achieving optimal results in accuracy (Acc) and F1 score. Although on GossipCop, precision and recall did not surpass some of the baseline models, the optimal F1 score indicates that our method strikes a good balance between precision and recall. We attribute this observation to the nature of the GossipCop dataset, where mismatches between text and images are more prevalent in the entertainment domain. Future work will focus on further optimizing recall and precision, especially in cases of class imbalance or high data noise, to improve the model’s generalization ability.

C.2 Experiments on Fakeddit

To further validate the effectiveness of our method, we introduced the Fakeddit dataset. Unlike the common datasets mentioned earlier, where each news article is only labeled as either real or fake, the Fakeddit dataset not only has labels indicating the authenticity of the news but also includes specific labels for five different types of fake news. These labels are True, Satire/Parody, Misleading Content, Imposter Content, and False Connection and Manipulate Content. Here is a brief explanation of each label:

- 0 (True): True content is accurate in accordance with fact. Eight of the subreddits fall into this category, such as usnews and mildlyinteresting. The former consists of posts from various news sites. The latter encompasses real photos with accurate captions.
- 1 (Satire/Parody): This category consists of content that spins true contemporary content with a satirical tone or information that makes it false. One of the four subreddits that make up this label is theonion, with headlines such as “Man Lowers Carbon Footprint By Bringing Reusable Bags Every Time He Buys Gas”.
- 2 (Misleading Content): This category consists of information that is intentionally manipulated to fool the audience. Our dataset contains three subreddits in this category.
- 3 (Imposter Content): This category contains two subreddits, which contain bot-generated content and are trained on a large number of other subreddits.
- 4 (False Connection): Submission images in this category do not accurately support their text descriptions. We have four subreddits with this label, containing posts of images with captions that do not relate to the true meaning of the image.
- 5 (Manipulated Content): Content that has been purposely manipulated through manual photo editing or other forms of alteration. The photoshopbattle subreddit comments (not submissions) make up the entirety of this category. Samples contain doctored derivatives of images from the submissions.

Tables 6 and figure 5 present the comparative and ablation experiment results of our approach across all categories in the Fakeddit dataset. In the comparative experiments, the proposed method achieved the best performance in the categories of True, Satire/Parody, Misleading Content, False Connection, and Manipulated Content, and second-best in the Imposter Content category. This demonstrates that MIAN has strong generalization ability across different types of fake news. In the ablation experiments, other model variants exhibited varying degrees of accuracy degradation, indicating that our proposed fake news classification approach effectively covers various fake news categories, and the introduced modules contribute to improving the model’s performance.

The t-SNE visualizations of the features extracted by MIAN and other methods (CAFE, HMCAN, and LII) on the Fakeddit dataset, as shown in Figure 6, highlight the superior performance of MIAN in separating the six classes of news. Unlike the other methods, MIAN demonstrates clear and distinct clustering, with minimal overlap between real and fake news categories. This indicates that MIAN effectively captures discriminative features across modalities, leading to improved classification accuracy. In contrast, CAFE, HMCAN, and LII exhibit more significant overlap, especially in distinguishing fake news types, suggesting that MIAN’s approach to hierarchical learning and cross-attention is more effective in handling the complexities of multimodal fake news detection.

Datasets	w/o models	Acc.	Fake News			Real News		
			Pre.	Rec.	F1	Pre.	Rec.	F1
Weibo17	MIAN	0.936	0.950	0.920	0.935	0.923	0.952	0.937
	w/o intra-lg	0.906	0.921	0.884	0.902	0.891	0.927	0.909
	w/o intra-lg-ic	0.910	0.920	0.894	0.907	0.900	0.925	0.912
	w/o intra-ll-ic	0.913	0.924	0.897	0.910	0.902	0.929	0.916
	w/o inter-ic	0.908	0.918	0.892	0.905	0.898	0.923	0.910
GossipCop	MIAN	0.901	0.872	0.755	0.809	0.909	0.961	0.934
	w/o intra-lg	0.895	0.860	0.722	0.785	0.905	0.957	0.930
	w/o intra-lg-ic	0.901	0.856	0.734	0.780	0.915	0.952	0.933
	w/o intra-ll-ic	0.893	0.827	0.755	0.789	0.914	0.943	0.928
	w/o inter-ic	0.898	0.875	0.719	0.789	0.905	0.960	0.932

Table 5: Ablation study on the architecture design of variant on Weibo17 and GossipCop datasets.

Methods	Real News		Fake News					Macro Avg.	
	0	1	2	3	4	5	Micro Avg.		
HMCAN	0.776	0.777	0.704	0.627	0.804	0.968	0.822	0.785	
CAFE	0.907	0.866	0.795	0.819	0.794	0.938	0.842	0.853	
LII	0.909	0.752	0.645	0.687	0.840	0.941	0.773	0.802	
MIAN	0.920	0.918	0.797	0.818	0.843	0.972	0.870	0.881	

Table 6: Comparison of accuracy of different models on Fakeddit dataset.

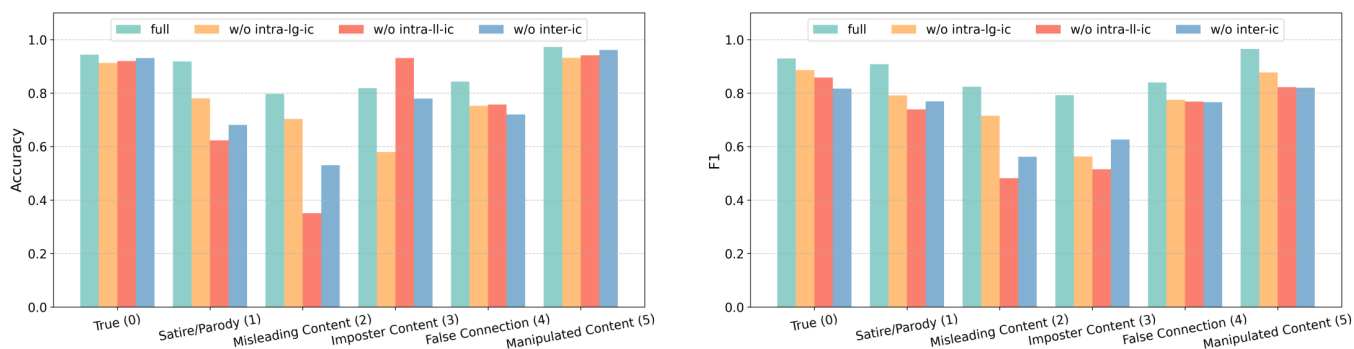


Figure 5: The performance of MIAN and its variants on the Fakeddit multiclass classification task.

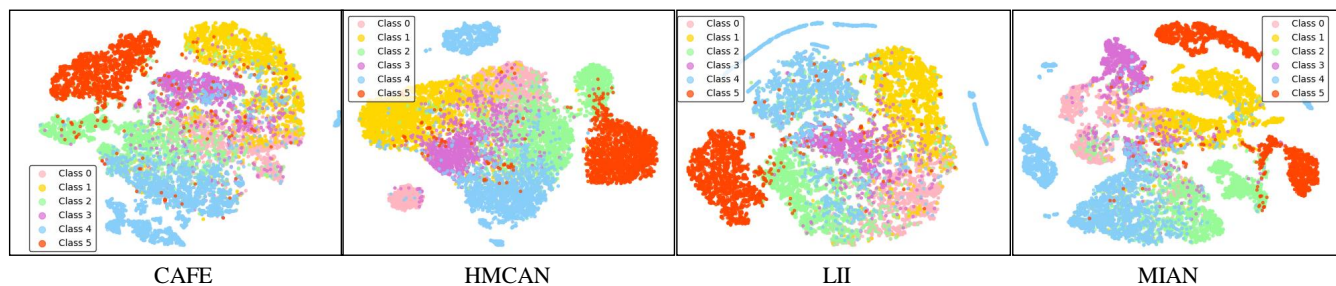


Figure 6: t-SNE visualization of the features extracted by the proposed method and other approaches on the Fakeddit dataset.