

PRIVACY ATTACKS ON IMAGE AUTOREGRESSIVE MODELS

Antoni Kowalczyk *

CISPA Helmholtz Center for Information Security
antoni.kowalczyk@cispa.de

Jan Dubiński *

Warsaw University of Technology, IDEAS NCBR
jan.dubinski.dokt@pw.edu.pl

Franziska Boenisch

CISPA Helmholtz Center for Information Security
boenisch@cispa.de

Adam Dziejcz

CISPA Helmholtz Center for Information Security
adam.dziejcz@cispa.de

ABSTRACT

Image AutoRegressive generation has emerged as a new powerful paradigm with image autoregressive models (IARs) surpassing state-of-the-art diffusion models (DMs) in both image quality (FID: 1.48 vs. 1.58) and generation speed. However, the privacy risks associated with IARs remain unexplored, raising concerns regarding their responsible deployment. To address this gap, we conduct a comprehensive privacy analysis of IARs, comparing their privacy risks to the ones of DMs as reference points. Concretely, we develop a novel membership inference attack (MIA) that achieves a remarkably high success rate in detecting training images (with a TPR@FPR=1\% of 86.38% vs. 4.91% for DMs with comparable attacks). We leverage our novel MIA to provide dataset inference (DI) for IARs, and show that it requires as few as 6 samples to detect dataset membership (compared to 200 for DI in DMs), confirming a higher information leakage in IARs. Finally, we are able to extract hundreds of training data points from an IAR (e.g., 698 from VAR-*d30*). Our results demonstrate a fundamental privacy-utility trade-off: while IARs excel in image generation quality and speed, they are significantly more vulnerable to privacy attacks compared to DMs. This trend suggests that utilizing techniques from DMs within IARs, such as modeling the per-token probability distribution using a diffusion procedure, holds potential to help mitigating IARs' vulnerability to privacy attacks. We make our code available at¹.

1 INTRODUCTION

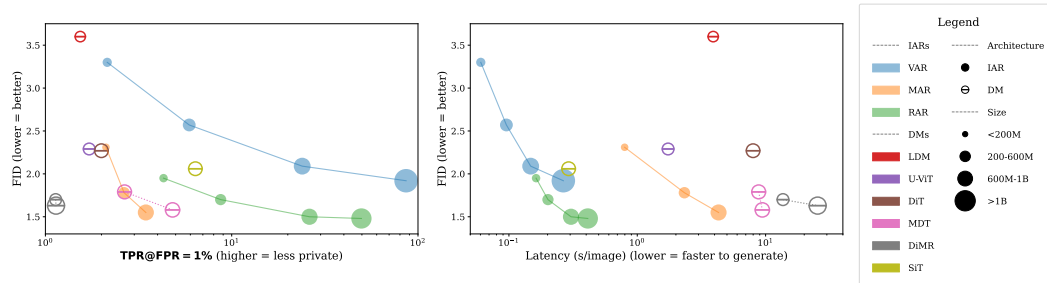


Figure 1: **Privacy-utility and generation speed-performance trade-off for IARs compared to DMs.** 1) IARs achieve better and faster image generation, but reveal more information to potential training data identification attacks. 2) In particular, large IAR models are most vulnerable. 3) In case of large IARs, even the identification of individual training samples (MIAs) has a high success rate. 4) MAR models are more private than other IARs. We attribute it to the inclusion of a diffusion module in this architecture.

*Equal contribution.

¹https://github.com/sprintml/privacy_attacks_against_iars

The field of visual generative modeling has seen rapid advances in recent years, primarily due to the rise of Diffusion Models (DMs) (Sohl-Dickstein et al., 2015) that achieve impressive performance in generating highly detailed and realistic images. For this ability, they currently act as the backbones of commercial image generators (Rombach et al., 2022; Team, 2022; Saharia et al., 2022). Yet, recently, their performance was further surpassed through novel image autoregressive models (IARs). Over the last months, IARs have been achieving new state-of-the-art performance for class-conditional (Tian et al., 2024; Yu et al., 2024; Li et al., 2024) and text-conditional (Han et al., 2024; Tang et al., 2024; Fan et al., 2024) generation. The crucial improvement of their training cost and generation quality results from the *scaling laws* that previously were observed for large language models (LLMs) (Kaplan et al., 2020) with which they share both a training paradigm and architectural foundation. As a result, with more compute budget, and larger datasets, IARs can achieve better performance than their DM-based counterparts.

At the same time, the privacy risks of IARs remain largely unexplored, posing challenges for their responsible deployment. While privacy risks, such as the leakage of training data points at inference time, have been demonstrated for DMs and LLMs (Carlini et al., 2021; 2023; Huang et al., 2024; Wen et al., 2024), no such evaluations currently exist for IARs. As a result, the extent to which IARs may similarly expose sensitive information remains an open question, underscoring the necessity for rigorous privacy investigations in this context.

To address this gap and investigate the privacy risks associated with IARs, we conduct a comprehensive analysis using multiple perspectives on privacy leakage. First, we develop a new membership inference attack (MIA) (Shokri et al., 2017), which aims to determine whether a specific data point was included in an IAR’s training set—a widely used approach for assessing privacy risks. We find that existing MIAs developed for DMs (Carlini et al., 2023; Duan et al., 2023; Kong et al., 2023; Zhai et al., 2024) or LLMs (Mattern et al., 2023; Shi et al., 2024), are ineffective for IARs, as they rely on signals specific to their target model. We combine elements of MIAs from DMs and LLMs into our new MIA based on the shared properties between the models. For example, we leverage the fact that IARs, similarly to LLMs, perform per-token prediction to obtain signal from every predicted token. However, while LLMs’ training is fully self-supervised (e.g., by predicting the next word), the training of IARs can be conditional (based on a class or prompt) as in DMs. We exploit this property and compute the difference in outputs between conditional and unconditional inputs as an input to MIAs. This approach allows us to achieve a remarkably strong performance of **86.38%** $\text{TPR}@FPR=1\%$.

We employ our novel MIA to provide an efficient dataset inference (DI) (Maini et al., 2021) method for IARs. DI generalizes MIAs by assessing membership signals over entire datasets, providing a more robust measure of privacy leakage. Additionally, we optimize DI for IARs by eliminating the stage of MIA selection for a given dataset, which was necessary for prior DIs on LLMs (Maini et al., 2024) and DMs (Dubifski et al., 2024). Since our MIAs for IARs consistently produce higher scores for members than for non-members, all MIAs can be utilized without any selection. This optimization reduced the number of samples required for DI in IARs to as few as 6 samples, which is significantly fewer than at least 200 samples required for DI in DMs. Finally, we examine the privacy leakage from IARs through the lens of memorization (Feldman, 2020; Wen et al., 2024; Huang et al., 2024). Specifically, we assess the IARs’ ability to reproduce verbatim outputs from their training data during inference. We demonstrate that IARs have a substantial tendency to verbatim memorization by extracting 698 training samples from VAR-*d*30, 36 from RAR-XXL, and 5 from MAR-H. These results highlight the varying degrees of memorization across models and reinforce the importance of mitigating privacy risks in IARs. Together, these approaches form a comprehensive framework for evaluating the privacy risks of IARs.

Our empirical analysis of state-of-the-art IARs and DMs across various scales further shows that IARs are notably more susceptible to privacy leakage than DMs. We also explore the trade-offs between privacy risks and other model properties. Specifically, we find that, while IARs are more cost-efficient, faster, and more accurate in generation than DMs, they exhibit significantly greater privacy leakage (see Figure 1). These findings highlight a critical trade-off between performance, efficiency, and privacy in IARs.

In summary, we make the following contributions:

- Our new MIA for IARs achieves extremely strong performance of even **86.38%** TPR@FPR=1%, improving over naive application of MIAs by up to **69%**
- We provide a potent DI method for IARs, which requires as few as **6** samples to assess dataset membership signal.
- We propose an efficient method of training data extraction from IARs, and successfully extract up to **698** images.
- IARs outperform DMs in generation efficiency and quality but suffer **order-of-magnitude** higher privacy leakage compared to them in MIAs, DI, and data extraction.

2 BACKGROUND AND RELATED WORK

Notation. We first introduce the notation used throughout the remainder of this paper. Let C, H, W, N denote the number of channels, height, width, and sequence length, respectively. We represent an *original image* as $x \in \mathbb{R}^{C \times H \times W}$ and a *generated image* as $\hat{x} \in \mathbb{R}^{C \times H \times W}$. The *tokenized image* is denoted as $t \in \mathbb{N}^N$, while the *generated token sequence* is represented as $\hat{t} \in \mathbb{N}^N$.

Image AutoRegressive modeling. Originally, Chen et al. (2020) defined image autoregressive modeling as:

$$p(x) = \prod_{n=1}^N p(t_n | t_1, t_2, \dots, t_{n-1}), \quad (1)$$

where N is the number of pixels in the image, t_i is the value of i^{th} pixel of image $x \sim \mathcal{D}_{\text{train}}$ (training data), where pixels follow raster-scan order, row-by-row, left-to-right. During training, the goal is to minimize negative log-likelihood:

$$L_{AR} = \mathbb{E}_{x \sim \mathcal{D}_{\text{train}}} [-\log(p(x))]. \quad (2)$$

However, learning pixel-level dependencies directly is computationally expensive. To address the issue, VQ-GAN (Esser et al., 2020) transforms the task from next-pixel to next-token prediction. First, the VQ-GAN’s encoder maps an image into (lower resolution) latent feature vector, which is then quantized into a sequence of tokens, by a learnable codebook. In effect, the sequence length is short, which enables higher-resolution and high-quality generation. Then, tokens are generated and projected back to the image space by VQ-GAN’s decoder. All the subsequent IARs we introduce, utilize tokens from VQ-GAN. This token-based formulation aligns image generation more closely with natural language processing. Additionally, similarly to autoregressive language models such as GPT-2 (Radford et al.), which generate text by sequentially predicting tokens, modern IARs also employ transformer-based (Vaswani et al., 2017) architectures to model dependencies between image tokens. We focus on the recent state-of-the-art IARs.

VAR (Tian et al., 2024) is a novel approach to image generation, which shifts the focus of traditional autoregressive learning from next-token to next-scale prediction. Unlike classical IARs, which generate 1D token sequences from images by raster-scan orders, VAR introduces a coarse-to-fine multi-scale approach, encoding images into hierarchical 2D token maps and predicting tokens progressively from lower to higher resolutions. This preserves spacial locality and significantly improves scalability and inference speed.

RAR (Yu et al., 2024) introduces bidirectional context modeling into IAR. Building on findings from language modeling, specifically BERT (Devlin et al., 2019), RAR highlights the limitations of unidirectional approach, and enhances training by randomly permuting token sequences and utilizing bidirectional attention. RAR optimizes Equation (2) over all possible permutations, enabling the model to capture bidirectional dependencies, resulting in higher quality generations.

MAR (Li et al., 2024) uses a small DM to model $p(x)$ from Equation (1), and samples tokens from it during inference. MAR is trained with the following loss objective:

$$L_{DM} = \mathbb{E}_{\epsilon, s} [\|\epsilon - \epsilon_{\theta}(t_n^s | s, z)\|^2], \quad (3)$$

where $\epsilon \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$, ϵ_{θ} is the DM, $t_n^s = \sqrt{\bar{\alpha}_s} t_n + \sqrt{1 - \bar{\alpha}_s} \epsilon$ and $\bar{\alpha}_s$ is DDIM’s (Song et al., 2020) noise schedule, s is the timestep for diffusion process, and z is conditioning input, obtained from the

autoregressive backbone, from the previous tokens. This loss design allows MAR to operate with continuous-valued tokens, contrary to VAR and RAR, which use discrete tokens. MAR also integrates masked prediction strategies from MAE (He et al., 2022), into the IAR paradigm. Specifically, MAR predicts masked tokens, based on unmasked ones, formulated as $p(x \cdot \neg M \mid x \cdot M)$, where $M \in [0, 1]^N$ is random binary mask. Like to RAR, MAR utilizes bidirectional attention during training. Its autoregressive backbone differs from other IARs, as MAR employs a ViT (Dosovitskiy et al., 2021) backbone.

Sampling for IARs is based on $p(x)$, which models the distribution of the next token conditioned on the previous ones in the sequence. For VAR and RAR, operating on discrete tokens, the next token can be predicted via greedy or top- k sampling. In contrast, MAR samples tokens by the DM module, which performs 100 DDIM (Song et al., 2020) denoising steps. During a single sampling step, VAR outputs a 2D token map, RAR predicts a single token, and MAR generates a batch of tokens.

3 PRIVACY EVALUATION FRAMEWORKS

We assess IARs’ privacy risks from the three perspectives of membership inference, dataset inference, and memorization.

3.1 MEMBERSHIP INFERENCE

Membership Inference Attacks (MIAs) (Shokri et al., 2017) aim to identify whether a specific data point was part of the training dataset for a given machine learning model.

Many MIAs have been proposed for DMs (Duan et al., 2023; Zhai et al., 2024; Carlini et al., 2023; Kong et al., 2023), but these methods are tailored to DM-specific properties and do not transfer easily to IARs. For instance, some directly exploit the denoising loss (Carlini et al., 2023), while others (Kong et al., 2023), leverage discrepancies in noise prediction between clean and noised samples. CLiD (Zhai et al., 2024) sources membership signal from the difference between conditional and un-conditional prediction of the DM. Since IARs are also trained with conditioning input, we leverage CLiD to design our MIAs in Section 5.1.

MIAs are also popular against LLMs (Mattern et al., 2023; Shi et al., 2024), where they often use per-token logit outputs. For example, Shi et al. (2024) introduce the MIN-K% PROB metric, which computes the mean of the lowest $k\%$ -log-likelihoods in the sequence, where k is a hyper-parameter. Zlib (Carlini et al., 2021) leverages the compression ratio of predicted tokens using *zlib* (Gailly & Adler, 2004) to adjust the metric to input sequence complexity. Hinge (Bertran et al., 2024) computes the mean distance between tokens’ log-likelihood and the maximum of the remaining log-likelihoods. SURP (Zhang & Wu, 2024) computes the mean log-likelihood of tokens with the lowest $k\%$ -log-likelihoods, where k is a pre-defined threshold. MIN-K%++ (Zhang et al., 2024b) is based on MIN-K% PROB, but per-token log-likelihoods are normalized by the mean and standard deviation of preceding tokens. CAMIA (Chang et al., 2024) computes the mean log-likelihood of values smaller than the mean, the mean of log-likelihoods smaller than that of preceding tokens, and the slope of log-likelihoods. A detailed description of MIAs is in Appendix B.1. While LLM MIAs seem a natural choice for membership inference on IARs, it is unclear whether language-domain approaches transfer. We show this transferability is limited (see Section 5.1); hence, we design novel MIAs by exploiting unique IAR properties. Our methods significantly improve over initial MIAs with up to **69%** higher TPR@FPR=1% than baselines.

3.2 DATASET INFERENCE

Dataset Inference (DI) (Maini et al., 2021) aims to determine whether a specific dataset was included in a model’s training set. Therefore, instead of focusing on individual data points like MIAs, DI aggregates the membership signal across a larger set of training points. With this strong signal, it can uniquely identify whether a model was trained on a given (private) dataset, leveraging strong statistical evidence. Similarly to MIAs, DI can serve as a proxy for estimating privacy leakage from a given machine learning model: DI provides insight into how easily one can determine which datasets were used to train a model, for instance, by analyzing the effect size from statistical tests. A higher success rate in DI indicates greater potential privacy leakage.

Previous DI Methods. For supervised models, DI involves three steps: (1) obtaining specific features from data samples, observing that training data points are farther from decision boundaries than test samples, (2) aggregating the extracted information through a binary classifier, and (3) applying statistical tests to identify the model’s train set. This approach was later extended to self-supervised learning models (Dziedzic et al., 2022), where training data representations differ from test data, and then to LLMs (Maini et al., 2024) and DMs Dubiński et al. (2024) to identify training datasets in large generative models. Since DI relies on model-specific properties, it is completely unclear how it can be applied to IARs. We propose how to make DI applicable and effective for IARs.

Setup for DI. DI relies on two data sets: (suspected) member and (confirmed) non-member sets. First, the method extracts features for each sample using MIAs. Next, it aggregates the features for each sample, and obtains the final score, which is designed so that it should be higher for members. Then, it formulates the following hypothesis test: H_0 : mean(scores of suspected member samples) \leq mean(scores of non-members), and uses the Welch’s t-test for evaluation. If we reject H_0 at a confidence level $\alpha = 0.01$, we claim that we confidently identified suspected members as actual members of the training set.

Since the strength of the t-test depends on the size of both sample sets, the goal is to reject H_0 with as few samples as possible. Intuitively, as the difference in a model’s behavior between member and non-member samples increases, rejecting H_0 becomes easier. A larger difference also indicates greater information leakage, allowing us to use DI to compare models in terms of privacy risks. For instance, if model A allows rejection of H_0 with 100 samples, while model B requires 1000 samples, model A exhibits higher leakage than model B. Throughout this paper, we refer to the minimum number of samples required to reject the null hypothesis as P .

Assumptions about Data. For the hypothesis test to be sound, the suspected member set and non-member set must be independently and identically distributed. Otherwise, the t-test result will be affected by the distribution mismatch between these sets, yielding a false positive prediction.

3.3 MEMORIZATION

Memorization in generative models refers to the models’ ability to reproduce training data exactly or nearly indistinguishably at inference time. While MIAs and DI assess if given samples were used to train the model, memorization enables extracting training data directly from the model (Carlini et al., 2021; 2023)—highlights an *extreme* privacy risk.

In the vision domain, a data point x is memorized, if the distance $l(x, \hat{x})$ from the original x and the generated \hat{x} image is smaller than a pre-defined threshold τ (Carlini et al., 2023). We use the same definition when evaluating our extraction attack in Section 5.3.

Intuitively, in LLMs, memorization can be understood as the model’s ability to reconstruct a training sequence t when given a prefix c (Carlini et al., 2021). Specifically, $t = \operatorname{argmax}_{t' \in \mathbb{N}^N} p_\theta(t'|c)$, where p_θ is the probability distribution of the sequence t' , parameterized by the LLM’s weights θ , akin to Equation (1). This formulation states we can extract the training sequence t by constructing a prefix c that makes the model output t , with greedy sampling.

Similarly to LLMs, IARs complete an image given an initial portion (a prefix), which we leverage for designing our data extraction attack. In contrast, extraction from DMs can rely only on the conditioning input (class label or text prompt), which is costly and highly inefficient, *e.g.*, work by Carlini et al. (2023) requires generating **175M** images to find just 50 memorized ones, and no memorization has been shown for other large DMs. In contrast, we extract up to **698** training samples from IARs by conditioning them on part of the tokenized image, requiring only **5000** generations.

4 EXPERIMENTAL SETUP

We evaluate state-of-the-art IARs: VAR- $d\{16, 20, 24, 30\}$ (d = model depth), RAR- $\{B, L, XL, XXL\}$, MAR- $\{B, L, H\}$, trained for class-conditioned generation. The IARs’ sizes cover a broad spectrum between 208M for MAR-B, and 2.1B parameters for VAR- $d30$. We use IARs shared by the authors of their respective papers in their repositories, with details in Appendix C. As these models were trained on ImageNet-1k (Deng et al., 2009) dataset, we use it to perform our privacy attacks. For MIA and DI, we take 10000 samples from the training set as members and also 10000 samples from

the validation set as non-members. To perform data extraction attack, we use all images from the training data. Additionally, we leverage the known validation set to check for false positives. For MIA and DI we use 10000 samples from the training and validation sets, as members and non-members.

5 OUR METHODS FOR ASSESSING PRIVACY IN IARS

5.1 TAILORING MEMBERSHIP INFERENCE FOR IARS

Table 1: **Performance of our MIAs vs baselines.** We report TPR@FPR=1% for best MIAs per model.

Model	VAR- <i>d</i> 16	VAR- <i>d</i> 20	VAR- <i>d</i> 24	VAR- <i>d</i> 30	MAR-B	MAR-L	MAR-H	RAR-B	RAR-L	RAR-XL	RAR-XXL
Baselines	1.62	2.21	3.72	16.68	1.69	1.89	2.18	2.36	3.25	6.27	14.62
Our Methods	2.16	5.95	24.03	86.38	2.09	2.61	3.40	4.30	8.66	26.14	49.80
Improvement	+0.54	+3.73	+20.30	+69.69	+0.40	+0.73	+1.22	+1.94	+5.41	+19.87	+35.17

Baselines. We comprehensively analyze how existing MIAs designed for LLMs transfer to IARs. Our results in Table 1 (detailed in Appendix F) indicate that off-the-shelf MIAs for LLMs perform poorly when directly applied to IARs. We report the TPR@FPR=1% metric to measure the true positive rate at a fixed low false positive rate, which is a standard metric to evaluate MIAs (Carlini et al., 2022). For smaller models, such as VAR-*d*16 and MAR-B, all MIAs exhibit performance close to random guessing ($\sim 1\%$). As model size and the number of parameters increase, the membership signal strengthens, improving MIAs’ performance in identifying member samples. Even in the best case (CAMIA with TPR@FPR=1% of 16.69% on the large VAR-*d*30), the results indicate that the problem of reliably identifying member samples remains far from being solved. These findings align with results reported for other types of generative models, as demonstrated by Maini et al. (2024); Zhang et al. (2024a); Duan et al. (2024) in their evaluation of MIAs on LLMs and by Dubiński et al. (2024); Zhai et al. (2024) for DMs, where the utility of MIAs for models trained on large datasets was shown to be severely limited.

Our MIAs for VARs and RARs. To provide powerful MIAs for IARs, we leverage the models’ key properties. Specifically, we exploit the fact that IARs utilize classifier-free guidance (Ho & Salimans, 2022) during training, *i.e.*, in the forward pass, images are processed both with and without conditioning information, such as class label. This distinguishes IARs from LLMs, which are trained without explicit supervision (no conditioning). Consequently, MIAs designed for LLMs fail to take advantage of this additional conditioning information present in IARs. We incorporate this into our MIAs by building on CLiD (Zhai et al., 2024), computing output differences between conditional and unconditional inputs—using this difference as an input to MIAs, instead of per-token logits. Our results in Table 1 show even up to a **69.69%** increase in TPR@FPR=1% for the VAR-*d*30 model.

Our MIAs for MARs. Many MIAs for LLMs (Hinge, MIN-K%++, SURP) require logits to compute their membership scores. However, we cannot apply these MIAs to MAR since MAR predicts continuous tokens instead of logits. We instead use per-token loss values obtained from Equation (3) to adapt other LLM MIAs (Loss, Zlib, MIN-K% PROB, CAMIA). As the tokens for MAR are generated using a small diffusion module, we can apply insights from MIAs designed for DMs and target the diffusion module directly in our attack. We detail our MIA improvements for MAR, which counter randomness from the diffusion process and binary masks.

Improvement 1: Adjusted Binary Masks. MAR extends the IAR framework by incorporating masked prediction, where masked tokens are inferred from visible ones. We hypothesize that adjusting the masking ratio during inference amplifies membership signals. Increasing this parameter from 0.86 (training average) to 0.95 improves MIA, suggesting an optimal masking rate exposes more membership information.

Improvement 2: Fixed Timestep. Carlini et al. (2023) found MIAs on DMs perform best at a specific denoising step t . Since tokens in MAR are generated using a small diffusion module, we exploit this by executing MIAs at a fixed t rather than a randomly chosen one. Interestingly, $t = 500$ is the most discriminative, unlike full-scale DMs, where $t = 100$ gives the strongest signal.

Improvement 3: Reduced Diffusion Noise Variance. The MAR loss in Equation (3) exhibits high variance due to randomly sampled noise ϵ . To mitigate this, we increase noise sampling from the default 4 during training to 64, computing the mean loss for a more stable signal.

Table 2: **Ablation of improvements to MAR MIAs.** Each modification further strengthens the membership signal. We report TPR@FPR=1% values and gains.

Method	MAR-B	MAR-L	MAR-H
Baseline	1.69	1.89	2.18
+ Adjusted Binary Mask	1.88 (+0.19)	2.25 (+0.36)	2.88 (+0.70)
+ Fixed Timestep	1.88 (+0.00)	2.41 (+0.17)	3.30 (+0.42)
+ Reduced Noise Variance	2.09 (+0.21)	2.61 (+0.20)	3.40 (+0.10)

More detailed description of these improvements can be found in Appendix E. Our results in Table 2 highlight the importance of our changes to evaluate MAR’s privacy leakage correctly. Thanks to our improved MIAs we do not under-report the privacy leakage they exhibit.

Overall Performance and Comparison to DMs We present our results in Figure 1, evaluate overall privacy leakage and compare IARs to DMs based on the TPR@FPR=1% of MIAs. In general, smaller and less performant models exhibit lower privacy leakage, which increases with model size. Notably, VAR-*d*30 and RAR-XXL achieve TPR@FPR=1% values of 86.38% and 49.80%, respectively, indicating a substantially higher privacy risk in IARs compared to DMs. In contrast, the highest TPR@FPR=1% observed for DMs is only 4.91% for MDTv2-XL/2 (see also Table 13). Furthermore, MIAs are significantly less effective at identifying member samples in MARs. We attribute this to MAR’s use of a diffusion loss function (Equation (3)) for modeling per-token probability, which replaces categorical cross-entropy loss and eliminates the need for discrete-valued tokenizers.

5.2 DATASET INFERENCE

Table 3: **DI for IARs.** We report the reduction in the number of samples required to carry out DI. Our improvements to the DI procedure can enable DI on IARs even with fewer than 10 samples.

Model	VAR- <i>d</i> 16	VAR- <i>d</i> 20	VAR- <i>d</i> 24	VAR- <i>d</i> 30	MAR-B	MAR-L	MAR-H	RAR-B	RAR-L	RAR-XL	RAR-XXL
Baseline	2000	300	60	20	5000	2000	900	500	200	40	30
+Optimized Procedure	600	200	40	8	4000	2000	800	300	80	30	10
Improvement	-1400	-100	-20	-12	-1000	0	-100	-200	-120	-10	-20
+Our MIAs for IARs	200	40	20	6	2000	600	300	80	30	20	8
Improvement	-400	-160	-20	-2	-2000	-1400	-500	-220	-50	-10	-2

While our results in Table 1 demonstrate impressive MIA performance for large models (such as VAR-*d*30 with 2.1B parameters), privacy risk assessment for smaller models (such as VAR-*d*16 with 310M parameters) needs improvement. To address this, we draw insights from previous work on DI (Maini et al., 2024; Dubiński et al., 2024), which has proven effective when MIAs fail to achieve satisfactory performance. The advantage of DI over MIAs lies in its ability to aggregate signals across multiple data points while utilizing a statistical framework to amplify the membership signal, yielding more reliable privacy leakage assessment. We find that while the framework of DI is applicable to IARs, key parts must be improved to boost DI’s effectiveness on IARs. We detail our improvements.

Improvement 1: Optimized DI Procedure. Existing DI techniques for LLMs (Maini et al., 2024) and DMs (Dubiński et al., 2024) follow a four-stage process, with the third stage involving training a linear classifier. This classifier weights, scales, aggregates, and strengthens signals from individual MIAs, where each MIA score serves as a feature. This step is crucial for selecting the most effective MIAs while suppressing ineffective ones that could introduce false results. However, we observe that MIA features for IARs are well-behaved, *i.e.*, on average, they are consistently higher for members than non-members. Thus, instead of training a linear classifier on MIA features, which requires additional auditing data, we adopt a more efficient approach: simply summing the MIA scores across all samples. This eliminates the need to allocate scarce auditing data for classifier training. The only preprocessing required is normalizing features by scaling them to the range [0, 1] before summation.

Our results for the optimized DI procedure are presented in Table 3. We observe a significant reduction in the number of samples required to perform DI for smaller models, with reductions of up to 70% for VAR-*d*16. Additionally, we conduct a similar ablation study by replacing the linear classifier in CDI (Dubiński et al., 2024) for DMs with simple feature summation (Table 15). However, unlike in our approach for IARs, this modification leads to worse results for these models, suggesting that the linear classifier remains necessary for DMs.

Improvement 2: Our MIAs for IARs. Our results in Table 3 indicate that as model size increases, the membership signal is amplified, enabling DI to achieve better performance with fewer samples. However, the main problem is the mixed reliability of DI when utilizing baseline MIAs as feature extractors. This issue is especially evident for smaller models, such as VAR- $d16$ and MAR-B, where DI requires thousands of samples to successfully reject the null hypothesis H_0 when the suspect set is part of the training data. Building on the performance gains of our tailored MIAs (Table 1) we apply them to the DI framework as the more powerful feature extractors to further strengthen DI for IARs. Our improvements through stronger MIAs further enhance DI, fully exposing privacy leakage in IAR models. As a result, the number of required samples to execute DI drops to a few hundred, for example, down to only 200 for VAR- $d16$. Overall, as shown in Table 3, replacing the linear classification model with summation and transitioning to our MIAs for IARs as feature extractors significantly reduces the number of samples required to reject H_0 .

Overall Performance and Comparison to DMs.

We present our results in Figure 2, evaluating the overall privacy leakage and comparing IARs to DMs based on the number of required samples (P) to perform DI. Recall that a lower P under the DI framework indicates greater privacy vulnerability, as it means fewer data points are needed to reject the null hypothesis H_0 . Our findings indicate that the same trend observed in MIAs extends to DI. Overall, models with a higher TPR@FPR=1% in Table 1 for MIAs also require smaller suspect sets P for DI. Specifically, DI shows that larger models exhibit greater privacy leakage, with VAR- $d30$ and RAR-XXL being the most vulnerable. Crucially, our results clearly demonstrate that IARs are significantly more susceptible to privacy leakage than DMs. While MDT shows lower generative quality (as indicated by a higher FID), it requires substantially more samples for DI (higher P value), resulting in much lower privacy leakage.

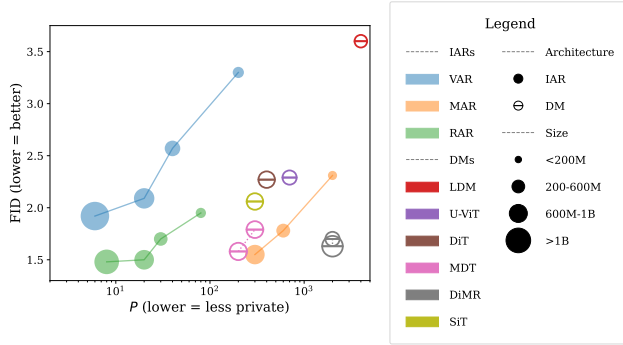


Figure 2: **DI success for IARs vs DMs.** We report the generative quality expressed with the FID score vs the number of suspect samples P required to carry out DI.

5.3 EXTRACTING TRAINING DATA FROM IARs

To analyze memorization in IARs, we design a novel training data extraction attack for IARs. This attack builds on elements of data extraction attacks for LLMs (Carlini et al., 2021) and DMs (Carlini et al., 2023). Integrating elements from both domains is required since IARs operate on tokens (similarly to LLMs), which are then decoded and returned as images (similarly to DMs). In particular, we observe that, on the token level, IARs exhibit behavior previously seen in LLMs (Carlini et al., 2021). Namely, for memorized samples, they tend to complete the *correct ending* of a token sequence when prompted with the sequence’s prefix. We exploit this behavior and 1) identify candidate samples that might be memorized, 2) generate them by starting from a prefix in their token space and sampling the remaining tokens from the IAR, and finally 3) compare the generated image with the original candidate image. We report a sample as memorized when the generated image is nearly identical to the original image. Here, we detail the building blocks of the attack.

1) Candidate Identification. To reduce the computational costs, we do not simply generate a large pool of images, but identify promising candidate samples that might be memorized, before generation. Specifically, we feed an entire tokenized image t into the IAR, which predicts the full token sequence \hat{t} in a *single step*. Then, we compute the distance between original and predicted sequence, $d(t, \hat{t})$, which we use to filter promising candidates. This approach is efficient, since for IARs the entire token sequence can be processed at once, significantly faster than iterative sampling. For VAR and RAR we use per-token logits, and apply greedy sampling, with $d(t, \hat{t}) = 100 - \frac{100 \cdot \sum_{i=1}^N \mathbb{1}(t_i = \hat{t}_i)}{N}$ —an average prediction error. For MAR, we sample 95% of the tokens from the remaining 5% unmasked in a single step, and set $d(t, \hat{t}) = \|t - \hat{t}\|_2^2$, as MAR’s tokens are continuous. Following the intuition

that \hat{t} is memorized if $\hat{t} = t$, for each model, for each class we select top-5 samples with the smallest d , and obtain 5000 candidates per model. We show the success of our filtering in Appendix I.3.

2) Generation. Then, for each candidate we select the first i tokens as a prefix. The parameter i is a hyperparameter and we present our best choices for the models in Table 16. We perform iterative greedy sampling of the remaining tokens in the sequence for VAR and RAR, and for MAR we sample from the DM batch by batch. We do not use classifier-free guidance during generation. We note that our method *does not* produce false positives, *i.e.*, we do not generate samples from the validation set.

3) Assessment. Finally, we decode the obtained \hat{t} into images, and assess the similarity to the original t . Following Wen et al. (2024) we use SSCD (Pizzi et al., 2022) score as to calculate the similarity, and set the threshold $\tau = 0.75$ such that samples with a similarity $\geq \tau$ will be flagged as memorized.

Results. In Figure 3 we show example memorized samples from VAR- $d30$, RAR-XXL, and MAR-H. We are not able to extract memorized images from smaller versions of these IARs. In Table 4 we see that the extent of memorization is severe, with VAR- $d30$ memorizing **698** images. We observe lower memorization for MAR-H and RAR-XXL, which is intuitive, as results from Sections 5.1, and 5.2 show that VAR- $d30$ is the most vulnerable to MIA and DI. Surprisingly, there is no memorization in token space, *i.e.*, $t \neq \hat{t}$, we observe it only in the pixel space. We provide more examples of memorized images in Appendix I.1.

Table 4: Count of Extracted Training Samples per IAR.

Model	VAR- $d30$	MAR-H	RAR-XXL
Count	698	5	36

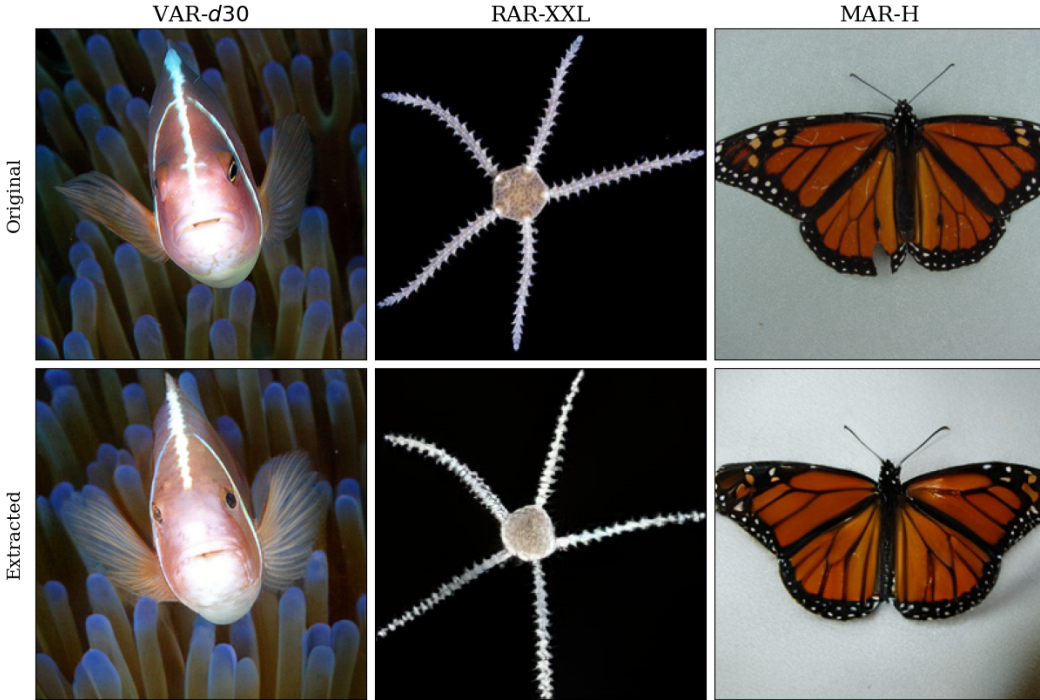


Figure 3: **Extracted Training Samples.** IARs can reconstruct verbatim images from their training data. The first row shows the original training samples, and the second presents the extracted images.

Memorization Insights. Many memorized samples share a noticeable pattern: their backgrounds deviate from the “default” or typical scene, as shown in Figure 7 and Appendix I.1. We hypothesize that when a prefix contains part of this “unusual” background, the IAR is conditioned to reproduce the specific training image that featured it. Additionally, several extracted images appear as poorly executed center crops with skewed proportions, *e.g.*, the wine bottle in Figure 6. These findings suggest that memorization is driven by distinct visual cues in the prefix and can lead to generating replicas of training data. Moreover, the same **5** samples were extracted from both VAR- $d30$ and

RAR-XXL, *i.e.*, the same 5 training images are memorized by both models. One sample is memorized by both VAR-*d30* and MAR-H (Fig. 7 and 8).

Our results contrast with findings on DMs (Carlini et al., 2023), where extracting training data requires far more computation. The high memorization in IARs likely stems from their size, as VAR-*d30* has 2.1B parameters—more than twice the number of parameters in DMs investigated in prior work. Importantly, our results also show a link between IAR size and memorization, with bigger IARs memorizing more. Scaling laws suggest that as IARs grow larger, their performance improves, but so does their tendency to memorize.

6 MITIGATION STRATEGIES

Our privacy assessment methods rely on precise outputs from IARs. We exploit this insight to design defenses that mitigate privacy risks by perturbing model outputs, *e.g.*, with random noise. For VAR and RAR, we noise the logits, while for MAR, we add noise to continuous tokens after sampling. Our preliminary evaluation in Appendix H shows that the defenses are insufficient for VAR and RAR, as reducing privacy attack success comes at the cost of substantially lower performance. In contrast, our proposed defense helps protect MAR even more, with a relatively low performance drop. However, MAR already exhibits the lowest privacy attack success rate. This further emphasizes that leveraging diffusion techniques is a promising direction toward strong privacy safeguards for IARs.

7 DISCUSSION AND CONCLUSIONS

IARs surpass DMs in image quality and generation speed. However, our comprehensive analysis demonstrates that IARs exhibit significantly higher privacy risks than DMs. Concretely, we develop novel MIA for IARs that leverages components of the strongest MIAs from LLMs and DMs to reach an extremely high **86.38%** TPR@FPR=1%, as opposed to merely 4.91% for the strongest MIAs in respective DMs. Our DI method further confirms the high privacy leakage from IARs by showing that only **6** samples are required to detect dataset membership, compared to at least 200 for reference DMs. We also create a new data extraction attack for IARs that reconstruct even up to **698** training images from VAR-*d30*, while previous work showed only 50 images extracted from DMs. Our results clearly indicate the fundamental privacy-utility trade-off for IARs, where their higher performance comes at the cost of more severe privacy leakage. We explore preliminary mitigation strategies inspired primarily by diffusion-based approaches, however, the initial results indicate that dedicated privacy-preserving techniques are necessary. Our findings highlight the need for stronger safeguards in the deployment of these models, especially in sensitive applications.

BROADER IMPACT

Image autoregressive models (IARs) have rapidly gained popularity for their strong image generation abilities. However, the privacy risks that come associated to these advancements have remained unexplored. This work makes a first step towards identifying and quantifying these risks. Through our findings, we highlight that IARs experience significant leakage of private data. These findings are relevant to raise awareness of the community and to steer efforts towards designing dedicated defenses. This enables a more ethical deployment of these models.

ACKNOWLEDGMENTS

This work was supported by the German Research Foundation (DFG) within the framework of the Weave Programme under the project titled "Protecting Creativity: On the Way to Safe Generative Models" with number 545047250. We also gratefully acknowledge support from the Initiative and Networking Fund of the Helmholtz Association in the framework of the Helmholtz AI project call under the name "PAFMIM", funding number ZT-I-PF-5-227. Responsibility for the content of this publication lies with the authors. This research was also supported by the Polish National Science Centre (NCN) within grant no. 2023/51/I/ST6/02854 and 2020/39/O/ST6/01478 and by Warsaw University of Technology within the Excellence Initiative Research University (IDUB) programme.

REFERENCES

- Code repository for torchprofile python library., 2021. URL <https://github.com/zhijian-liu/torchprofile>.
- Martin Bertran, Shuai Tang, Aaron Roth, Michael Kearns, Jamie H Morgenstern, and Steven Z Wu. Scalable membership inference attacks via quantile regression. *Advances in Neural Information Processing Systems*, 36, 2024.
- Nicholas Carlini, Florian Tramèr, Eric Wallace, Matthew Jagielski, Ariel Herbert-Voss, Katherine Lee, Adam Roberts, Tom Brown, Dawn Song, Úlfar Erlingsson, Alina Oprea, and Colin Raffel. Extracting training data from large language models. In *30th USENIX Security Symposium (USENIX Security 21)*, pp. 2633–2650. USENIX Association, August 2021. ISBN 978-1-939133-24-3. URL <https://www.usenix.org/conference/usenixsecurity21/presentation/carlini-extracting>.
- Nicholas Carlini, Steve Chien, Milad Nasr, Shuang Song, Andreas Terzis, and Florian Tramèr. Membership inference attacks from first principles. In *2022 IEEE Symposium on Security and Privacy (SP)*, pp. 1897–1914, 2022. doi: 10.1109/SP46214.2022.9833649.
- Nicholas Carlini, Jamie Hayes, Milad Nasr, Matthew Jagielski, Vikash Sehwal, Florian Tramer, Borja Balle, Daphne Ippolito, and Eric Wallace. Extracting training data from diffusion models. In *32nd USENIX Security Symposium (USENIX Security 23)*, pp. 5253–5270, 2023.
- Hongyan Chang, Ali Shahin Shamsabadi, Kleomenis Katevas, Hamed Haddadi, and Reza Shokri. Context-aware membership inference attacks against pre-trained large language models. *arXiv preprint arXiv:2409.13745*, 2024.
- Mark Chen, Alec Radford, Rewon Child, Jeffrey Wu, Heewoo Jun, David Luan, and Ilya Sutskever. Generative pretraining from pixels. In *International conference on machine learning*, pp. 1691–1703. PMLR, 2020.
- daixiangzi. Issue #17 - var-clip github repository, 2024. URL <https://github.com/daixiangzi/VAR-CLIP/issues/17>. Accessed: 20-Jan-2025.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pp. 248–255. Ieee, 2009.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding, 2019. URL <https://arxiv.org/abs/1810.04805>.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale, 2021. URL <https://arxiv.org/abs/2010.11929>.
- Jinhao Duan, Fei Kong, Shiqi Wang, Xiaoshuang Shi, and Kaidi Xu. Are diffusion models vulnerable to membership inference attacks? In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 8717–8730. PMLR, 23–29 Jul 2023.
- Michael Duan, Anshuman Suri, Niloofar Miresghallah, Sewon Min, Weijia Shi, Luke Zettlemoyer, Yulia Tsvetkov, Yejin Choi, David Evans, and Hannaneh Hajishirzi. Do membership inference attacks work on large language models? *arXiv preprint arXiv:2402.07841*, 2024.
- Jan Dubiński, Antoni Kowalczyk, Stanisław Pawlak, Przemysław Rokita, Tomasz Trzcziński, and Paweł Morawiecki. Towards more realistic membership inference attacks on large diffusion models. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pp. 4860–4869, 2024.
- Jan Dubiński, Antoni Kowalczyk, Franziska Boenisch, and Adam Dziedzic. Cdi: Copyrighted data identification in diffusion models, 2024. URL <https://arxiv.org/abs/2411.12858>.

- Cynthia Dwork. Differential privacy. In *International colloquium on automata, languages, and programming*, pp. 1–12. Springer, 2006.
- Adam Dziedzic, Haonan Duan, Muhammad Ahmad Kaleem, Nikita Dhawan, Jonas Guan, Yannis Cattan, Franziska Boenisch, and Nicolas Papernot. Dataset inference for self-supervised models. In *NeurIPS (Neural Information Processing Systems)*, 2022.
- Patrick Esser, Robin Rombach, and Björn Ommer. Taming transformers for high-resolution image synthesis, 2020.
- Lijie Fan, Tianhong Li, Siyang Qin, Yuanzhen Li, Chen Sun, Michael Rubinstein, Deqing Sun, Kaiming He, and Yonglong Tian. Fluid: Scaling autoregressive text-to-image generative models with continuous tokens, 2024. URL <https://arxiv.org/abs/2410.13863>.
- Vitaly Feldman. Does learning require memorization? a short tale about a long tail. In *Proceedings of the 52nd Annual ACM SIGACT Symposium on Theory of Computing*, pp. 954–959, 2020.
- Jean-loup Gailly and Mark Adler. zlib compression library. 2004. URL <http://www.dspace.cam.ac.uk/handle/1810/3486>.
- Jian Han, Jinlai Liu, Yi Jiang, Bin Yan, Yuqi Zhang, Zehuan Yuan, Bingyue Peng, and Xiaobing Liu. Infinity: Scaling bitwise autoregressive modeling for high-resolution image synthesis, 2024. URL <https://arxiv.org/abs/2412.04431>.
- Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 16000–16009, 2022.
- Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. *Advances in neural information processing systems*, 30, 2017.
- Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance. *arXiv preprint arXiv:2207.12598*, 2022.
- Jing Huang, Diyi Yang, and Christopher Potts. Demystifying verbatim memorization in large language models. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pp. 10711–10732, 2024.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- Fei Kong, Jinhao Duan, RuiPeng Ma, Hengtao Shen, Xiaofeng Zhu, Xiaoshuang Shi, and Kaidi Xu. An efficient membership inference attack for the diffusion model by proximal initialization. *arXiv preprint arXiv:2305.18355*, 2023.
- Tianhong Li, Yonglong Tian, He Li, Mingyang Deng, and Kaiming He. Autoregressive image generation without vector quantization, 2024. URL <https://arxiv.org/abs/2406.11838>.
- Pratyush Maini, Mohammad Yaghini, and Nicolas Papernot. Dataset inference: Ownership resolution in machine learning. In *Proceedings of ICLR 2021: 9th International Conference on Learning Representations*, 2021.
- Pratyush Maini, Hengrui Jia, Nicolas Papernot, and Adam Dziedzic. Llm dataset inference: Did you train on my dataset?, 2024. URL <https://arxiv.org/abs/2406.06443>.
- Justus Mattern, Fatemehsadat Mireshghallah, Zhijing Jin, Bernhard Schoelkopf, Mrinmaya Sachan, and Taylor Berg-Kirkpatrick. Membership inference attacks against language models via neighbourhood comparison. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki (eds.), *Findings of the Association for Computational Linguistics: ACL 2023*, pp. 11330–11343, Toronto, Canada, July 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-acl.719. URL <https://aclanthology.org/2023.findings-acl.719>.

- Ed Pizzi, Sreya Dutta Roy, Sugosh Nagavara Ravindra, Priya Goyal, and Matthijs Douze. A self-supervised descriptor for image copy detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 14532–14542, 2022.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022.
- Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily Denton, Seyed Kamyar Seyed Ghasemipour, Burcu Karagol Ayan, S Sara Mahdavi, Rapha Gontijo Lopes, et al. Photorealistic text-to-image diffusion models with deep language understanding. *arXiv preprint arXiv:2205.11487*, 2022.
- Weijia Shi, Anirudh Ajith, Mengzhou Xia, Yangsibo Huang, Daogao Liu, Terra Blevins, Danqi Chen, and Luke Zettlemoyer. Detecting pretraining data from large language models. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=zWqr3MQUNs>.
- R. Shokri, M. Stronati, C. Song, and V. Shmatikov. Membership inference attacks against machine learning models. In *2017 IEEE Symposium on Security and Privacy (SP)*, pp. 3–18, Los Alamitos, CA, USA, may 2017. IEEE Computer Society. doi: 10.1109/SP.2017.41. URL <https://doi.ieeecomputersociety.org/10.1109/SP.2017.41>.
- Jascha Sohl-Dickstein, Eric Weiss, Niru Maheswaranathan, and Surya Ganguli. Deep unsupervised learning using nonequilibrium thermodynamics. In *International Conference on Machine Learning*, 2015.
- Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. In *International Conference on Learning Representations (ICLR)*, 2020. URL <https://openreview.net/forum?id=StlgiaRCHLP>.
- Haotian Tang, Yecheng Wu, Shang Yang, Enze Xie, Junsong Chen, Junyu Chen, Zhuoyang Zhang, Han Cai, Yao Lu, and Song Han. Hart: Efficient visual generation with hybrid autoregressive transformer, 2024. URL <https://arxiv.org/abs/2410.10812>.
- Midjourney Team. <https://www.midjourney.com/>, 2022.
- Keyu Tian, Yi Jiang, Zehuan Yuan, Bingyue Peng, and Liwei Wang. Visual autoregressive modeling: Scalable image generation via next-scale prediction, 2024. URL <https://arxiv.org/abs/2404.02905>.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 30, pp. 5998–6008, 2017. URL <https://arxiv.org/abs/1706.03762>.
- Yuxin Wen, Yuchen Liu, Chen Chen, and Lingjuan Lyu. Detecting, explaining, and mitigating memorization in diffusion models. In *The Twelfth International Conference on Learning Representations*, 2024.
- S. Yeom, I. Giacomelli, M. Fredrikson, and S. Jha. Privacy risk in machine learning: Analyzing the connection to overfitting. In *2018 IEEE 31st Computer Security Foundations Symposium (CSF)*, pp. 268–282, Los Alamitos, CA, USA, jul 2018. IEEE Computer Society. doi: 10.1109/CSF.2018.00027. URL <https://doi.ieeecomputersociety.org/10.1109/CSF.2018.00027>.
- Qihang Yu, Ju He, Xueqing Deng, Xiaohui Shen, and Liang-Chieh Chen. Randomized autoregressive visual generation, 2024. URL <https://arxiv.org/abs/2411.00776>.

Shengfang Zhai, Huanran Chen, Yinpeng Dong, Jiajun Li, Qingni Shen, Yansong Gao, Hang Su, and Yang Liu. Membership inference on text-to-image diffusion models via conditional likelihood discrepancy. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=DztaBt4wP5>.

Anqi Zhang and Chaofeng Wu. Adaptive pre-training data detection for large language models via surprising tokens. *arXiv preprint arXiv:2407.21248*, 2024.

Jie Zhang, Debeshee Das, Gautam Kamath, and Florian Tramèr. Membership inference attacks cannot prove that a model was trained on your data. *arXiv preprint arXiv:2409.19798*, 2024a.

Jingyang Zhang, Jingwei Sun, Eric Yeats, Yang Ouyang, Martin Kuo, Jianyi Zhang, Hao Frank Yang, and Hai Li. Min-k%++: Improved baseline for detecting pre-training data from large language models. *arXiv preprint arXiv:2404.02936*, 2024b.

Qian Zhang, Xiangzi Dai, Ninghua Yang, Xiang An, Ziyong Feng, and Xingyu Ren. Var-clip: Text-to-image generator with visual auto-regressive modeling, 2024c. URL <https://arxiv.org/abs/2408.01181>.

A LIMITATIONS

Currently, our evaluation does not include text-conditioned models due to the lack of high-performance text-to-image generation IAR models with a known dataset that provides a clear distinction between members and non-members. Notably, VAR-CLIP (Zhang et al., 2024c) has been reported to produce low-quality images, as highlighted in daixiangzi (2024) and confirmed by our own assessments. However, our methodology is inherently adaptable and can be extended to text-to-image generation by incorporating text-conditioning in place of class-conditioning.

B ADDITIONAL BACKGROUND

B.1 MEMBERSHIP INFERENCE ATTACKS

MIA attempts to identify whether a given input x , drawn from distribution \mathcal{X} , was part of the training dataset $\mathcal{D}_{\text{train}}$ used to train a target model f_θ . We explore several MIA strategies under a gray-box setting, where the adversary has access to the model’s loss but no information about its internal parameters or gradients. The goal is to construct an *attack* function $A_{f_\theta} : \mathcal{X} \rightarrow \{0, 1\}$ that predicts membership.

Threshold-Based attack. Threshold-based attack is a key method of establishing membership status of a sample. It relies on a metric such as Loss (Yeom et al., 2018) to determine membership. An input x is classified as a member if value of the metric falls below a predefined threshold:

$$A_{f_\theta}(x) = \mathbb{1}[\mathcal{M}(f_\theta, x) < \gamma], \quad (4)$$

where \mathcal{M} is the metric function, and γ is the threshold.

MIN-K% PROB Metric. To address the limitations of predictability in threshold-based attacks, Shi et al. (2024) introduced the MIN-K% PROB metric. This approach evaluates the least probable $K\%$ of tokens in the input x , conditioned on preceding tokens. By focusing on less predictable tokens, MIN-K% PROB avoids over-reliance on highly predictable parts of the sequence. Membership is determined by thresholding the average negative log-likelihood of these low-probability tokens:

$$A_{f_\theta}(x) = \mathbb{1}[\text{MIN-K\% PROB}(x) < \gamma].$$

MIN-K% PROB ++. MIN-K% PROB ++ refines the MIN-K% PROB method by leveraging the insight that training samples tend to be local maxima in the modeled probability distribution. Instead of simply thresholding token probabilities, MIN-K% PROB ++ examines whether a token forms a mode or has relatively high probability compared to other tokens in the vocabulary.

Given an input sequence $x = (x_1, x_2, \dots, x_T)$ and an autoregressive language model f_θ , the MIN-K% PROB ++ score is computed as:

$$S_{\text{Min-K\%++}}(x) = \frac{1}{|S|} \sum_{t \in S} \frac{\log p(x_t | x_{<t}) - \mu_{x_{<t}}}{\sigma_{x_{<t}}}, \quad (5)$$

where S consists of the least probable $K\%$ tokens in x , and $\mu_{x_{<t}}$ and $\sigma_{x_{<t}}$ are the mean and standard deviation of log probabilities across the vocabulary. Membership is determined by thresholding:

$$A_{f_\theta}(x) = \mathbb{1}[S_{\text{Min-K\%++}}(x) \geq \gamma]. \quad (6)$$

zlib Ratio Attacks. A simple baseline attack leverages the compression ratio computed using the *zlib library* (Gailly & Adler, 2004). This method compares the model’s perplexity with the sequence’s entropy, as determined by its zlib-compressed size. The attack is formalized as:

$$A_{f_\theta}(x) = \mathbb{1} \left[\frac{\mathcal{P}_{f_\theta}(x)}{\text{zlib}(x)} < \gamma \right].$$

The intuition is that samples from the training set tend to have lower perplexity for the model, while the zlib compression, being model-agnostic, does not exhibit such biases.

CAMIA introduces several context-aware signals to enhance membership inference accuracy. The *slope signal* captures how quickly the per-token loss decreases over time, as members typically

exhibit a steeper decline. *Approximate entropy* quantifies the regularity of the loss sequence by measuring the frequency of repeating patterns, while *Lempel-Ziv complexity* captures the diversity of loss fluctuations by counting unique substrings in the loss trajectory—both of which tend to be higher for non-members. The loss thresholding *Count Below* approach computes the fraction of tokens with losses below a predefined threshold, exploiting the tendency of members to have more low-loss tokens. *Repeated-sequence amplification* measures how much the loss decreases when an input is repeated, as non-members often show stronger loss reductions due to in-context learning.

Surprising Tokens Attack (SURP). SURP detects membership by identifying *surprising tokens*, which are tokens where the model is highly confident in its prediction but assigns a low probability to the actual ground truth token. Seen data tends to be less surprising, meaning the model assigns higher probabilities to these tokens in familiar contexts.

For a given input $x = (x_1, x_2, \dots, x_T)$, surprising tokens are those where the Shannon entropy is low and the probability of the ground truth token is below a threshold:

$$S = \{t \mid H_t < \epsilon_e, \quad p(x_t|x_{<t}) < \tau_k\}, \quad (7)$$

where H_t is the entropy of the model’s output at position t . The SURP score is the average probability assigned to these surprising tokens:

$$\mathcal{S}_{\text{SURP}}(x) = \frac{1}{|S|} \sum_{t \in S} p(x_t|x_{<t}). \quad (8)$$

Membership is determined by thresholding:

$$A_{f_\theta}(x) = \mathbb{1}[\mathcal{S}_{\text{SURP}}(x) \geq \gamma]. \quad (9)$$

B.2 DATASET INFERENCE

Scaling IARs to larger datasets raises concerns about the unauthorized use of proprietary or copyrighted data for training. With the growing adoption and increasing scale of IARs, this issue is becoming more pressing. In our work, we use DI to quantify the privacy leakage in IAR models. However, DI can be additionally used to establish a dispute-resolution framework for resolving illicit use of data collections in model training, ie. *determine if a specific dataset was used to train a IAR*.

The framework involves three key roles. First, the *victim* (\mathcal{V}) is the content creator who suspects that their proprietary or copyrighted data was used to train a IAR without permission. The victim provides a subset of samples (\mathcal{P}) they believe may have been included in the model’s training dataset. Second, the *suspect* (\mathcal{A}) refers to the IAR provider accused of using the victim’s dataset during training. The suspect model (f_θ) is examined to determine whether it demonstrates evidence of having been trained on \mathcal{P} . Finally, the *arbiter* acts as a trusted third party, such as a regulatory body or law enforcement agency, tasked with conducting the dataset inference procedure. For instance, consider an artist whose publicly accessible but copyrighted artworks have been used without consent to train a IAR. The artist, acting as the victim (\mathcal{V}), provides a small subset of suspected training samples (\mathcal{P}). The IAR provider (\mathcal{A}) denies any infringement. An arbiter intervenes and obtains gray-box or white-box access to the suspect model. Using DI methodology, the arbiter determines whether the IAR demonstrates statistical evidence of training on \mathcal{P} .

B.3 SAMPLING STRATEGIES

The greedy approach selects the token with the highest probability. In the top- k sampling, the highest k token probabilities are retained, while all others are set to zero. The remaining non-zero probabilities are then re-normalized and used to determine the next token. Notably, when $k = 1$, this method reduces to greedy sampling.

C MODEL DETAILS

In our experiments, we use a range of models from VAR Tian et al. (2024), RAR Yu et al. (2024), and MAR Li et al. (2024) architectures, each varying in model size and training time. The details of these models, including the number of parameters, training epochs, and FID scores, are summarized in Table 5. The models were trained on the class-conditioned image generation on the ImageNet dataset Deng et al. (2009).

Table 5: **Model details.** We report the training details for the models used in this paper.

	VAR Models				RAR Models				MAR Models		
	VAR-d16	VAR-d20	VAR-d24	VAR-d30	RAR-B	RAR-L	RAR-XL	RAR-XXL	MAR-B	MAR-L	MAR-H
Model parameters	310M	600M	1.0B	2.1B	261M	462M	955M	1.5B	208M	478M	942M
Training epochs	200	250	300	350	400	400	400	400	400	400	400
FID	3.55	2.95	2.33	1.92	1.95	1.70	1.50	1.48	2.31	1.78	1.55

D TRAINING AND INFERENCE COST ESTIMATION

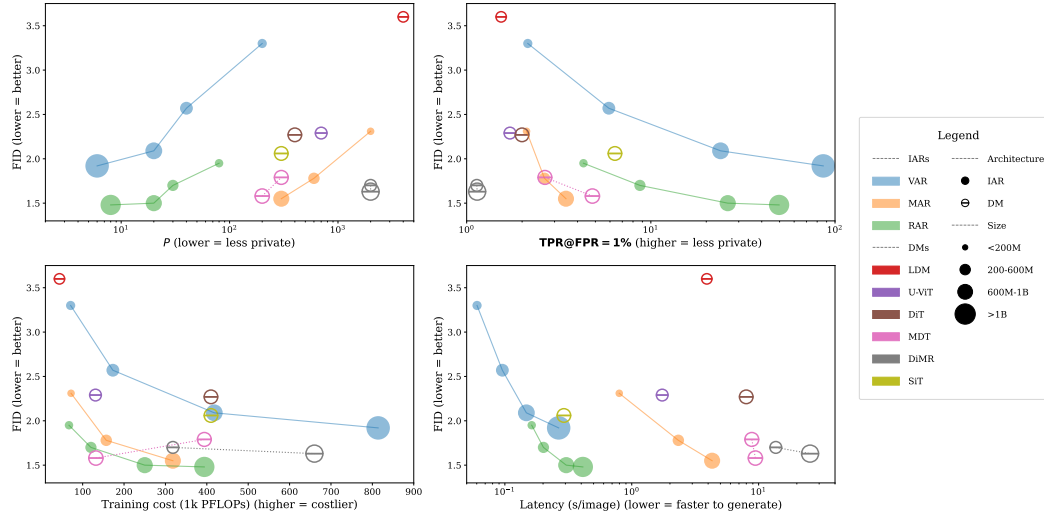


Figure 4: **Comprehensive comparison of the trade-offs between IARs and DMs.**

Here we describe the comprehensive process of training and generation cost estimation of IARs and DMs, which results in the plot Figure 4. We use *torchprofile* (tor, 2021) Python library to measure GFLOPs used for generation and training.

In order to compute the training cost, the procedure is as follows. (1) We perform a single forward pass through the model. (2) We multiply the obtained GFLOPs cost by two, to accommodate for the backward pass cost. (3) We multiply the resulting cost of a single forward and backward pass by the amount of training samples passed through the model during training. The amount of samples is based on the numbers reported in the papers for each of the evaluated models. DMs and IARs use a different reporting methodology, with the former reporting training steps and a batch size, and the latter reporting the number of epochs. For the latter, we assume that a full pass through the ImageNet-1k training set is performed, thus we multiply the number of epochs by 1, 281, 167.

Time to generate a single sample (referred to as latency) is computed by generating 640 images using code from the original models’ repositories. We use the maximum batch size that fits on a single NVIDIA RTX A4000 48GB GPU, to utilize our hardware to the maximum, in order to ensure a fair comparison. For DMs and IARs we follow the settings reported by authors of the respective papers that give the lowest FID score, *i.e.*, we use classifier-free guidance for all the models. For MAR we perform 64 steps of patches sampling. For all DMs but U-ViT we perform 250 steps of denoising, while for U-ViT the reported number is 50, which explains low latency of this model in comparison to others. We acknowledge that, in case of DMs, there are ways to lower the cost of the inference, *e.g.*, by lowering the number of denoising steps. However, we use the default, yet more costly setup for these models, as there is an inherent trade-off between generation quality and cost for DMs, which we want to avoid to make our results sound.

Single generation cost in GFLOPs is computed in a similar fashion. We utilize code provided by the authors of the respective papers for the inference, wrap it using *torchprofile*, and perform a generation of a single sample. Note that here we do not measure time, and we can ignore the parallelism of hardware, as the total cost would stay the same. As we observe in Figure 1, there is a discrepancy

between latency and cost of generation, especially in case of RAR, where we observe an order of magnitude higher generation time than the GFLOPs cost would suggest. This phenomenon originates from the KV-Cache mechanism that is used in case of VAR and RAR during sampling. While the compute cost is lower thanks to the mechanism, the reading operation of the cache mechanism is not effectively parallelized, which results in hardware-incurred latency. We, however, acknowledge that this trade-off might become more beneficial in cases of low-power edge devices, as the computational power of these devices is more limited than the speed of memory operations.

E MIAS FOR MAR

Adjusting Binary Mask MAR extends the IAR framework by incorporating masked prediction strategies, where masked tokens are predicted based on visible ones. This design choice is inspired by Masked Autoencoders (He et al., 2022), where selectively removing and reconstructing parts of the input allows models to learn better representations. Given that MIAs rely on detecting subtle differences in how models process known and unknown data, we hypothesize that adjusting the masking ratio during inference can amplify membership signals. By increasing the masking ratio from 0.86 (the training average) to 0.95, we create conditions where fewer tokens are available to reconstruct the original image, potentially exposing membership information more prominently.

Our experimental results, reported in Table 6, confirm that this strategy enhances MIAs’ effectiveness. Specifically, TPR@FPR=1% for MAR-H increases from 2.18 to 2.88 (+0.70), and MAR-L sees an improvement from 1.89 to 2.25 (+0.36), demonstrating that a higher masking ratio strengthens membership signals. Notably, setting the mask ratio too high (e.g., 0.99) leads to a slight drop in MIA performance, suggesting a balance must be struck between revealing more membership signal and overly degrading the model’s ability to generate images effectively.

Table 6: **Impact of varying mask ratio on MIAs for MAR.** We report TPR@FPR=1%. Higher values indicate stronger membership signals. The best-performing setting is highlighted in bold.

Mask Ratio	MAR-B	MAR-L	MAR-H
0.75	1.64 (-0.05)	1.65 (-0.24)	1.81 (-0.37)
0.80	1.74 (+0.05)	1.76 (-0.13)	1.85 (-0.33)
0.85	1.68 (-0.01)	1.83 (-0.06)	2.00 (-0.18)
0.86 (default)	1.69 (0.00)	1.89 (0.00)	2.18 (0.00)
0.90	1.65 (-0.04)	1.88 (-0.01)	2.22 (+0.05)
0.95	1.88 (+0.19)	2.25 (+0.36)	2.88 (+0.70)
0.99	1.77 (+0.08)	1.86 (-0.03)	2.14 (-0.04)

Fixed Timestep MIAs on DMs have been shown to be most effective when conducted at a specific denoising step t (Carlini et al., 2023). Since MAR utilizes a small diffusion module for token generation, we hypothesize that targeting MIAs at a fixed timestep t rather than a randomly chosen one can similarly enhance MIA effectiveness. Unlike full-scale diffusion models, where the most discriminative timestep is typically around $t = 100$, our experiments reveal that for MAR models, the optimal timestep is $t = 500$.

Table 7 illustrates the impact of this adjustment. When MIAs are performed at $t = 500$, MAR-H achieves a TPR@FPR=1% of 3.30, improving by +0.42 over the baseline random timestep approach. Similarly, MAR-L and MAR-B also see noticeable gains at this timestep. Notably, selecting timestep $t = 100$ significantly reduces the attack’s effectiveness, with a drop of -0.38 for MAR-H.

Table 7: **Impact of using a fixed denoising timestep on MIAs for MAR performance.** We report TPR@FPR=1%. The most discriminative timestep is highlighted in bold.

Timestep	MAR-B	MAR-L	MAR-H
random	1.88 (0.00)	2.25 (0.00)	2.88 (0.00)
100	1.60 (-0.27)	1.90 (-0.34)	2.50 (-0.38)
500	1.88 (+0.00)	2.41 (+0.17)	3.30 (+0.42)
700	1.85 (-0.03)	2.35 (+0.10)	3.20 (+0.32)
900	1.65 (-0.22)	2.14 (-0.10)	2.97 (+0.09)

Reducing Diffusion Noise Variance The MAR loss function, as defined in Equation (3), exhibits certain variance due to its dependence on randomly sampled noise ϵ . During training, MAR uses four different noise samples per image. We hypothesize that increasing the number of noise samples can provide a more stable loss signal, thereby improving the performance of MIAs.

Our results, summarized in Table 8, confirm that increasing the number of noise samples has a positive effect on attack performance.

Table 8: **Impact of reducing diffusion noise variance** on MIAs for MAR performance. We report TPR@FPR=1%. Obtaining loss for random noise sampled multiple times generally improves attack effectiveness. The best-performing setting is highlighted in bold.

Repeats	MAR-B	MAR-L	MAR-H
4 (default)	1.88 (0.00)	2.41 (0.00)	3.30 (0.00)
8	1.98 (+0.10)	2.59 (+0.18)	3.32 (+0.03)
16	2.01 (+0.13)	2.50 (+0.09)	3.19 (-0.11)
32	2.00 (+0.11)	2.56 (+0.15)	3.35 (+0.06)
64	2.09 (+0.21)	2.61 (+0.20)	3.40 (+0.10)

F FULL MIA RESULTS

We report TPR@FPR=1% and AUC for each baseline MIA (Table 9, Table 10, each improved MIA for IAR (Table 11, Table 12) and each MIA for DMs (Table 13, Table 14). Results are randomized over 100 experiments.

Table 9: **TPR@FPR=1% for baseline MIAs.**

Model	VAR-d16	VAR-d20	VAR-d24	VAR-d30	MAR-B	MAR-L	MAR-H	RAR-B	RAR-L	RAR-XL	RAR-XXL
Loss (Yeom et al., 2018)	1.50±0.16	1.67±0.20	2.19±0.21	4.95±0.38	1.42±0.21	1.48±0.19	1.60±0.21	1.76±0.24	2.10±0.27	3.38±0.42	5.70±0.55
Zlib (Carlini et al., 2021)	1.55±0.20	1.74±0.20	2.24±0.24	5.77±0.59	1.41±0.22	1.49±0.21	1.59±0.22	1.91±0.23	2.45±0.26	4.21±0.31	7.52±0.57
Hinge (Bertran et al., 2024)	1.62±0.19	1.72±0.22	2.14±0.23	4.09±0.40	—	—	—	1.81±0.17	1.99±0.19	2.94±0.36	5.16±0.63
Min-K% (Shi et al., 2024)	1.58±0.16	2.04±0.25	3.22±0.38	12.23±1.13	1.69±0.18	1.89±0.16	2.18±0.23	2.09±0.24	2.86±0.32	5.83±0.52	13.48±0.98
SURP (Zhang & Wu, 2024)	1.53±0.17	1.70±0.20	2.23±0.23	5.02±0.43	—	—	—	1.84±0.18	2.12±0.30	3.46±0.46	5.82±0.53
Min-K%++ (Zhang et al., 2024b)	1.34±0.18	2.21±0.28	3.73±0.34	14.90±0.96	—	—	—	2.36±0.29	3.26±0.30	6.27±0.65	14.63±0.87
CAMIA (Chang et al., 2024)	1.33±0.18	1.76±0.19	3.07±0.35	16.69±1.16	1.35±0.19	1.38±0.19	1.44±0.23	1.51±0.17	1.78±0.15	1.99±0.34	4.34±0.51

Table 10: **AUC for baseline MIAs.**

Model	VAR-d16	VAR-d20	VAR-d24	VAR-d30	MAR-B	MAR-L	MAR-H	RAR-B	RAR-L	RAR-XL	RAR-XXL
Loss (Yeom et al., 2018)	52.35±0.35	54.53±0.34	59.55±0.35	75.45±0.30	51.92±0.36	53.33±0.36	55.06±0.34	54.92±0.37	58.04±0.37	65.59±0.34	74.45±0.30
Zlib (Carlini et al., 2021)	52.38±0.38	54.59±0.38	59.65±0.37	75.67±0.34	51.91±0.39	53.32±0.39	55.05±0.38	55.27±0.36	58.68±0.35	66.85±0.34	76.17±0.30
Hinge (Bertran et al., 2024)	53.29±0.39	56.83±0.39	62.89±0.39	77.36±0.33	—	—	—	57.07±0.44	61.41±0.44	71.48±0.39	82.14±0.29
Min-K% (Shi et al., 2024)	53.77±0.40	57.84±0.44	65.49±0.40	83.55±0.30	51.87±0.38	53.29±0.38	55.05±0.38	56.53±0.38	61.21±0.36	71.35±0.32	82.33±0.28
SURP (Zhang & Wu, 2024)	50.46±0.25	54.54±0.38	59.60±0.40	75.46±0.34	—	—	—	52.21±0.40	58.02±0.42	65.58±0.41	74.50±0.33
Min-K%++ (Zhang et al., 2024b)	54.52±0.41	57.93±0.38	65.76±0.38	85.33±0.27	—	—	—	57.82±0.41	62.48±0.38	75.61±0.32	85.16±0.26
CAMIA (Chang et al., 2024)	52.44±0.44	55.12±0.44	61.37±0.42	80.16±0.34	51.08±0.42	51.96±0.43	53.20±0.38	51.40±0.36	51.83±0.39	59.28±0.39	66.07±0.36

Table 11: **TPR@FPR=1% for our improved MIAs for IARs.**

Model	VAR-d16	VAR-d20	VAR-d24	VAR-d30	MAR-B	MAR-L	MAR-H	RAR-B	RAR-L	RAR-XL	RAR-XXL
Loss (Yeom et al., 2018)	2.16±0.26	5.95±0.54	24.03±1.91	86.38±0.92	0.88±0.27	3.31±0.78	23.50±2.77	2.86±0.20	5.50±0.39	16.58±0.97	40.76±1.87
Zlib (Carlini et al., 2021)	1.75±0.17	4.87±0.41	20.37±1.19	83.99±0.87	0.96±0.21	3.17±0.16	23.22±1.18	2.52±0.31	4.56±0.39	13.91±1.02	41.03±1.96
Hinge (Bertran et al., 2024)	0.00±0.00	0.00±0.00	0.00±0.00	0.00±0.00	—	—	—	2.50±0.20	4.34±0.39	10.59±0.88	20.23±1.85
Min-K% (Shi et al., 2024)	0.05±0.02	0.06±0.02	0.14±0.04	1.63±0.13	3.23±0.22	10.24±0.57	49.19±2.03	4.30±0.33	8.66±0.79	26.14±1.22	49.80±2.15
Min-K%++ (Zhang et al., 2024b)	0.39±0.06	1.40±0.11	4.88±0.20	37.90±0.44	—	—	—	4.19±0.40	8.24±0.66	23.04±1.14	43.67±2.32
CAMIA (Chang et al., 2024)	1.83±0.25	5.46±0.52	20.92±1.14	72.77±1.04	3.09±0.30	3.97±0.46	4.60±0.60	1.63±0.21	2.60±0.27	6.77±0.47	17.85±1.20

Table 12: AUC for our improved MIAs for IARs.

Model	VAR- <i>d</i> 16	VAR- <i>d</i> 20	VAR- <i>d</i> 24	VAR- <i>d</i> 30	MAR-B	MAR-L	MAR-H	RAR-B	RAR-L	RAR-XL	RAR-XXL
Loss (Yeom et al., 2018)	61.73±0.33	76.26±0.30	92.20±0.15	98.95±0.05	70.13±0.44	86.20±0.31	95.91±0.14	65.61±0.35	75.83±0.32	89.64±0.21	96.17±0.12
Zlib (Carlini et al., 2021)	57.91±0.39	70.86±0.33	88.69±0.24	98.51±0.07	69.81±0.39	86.00±0.28	95.82±0.13	62.22±0.42	72.19±0.37	87.51±0.22	95.46±0.13
Hinge (Bertran et al., 2024)	52.67±0.36	56.11±0.36	62.48±0.36	74.63±0.30	—	—	—	59.66±0.39	68.09±0.35	81.56±0.29	90.62±0.21
Min-K% (Shi et al., 2024)	59.78±0.34	70.43±0.34	83.10±0.25	90.16±0.27	66.04±0.39	82.14±0.29	96.40±0.14	66.81±0.38	78.73±0.32	91.36±0.20	96.97±0.10
Min-K%++ (Zhang et al., 2024b)	57.10±0.30	65.44±0.29	78.74±0.25	93.18±0.16	—	—	—	65.20±0.36	75.37±0.34	88.29±0.23	95.84±0.14
CAMIA (Chang et al., 2024)	56.37±0.38	68.18±0.31	84.83±0.24	96.95±0.09	55.71±0.39	60.59±0.36	64.04±0.37	57.95±0.40	63.17±0.43	70.43±0.39	83.55±0.31

Table 13: TPR@FPR=1% of MIAs for DMs.

	LDM	U-ViT-H/2	DiT-XL/2	MDTv1-XL/2	MDTv2-XL/2	DiMR-XL/2R	DiMR-G/2R	SiT-XL/2
Denoising Loss (Carlini et al., 2023)	1.35±0.14	1.30±0.17	1.42±0.17	1.55±0.18	1.64±0.17	0.91±0.15	0.88±0.15	1.02±0.13
SecMI _{stat} (Duan et al., 2023)	1.30±0.20	1.31±0.19	1.49±0.22	1.35±0.17	1.52±0.22	1.15±0.21	1.05±0.15	0.00±0.00
PIA (Kong et al., 2023)	1.25±0.16	1.25±0.19	1.59±0.20	1.72±0.20	2.07±0.24	1.07±0.11	1.09±0.12	1.14±0.14
PIAN (Kong et al., 2023)	1.03±0.14	1.17±0.16	0.92±0.12	1.22±0.15	1.50±0.20	1.04±0.13	1.01±0.12	1.09±0.14
GM (Dubniński et al., 2024)	1.25±0.17	1.26±0.17	1.34±0.17	1.18±0.16	1.47±0.19	1.13±0.15	1.16±0.16	1.38±0.18
ML (Dubniński et al., 2024)	1.41±0.16	1.36±0.20	1.50±0.18	1.70±0.16	1.98±0.26	1.01±0.15	1.10±0.14	1.14±0.12
CLiD (Zhai et al., 2024)	1.55±0.19	1.75±0.22	2.08±0.28	2.72±0.39	4.91±0.44	0.96±0.14	0.90±0.13	0.91±0.11

Table 14: AUC for MIAs for DMs.

	LDM	U-ViT-H/2	DiT-XL/2	MDTv1-XL/2	MDTv2-XL/2	DiMR-XL/2R	DiMR-G/2R	SiT-XL/2
Denoising Loss (Carlini et al., 2023)	50.53±0.41	50.36±0.42	51.77±0.43	51.25±0.37	51.65±0.37	46.25±0.40	46.01±0.40	47.25±0.34
SecMI _{stat} (Duan et al., 2023)	49.84±0.44	53.15±0.43	55.15±0.46	54.44±0.38	56.80±0.36	48.73±0.45	48.73±0.44	50.00±0.00
PIA (Kong et al., 2023)	48.97±0.43	51.77±0.44	53.18±0.42	52.60±0.44	54.68±0.45	47.31±0.42	47.16±0.41	49.13±0.44
PIAN (Kong et al., 2023)	49.56±0.43	50.99±0.46	50.14±0.43	49.96±0.42	51.52±0.38	49.85±0.41	49.79±0.43	50.17±0.37
GM (Dubniński et al., 2024)	51.51±0.40	51.19±0.42	50.46±0.46	50.72±0.39	48.85±0.37	45.97±0.45	45.86±0.45	50.94±0.38
ML (Dubniński et al., 2024)	50.36±0.41	51.16±0.41	52.53±0.45	50.42±0.19	54.65±0.38	46.26±0.38	49.37±0.41	49.83±0.17
CLiD (Zhai et al., 2024)	52.50±0.39	54.27±0.41	56.16±0.41	57.43±0.41	62.54±0.40	46.20±0.38	45.95±0.41	43.58±0.39

G FULL DI RESULTS

We report the outcome of DI for DMs in Table 15. As an additional observation, we note that contrary to DI for IARs, shifting from the classifier to an alternative feature aggregation increases the number of samples needed to reject H_0 . This suggests, that the linear classifier remains necessary for DMs.

Table 15: DI for DMs. We report the minimal number of samples needed to successfully reject H_0 .

	LDM	U-ViT-H/2	DiT-XL/2	MDTv1-XL/2	MDTv2-XL/2	DiMR-XL/2R	DiMR-G/2R	SiT-XL/2
DI for DM	4000	700	400	300	200	2000	200	300
No Classifier	5000	4000	3000	600	400	2000	2000	500

H MITIGATION STRATEGY

In this section we detail our privacy risk mitigation strategy.

H.1 METHOD

Given an input sample x , we perturb the output of the IAR according to a noise scale σ , which we can adjust to balance privacy-utility trade-off. During inference, we add noise sampled from $\mathcal{N}(0, \sigma)$ to the output. For VAR and RAR, we add it to the logits, and for MAR we add them to the sampled continuous tokens.

We measure privacy leakage with our methods from Section 5. Specifically, we perform MIAs, DI, and the extraction attack. To quantify utility, we generate 10,000 images from the IARs, and compute FID (Heusel et al., 2017) between generations and the validation set. Lower FID means better quality of the generations.

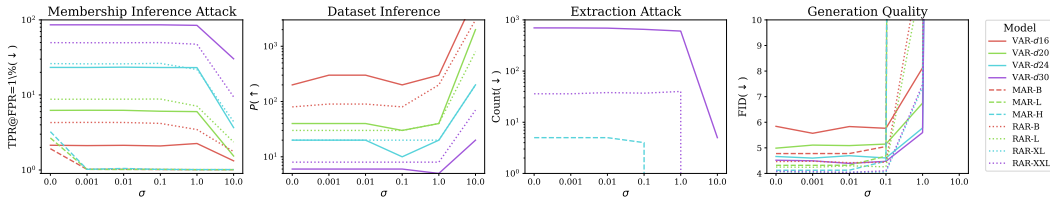


Figure 5: **Privacy-utility trade-off of our mitigation strategy.** We show that successfully defending VAR and RAR against MIA and DI requires adding noise that severely harms the performance. Interestingly, we are able to limit the extent of memorization for VAR, and fully defend MAR against MIA and DI.

H.2 RESULTS

Our results in Figure 5 show that we can effectively lower the privacy loss by applying our mitigation strategy, however, this comes at a cost of significantly decreased utility, as highlighted by substantially increasing FID score.

We are able to lower the MIAs success by more than half (Fig. 5, left), with the biggest relative drop observed for RAR-XL, for which the TPR@FPR=1% drops from 26% to **4.4**. Moreover, *all* MAR models become immune to MIAs after noising their tokens, as TPR@FPR=1% drops to 1% (random guessing) with $\sigma = 0.001$. When we apply our defense to DI (Fig. 5, second from the left), we have to increase P , the minimum number required to perform a successful DI attack, by an order of magnitude, with the biggest relative difference for the smallest models: VAR-16, and RAR-B, with an increase from 80 to 3000, and 200 to 8000, respectively. Such an increase means that the models are harder to attack with DI, *i.e.*, their privacy protection is boosted. Similarly to MIA, DI stops working for MAR models immediately.

Our method achieves limited success in mitigating extraction (Fig. 5, third from the left). We are lowering the success of extraction attack only when adding significant amount of noise. However, for VAR- d_{30} , which exhibits the biggest memorization, with $\sigma = 1.0$ we successfully protect **93** out of 698 samples from being extracted without significantly harming the utility. Our method, similarly to all defenses, suffers from lowered performance (Fig. 5, right), as signal-to-noise ratio during generation gets worse when σ increases.

H.3 DISCUSSION

We show that we can mitigate privacy risks by adding noise to the outputs of IARs, at a cost of utility. Notably, all MARs become *fully* immune to MIAs and DI with noise scale as small as 0.001. This result supports previous insights from Section 5, in which we show that MARs are significantly less prone to privacy risks than VARs and RARs. We argue that logits leak significantly more information than continuous tokens, and thus, adding noise to the latter yields significantly higher protection, at a lower performance cost.

We acknowledge that our privacy leakage defense is a heuristic, and more theoretically sound approaches should be explored, *e.g.*, in the domain of Differential Privacy (Dwork, 2006). To the best of our knowledge, we make the first step towards private IARs.

I MORE ABOUT MEMORIZATION

In this section we provide an extended analysis of memorization phenomenon in IARs. We show more examples of memorized images, highlight the relation between the prefix length i and the number of extracted samples, and shed more light on our efficient extraction method, described in Section 5.3.

I.1 MORE MEMORIZED IMAGES

In Figure 11 we show a non-cherry-picked set of images memorized by IARs. In Figure 6 we show an example of an image memorized verbatim by VAR- d_{30} **without any prefix**, *i.e.*, only from the



Figure 6: **Image extracted from VAR- $d30$ without prefix.** (Left) memorized image, (right) generated image.

class label token. In Figure 7 we show an image that has been memorized by both VAR- $d30$ and RAR-XXL.

I.2 PREFIX LENGTH VS. NUMBER OF EXTRACTED IMAGES

We analyze the effect on the prefix length on the number of extracted samples. As our method leveraged conditioning on a part of the input sequence, in Figure 9 we show an increase of extraction success with the increase of the length of the prefix. Notably, we start experiencing false-positives once the prefix length surpasses for VAR- $d30$ and RAR-XXL 30, and 5 for MAR-H. In effect, the results in Table 4 provide an upper bound of the success of our extraction method.

Table 16: Prefix length i for our data extraction attack. We note that appending longer sequences leads to false positives, *i.e.*, the IARs start to generate images from the validation set.

Model	VAR- $d30$	MAR-H	RAR-XXL
Prefix length i	30	5	30

I.3 APPROXIMATE DISTANCE VS. SSCD SCORE

In this section we underscore the effectiveness of our filtering approach. Figure 10 shows that the distances we design for the candidates selection process indeed correlate with the SSCD score. By focusing only on the top-5 samples for each class we effectively narrow our search to just 0.5% of the training set, significantly speeding up the whole process.

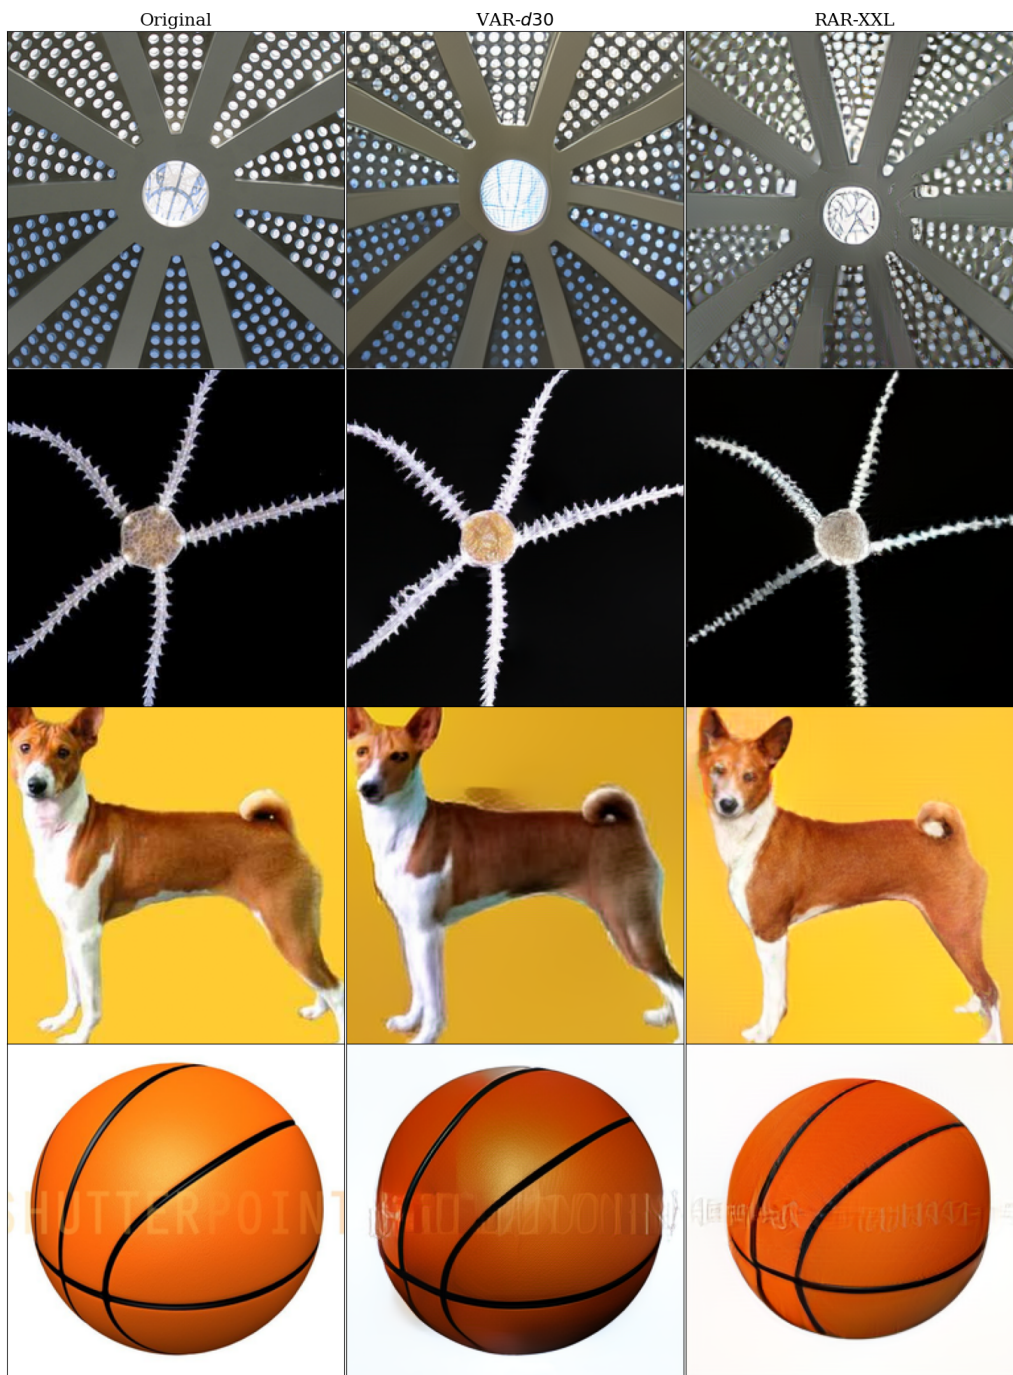


Figure 7: Images extracted from both VAR-d30, and RAR-XXL.

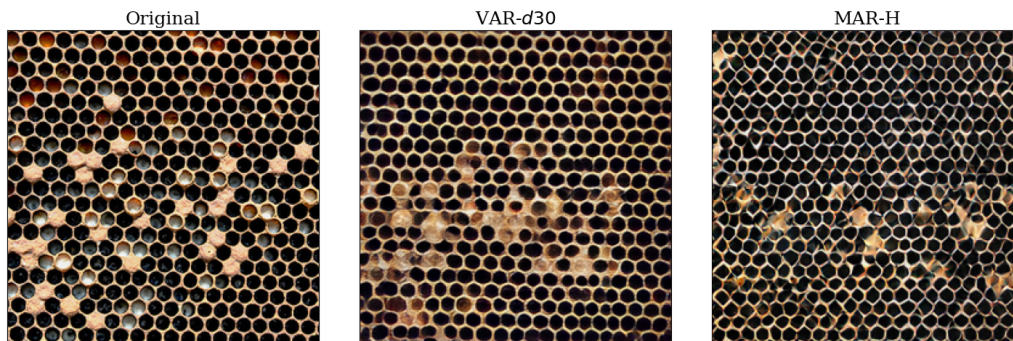


Figure 8: An image extracted from both VAR- $d30$, and MAR-H.

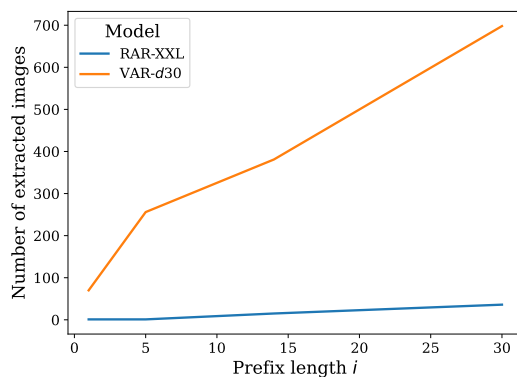


Figure 9: **Prefix length and the number of extracted samples.** We show that with an increase of the prefix length, the success of our extraction method increases.

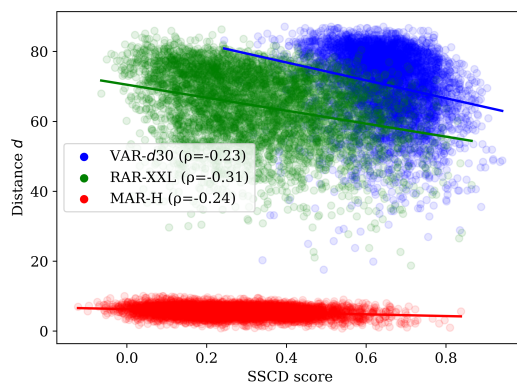


Figure 10: **Distance function d and the SSCD score.** We show that d correlates with the final memorization score. This result makes our candidate selection process sound, and reduces the cost of extracting memorized samples.

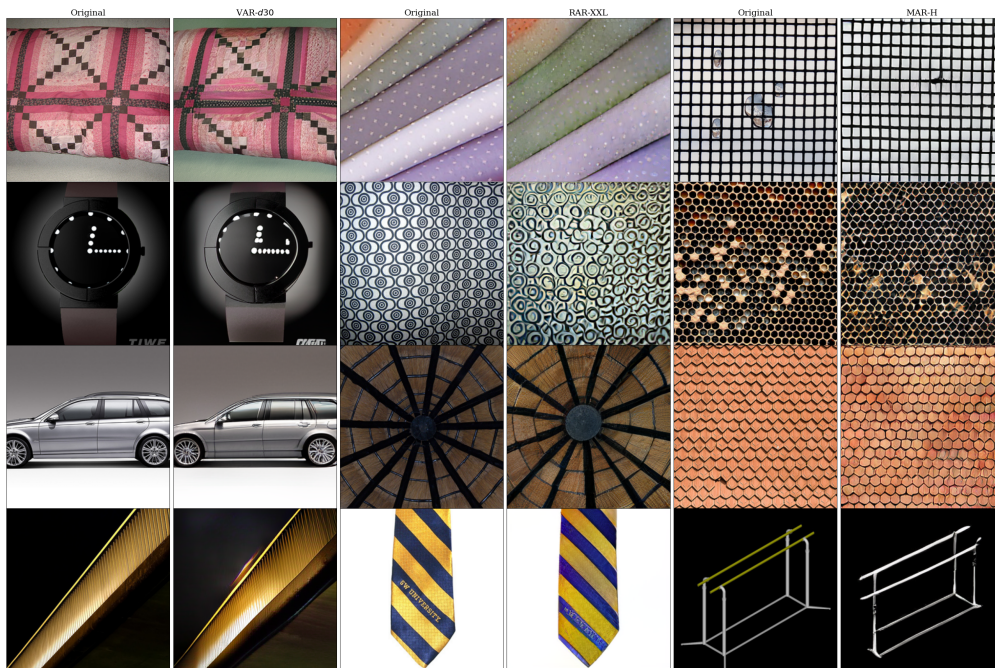


Figure 11: **Non-cherry-picked extracted images.** Odd columns from the left correspond to the original image, even to extracted. From left, the images are for VAR-d30, RAR-XXL, and MAR-H.