

# SCHOLAWRITE: A Dataset of End-to-End Scholarly Writing Process

Linghe Wang\* Minhwa Lee\* Ross Volkov Luan Tuyen Chau Dongyeop Kang

University of Minnesota

{wang9257, lee03533, volko032, chau0139, dongyeop}@umn.edu

## Abstract

Writing is a cognitively demanding task involving continuous decision-making, heavy use of working memory, and frequent switching between multiple activities. Scholarly writing is particularly complex as it requires authors to coordinate many pieces of multiform knowledge. To fully understand writers' cognitive thought process, one should fully decode the *end-to-end writing data* (from individual ideas to final manuscript) and understand their complex cognitive mechanisms in scholarly writing. We introduce SCHOLAWRITE dataset, a first-of-its-kind keystroke corpus of an end-to-end scholarly writing process for complete manuscripts, with thorough annotations of cognitive writing intentions behind each keystroke. Our dataset includes  $\text{\LaTeX}$ -based keystroke data from five preprints with nearly 62K total text changes and annotations across 4 months of paper writing. SCHOLAWRITE shows promising usability and applications (e.g., iterative self-writing), demonstrating the importance of collection of end-to-end writing data, rather than the final manuscript, for the development of future writing assistants to support the cognitive thinking process of scientists. Our de-identified data examples and code are available on our project page<sup>1</sup>.

## 1 Introduction

Scholarly writing requires researchers to produce texts that concisely and precisely present novel findings and to follow a systematized structure and style by their targeted venue (Jourdan et al., 2023; Kallestinova, 2011; Bourekache, 2022). To address this need, researchers have leveraged large language models (LLMs) to develop intelligent support systems in several writing tasks, such as revision process (Du et al., 2022b; Kim et al., 2022) or feedback generation (Liang et al., 2024; Lu et al.,

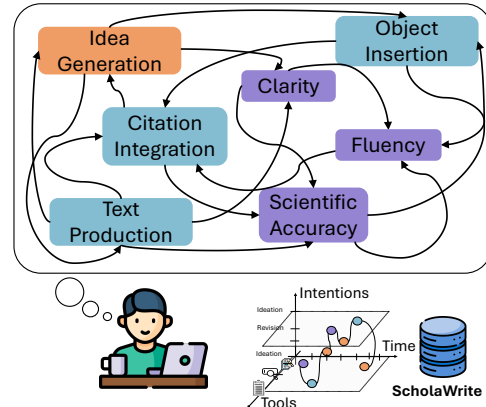


Figure 1: An example of cognitive processes of human writing: it is iterative, non-linear, and switches frequently between multiple activities, tools, and writing intentions over a long range of time. SCHOLAWRITE captures such complex characteristics of human scholarly writing.

2024a). However, a critical question arises: *Are LLMs able to truly understand and generate writing as human scientists do?*

LLMs are generally trained to progress autoregressively, generating text from left to right. In contrast, human writing typically involves multiple iterations of complex and non-linear cognitive actions to refine the main message (Flower and Hayes, 1981; Koo et al., 2023), as illustrated in Figure 1. This fundamental cognitive gap between human writing and language models necessitates a deeper understanding of human writing processes and the development of cognitively-aligned writing assistance tools, moving beyond basic auto-completion.

Although much literature has examined the cognitive processes used in general writing tasks (Lindgren and Sullivan, 2003; Hayes and Berninger, 2014; Zhu et al., 2023; Wengelin and Johansson, 2023), the specific cognitive patterns in scholarly writing remain understudied. Our work observes the end-to-end cognitive process of scholarly writing, inspired by the method of keystroke collections that have been a major methodology to observe in-

\*Equal contribution.

<sup>1</sup><https://minnesotanlp.github.io/scholawrite/>

dividual writing processes (Baaijen et al., 2012; Latif, 2008; Leijten and Van Waes, 2013) in cognitive science or a few recent works in NLP at a small scale (Koo et al., 2023; Velentzas et al., 2024).

We believe our work (SCHOLAWRITE) is the first attempt to present a keystroke corpus of scholarly writing with annotations of *cognitive writing intentions*, which were collected over *multiple months* and produced by early-career researchers. Furthermore, we developed novel data collection and annotation systems, which improves data accessibility to the public and enables real-time collection of  $\LaTeX$ -based keystrokes from multiple researchers. We also present a comprehensive taxonomy of cognitive writing processes specific to the scholarly writing domain. Throughout several experiments with LLMs, SCHOLAWRITE shows promising usability as a resource for enabling LLMs to understand the human cognitive process of scholarly writing and provide writing suggestions that are aware of writers’ cognitive behaviors.

**Contributions** We present SCHOLAWRITE, a curated dataset of nearly 62K  $\LaTeX$ -based keystrokes that were turned into publications in the computer science domain, annotated by experts in linguistics and computer science. We develop a taxonomy of cognitive process of scholarly writing, providing an overall understanding of how scholars tend to develop writing manuscripts. Experiment results showed that the Llama-8B model fine-tuned on the SCHOLAWRITE dataset achieved the high linguistic quality of the final writing.

## 2 Related Work

### 2.1 Cognitive Theory of Writing Process

Research on human writing shifted from analyzing final written products to examining cognitive processes across various writing phases (Diederich, 1974; Krapels, 1990; MacArthur and Graham, 2016). Building on this process-oriented approach, Flower and Hayes (1981)’s cognitive writing theory outlines three key sub-processes: (1) *planning*, (2) *translating*, and (3) *reviewing*. These interconnected and non-linear stages of human writing inform our work, where we expand this model to a more granular taxonomy of cognitive writing patterns in scholarly communication.

Koo et al. (2023) introduced a taxonomy of scholarly writing process based on keystroke data from short research plans written in 30-minute sessions. Expanding on this, we perform a larger-

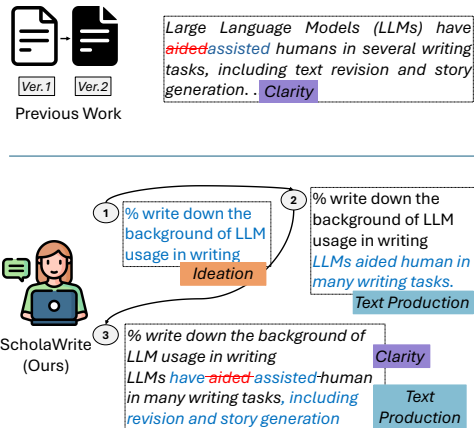


Figure 2: Previous studies primarily compared finalized edits between subsequent versions of revisions in open-source preprints (e.g., arXiv, OpenReview) (Du et al., 2022b; Jiang et al., 2022; Kuznetsov et al., 2022; D’Arcy et al., 2024). Our work, however, collects trajectories of keystrokes that comprise sentences to observe the cognitive process of end-to-end scholarly writing.

scale keystroke collection over months, whose final products culminated in research publications. Expert-reviewed and grounded in prior literature, our taxonomy encompasses end-to-end cognitive trajectories of scholarly writing.

### 2.2 Keystroke Loggers for Scholarly Writing

Keystroke logging tools (e.g., Inputlog) allow researchers to observe digital writing without disrupting the writing process (Chan, 2017; Johansson et al., 2010; Leijten and Van Waes, 2013; Lindgren and Sullivan, 2019). However, they are often restricted to a closed ecosystem, such as MS Word, and thus less accessible for scientific communities who use  $\LaTeX$ . Moreover, they are not well-suited for collecting data from extended writing sessions.

Current studies rarely examined scholarly communication that uses  $\LaTeX$ , particularly for scientific writing. To address this gap, we developed systems that securely collect real-time keystrokes over months from Overleaf, a widely-used online  $\LaTeX$  editor, while ensuring privacy. The system workflow enables span-level annotation of writing intentions, offering a natural, uninterrupted environment for studying cognitive writing activities over long periods and across multiple sections.

### 2.3 Datasets for Scholarly Writing

Previous work primarily focused on constructing datasets to analyze scholarly writing processes, which vary in content and scale. Publicly available datasets tend to track linguistic style changes

or grammatical edits during revision (Du et al., 2022b; Jiang et al., 2022; Ito et al., 2019; Mita et al., 2022), while others capture edits based on feedback and peer review (D’Arcy et al., 2024; Jourdan et al., 2024; Kuznetsov et al., 2022) or citation generation (Kobayashi et al., 2022; Narimatsu et al., 2021). Also, most focus on specific sections of papers (e.g., abstracts, introductions) (Du et al., 2022b; Mita et al., 2022). In contrast, our dataset covers all cognitive phases of writing, from inception to final manuscript, over an extended period.

Furthermore, those existing corpora often compare multiple versions of final manuscripts from preprint databases (Jiang et al., 2022; Du et al., 2022b; D’Arcy et al., 2024; Jourdan et al., 2024), missing how those manuscripts evolved (Jourdan et al., 2023). To address this, we build a keystroke-based corpus that captures the progression of publications in real-time (See Figure 2).

### 3 Dataset Construction

To collect authentic writing data from writers’ natural thoughts, we developed a Chrome extension that records keystroke data in the background. After the study, an in-depth annotation process is conducted to interpret the intent behind each keystroke. We describe the detailed process of our data collection, annotation system design, and taxonomy creation in the following sections.

#### 3.1 Participant Recruitment

We recruited 10 graduate students<sup>2</sup> from the computer science department who were actively preparing academic manuscripts in Overleaf LaTeX editor for submission to peer-reviewed conferences in AI and NLP. The data is collected from November 2023 to February 2024, totaling up to 4 months. Our study has been approved by the IRB institution of the authors. Please refer to Appendix A.1 for more detailed descriptions.

#### 3.2 Chrome Extension for Keystroke Collection in Overleaf

We designed and implemented a Chrome extension (Appendix Figure 7), which enables the real-time collection of keystroke trajectories in the Overleaf platform. Participants can create their account credentials, and after logging into the system, the extension monitors the user’s keystrokes in the back-

<sup>2</sup>All participants attend a R1 university in US and are proficient in English. Appendix A.1 details the recruitment process.

ground silently without disrupting writing process. See Appendix A.2 for more description of the extension workflow.

#### 3.3 Writing Intention Annotation

To decode the nuanced intentions behind each writing action, we annotate each keystroke collected from the Chrome extension, using a specialized interface. This process is crucial for developing a detailed taxonomy of the end-to-end scholarly writing process, which serves as the basis for annotating the collected keystrokes. To perform annotations, we processed those raw keystroke entries by file name, type of writing actions, an array of differences between two subsequent texts, and line number in an Overleaf editor. Please see Appendix B for further annotation details.

**Annotation Interface** We developed a novel interface for keystroke annotation, enabling visualization by time, LaTeX file, and author (Appendix Figure 8). Annotators can navigate the keystroke timeline, identify a span of related edits (e.g., outlining or grammar correction), and assign a pre-defined intention label from the dropdown menu.

**Intention Taxonomy Construction** Our taxonomy (Table 1) builds on prior literature (Flower and Hayes, 1981; Du et al., 2022b; Koo et al., 2023). During annotations, we have identified 15 types of scholarly writing intentions from the five projects and further grouped them into three high-level categories according to Flower and Hayes (1981) - **Planning**, **Implementation**, and **Revision**.

Following Pustejovsky et al. (2017), we performed an iterative open coding for the collected keystrokes from the two Overleaf projects. Using the annotation interface, each annotator reviewed the first few writing keystrokes and identified the high-level processes. Next, the annotators (1) determine the span of keystrokes that form a meaningful unit together (e.g., a clause or sentence) within the high-level process and (2) decide the underlying intention of edits. The annotators coded these spans independently, resolving conflicts through multiple in-depth discussions. Finally, a cognitive linguist participated in all discussions, refining the definition and scope of each writing intention.

To ensure taxonomy validity, we followed two standard practices (Nickerson et al., 2013; Kundisch et al., 2021): (1) mutual exclusivity and (2) collective comprehensiveness. Ambiguous keystroke spans were flagged and refined through

1st	Intention	Definition	An example action	Prop.
	Idea Generation	Formulate and record initial thoughts and concepts.	writing keywords or notes (e.g., “..% <i>[Comment out]</i> main point: artifacts lack in human subjectivity.”)	7.0%
PLANNING	Idea Organization	Select the most useful materials and demarcate those generated ideas in a visually formatted way.	Linking the generated ideas into a logical sequence and spacing out between ideas (e.g., “..% (1) need diff. stress testing...%%[Spacing] (2) exp. setup? ”)	0.5%
	Section Planning	Initially create sections and sub-level structures.	Putting section-related LaTeX commands (e.g., <code>\section</code> , <code>\paragraph</code> )	2.2%
	Text Production	Translate their ideas into full languages, either from the writers’ language or borrowed sentences from an external source.	Generating subsequent sentences with the author’s own idea (e.g., “... GPT-4 (OpenAI, 2023) explains the data ... Our approach is built on top of GPT-4...”)	57.4%
IMPLEMENTATION	Object Insertion	Insert visual claims of their arguments (e.g., figures, tables, equations, footnotes, lists)	e.g., <code>\begin{figure}[h] \centering \includegraphics{figure_A.pdf} \end{figure}</code>	4.6%
	Citation Integration	Incorporate bibliographic references into a document and systematically link these references using citation commands.	Inserting a new BibTeX object in the bibliography file and adding the object name to an existing <code>\cite{}</code> on the Related Work section	1.7%
	Cross-reference	Link different sections, figures, tables, or other elements within a document through referencing commands.	Putting a command <code>\label{figure-1}</code> to a figure and referencing it in the main body by calling <code>\ref{figure-1}</code>	1.1%
	Macro Insertion	Incorporate predefined commands or packages into a LaTeX document to alter its formatting.	Putting a <code>\usepackage{minted}</code> for formatting a LLM prompt	0.2%
	Fluency	Fix grammatical or syntactic errors in the text or LaTeX commands.	“We design <del>ing</del> <sup>ned</sup> several experiment setups for the LLM evaluations as described in Figure <code>\ref{figure-A}</code> .”	1.4%
	Coherence	Logically link (1) any of the two or multiple sentences within the same paragraph; (2) any two subsequent paragraphs; or (3) objects to be consistent as a whole.	“Each comment was annotated by three different annotators <del>, which and we</del> achieved high inter-annotator agreement.”	3.3%
REVISION	Clarity	Improve the semantic relationships between texts to be more straightforward and concise.	“..relevant studies have examined <del>one of the several textual styles</del> one aspect of texts, the formality, ...”	11.5%
	Structural	Improve the flow of information by modifying the location of texts and objects.	“We calculate Pearson’s <i>r</i> correlation for human alignment to compare the alignment between lexicon-based preferences and humans’ original preferences. First, we calculated the score from each human participant to compare the alignment between lexicon-based preferences and humans’ original preferences.”	3.7%
	Linguistic Style	Modify texts with the writer’s writing preferences regarding styles and word choices, etc.	“We believe posit that ...”	1.6%
	Scientific Accuracy	Update or correct scientific evidence (e.g., numbers, equations) for more accurate claims.	“..Pearson’s <i>r</i> correlation ( <del>0.780.68</del> ; $p < 0.01$ )”	0.7%
	Visual Formatting	Modify the stylistic formatting of texts, objects, and citations	<code>\cite</code> → <code>\citet</code> , <code>\textbf</code> → <code>\textsc</code> , etc.	3.2%

Table 1: The developed taxonomy of Scholarly Writing Process in SCHOLAWRITE

iterative discussions to sharpen category boundaries. After finalizing the codebook and taxonomy, we updated intention annotations<sup>3</sup> for the two selected projects and applied the taxonomy to the rest. The final inter-annotator agreement was 0.71 (weighted F1 score in a multi-label setting for a 1K-keystroke sample<sup>4</sup>). See Appendix B for full

<sup>3</sup>The updated list appears in annotation interface.

<sup>4</sup>Unlike Kappa, which assumes categorical agreement and struggles with multi-label classification, weighted F-1 scores

annotation details.

**Post-processing** To encourage public use, such as fine-tuning LLMs with SCHOLAWRITE, we applied post-processing to increase usability and mitigate privacy concerns (see Appendix A.3). Listing 1 presents a sample data entry, where the author corrects “expct” to “aspect” for grammatical accuracy. This edit, aimed at improving fluency, is better handle class imbalances and partial agreements.

```

{
  "Project": 1, # Overleaf Project ID
  "timestamp": 1702958491535, # recorded time
    when change was made
  "author": "1",
  "before text": "One important expt of
    studying LLMs is ..",
  "after text": "One important aspect of
    studying LLMs is ..",
  "label": "Fluency",
  "high-level": "REVISION"
}

```

Listing 1: An example entry of the post-processed data. Each data entry represents an array of a keystroke change (or edits) with metadata information and a label of annotated intention.

annotated as “fluency” in our taxonomy.

#### 4 SCHOLAWRITE: A Dataset of Cognitive Process of Scholarly Writing

**Summary** Our post-processed dataset, SCHOLAWRITE, contains end-to-end writing trajectories with annotated intentions, for five Overleaf projects whose final product turned into arXiv preprints. The dataset consists of 61,504 arrays of keystroke changes with fine-grained annotations of writing intentions. Appendix Table 6 shows the overall statistics of the dataset.

**Writing Intention Distributions** The writing intention distributions is illustrated in Figure 3c. During the planning stage, idea generation is the most frequent intention. Text production dominates the implementation stage, and clarity becomes the primary focus during the revision stage. Since we defined the boundary between implementation and revision as the point where meaning changes occur, the high frequency of text production suggests that authors often continue revising their texts by introducing new topics into the documents. Appendix Table 8 shows the label distribution per project.

**Flows Between Writing Intentions** We analyze the flow of writing intentions most likely to follow each other throughout the writing process, as presented in Table 2. Many intentions proceed to text production, where the idea generation has the highest probability of feeding into text production. Figure 3a also shows a similar pattern of flows between text productions and other intentions. Also, in Table 2 the reflexive relationship between text production and clarity suggests a constant loop of producing new texts and refining them, ensuring the

Label	Subsequent label	Probability
Idea Generation	→ Text Production	0.52
Idea Organization	→ Idea Generation	0.34
Citation Integration	→ Text Production	0.37
Cross-reference	→ Text Production	0.36
Clarity	→ Text Production	0.35
Coherence	→ Text Production	0.34
Scientific Accuracy	→ Text Production	0.34

Table 2: Top-2 Probability of inter-connections between writing intentions. For example, in 34% of instances where an author engaged in “Idea Organization,” the subsequent intention was “Idea Generation.” See Appendix Table 7 for full description.

precision and reasonability of their claims. Please see Appendix Figure 13 for the intention flows of each of the five projects.

#### Time-series Distributions of Writing Intentions

We calculated the average Wasserstein distance between each intention distribution and uniform distribution to assess how evenly intentions occur throughout the writing process. As shown in Figure 3d, text production had the smallest distance, while scientific accuracy had the largest. This suggests that text production is spread throughout the writing, whereas scientific accuracy is concentrated in specific phases. A similar pattern appears in Figure 3e, where text production is evenly distributed over time, and scientific accuracy peaks in the middle-to-late of the writing process. Figure 3b demonstrates a similar pattern that text production of the implementation stage spreads evenly over time. Types of clarity and structural revisions tend to occur after the medium steps of writing. Please see Appendix Figures 9 to 12 for each of the five projects.

### 5 Applications for Writing Assistance

We envision SCHOLAWRITE as a valuable resource for training language models and improving future writing assistants for scholarly writing. To evaluate its usability, we conducted experiments training LLMs to mimic the complex, non-linear writing processes of human scholars. Specifically, we aimed to showcase the capabilities of LLMs trained on SCHOLAWRITE in two scenarios:

(1) **Predicting an author’s next writing intention (§5.1):** The task is crucial for writing assistants to accurately assess the writer’s current status in context and predict the correct writing in-

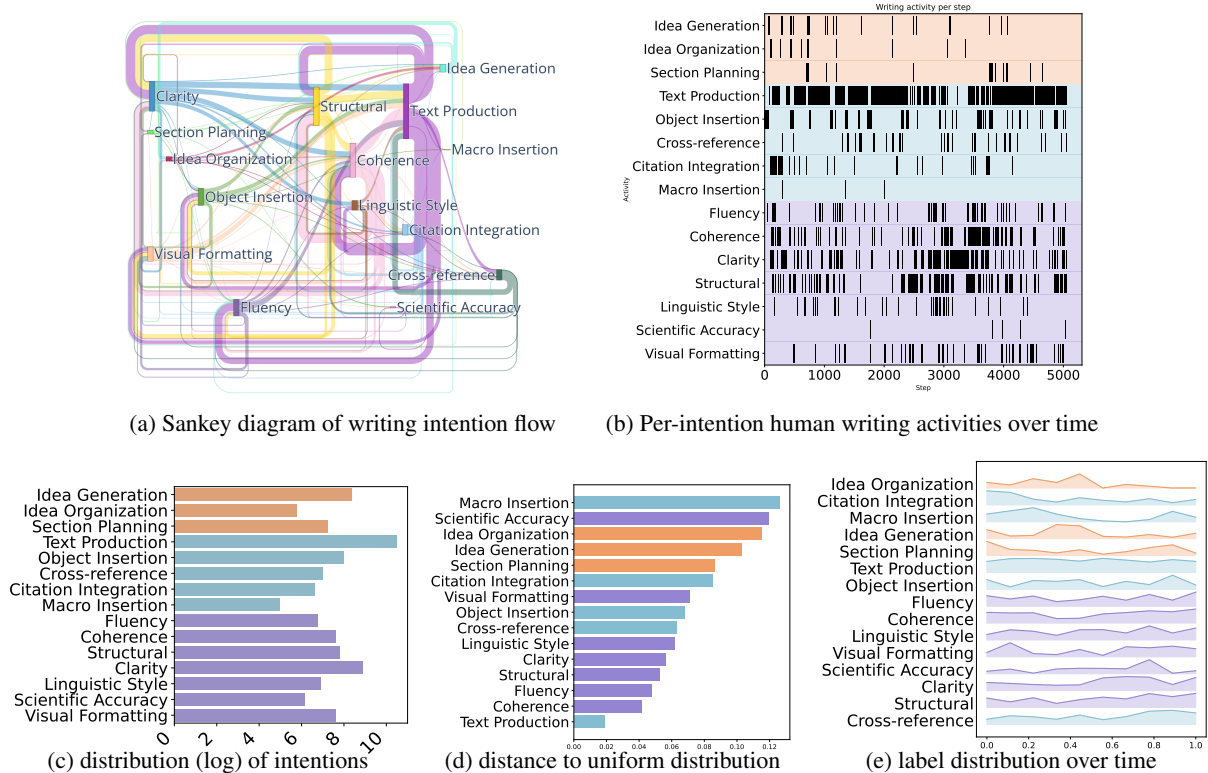


Figure 3: Overall characteristics of scholarly writing patterns in the SCHOLAWRITE dataset

tention. This enables them to offer cognitively-appropriate writing suggestions that align with the writer’s needs.

(2) **Iteratively generating scholarly writing actions from scratch (§5.2)** (called Iterative Self-Writing), mirroring the human writing process: This task focuses on how well the model trained on our dataset can replicate the actual iterative writing and thinking process of scholars, and whether the generated text achieves higher quality compared to LLM-prompted writing.

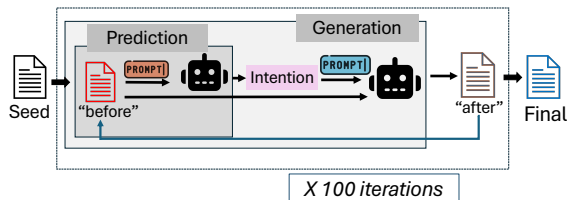


Figure 4: The overview of next writing intention prediction task (Prediction box) and iterative self-writing task setup (the whole pipeline).

### 5.1 Predicting Next Writing Intention

**Setup & Metrics** This task (represented by the inner box “Prediction” in Figure 4) takes the “before-text” from a keystroke pair (i.e., Listing 1) and context **prompt**, and predicts the writing **intention** to apply for the subsequent actions.

We use BERT (Devlin et al., 2019), RoBERTa (Liu et al., 2019), and Llama3.1-8B-Instruct (Dubey et al., 2024) as baselines, fine-tuning each on the SCHOLAWRITE training set. For comparison, we also run GPT-4o (OpenAI, 2024) on the test set. To evaluate model performance, we used a weighted F-1 score<sup>5</sup>. See Appendix E.2 for details.

	BERT	RoBERTa	Llama-8B	GPT-4o
Base	0.04	0.02	0.12	0.08
+ SW	<b>0.64</b>	<b>0.64</b>	<b>0.13</b>	-

Table 3: Weighted F-1 scores of each baseline and its corresponding fine-tuned model with SCHOLAWRITE (+SW) for the writing intention prediction task.

**Results** Table 3 presents the weighted F1 scores for predicting writing intentions across baselines and fine-tuned models. Regardless of the intricate nature of the task itself<sup>6</sup>, all models finetuned on SCHOLAWRITE show an improved performance compared to their baselines. BERT and RoBERTa

<sup>5</sup>Weighted F-1 was chosen to address skewed label distribution (as shown in Figure 3c and Table 1).

<sup>6</sup>Each model predicts the next intention using only the “before” text, while human annotators consider multiple “before and after” edits. Moreover, the chosen next intention is not necessarily the only correct one.

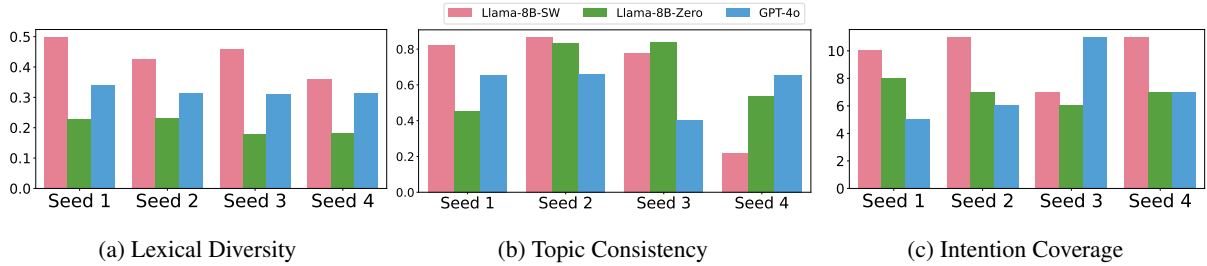


Figure 5: Metric scores of the final writing output of models (LLama-8B-SW, LLama-8B-Zero, and GPT-4o) after 100 iterations of the iterative self-writing experiment. We observe that our LLama-8B-SW model presents the highest quality of the final output across most of the four seed documents.

Iter.	LLama-8B-SW	LLama-8B-Zero	GPT-4o
10	[..Editing Abstract..] but rather should be used to improve the flow of information to avoid information-; over <b>load-claiming (Text Production)</b>	[..Generating Experiment Section] ..with an average acceptance rate of <b>87.5%</b> (standard deviation: 3.2%),... .. with a reduction of <b>305%</b> in revision time and <b>258%</b> in human effort... ( <b>Scientific Accuracy</b> )	[..Same as the 9th iteration] \usepackage{booktabs} \usepackage{array} \usepackage{hyperref}... \method <b>R3...</b> \method <b>R3...</b> ( <b>Cross-reference</b> )
25	[..Editing Abstract..] but rather should be used to improve the flow of information to avoid information overload;. ( <b>Text Production</b> )	[..Editing Table] Acceptance rate (%) & 75 & <b>87.58.2</b> // Revision time (minutes) & 45 & <b>298.5</b> Human effort (minutes) & 60 & <b>432</b> ... ( <b>Scientific Accuracy</b> )	[..Same as the 24th iteration] The <b>efficiency</b> ...consider the structural flowchart in Figure \ref{fig:system-architecture}, which outlines... [Inserting the figure] \label{fig:system-architecture} ( <b>Object Insertion</b> )
51	[..Editing Abstract..] but rather should be used to improve the flow of information, offering <b>teach</b> previously trained to a load more related information over the load. ( <b>Clarity</b> )	\section{Impact of the Proposed System} The proposed system, <b>R3</b> , has the potential to impact the writing process in several ways.... \section{Future Research Direction}... ( <b>Structural</b> )	\bibitem{jones2020one_shot} Jones, L., \& Green, D. (2020). \bibitem{brown2021collaboration} Brown, E., \& Davis, M. (2021). \bibitem{garcia2021revision_metrics} Garcia, I., \& Lopez, R. (2021). ( <b>Object Insertion</b> )
100	[..Same as the 99th iteration] \end{document} ( <b>Macro Insertion</b> )	[..Same as the 99th ] \usepackage[margin=1in]{geometry} % Customizes page margins \usepackage{hyperref} % Enables hyperlinks ( <b>Fluency</b> )	[..Same as the 93th iteration] \bibliography{references} \bibliographystyle{plain} % <b>References</b> \begin{thebibliography}{} ( <b>Cross-reference</b> )

Table 4: Example model outputs at different iterations, from the seed document (Du et al., 2022a) (Listing 3).

achieved the most improvement, while LLama-8B-Instruct showed a modest improvement after fine-tuning. As detailed in Appendix E, more training epochs and encoder-decoder architectures of BERT variants are assumed to be the reason for significant improvement compared to LLMs. This aligns with findings from Grasso and Locci (2024); Yu et al. (2023), which shows that RoBERTa and BERT can often match or even outperform LLMs for the text classification tasks. Those results demonstrate the effectiveness of our SCHOLAWRITE dataset to align language models with writers’ intentions.

## 5.2 Iterative Self-Writing

**Setups** During iterative self-writing (Figure 4), a fine-tuned model processes LaTeX-formatted

seed document (as “before-text”) with a context **prompt** to predict the next **intention**, then revises the text (“after-text”) accordingly given **prompt**. The revised document then serves as the new seed for the next iteration. This process repeats until a set iteration limit (e.g., 100) is reached. All models use the same train (80%)-test (20%) split across experiments. See Appendix E and Figure 14 for training details.

We fine-tune Llama3.1-8B-Instruct (LLama-8B-SW) and compare it to vanilla Llama-8B-Instruct (LLama-8B-Zero) and GPT-4o. Also, seed documents were derived from LaTeX-formatted abstracts of four award-winning NLP papers on diverse topics (Zeng et al., 2024; Lu et al., 2024b; Du et al., 2022a; Etxaniz et al., 2024) (Appendix 2-5).

**Metrics** We evaluated *lexical diversity* (unique-to-total token ratio), *topic consistency* (cosine similarity between seed and final output), and *intention coverage* (unique writing intentions used over 100 iterations). For **human evaluation**, three native English speakers with LaTeX expertise assessed outputs from **Llama-8B-Zero** and **Llama-8B-SW** on *accuracy* (alignment with predicted intention), *alignment* (similarity to human writing), *fluency* (grammatical correctness), *coherence* (logical structure), and *relevance* (connection to the seed document) - Refer to Appendix E.8. Accuracy was judged per iteration, while other metrics used pairwise comparisons. Inter-annotator agreement (IAA)<sup>7</sup> was measured using Krippendorff’s alpha for accuracy and percentage agreement for others.

Metrics	Model	Seed 1	Seed 2	Seed 3	Seed 4
Accuracy	SW	21.0	10.3	18.3	15.3
	Zero	35.7	29.7	45.3	43.3
Alignment	SW	0	0	0	0
	Zero	3	3	3	3
Fluency	SW	0	0	0	0
	Zero	3	3	3	3
Coherence	SW	0	0	0	0
	Zero	3	3	3	3
Relevance	SW	1	3	2	1
	Zero	3	3	3	3

Table 5: Human evaluation results for all the four seed documents. For *accuracy*, each represents the average number of generated keystrokes inferred with correct intentions across three evaluators per seed. For other metrics, each indicates the number of human evaluators who agreed based on the performance of each model. **SW** abbreviated for **Llama-8B-SW** and **Zero** for **Llama-8B-Zero**, respectively.

**Results** Figure 5 shows that **Llama-8B-SW** consistently produced the most lexically diverse words, generated the most semantically aligned topics (Seeds 1 & 2), and covered the most writing intentions (except Seed 3). These results underscore the value of SCHOLAWRITE in improving scholarly writing quality generated by language models.

However, our human evaluation (Table 5) revealed that **Llama-8B-SW** generated less human-like writing, in terms of fluency and logical claims.

<sup>7</sup>The IAA scores are 0.84 (**SW**) and 0.76 (**Zero**) for accuracy, all 100% for alignment, fluency, coherence, and 49.8% (**SW**) and 100% (**Zero**) for relevance.

It also struggled with generating texts aligned with the predicted intentions. See Appendix Tables 9 to 12 for more details. Despite the weaknesses, **Llama-8B-SW** still produced more relevant content (Seed 2), which aligns with topic consistency trends in Figure 5, highlighting the usefulness of SCHOLAWRITE dataset in certain contexts.

Moreover, **Llama-8B-SW** exhibited the most human-like writing activity patterns over time (Figure 17), which frequently switches between implementation and revision and covers all three high-level processes. **Llama-8B-Zero** and **GPT-4o** tend to remain in a single high-level stage throughout all 100 iterations of self-writing. Compared to Appendix Figure 12, which depicts frequent transitions across all three stages in an early draft (e.g., the first 100 steps), **Llama-8B-SW** most closely replicates human writing behaviors in iterative writing tasks. These findings reinforce the potential of SCHOLAWRITE in helping LLMs emulate human scholarly writing processes.

## 6 Conclusion and Future Work

We present SCHOLAWRITE, a first-of-its-kind dataset capturing the end-to-end cognitive process of scholarly writing, comprising nearly 62K LaTeX keystrokes collected via our custom-built Chrome extension. This dataset, sourced from ten graduate students with varying levels of scientific writing expertise, is further enriched with expert annotations based on a novel taxonomy of cognitive writing intentions inspired by Flower and Hayes (1981); Koo et al. (2023). Through several experiments, SCHOLAWRITE shows its value for advancing the cognitive capabilities of LLMs and developing cognitively-aligned writing assistants, enabling them to mimic the complex, non-linear, and intention-driven nature of human writing.

Future work includes expanding the dataset to diverse academic fields, authors, and collaborative projects, thus enabling models to generalize beyond fact recall to emulate human decision-making and reasoning in more realistic academic environments. Additionally, integrating advanced memory architectures and lifelong learning techniques could further enhance LLMs’ ability to adapt dynamically to evolving writing intentions and produce coherent, high-quality scholarly outputs.



## Limitations and Ethical Considerations

We acknowledge several limitations in our study. First, the SCHOLAWRITE dataset is **currently limited to the computer science domain**, as LaTeX is predominantly used in computer science journals and conferences. This domain-specific focus may restrict the dataset’s generalizability to other scientific disciplines. Future work could address this limitation by collecting keystroke data from a broader range of fields with diverse writing conventions and tools, such as the humanities or biological sciences. For example, students in humanities usually write book-length papers and integrate more sources, so it could affect cognitive complexities.

Second, our dataset includes **contributions from only 10 participants, resulting in five final preprints on arXiv**. This small-to-medium sample size is partly due to privacy concerns, as the dataset captures raw keystrokes that transparently reflect real-time human reasoning. To mitigate these concerns, we removed all personally identifiable information (PII) during post-processing and obtained full IRB approval for the study’s procedures. However, the highly transparent nature of keystroke data may still have discouraged broader participation. Future studies could explore more robust data collection protocols, such as advanced anonymization or de-identification techniques, to better address privacy concerns and enable larger-scale participation. We also call for community-wide collaboration and participation for our next version of our dataset, SCHOLAWRITE 2.0 and encourage researchers to contact authors for future participation.

Furthermore, **all participants were early-career researchers** (e.g., PhD students) at an R1 university in the United States. Expanding the dataset to include senior researchers, such as post-doctoral fellows and professors, could offer valuable insights into how writing strategies and revision behaviors evolve with research experience and expertise. Despite these limitations, our study captured an end-to-end writing process for 10 unique authors, resulting in a diverse range of writing styles and revision patterns. The dataset contains approximately 62,000 keystrokes, offering fine-grained insights into the human writing process, including detailed editing and drafting actions over time. While the number of articles is limited, the granularity and volume of the data provide a rich resource for understanding writing behaviors. Prior

research has shown that detailed keystroke logs, even from small datasets, can effectively model writing processes (Leijten and Van Waes, 2013; Guo et al., 2018; Vandermeulen et al., 2023). Unlike studies focused on final outputs, our dataset enables a process-oriented analysis, emphasizing the cognitive and behavioral patterns underlying scholarly writing.

Third, **collaborative writing is underrepresented** in our dataset, as only one Overleaf project involved multiple authors. This limits our ability to analyze co-authorship dynamics and collaborative writing practices, which are common in scientific writing. Future work should prioritize collecting multi-author projects to better capture these dynamics. Additionally, the dataset is **exclusive to English-language writing**, which restricts its applicability to multilingual or non-English writing contexts. Expanding to multilingual settings could reveal unique cognitive and linguistic insights into writing across languages.

Fourth, due to computational and cost constraints, we evaluated the usability of the SCHOLAWRITE dataset with **a limited number of LLMs and hyperparameter configurations**. As shown in Table 3, the Llama-8B-Instruct model demonstrated only marginal improvements after fine-tuning on our dataset. This underscores the need for future research to explore advanced techniques, such as fine-grained prompt engineering, to better align LLM outputs with human writing processes. Specifically, optimizing prompts with clearer contextual guidance (e.g., "before-text" and intention label definitions) may significantly enhance model performance.

Finally, the human evaluation process in Section E.8 was determined as exempt from IRB review by the authors’ primary institution, while the data collection using our Chrome extension program was fully approved by the IRB at our institution. Importantly, no LLMs were used during any stage of the study, except for grammatical error correction in this manuscript.

## References

- Veerle M. Baaijen, David Galbraith, and Kees de Glopper. 2012. *Keystroke analysis: Reflections on procedures and measures*. *Written Communication*, 29(3):246–277.
- Samir Bourekkache. 2022. English for specific pur-

- poses: writing scientific research papers. case study: Phd students in the computer science department.
- Sathena Chan. 2017. Using keystroke logging to understand writers' processes on a reading-into-writing test. *Language Testing in Asia*, 7:1–27.
- Mike D'Arcy, Alexis Ross, Erin Bransom, Bailey Kuehl, Jonathan Bragg, Tom Hope, and Doug Downey. 2024. [ARIES: A corpus of scientific paper edits made in response to peer reviews](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 6985–7001, Bangkok, Thailand. Association for Computational Linguistics.
- Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. 2024. Qlora: Efficient finetuning of quantized llms. *Advances in Neural Information Processing Systems*, 36.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186.
- Paul B Diederich. 1974. Measuring growth in english.
- Wanyu Du, Zae Myung Kim, Vipul Raheja, Dhruv Kumar, and Dongyeop Kang. 2022a. [Read, revise, repeat: A system demonstration for human-in-the-loop iterative text revision](#). In *Proceedings of the First Workshop on Intelligent and Interactive Writing Assistants (In2Writing 2022)*, pages 96–108, Dublin, Ireland. Association for Computational Linguistics.
- Wanyu Du, Vipul Raheja, Dhruv Kumar, Zae Myung Kim, Melissa Lopez, and Dongyeop Kang. 2022b. [Understanding iterative revision from human-written text](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3573–3590, Dublin, Ireland. Association for Computational Linguistics.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. 2024. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*.
- Julen Etxaniz, Oscar Sainz, Naiara Miguel, Itziar Aldabe, German Rigau, Eneko Agirre, Aitor Ormazabal, Mikel Artetxe, and Aitor Soroa. 2024. [Latxa: An open language model and evaluation suite for Basque](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 14952–14972, Bangkok, Thailand. Association for Computational Linguistics.
- Linda Flower and John R. Hayes. 1981. [A cognitive process theory of writing](#). *College Composition and Communication*, 32(4):365–387.
- Francesca Grasso and Stefano Locci. 2024. Assessing generative language models in classification tasks: Performance and self-evaluation capabilities in the environmental and climate change domain. In *International Conference on Applications of Natural Language to Information Systems*, pages 302–313. Springer.
- Hongwen Guo, Paul D Deane, Peter W van Rijn, Mo Zhang, and Randy E Bennett. 2018. Modeling basic writing processes from keystroke logs. *Journal of Educational Measurement*, 55(2):194–216.
- John R Hayes and Virginia W Berninger. 2014. Cognitive processes in writing: A framework.
- Takumi Ito, Tatsuki Kuribayashi, Hayato Kobayashi, Ana Brassard, Masato Hagiwara, Jun Suzuki, and Kentaro Inui. 2019. Diamonds in the rough: Generating fluent sentences from early-stage drafts for academic writing assistance. *arXiv preprint arXiv:1910.09180*.
- Chao Jiang, Wei Xu, and Samuel Stevens. 2022. [arXivEdits: Understanding the human revision process in scientific writing](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 9420–9435, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Roger Johansson, Åsa Wengelin, Victoria Johansson, and Kenneth Holmqvist. 2010. Looking at the keyboard or the monitor: relationship with text production processes. *Reading and writing*, 23:835–851.
- Léane Jourdan, Florian Boudin, Richard Dufour, and Nicolas Hernandez. 2023. Text revision in scientific writing assistance: An overview. *arXiv preprint arXiv:2303.16726*.
- Léane Jourdan, Florian Boudin, Nicolas Hernandez, and Richard Dufour. 2024. Casimir: A corpus of scientific articles enhanced with multiple author-integrated revisions. *arXiv preprint arXiv:2403.00241*.
- Elena D Kallestinova. 2011. How to write your first research paper. *The Yale journal of biology and medicine*, 84(3):181.
- Zae Myung Kim, Wanyu Du, Vipul Raheja, Dhruv Kumar, and Dongyeop Kang. 2022. [Improving iterative text revision by learning where to edit from other revision tasks](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 9986–9999, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Keita Kobayashi, Kohei Koyama, Hiromi Narimatsu, and Yasuhiro Minami. 2022. [Dataset construction for scientific-document writing support by extracting related work section and citations from PDF papers](#). In *Proceedings of the Thirteenth Language Resources and Evaluation Conference*, pages 5673–5682, Marseille, France. European Language Resources Association.

- Ryan Koo, Anna Martin, Linghe Wang, and Dongyeop Kang. 2023. Decoding the end-to-end writing trajectory in scholarly manuscripts. *arXiv preprint arXiv:2304.00121*.
- Alexandra Rowe Krapels. 1990. [Second language writing: An overview of second language writing process research](#).
- Dennis Kundisch, Jan Muntermann, Anna Maria Oberländer, Daniel Rau, Maximilian Röglinger, Thorsten Schoormann, and Daniel Szopinski. 2021. An update for taxonomy designers: methodological guidance from information systems research. *Business & Information Systems Engineering*, pages 1–19.
- Iliia Kuznetsov, Jan Buchmann, Max Eichler, and Iryna Gurevych. 2022. Revise and resubmit: An intertextual model of text-based collaboration in peer review. *Computational Linguistics*, 48(4):949–986.
- Muhammad M Abdel Latif. 2008. A state-of-the-art review of the real-time computer-aided study of the writing process. *International Journal of English Studies*, 8(1):29–50.
- Mariëlle Leijten and Luuk Van Waes. 2013. Keystroke logging in writing research: Using inputlog to analyze and visualize writing processes. *Written Communication*, 30(3):358–392.
- Weixin Liang, Yuhui Zhang, Hancheng Cao, Binglu Wang, Daisy Yi Ding, Xinyu Yang, Kailas Vodrahalli, Siyu He, Daniel Scott Smith, Yian Yin, et al. 2024. Can large language models provide useful feedback on research papers? a large-scale empirical analysis. *NEJM AI*, 1(8):AIoa2400196.
- Eva Lindgren and Kirk Sullivan. 2019. *Observing writing: Insights from keystroke logging and handwriting*, volume 38. Brill.
- Eva Lindgren and Kirk PH Sullivan. 2003. Stimulated recall as a trigger for increasing noticing and language awareness in the l2 writing classroom: A case study of two young female writers. *Language Awareness*, 12(3-4):172–186.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Roberta: A robustly optimized bert pretraining approach](#). *ArXiv*, abs/1907.11692.
- Chris Lu, Cong Lu, Robert Tjarko Lange, Jakob Foerster, Jeff Clune, and David Ha. 2024a. The ai scientist: Towards fully automated open-ended scientific discovery. *arXiv preprint arXiv:2408.06292*.
- Liang Lu, Peirong Xie, and David Mortensen. 2024b. [Semisupervised neural proto-language reconstruction](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 14715–14759, Bangkok, Thailand. Association for Computational Linguistics.
- Charles A MacArthur and Steve Graham. 2016. Writing research from a cognitive perspective.
- Masato Mita, Keisuke Sakaguchi, Masato Hagiwara, Tomoya Mizumoto, Jun Suzuki, and Kentaro Inui. 2022. Towards automated document revision: Grammatical error correction, fluency edits, and beyond. *arXiv preprint arXiv:2205.11484*.
- Hiromi Narimatsu, Kohei Koyama, Kohji Dohsaka, Ryuichiro Higashinaka, Yasuhiro Minami, and Hirotoshi Taira. 2021. Task definition and integration for scientific-document writing support. In *Proceedings of the Second Workshop on Scholarly Document Processing*, pages 18–26.
- Robert C Nickerson, Upkar Varshney, and Jan Muntermann. 2013. A method for taxonomy development and its application in information systems. *European Journal of Information Systems*, 22(3):336–359.
- OpenAI. 2024. [Hello gpt-4o](#). Accessed: 2024-10-14.
- James Pustejovsky, Harry Bunt, and Annie Zaenen. 2017. Designing annotation schemes: From theory to model. *Handbook of Linguistic Annotation*, pages 21–72.
- Nina Vandermeulen, Elke Van Steendam, Sven De Maeyer, and Gert Rijlaarsdam. 2023. Writing process feedback based on keystroke logging and comparison with exemplars: Effects on the quality and process of synthesis texts. *Written Communication*, 40(1):90–144.
- Georgios Velentzas, Andrew Caines, Rita Borgo, Erin Pacquetet, Clive Hamilton, Taylor Arnold, Diane Nicholls, Paula Buttery, Thomas Gaillat, Nicolas Ballyer, et al. 2024. Logging keystrokes in writing by english learners. In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 10725–10746.
- Åsa Wengelin and Victoria Johansson. 2023. [Investigating Writing Processes with Keystroke Logging](#), pages 405–420. Springer International Publishing, Cham.
- Hao Yu, Zachary Yang, Kellin Pelrine, Jean Francois Godbout, and Reihaneh Rabbany. 2023. [Open, closed, or small language models for text classification?](#) *Preprint*, arXiv:2308.10092.
- Yi Zeng, Hongpeng Lin, Jingwen Zhang, Diyi Yang, Ruoxi Jia, and Weiyan Shi. 2024. [How johnny can persuade LLMs to jailbreak them: Rethinking persuasion to challenge AI safety by humanizing LLMs](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 14322–14350, Bangkok, Thailand. Association for Computational Linguistics.
- Mengxiao Zhu, Mo Zhang, and Lin Gu. 2023. Insights into editing and revising in writing process using keystroke logs. *Language Assessment Quarterly*, 20(4-5):445–468.

## A More About Data Collection Process

### A.1 Participant Recruitment & Demographics

We recruited ten graduate students in the computer science department who actively prepared their manuscripts in Overleaf, an online L<sup>A</sup>T<sub>E</sub>X editor, and who aimed to submit their manuscripts to peer-reviewed conferences. We held a consent procedure with each participant through a 30-minute virtual meeting remotely. After the consent process, we installed on their computers a Chrome extension program that we designed and implemented only for this study and asked for the ID number of only the Overleaf projects that the participants agreed to share as their manuscripts. We provided all participants with a \$100 Amazon gift card per project, which could be divided among the authors involved in the project. Our data collection process is approved by the IRB of the authors' primary institution.

All ten participants of our study are graduate students who currently study computer science domain at an accredited university in the United States. Out of the ten, two of them identified themselves as native English speakers, and the remaining participants identified themselves as proficient in English in terms of writing. Also, two of the ten participants attained a Master of Science degree in Computer Science with several publication experiences, and the remaining eight of them are currently PhD students with extensive research experiences.

### A.2 Technical Details of System Implementations

When a key-up event fires in a browser, the extension collects the writer's viewable texts in the code editor panel<sup>8</sup>. When each of these actions<sup>9</sup> occurs, the extension uses 'diff\_match\_patch' package<sup>10</sup> to generate an array of differences between two subsequent texts (i.e., Figure 6). Then, the extension will send the array along with metadata (e.g., time stamp, author ID, etc.) to the backend server.

For any Overleaf project that consists of multiple LaTeX files, we also collected all keystrokes from

<sup>8</sup>To prevent privacy concerns, the extension filters out keystroke data from any unauthorized Overleaf projects. Please see Appendix A.2 for more details.

<sup>9</sup>Example actions are (1) inserting a space/newline; (2) copy/paste; (3) undo/redo; (4) switching files and (5) scrolling a page.

<sup>10</sup><https://github.com/google/diff-match-patch>

subfiles associated with the main LaTeX file. Our comprehensive data collection process captures the end-to-end writing processes of the participating authors across all parts of Overleaf projects. This approach ensures that our dataset reflects the full scope of scholarly writing including edits made in auxiliary files such as files of each section, appendix, bibliography, etc.

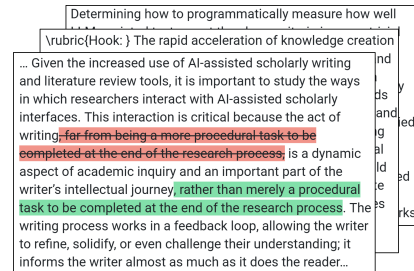


Figure 6: The array of differences between two subsequent texts, generated by diff\_match\_patch

We explain the technical implementation details of the two systems for the data collection process. For the Chrome extension, we implemented a backend application using Flask and Python and stored all keystroke data in the MongoDB database.

For the annotation interface, we used HTML/CSS and JavaScript for the client side and Flask for the backend. All data for the annotation interface was retrieved from the MongoDB database used in the Chrome extension system.

**Privacy Concerns** To prevent any issue of private data collection, we designed the backend of our Chrome extension to fetch only the IDs of the Overleaf projects that participants consented to share during the recruitment process and filter out participants' keystroke data from any unauthorized projects. We used Google Sheet API to retrieve ID information that we collected during the recruitment process.

### A.3 Data Post-Processing

For use during the annotation phase, each keystroke entry from the raw collection includes the following fields: (1) a valid file name; (2) a valid writing action that triggered keystroke logging (e.g., copy, paste, typing, etc.); (3) a valid array of differences to enable visualization of writing trajectories; and (4) the line numbers in the Overleaf editor. Data entries annotated with a valid intention label (i.e., labels except 'artifact') and having a difference array length of fewer than or equal to 300 are then used for model training.

Regarding the additional postprocessing for public use, we took the following steps to post-process our data with the annotations to promote the usability of our dataset and prevent any privacy issues. For the annotation data, we only include the keystroke changes, anonymized project ID, time-frame information, and anonymized author’s name (e.g., 0, 1, 2, etc.) from the metadata. Then, we extract the before and after texts from the differences array. We also include the annotated intention label for each entry.

Then, we analyzed any ‘artifact’ generated due to natural keyboard/mouse activities or user switching files, and we discarded them as they are not informative to any writing intention in our taxonomy. Lastly, to prevent any privacy issues we removed keystrokes containing any private author information such as names, affiliations, contact information, and any personally identifiable information (PID) from the collected keystrokes. Instead, we replaced those with an arbitrary command (e.g., ‘\anonymous’).

## B More About Writing Intention Annotations & Taxonomy

### B.1 Annotator Recruitment

Due to privacy concerns, we did not hire external freelancers with expertise, rather the two corresponding authors of this paper annotated the data are graduate students who possess extensive scholarly writing experiences in natural language processing and data annotation skills. The raw keystroke data collected by our Chrome extension could potentially contain personally identifiable information, such as specific content edits or metadata that could reveal the identity of the authors. To ensure the confidentiality and ethical handling of sensitive information, we restricted access to the data to the authors only. This annotation process was also authorized by the IRB of the authors’ institution. Please note that the final dataset which will be released publicly is ensured not to contain any PII information through several sophisticated post-processing steps.

### B.2 Detailed Annotation Process

The two authors (or annotators) collaborated with a cognitive linguist to develop a codebook and review the results of the annotations. Also, the two annotators conducted an iterative open coding approach to identify several unique writing inten-

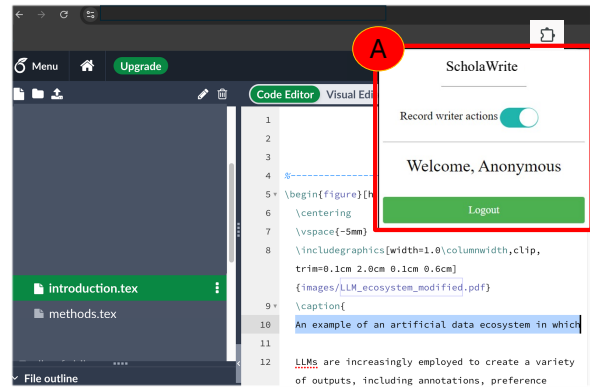


Figure 7: The Chrome extension interface (A) on the Overleaf project, where it collects real-time keystrokes in the Overleaf editor (highlighted).

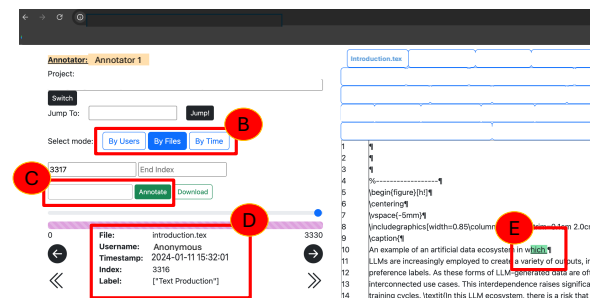


Figure 8: Annotation interface. During the annotation stage, annotators can click a viewing mode of the collected keystroke data (B). By right-clicking to navigate the timeline of keystroke trace in the interactive panel on the right side (E), annotators can choose an intention label under the drop-down menu (C). They can also view the meta-information of each annotated keystroke (D).

tions from keystrokes and developed a codebook of intention labels (“ground-truth labels”) within each high-level process (Planning, Implementation, and Revision) based on the findings from Flower and Hayes (1981); Koo et al. (2023). Using this codebook, those annotators re-labeled each span of keystrokes with the corresponding label during the annotation process.

The annotators were fully informed about all the labels and had complete access to them when annotating each data point. The annotation process for all the labels is the same: First, they view through multiple consecutive data points and identify which high-level label occurs (e.g., Planning, Implementation, or Revision). Once annotators have identified the current high-level label, attempting to identify where it ends. Then, they decide on the low-level label within the high-level label (e.g., idea generation or organization under the Planning stage, etc.). Finally, they identify the interval for low-level la-

bels and annotate data points in the interval with the identified low-level label. If a keystroke does not deliver any insight, then label it as an ‘artifact.’

We calculated **inter-annotator agreement** using the weighted F1 score in a multi-label, multi-class setting, which is suitable for our complex annotation schema involving multiple labels per instance. The weighted F1 score achieved was 0.71, indicating a high level of agreement between the annotators.

### C More About the Taxonomy of Scholarly Writing Process

During the **planning** stage, the writers engage in a process of generating and organizing raw ideas, arguments, or content structures that were not introduced in the previous trajectory. Based on the plan, the writers **implement** their plan by drafting full sentences and paragraphs and structuring the contents tangibly. At the same time, the writers enter the **revision** stage by improving the quality of their implemented sentences and LaTeX objects in terms of linguistic styles, format, or information accuracy. Particularly, spans of keystrokes whose intentions involved any changes but did not change the meaning of original texts are classified as **Revision**. For those edits that show changes in the meaning, we considered them as **Implementation**. Furthermore, if an author repeatedly adds, removes, and revises text back and forth until a sentence is completed, we consider this process as part of **text production**. Any subsequent changes made to the sentence after it is finished are considered **revision**. Table 1 presents the comprehensive, complete definitions of each intention of end-to-end scholarly writing process, identified from SCHOLAWRITE dataset.

### D SCHOLAWRITE dataset statistics

Table 6 presents the overall statistics of our SCHOLAWRITE dataset. Table 8 shows the distribution of intention labels per Overleaf project from SCHOLAWRITE.

Figures 9 to 12 show several characteristics of human writing process, analyzed from SCHOLAWRITE DATASET: (1) Figure 9 - the average Wasserstein distance between each intention distribution and uniform distribution; (2) Figure 10 - distribution of labels over time; (3) Figure 11 for high-level intention distribution over time; and (4) Figure 12 for intention-wise writing activity

Project	1	2	3	4	5
# Authors	1 (3)	1 (4)	1 (3)	1 (4)	9 (18)
# keystrokes	14,217	5,059	6,641	8,348	27,239
# Words added	17,387	23,835	7,779	12,448	57,511
# Words deleted	11,739	15,158	2,308	7,621	25,853

Table 6: Statistics of writing actions per Overleaf project in SCHOLAWRITE. ‘# Authors’ represents the number of authors who participated in our study (with the total number of authors in the final manuscript).

Label	Subsequent label	Probability
Idea Generation	→ Text Production	0.52
Idea Organization	→ Idea Generation	0.34
Section Planning	→ Text Production	0.33
Text Production	→ Clarity	0.20
Object Insertion	→ Text Production	0.32
Citation Integration	→ Text Production	0.37
Cross-reference	→ Text Production	0.36
Macro Insertion	→ Idea Generation	0.29
Fluency	→ Text Production	0.30
Coherence	→ Text Production	0.34
Clarity	→ Text Production	0.35
Structural	→ Text Production	0.27
Linguistic Style	→ Text Production	0.29
Scientific Accuracy	→ Text Production	0.34
Visual Formatting	→ Text Production	0.25

Table 7: Probability of inter-connections between writing intentions in SCHOLAWRITE. For example, in 34% of instances where an author engaged in “Idea Organization,” the subsequent intention was “Idea Generation.”

	1	2	3	4	5
Idea Generation	515	130	116	309	3255
Idea Organization	0	45	25	9	231
Section Planning	182	57	111	201	773
Text Production	9267	2438	5109	4478	14031
Object Insertion	583	383	62	486	1300
Cross-reference	141	112	13	292	458
Citation Integration	75	151	69	127	245
Macro Insertion	16	7	51	29	33
Linguistic Style	233	75	42	201	411
Coherence	422	242	126	193	1021
Clarity	1249	645	721	1180	3301
Scientific Accuracy	307	15	2	24	95
Structural	359	506	105	257	1042
Fluency	116	90	46	135	476
Visual Formatting	752	163	43	427	567

Table 8: Distribution of intention labels annotated across all five Overleaf projects.

distribution over time.

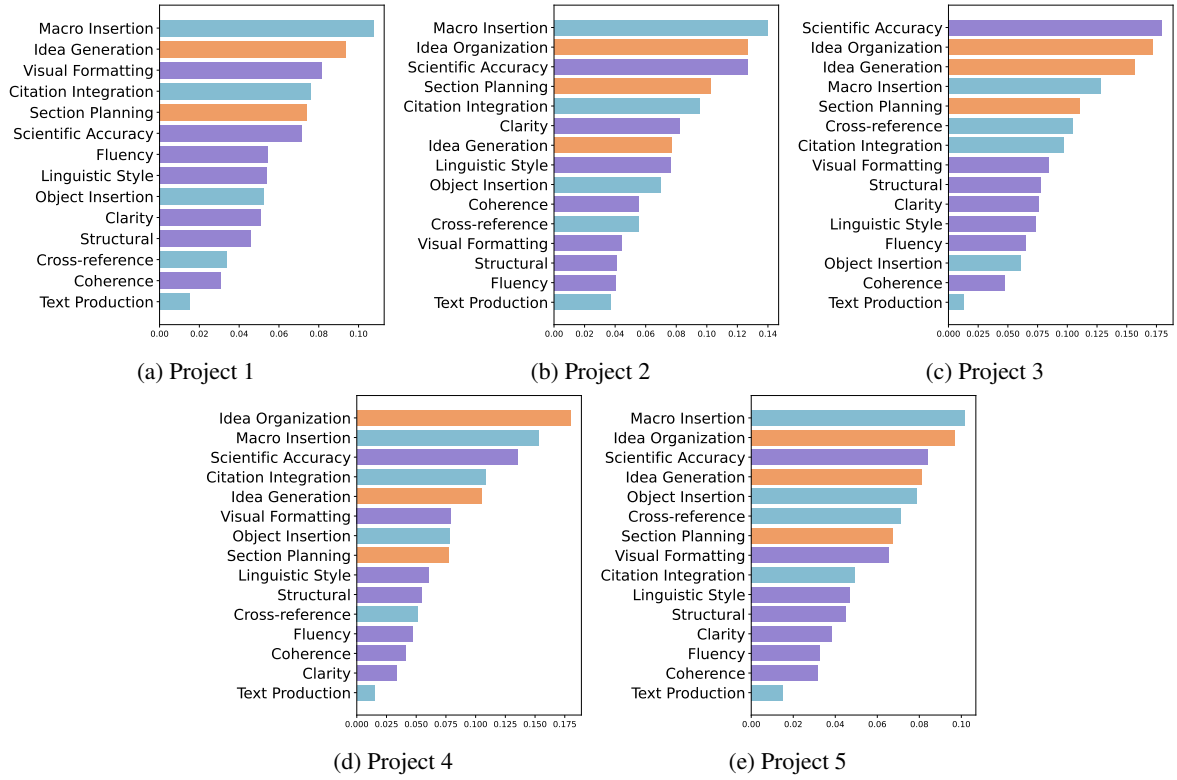


Figure 9: Wasserstein distance to uniform distribution for each distribution of writing intentions. Orange, Blue, and Purple represent Planning, Implementation, and Revision writing actions, respectively.

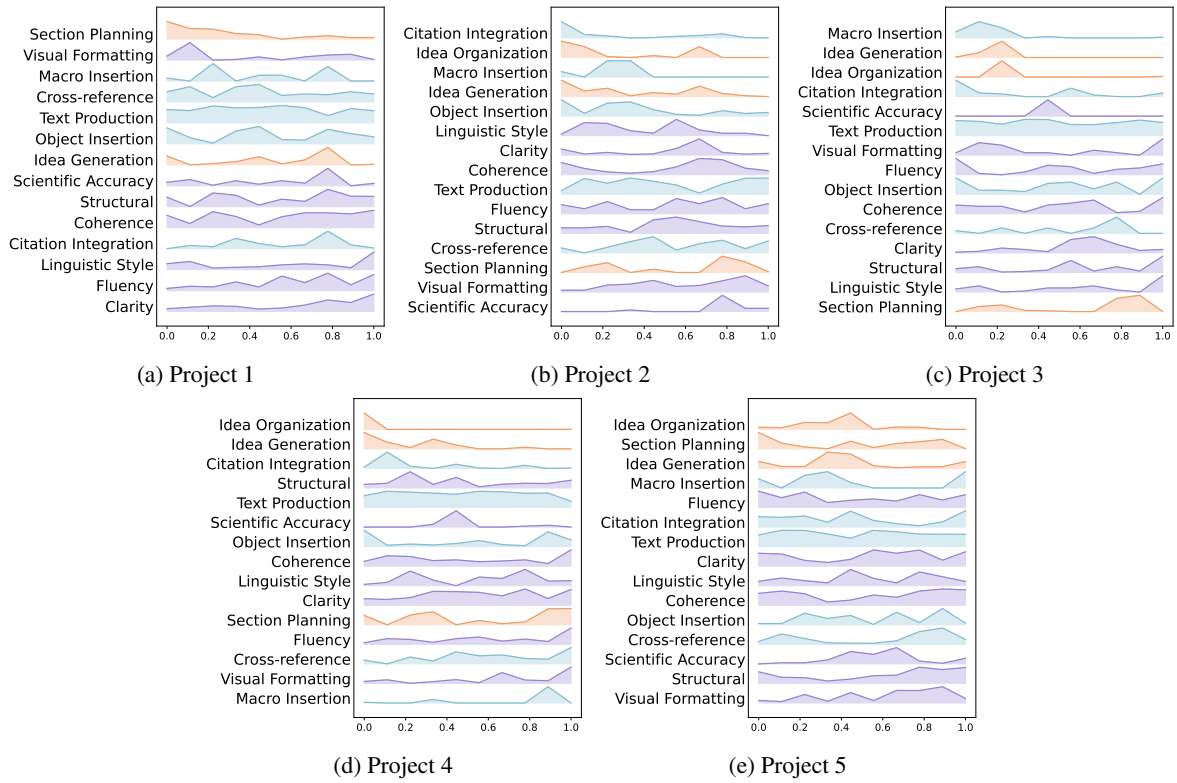


Figure 10: Distribution of labels over time across projects. Orange, Blue and Purple represent Planning, Implementation, and Revision writing actions respectively. The writing actions are sorted in ascending order, top to bottom, according to their distribution mean.

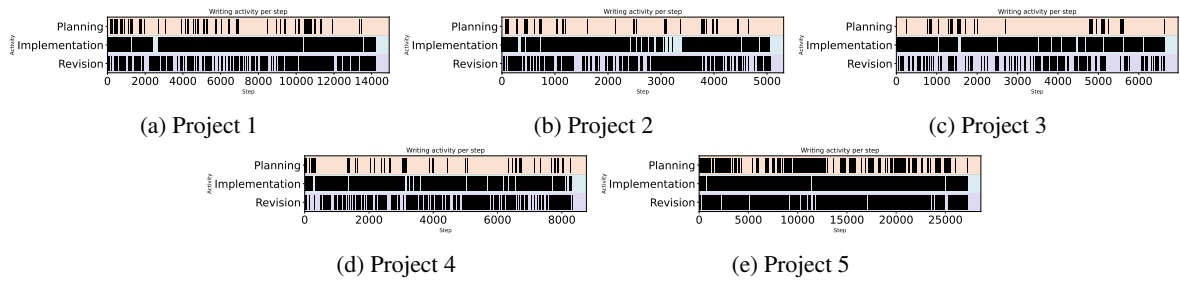


Figure 11: Distribution of high-level intention activities over time. Orange, Blue and Purple represent Planning, Implementation, and Revision writing actions respectively.

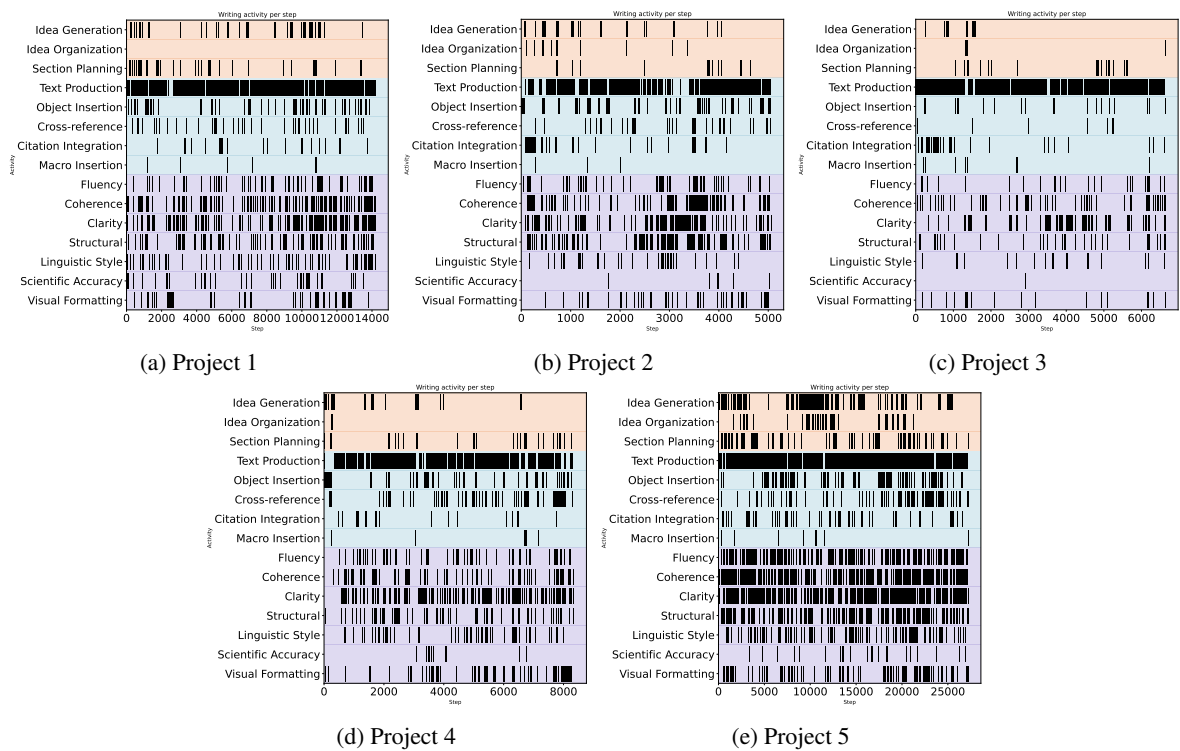


Figure 12: Distribution of Per-intention writing activities over time. Orange, Blue and Purple represent Planning, Implementation, and Revision writing actions respectively.



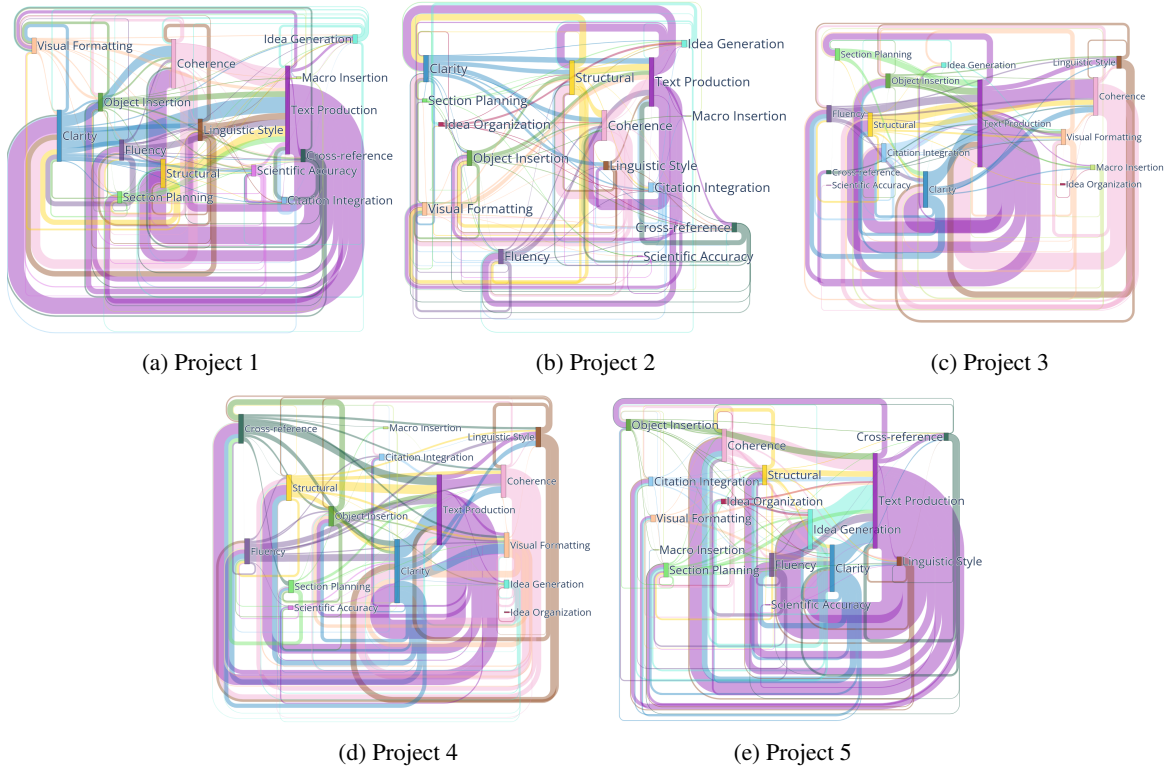


Figure 13: Sankey diagrams representing the intention flow of each project. Figure (a) to (d) generated from all intentions. Figure (e) generated from first 10K intentions due to computational constraint.

## E More about SCHOLAWRITE Evaluation

### E.1 Training environments

**BERT & RoBERTa** We fine-tuned BERT and RoBERTa with the following hyperparameter setups: (1) a learning rate of  $2e^{-5}$ ; (2) training batch size per device of 8; (3) evaluation batch size per device of 8; (4) the number of training epochs of 10; and (5) a weight decay of 0.01. For each model, it took approximately 3.5 hours on one NVIDIA RTX A6000.

**Llama** For all experiments, we used baseline models of 4-bit quantized Llama-8B-Instruct<sup>11</sup>, using unsloth library<sup>12</sup>.

For the **intention prediction task** (Sec. 5.1), here are the hyperparameter setups for the Llama models: (1) only one epoch of training; (2) a weight decay of 0.01; (3) warm-up steps of 5; (4) learning rate of  $2e^{-4}$ ; and (5) AdamW 8-bit optimizer. Due to computational constraints, we were able to run only one epoch for fine-tuning Llama models on our SCHOLAWRITE dataset. For Llama-8B, it took

<sup>11</sup><https://huggingface.co/unsloth/Meta-Llama-3.1-8B-Instruct-bnb-4bit>

<sup>12</sup><https://github.com/unslothai/unsloth>

approximately 8 hours on one RTX A5000.

For the **‘after’ text generation subtask** from the iterative self-writing experiment (Sec. 5.2), we used the following hyperparameter setups for the fine-tuned Llama-8B-Instruct: (1) only one epoch of training; (2) a weight decay of 0.01; (3) warm-up steps of 10; (4) learning rate of  $3e^{-4}$ ; and (5) AdamW 8-bit optimizer. Due to computational constraints, we were able to run only one epoch for fine-tuning Llama models on our SCHOLAWRITE dataset. Also, it took approximately 12 hours on one NVIDIA L40s.

**GPT-4o** We used the GPT-4o-2024-08-06 version for the classification and iterative writing experiments. The iterative writing with 100 iterations took approximately 1 hour on each seed.

### E.2 Details About Finetuning Process

**Next Intention Prediction (Sec 5.1)** The fine-tuning prompt included all possible labels with definitions, task instructions, the “before-text” chunk, and the corresponding human-annotated intention label, asking the model to predict the intention label based on the “before-text”. Differences in prompts were limited to only task instructions (see §E.3 for prompt details).

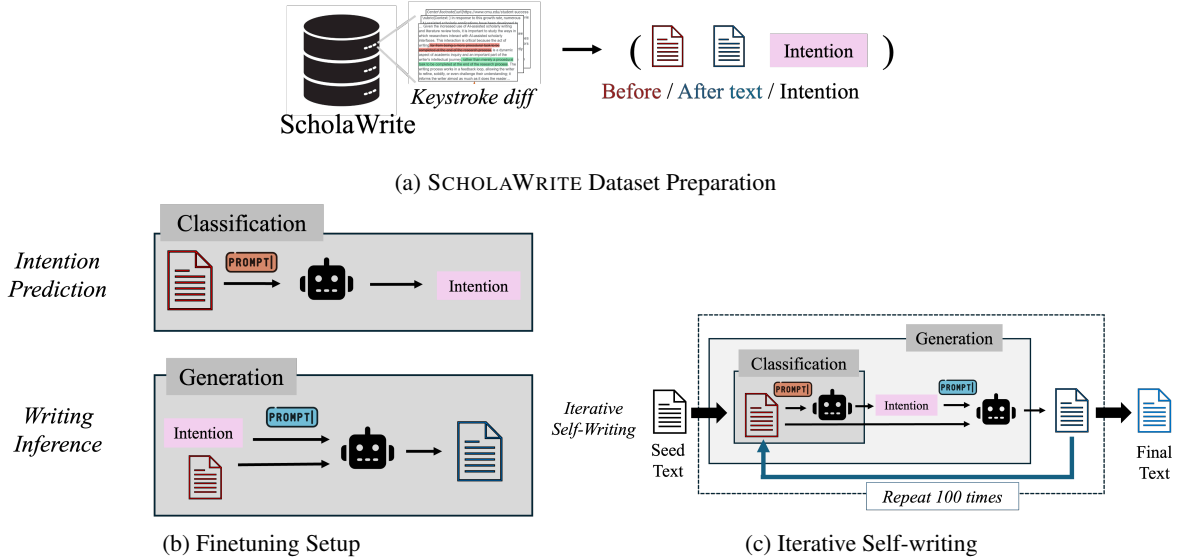


Figure 14: Experiment Setup for the iterative self-writing (Sec 5.2)

To achieve optimal performance while minimizing memory usage, we employed QLoRA (Dettmers et al., 2024) to fine-tune all linear modules of a 4-bit quantized Llama. During fine-tuning, we utilized the ‘train\_on\_response\_only’ function provided by the unsloth library, which masks the task instructions, intention label definitions, and “before” text with -100s. This ensures the model is trained exclusively on the response portion of the fine-tuning prompt (i.e., the predicted intention label), without being influenced by the instructional components of the input. The model was fine-tuned for one epoch with a batch size of 2, 4 gradient accumulation steps, and the AdamW 8-bit optimizer.

**Iterative Self-Writing (Sec 5.2)** The structure of the “after” text differs slightly to help the model learn where and what edits to make. We used the diff\_match\_patch library to generate a word-level difference array between the “before” and “after” texts. Special tokens (<same>, </same>, <del>, </del>, <add>, </add>) were added to the tokenizer, and the difference array was converted into text wrapped with these tokens. For example, given a “before” text of “Bad dog” and an “after” text of “Good dog”, the difference array would be [(-1, ‘Bad’), (1, ‘Good ’), (0, ‘dog’)]. This is converted into: <del>Bad </del><add>Good </add><same>dog</same>. This transformation was applied only to the “after” text, while the “before” text remained as plain LaTeX text.

For finetuning, we randomly split the

SCHOLAWRITE dataset into training (80%) and testing (20%) sets. From each intention label in the test set, we sample up to 300 keystroke entries due to budget constraints.

For intention prediction, we fine-tune Llama3.1-8B-Instruct on SCHOLAWRITE training set (LLAMA-8B-SW-PRED”) and compare it to baseline models (Llama-8B-Instruct and GPT-4o) from Section 5.1. For “after-text” generation, we fine-tune another Llama3.1-8B-Instruct model (“LLAMA-8B-SW-GEN”) using the same dataset, with Llama3.1-8B-Instruct and GPT-4o as baselines. The fine-tuning prompt includes task instructions, a verbalizer from human-annotated labels, and “before-text.” While prompts were standardized, task instructions varied by model.

The fine-tuning prompt included task instructions, a verbalizer derived from human-annotated labels, and the “before” text. For fine-tuning, we used QLoRA (Dettmers et al., 2024) to optimize all linear modules of a 4-bit quantized model while maintaining a small memory footprint. Additionally, the embed\_tokens and lm\_head modules were set as trainable and saved in the final checkpoint. To focus training on the response portion (the “after” text), we used the train\_on\_response\_only function, masking the task instructions, verbalizer, and “before” text with -100s. This ensures the model learns to generate the “after” text without being influenced by instructional input. The model was trained for one epoch with a batch size of 1, 4 gradient accumulation steps, and the AdamW 8-bit optimizer.

During iterative writing, we performed 100 iterations, treating the model’s output under one intention as a single iteration. If the intention predicted by the classification model (fine-tuned Llama3.1-8B-Instruct, as described in Sec 5.1) matched the current predicted intention, the model was prompted to edit the text again. In this case, the newly generated output was not treated as final output in the iteration, and the iteration did not proceed. We moved to the next iteration only when the intention prediction model generated a different intention label than the previous one.

For model setups, we created three pairs of models for each prediction and generation subtasks as follows:

- **LLama-8B-SW**: LLama-8B-Instruct fine-tuned on SCHOLAWRITE dataset (Prediction) & LLama-8B-Instruct fine-tuned on SCHOLAWRITE dataset (Generation), independently
- **LLama-8B-Instruct**: Vanilla LLama-8B-Instruct (Prediction) & Vanilla LLama-8B-Instruct (Generation), independently
- **GPT-4o**: GPT-4o inference (Prediction) & GPT-4o inference (Generation)

Also, due to budget constraints, models had different revision strategies. LLAMA-8B-SW-\* and LLAMA-8B-INSTRUCT continued revision until the next predicted intention changed. GPT-4o, however, moved to the next iteration regardless. We refer to the fine-tuned Llama-8B model as **Llama-8B-ScholaWrite** (or **Llama-8B-SW**) and the vanilla model as **Llama-8B-Zero**.

### E.3 Prompt Templates

#### E.3.1 Prediction Prompt for Llama-8B-Zero models

“Here are all the possible writing intention labels:

- **Idea Generation**: Formulate and record initial thoughts and concepts.
- **Idea Organization**: Select the most useful materials and demarcate those generated ideas in a visually formatted way.
- **Section Planning**: Initially create sections and sub-level structures.

- **Text Production**: Translate their ideas into full languages, either from the writers’ language or borrowed sentences from an external source.
- **Object Insertion**: Insert visual claims of their arguments (e.g., figures, tables, equations, footnotes, itemized lists, etc.).
- **Cross-reference**: Link different sections, figures, tables, or other elements within a document through referencing commands.
- **Citation Integration**: Incorporate bibliographic references into a document and systematically link these references using citation commands.
- **Macro Insertion**: Incorporate predefined commands or packages into a LaTeX document to alter its formatting.
- **Fluency**: Fix grammatical or syntactic errors in the text or LaTeX commands.
- **Coherence**: Logically link (1) any of the two or multiple sentences within the same paragraph; (2) any two subsequent paragraphs; or (3) objects to be consistent as a whole.
- **Structural**: Improve the flow of information by modifying the location of texts and objects.
- **Clarity**: Improve the semantic relationships between texts to be more straightforward and concise.
- **Linguistic Style**: Modify texts with the writer’s writing preferences regarding styles and word choices, etc.
- **Scientific Accuracy**: Update or correct scientific evidence (e.g., numbers, equations) for more accurate claims.
- **Visual Formatting**: Modify the stylistic formatting of texts, objects, and citations.

Identify the most likely next writing intention of a graduate researcher when editing the following LaTeX paper draft. Your output should only be a label from the list above.

```
## Input: before_text
## Output: ”
```

### E.3.2 Generation Prompt for Llama-8B-Zero models

“You are a computer science researcher with extensive experience of scholarly writing. Here, you are writing a research paper in natural language processing using LaTeX languages.

You currently want to “put the verbalizer of the predicted intention label” (e.g., “initially create sections and sub-level structures” if the predicted label was section planning).

Below is the paper you have written so far. Please strictly follow the writing intention given above and insert, delete, or revise at appropriate places in the paper given below.

Your writing should relate to the paper given below. Do not generate text other than paper content. Do not describe the changes you are making or your reasoning.

## Input: before\_text ”

### E.3.3 Prediction Prompt for Llama-8B-SW models

“Here are all the possible writing intention labels:

- Idea Generation: Formulate and record initial thoughts and concepts.
- Idea Organization: Select the most useful materials and demarcate those generated ideas in a visually formatted way.
- Section Planning: Initially create sections and sub-level structures.
- Text Production: Translate their ideas into full languages, either from the writers’ language or borrowed sentences from an external source.
- Object Insertion: Insert visual claims of their arguments (e.g., figures, tables, equations, footnotes, itemized lists, etc.).
- Cross-reference: Link different sections, figures, tables, or other elements within a document through referencing commands.
- Citation Integration: Incorporate bibliographic references into a document and systematically link these references using citation commands.

- Macro Insertion: Incorporate predefined commands or packages into a LaTeX document to alter its formatting.
- Fluency: Fix grammatical or syntactic errors in the text or LaTeX commands.
- Coherence: Logically link (1) any of the two or multiple sentences within the same paragraph; (2) any two subsequent paragraphs; or (3) objects to be consistent as a whole.
- Structural: Improve the flow of information by modifying the location of texts and objects.
- Clarity: Improve the semantic relationships between texts to be more straightforward and concise.
- Linguistic Style: Modify texts with the writer’s writing preferences regarding styles and word choices, etc.
- Scientific Accuracy: Update or correct scientific evidence (e.g., numbers, equations) for more accurate claims.
- Visual Formatting: Modify the stylistic formatting of texts, objects, and citations.

Identify the most likely next writing intention of a graduate researcher when writing the following LaTeX paper draft. Your output should only be a label from the list above.

## Input: before\_text

## Output: ”

### E.3.4 Generation Prompt for Llama-8B-Zero models

“You are a computer science researcher with extensive experience in scholarly writing. Here, you are writing a research paper in natural language processing using LaTeX.

You currently want to “put the verbalizer of the predicted intention label” (e.g., “initially create sections and sub-level structures” if the predicted label was section planning).

Below is the paper you have written so far. Given the paper information below and the corresponding scholarly writing intention, please revise or add to the text to fulfill this writing intention.

You may insert, delete, or revise text at appropriate places in the given paper.

Please provide a complete output. Do not generate text that is nonsensical or unrelated to the given paper information.

```
## Input: before_text "
```

### E.3.5 Classification Prompt for GPT-4o

“You are a classifier that identify the most likely next writing intention. You will be given a list of all possible writing intention labels with definitions, and an in-progress LaTeX paper draft written by a graduate student. Please strictly follow user’s instruction to identify the most likely next writing intention.

Here are the verbalizers of all the possible writing intention labels:

- Idea Generation: Formulate and record initial thoughts and concepts.
  - Idea Organization: Select the most useful materials and demarcate those generated ideas in a visually formatted way.
  - Section Planning: Initially create sections and sub-level structures.
  - Text Production: Translate their ideas into full languages, either from the writers’ language or borrowed sentences from an external source.
  - Object Insertion: Insert visual claims of their arguments (e.g., figures, tables, equations, footnotes, itemized lists, etc.).
  - Cross-reference: Link different sections, figures, tables, or other elements within a document through referencing commands.
  - Citation Integration: Incorporate bibliographic references into a document and systematically link these references using citation commands.
  - Macro Insertion: Incorporate predefined commands or packages into a LaTeX document to alter its formatting.
  - Fluency: Fix grammatical or syntactic errors in the text or LaTeX commands.
  - Coherence: Logically link (1) any of the two or multiple sentences within the same paragraph; (2) any two subsequent paragraphs; or (3) objects to be consistent as a whole.
- Structural: Improve the flow of information by modifying the location of texts and objects.
  - Clarity: Improve the semantic relationships between texts to be more straightforward and concise.
  - Linguistic Style: Modify texts with the writer’s writing preferences regarding styles and word choices, etc.
  - Scientific Accuracy: Update or correct scientific evidence (e.g., numbers, equations) for more accurate claims.
  - Visual Formatting: Modify the stylistic formatting of texts, objects, and citations.

Identify the most likely next writing intention of a graduate researcher when editing the following LaTeX paper draft. Your output should only be a label from the list above.

```
## Input: before_text
## Output: "
```

### E.3.6 Generation Prompt for GPT-4o

“ You are a computer science researcher with extensive experience of scholarly writing. Here, you are writing a research paper in natural language processing using LaTeX languages.

Your writing intention is to “put the verbalizer of the predicted intention label” (e.g., “initially create sections and sub-level structures” if the predicted label was section planning).

Below is the paper you have written so far. Please strictly follow the writing intention given above and insert, delete, or revise at appropriate places in the paper given below.

Your writing should relate to the paper given below. Do not generate text other than paper content. Do not describe the changes you are making or your reasoning. Do not include sidenotes. Your output should only be the paper draft in latex, without the ““latex delimiters.

```
## Input: before_text
## Output: "
```

### E.4 Seed Documents for Iterative Self-Writing

We present the remaining three seed documents that we used for the iterative self-writing experiments, as shown in Listings 2 to 5.

```

\begin{document}
\maketitle

\title{How Johnny Can Persuade LLMs to Jailbreak
      Them: Rethinking Persuasion to Challenge AI
      Safety by Humanizing LLMs}
\author{}
\date{}

\begin{abstract}
Most traditional AI safety research has
approached AI models as machines and
centered on algorithm-focused attacks
developed by security experts. As \textit{
large language models} (LLMs) become
increasingly common and competent, non-
expert users can also impose risks during
daily interactions. This paper introduces a
new perspective on jailbreaking LLMs as
human-like communicators to explore this
overlooked intersection between everyday
language interaction and AI safety.
Specifically, we study how to persuade LLMs
to jailbreak them. First, we propose a
persuasion taxonomy derived from decades of
social science research. Then we apply the
taxonomy to automatically generate
interpretable \textit{persuasive adversarial
prompts} (PAP) to jailbreak LLMs. Results
show that persuasion significantly increases
the jailbreak performance across all risk
categories: PAP consistently achieves an
attack success rate of over 92\% on Llama
2-7b Chat, GPT-3.5, and GPT-4 in 10$ trials
, surpassing recent algorithm-focused
attacks. On the defense side, we explore
various mechanisms against PAP, find a
significant gap in existing defenses, and
advocate for more fundamental mitigation for
highly interactive LLMs.
\end{abstract}

\end{document}

```

Listing 2: An example seed document (Zeng et al., 2024) as shown in LaTeX codes to begin iterative self-writing.

## E.5 Definition of Quantitative Metrics for Iterative Self-Writing

- *Lexical diversity*: Assess the unique tokens model generated in the final iteration of writing, measured by the number of unique tokens divided by the total tokens generated.
- *Topic consistency*: Cosine similarity between the seed document and output from the final iteration of writing.
- *Intention coverage*: Assess the diversity of the model’s writing intention, measured by the number of unique labels predicted through the

```

\begin{document}
\maketitle

\title{Read, Revise, Repeat: A System
      Demonstration for Human-in-the-loop
      Iterative Text Revision}
\author{}
\date{}

\begin{abstract}
Revision is an essential part of the human
writing process. It tends to be strategic,
adaptive, and, more importantly, \textit{
iterative} in nature. Despite the success of
large language models on text revision
tasks, they are limited to non-iterative,
one-shot revisions. Examining and evaluating
the capability of large language models for
making continuous revisions and
collaborating with human writers is a
critical step towards building effective
writing assistants. In this work, we present
a human-in-the-loop iterative text revision
system,  $\mathcal{R}$ sead,  $\mathcal{R}$ 
sevice,  $\mathcal{R}$ sepeat ( $\mathcal{R}3$ ), which aims at achieving high
quality text revisions with minimal human
efforts by reading model-generated revisions
and user feedbacks, revising documents, and
repeating human-machine interactions. In \
method, a text revision model provides text
editing suggestions for human writers, who
can accept or reject the suggested edits.
The accepted edits are then incorporated
into the model for the next iteration of
document revision. Writers can therefore
revise documents iteratively by interacting
with the system and simply accepting/
rejecting its suggested edits until the text
revision model stops making further
revisions or reaches a predefined maximum
number of revisions. Empirical experiments
show that \method can generate revisions
with comparable acceptance rate to human
writers at early revision depths, and the
human-machine interaction can get higher
quality revisions with fewer iterations and
edits.
\end{abstract}

\end{document}

```

Listing 3: An example seed document (Du et al., 2022a) as shown in LaTeX codes to begin iterative self-writing.

entire 100 iterations divided by all 15 intended labels available in our taxonomy.

## E.6 Iterative Training Sample Outputs

Figure 15 presents the sample outputs from the fine-tuned Llama-8B model during the iterative self-writing experiment. The model successfully was able to add several LaTeX commands to put some custom icon images (“Macro Insertion”). Also, it successfully revised several words and phrases in a

```

Macro Insertion Llama-8B-SW
\documentclass{article}
\usepackage{graphics} % required for including images
\title{F1: an LLM-based metric for evaluation of language quality}
\author{anonymous}
\def\incolor{Gray}[0.88]
\usepackage{booktabs}
\usepackage{times}
\usepackage{atextsym}
\usepackage{enumitem}
\usepackage{graphics}
\usepackage{multrow}
\usepackage{subcaption}
\usepackage{makecell}
\usepackage{muted}
\usepackage{soul}
\usepackage{fancyhdr}
\usepackage{listings}
\usepackage{rspace}
\usepackage{wrapfig}
% define icons
\newcommand{\simicon}{\includegraphics[height=2em]{images/icons/simulation_icon.pdf}}
\newcommand{\preficon}{\includegraphics[height=2em]{images/icons/preference_icon.pdf}}
%, trim = 60 45 45 60, clip
\newcommand{\reetexticon}{\includegraphics[height=2em]{images/icons/reetext_icon.pdf}}
\newcommand{\instructicon}{\includegraphics[height=2em]{images/icons/instruct_icon.pdf}}
\newcommand{\taskicon}{\includegraphics[height=2em]{images/icons/task_icon.pdf}}
%, trim = 15 25 25 25, clip

```

(a) Llama writing inference for Macro Insertion activity. The model successfully added several LaTeX commands for custom actions.

```

Idea Generation Llama-8B-SW
\documentclass{article}
\usepackage{graphics} % required for inserting images
\title{Instructions in the wild}
\title{Unknown/unfamiliar situations: Instructions}
\title{Unknown/unfamiliar situations: Simulations}
\begin{document}
\maketitle
\begin{abstract}
Existing work has primarily instructed, fine-tuned comparative frameworks, such as instruction-tuned LLMs, on how to generate ideas. We propose a language-dec. supervised learning task that is difficult in training large language models (LLMs) on many real-world scenarios, such as writing new content, labeling existing content, or evaluating text. comparative.
\title{Unknown/unfamiliar situations: Instructions}
\author{anonymous}
\title{Unknown/unfamiliar situations: Simulations}
\begin{document}
\maketitle
\begin{abstract}
Unknown/unfamiliar situations: Instructions
\end{abstract}
\end{document}

```

(b) Llama writing inference for Idea Generation. The model failed to provide generated ideas and instead deleted abstract.

```

Clarity Llama-8B-SW
\documentclass{article}
\usepackage{graphics} % Required for inserting images
\title{Semisupervised Neural Learning}
\author{anonymous}
\title{Unknown/unfamiliar situations: Instructions}
\title{Unknown/unfamiliar situations: Simulations}
\begin{document}
\maketitle
\begin{abstract}
Existing work has primarily implemented comparative construction of o)stractive language data, supervision however, construction models are only of practical value, if they can be trained with a limit amount of labeled data (cognitive) and a large amount of unlabeled data (cognitive) without labels data) We propose a semisupervised construction task in which the model is trained on only a smallest data (cognitive) with a proportion of modeling data (cognitive) task that have a highly constrained context) without labels data) We propose a neural architecture for comparative construction involving es that repaired words should not only be reconstructable from their words. We show that this architecture is able to compare labeled cognitive selevis)
\end{abstract}
\end{document}

```

(c) Llama writing inference for Clarity. The model successfully revised words and phrases for clearer delivery.

Figure 15: Sample outputs from Llama-8B-SW during the self-writing experiment.

paragraph for better clarity (“Clarity”). However, it struggled with understanding the definition of “Idea Generation,” and the model just deleted all paragraphs instead.

Table 4 shows sample model outputs at different iterations (1st, 25th, 51st, and 100th), from the seed document (Du et al., 2022a) as shown in Listing 3.

### E.7 Discussion about Next Intention Prediction Results

According to Table 3, none of them is reaching 0.7 in F1. This is likely due to the intricate nature of the task. The model is asked to predict the next intention by only giving the before text. In the annotation task, the annotator labels the data by looking through multiple consecutive before and after text pairs to determine the current intention rather than looking at the current text to predict the next intention. Another reason is that the next intention chosen by the author does not necessarily mean that it is the only correct intention. We also noticed that BERT and RoBERTa perform much better than the vanilla Llama-8b-Instruct. This is likely due to Llama 8b being under-trained as they

have a larger size of parameters, while we finetuned it on our data for only one epoch.

## E.8 Human Evaluation of Iterative Self-Writing Experiment

### E.8.1 Study Procedures

Human evaluation was conducted on the outputs of two models: the LLama-8B-Instruct<sup>13</sup> (Llama-8B-Zero) and its finetuned counterpart (Llama-8B-SW). Each evaluation session lasted approximately two hours and was conducted via a Zoom call. Participants were three graduate students of an R1 University in the United States, with extensive experience in Overleaf-based writing, and they were compensated with a US 40 dollar gift card for their effort.

Before the evaluation began, the author shared their screen to present the following information:

- A brief explanation of the research and an overview of the task (e.g., evaluating outputs from two models) using Google Slides.

<sup>13</sup>Unsloth/Meta-Llama-3.1-8B-Instruct-bnb-4bit'

```

\begin{document}
\maketitle

\title{Semisupervised Neural Proto-Language
Reconstruction}
\author{}
\date{}

\begin{abstract}
Existing work implementing comparative
reconstruction of ancestral languages (proto-
languages) has usually required full
supervision. However, historical
reconstruction models are only of practical
value if they can be trained with a limited
amount of labeled data. We propose a
semisupervised historical reconstruction
task in which the model is trained on only a
small amount of labeled data (cognate sets
with proto-forms) and a large amount of
unlabeled data (cognate sets without proto-
forms). We propose a neural architecture for
comparative reconstruction (DPD-
BiReconstructor) incorporating an essential
insight from linguists' comparative method:
that reconstructed words should not only be
reconstructable from their daughter words,
but also deterministically transformable
back into their daughter words. We show that
this architecture is able to leverage
unlabeled cognate sets to outperform strong
semisupervised baselines on this novel task.
\end{abstract}

\end{document}

```

Listing 4: An example seed document (Lu et al., 2024b) as shown in LaTeX codes to begin iterative self-writing.

- An explanation of all intention labels and their corresponding definitions in our taxonomy.
- A walkthrough of the evaluation web application, including (1) information displayed in the user interface (UI); (2) the locations on the UI where the participants should focus, such as the intention label; and (3) how to move between different seed documents.
- A tutorial on how to complete the evaluation of the five metrics (accuracy, alignment, fluency, coherence, relevance) using the provided Google Sheet.

During the evaluation, participants were required to share their screen while using the evaluation web application in their browser. The author remained muted but monitored the participants' shared screens and the Google Sheet to ensure the process was proceeding smoothly. The author only interacted with participants to address questions,

```

\begin{document}
\maketitle

\title{Latxa: An Open Language Model and
Evaluation Suite for Basque}
\author{}
\date{}

\begin{abstract}
We introduce Latxa, a family of large language
models for Basque ranging from 7 to 70
billion parameters.

Latxa is based on Llama 2, which we continue
pretraining on a new Basque corpus
comprising 4.3M documents and 4.2B tokens.
Addressing the scarcity of high-quality
benchmarks for Basque, we further introduce
4 multiple choice evaluation datasets:
EusProficiency, comprising 5,169 questions
from official language proficiency exams;
EusReading, comprising 352 reading
comprehension questions; EusTrivia,
comprising 1,715 trivia questions from 5
knowledge areas; and EusExams, comprising
16,774 questions from public examinations.
In our extensive evaluation, Latxa
outperforms all previous open models we
compare to by a large margin. In addition,
it is competitive with GPT-4 Turbo in
language proficiency and understanding,
despite lagging behind in reading
comprehension and knowledge-intensive tasks.
Both the Latxa family of models, as well as
our new pretraining corpora and evaluation
datasets, are publicly available under open
licenses. Our suite enables reproducible
research on methods to build LLMs for low-
resource languages.
\end{abstract}

\end{document}

```

Listing 5: An example seed document (Etxaniz et al., 2024) as shown in LaTeX codes to begin iterative self-writing.

resolve technical issues, or clarify instructions. No unsolicited interaction was allowed.

The model identities were hidden from the participants. Instead, the models were labeled as “Model 1” and “Model 2.” Specifically, “Model 1” corresponded to the [Llama-8B-SW](#), and “Model 2” corresponded to the [Llama-8B-Zero](#). The evaluation web app displayed two text boxes side by side, with an intention label predicted by the respective model shown in the top-left corner of each text box. Please refer to Figure 18 as a screenshot of the user interface that we developed for the human evaluation process.

After completing the evaluation, the authors thanked the participants for their time and effort, marking the conclusion of the Zoom call.



## E.8.2 Definitions of Evaluation Metrics

Here are the full description of our human evaluation metrics for the iterative self-writing experiment:

- *Accuracy*: Out of 100, how many is the number of generated outputs that align with the provided intention?
- *Alignment*: Which model’s whole writing process throughout the entire 100 iterations looks more human-like behaviors?
- *Fluency*: Which model’s final writing sounds more grammatically correct?
- *Coherence*: Which model’s final writing sounds more logical?
- *Relevance*: Does the final writing from each model contain related contents to the original seed document?

## E.8.3 Results & Discussion

Tables 9 to 12 present the human evaluation of results for each seed document. We observe that the fine-tuned **Llama-8B-SW** did not outperform the baseline vanilla counterpart (**Llama-8B-Zero**) across all metrics for all four seed settings.

This discrepancy may be attributed to the way the prompt used for training isolates individual writing actions from the continuous, interconnected process typical of human writing. A single writing action involves referencing the text before making an edit, the text after the edit, and the intention behind the edit. In human writing, these actions are cognitively and logically linked as part of a cohesive sequence. However, our model struggles to capture these connections due to the prompt structure, potentially causing it to become stuck in a local minimum.

Metrics	Model	Evaluator 1	Evaluator 2	Evaluator 3
Accuracy	SW	43	3	17
	Zero	47	22	38
Alignment	SW			
	Zero	X	X	X
Fluency	SW			
	Zero	X	X	X
Coherence	SW			
	Zero	X	X	X
Relevance	SW	Yes	No	No
	Zero	Yes	Yes	Yes

Table 9: Human evaluation results for the seed document 1.

Metrics	Model	Evaluator 1	Evaluator 2	Evaluator 3
Accuracy	SW	26	0	5
	Zero	48	12	29
Alignment	SW			
	Zero	X	X	X
Fluency	SW			
	Zero	X	X	X
Coherence	SW			
	Zero	X	X	X
Relevance	SW	Yes	Yes	Yes
	Zero	Yes	Yes	Yes

Table 10: Human evaluation results for the seed document 2.

Metrics	Model	Evaluator 1	Evaluator 2	Evaluator 3
Accuracy	SW	52	0	3
	Zero	70	23	43
Alignment	SW			
	Zero	X	X	X
Fluency	SW			
	Zero	X	X	X
Coherence	SW			
	Zero	X	X	X
Relevance	SW	Yes	Yes	No
	Zero	Yes	Yes	Yes

Table 11: Human evaluation results for the seed document 3.

Metrics	Model	Evaluator 1	Evaluator 2	Evaluator 3
Accuracy	SW	37	3	6
	Zero	60	22	48
Alignment	SW			
	Zero	X	X	X
Fluency	SW			
	Zero	X	X	X
Coherence	SW			
	Zero	X	X	X
Relevance	SW	Yes	No	No
	Zero	Yes	Yes	Yes

Table 12: Human evaluation results for the seed document 4.

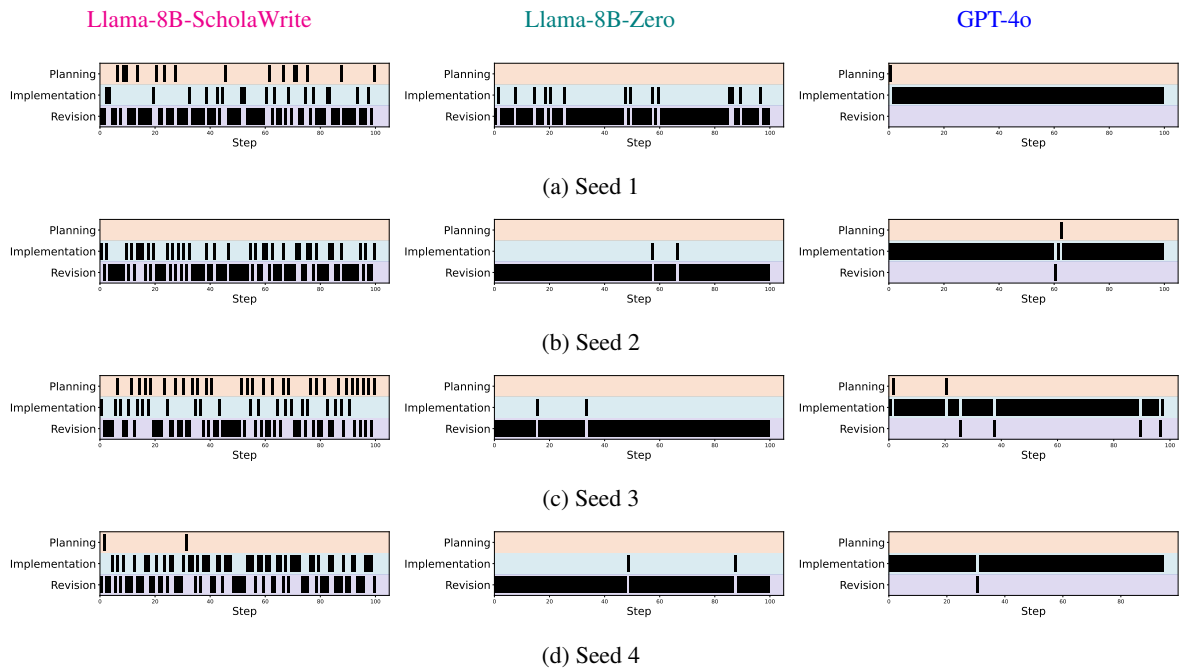


Figure 16: Distribution of high-level writing activities over time by models - **Llama-8B-ScholaWrite** (left); **Llama-8B-Zero** (middle); **GPT-4o** (right). Orange, Blue, and Purple represent Planning, Implementation, and Revision writing actions respectively.

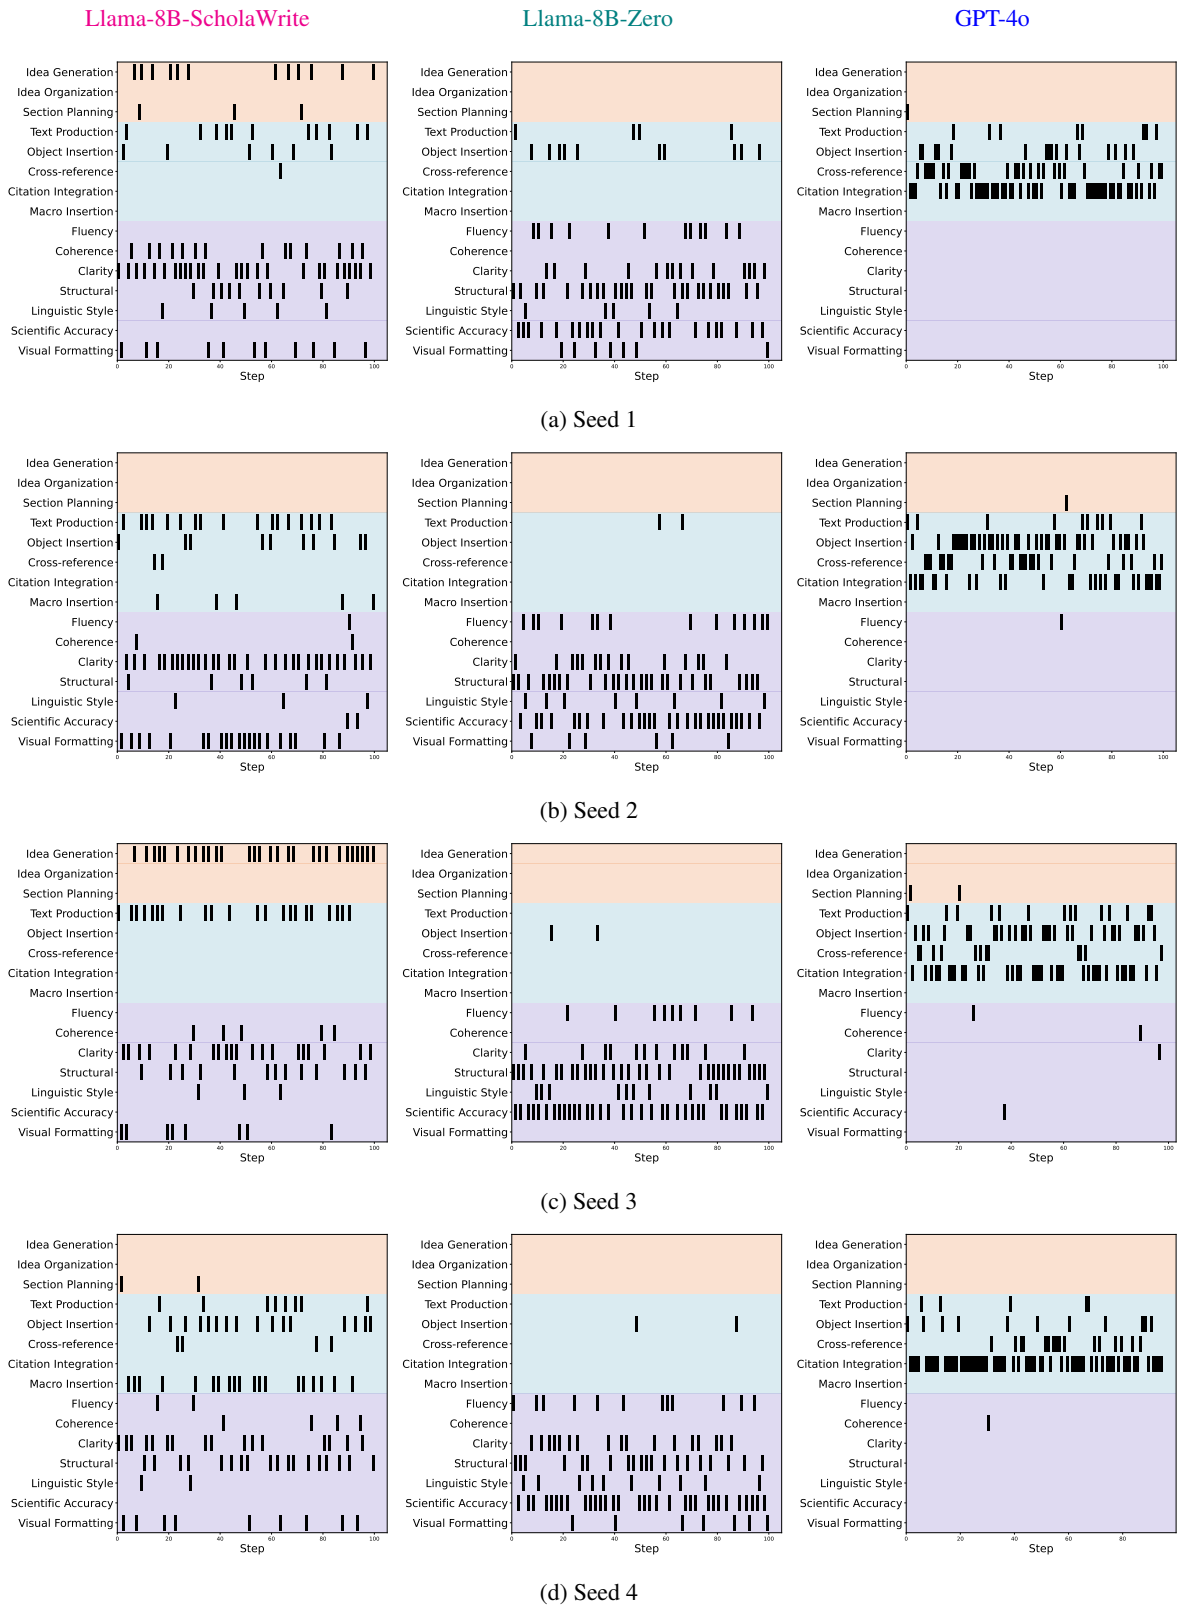


Figure 17: Distribution of Per-intention writing activities over time by models - **Llama-8B-ScholaWrite** (left); **Llama-8B-Zero** (middle); **GPT-4o** (right). Orange, Blue, and Purple represent Planning, Implementation, and Revision writing actions respectively. We observe different writing patterns by model during the entire 100 iterations.

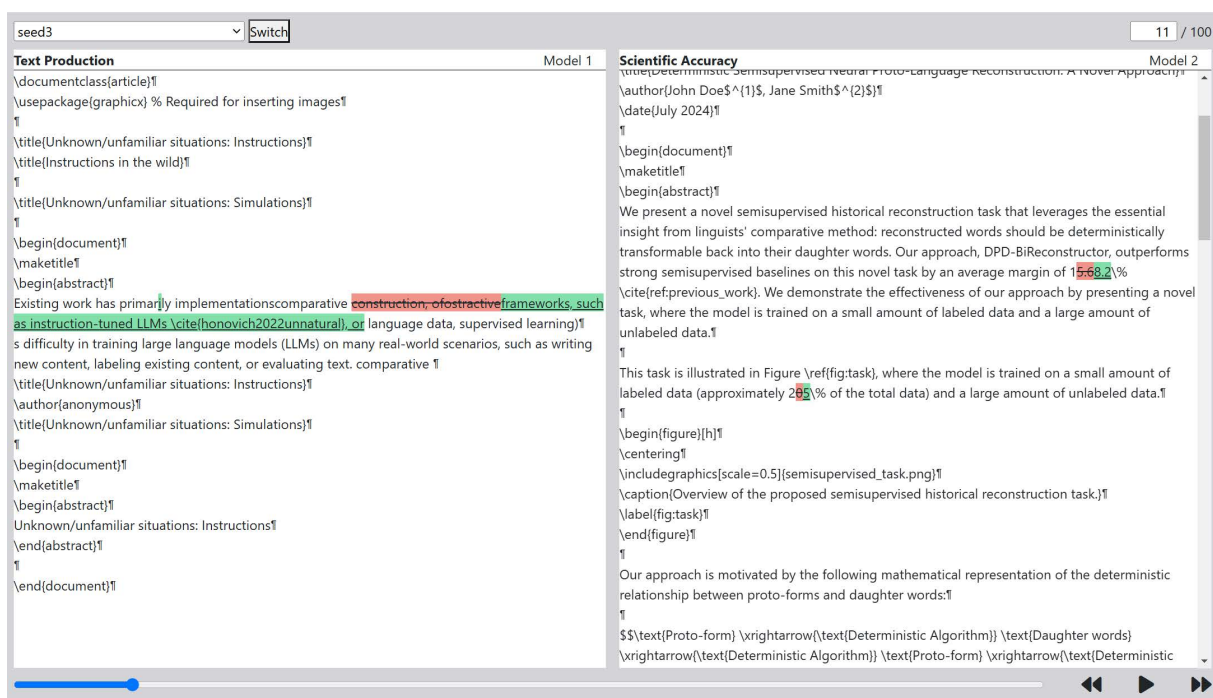


Figure 18: The user interface for the human evaluation process.