

---

# From Kernels to Features: A Multi-Scale Adaptive Theory of Feature Learning

---

Noa Rubin<sup>\*1</sup> Kirsten Fischer<sup>\*23</sup> Javed Lindner<sup>\*245</sup> David Dahmen<sup>2</sup> Inbar Seroussi<sup>6</sup> Zohar Ringel<sup>1</sup>  
 Michael Krämer<sup>5</sup> Moritz Helias<sup>24</sup>

## Abstract

Theoretically describing feature learning in neural networks is crucial for understanding their expressive power and inductive biases, motivating various approaches. Some approaches describe network behavior after training through a simple change in kernel scale from initialization, resulting in a generalization power comparable to a Gaussian process. Conversely, in other approaches training results in the adaptation of the kernel to the data, involving complex directional changes to the kernel. While these approaches capture different facets of network behavior, their relationship and respective strengths across scaling regimes remains an open question. This work presents a theoretical framework of multi-scale adaptive feature learning bridging these approaches. Using methods from statistical mechanics, we derive analytical expressions for network output statistics which are valid across scaling regimes and in the continuum between them. A systematic expansion of the network’s probability distribution reveals that mean-field scaling requires only a saddle-point approximation, while standard scaling necessitates additional correction terms. Remarkably, we find across regimes that kernel adaptation can be reduced to an effective kernel rescaling when predicting the mean network output of a linear network. However, even in this case, the multi-scale adaptive approach captures directional feature learning effects, providing richer insights than what could be recovered from a rescaling of the kernel alone.

---

<sup>\*</sup>Equal contribution <sup>1</sup>The Racah Institute of Physics, The Hebrew University of Jerusalem, Jerusalem, Israel <sup>2</sup>Institute for Advanced Simulation (IAS-6), Computational and Systems Neuroscience, Jülich Research Centre, Jülich, Germany <sup>3</sup>RWTH Aachen University, Aachen, Germany <sup>4</sup>Department of Physics, RWTH Aachen University, Aachen, Germany <sup>5</sup>Institute for Theoretical Particle Physics and Cosmology, RWTH Aachen University, Aachen, Germany <sup>6</sup>Department of Applied Mathematics, School of Mathematical Sciences, Tel-Aviv University, Tel-Aviv, Israel. Correspondence to: Noa Rubin <noa.rubin@mail.huji.ac.il>.

## 1. Introduction

A central phenomenon that is essential for explaining the power of neural networks (NNs) is feature learning (FL), where networks learn meaningful high-dimensional representations of the data (Bengio et al., 2013). FL plays an increasingly important role in our ability to understand and rationalize the behavior of large language models (LLMs). Sparse autoencoders can extract so called monosemantic features from LLMs that are given by a superposition of layer activations (Bricken et al., 2023); these features allow interpreting and even altering model behavior (Templeton et al., 2024). Beyond interpretability, FL is essential for efficient generalization with finite data, as it enhances informative directions in the learned representations, reducing the complexity of functions of these directions (Dandi et al., 2023; Abbe et al., 2021; Paccolat et al., 2021). Despite its significance, many open questions remain regarding the theoretical mechanisms underlying the emergence of such feature directions.


A well-characterized case in NN theory is the limit of infinite-width and finite sample size, where networks behave as Gaussian processes (GPs) (MacKay, 2003), characterized by the neural network Gaussian process (NNGP) kernel (Neal, 1996; Williams, 1998; Matthews et al., 2018; Lee et al., 2018). However, the NNGP does not capture FL, which emerges at finite network width as well as in the proportional limit, where both network width and sample size tend to infinity together (Li & Sompolinsky, 2021), or in certain scaling regimes (Yang et al., 2024). Multiple theoretical approaches have emerged as to describe this phenomenon, yet there is no consensus on how to characterize FL. A common approach is to study the change of the network kernel, though the existing frameworks differ in their predictions for this change.

One prominent class of theories, which are commonly referred to as rescaling theories (Li & Sompolinsky, 2021; Pacelli et al., 2023; Baglioni et al., 2024), predicts that the average network output and variance can be described by a rescaled NNGP kernel. Initially developed for linear networks in the standard scaling regime<sup>1</sup>, this framework surprisingly yields impressively accurate predictions even

---

<sup>1</sup>A scaling where readout weight variance scales as  $1/\text{width}$ .

in mean-field scaling<sup>2</sup>. Despite the strong FL in this regime, the average network outputs can be obtained from an output kernel that is simply a rescaled NNGP kernel.

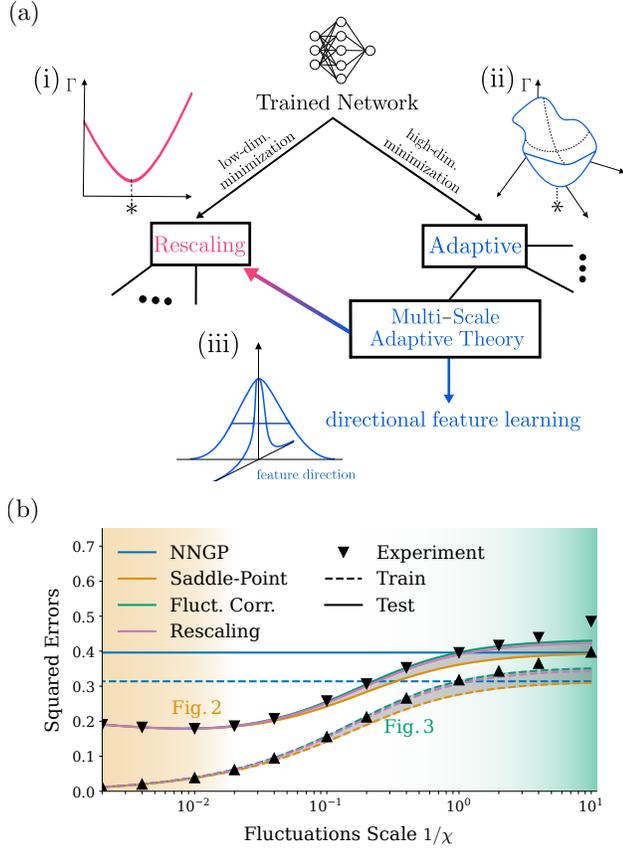

**Figure 1.** (a) The multi-scale adaptive theory bridges between rescaling and adaptive theories of feature learning. Starting from the distribution of network outputs for trained networks, the choice of order parameter decides whether a rescaling (red) or adaptive (blue) theory is obtained. The choice of order parameter recasts feature learning into either a (i) low-dimensional minimization or (ii) high-dimensional minimization problem. An approximation of the multi-scale adaptive theory in certain limits yields the result of the rescaling approach, but in addition describes (iii) directional aspects of feature learning. (b) Training (solid line) and test errors (dashed line) across scaling regimes for different approaches. While standard scaling (green shaded area) requires a one-loop approximation with fluctuation corrections (Fluct. Corr.), a saddle-point or tree-level approximation (Saddle-Point) is sufficient in mean-field scaling (orange shaded area). We show results for the kernel rescaling theory by (Li & Sompolinsky, 2021) as reference (Rescaling). Parameters:  $\gamma = 1$ ,  $P_{\text{train}} = 80$ ,  $N = 100$ ,  $D = 200$ ,  $\kappa_0 = 1$ ,  $P_{\text{test}} = 10^3$ ,  $g_v = g_w = 0.5$ ,  $\Delta p = 0.1$ .

<sup>2</sup>A scaling where readout weight variance scales as  $1/\text{width}^2$ .

However, FL is often considered a structural phenomenon, such as the case of Gabor filters (Gabor, 1946; Rai & Rivas, 2020) emerging in the latent layers of convolutional neural networks (Luan et al., 2018). Thus the expectation would be that the effect of FL on the output would be directional as well. The rescaling result raises fundamental questions about how learned features are represented in network outputs and can be captured theoretically.

In contrast, adaptive theories of FL (Roberts et al., 2022; Seroussi et al., 2023; Bordelon & Pehlevan, 2023; Fischer et al., 2024b) consider learned features, predicting that the kernel undergoes a structural change and incorporates features explicitly. Consequentially, these theories are able to predict phenomena in networks that stem from FL such as a reduction in sample complexity – the required amount of samples to learn a given task – relative to that of a GP (Naveh & Ringel, 2021b) as well as grokking (Rubin et al., 2024). However, adaptive theories are significantly more complex computationally than rescaling theories, while yielding comparable predictions for quantities such as the network loss. A fundamental open question remains: How can two such different descriptions of FL be valid at the same time?

In this work, we address this pivotal question by systematically connecting different FL theories and uncovering their underlying relationships. To this end, we choose the simplest non-trivial model where both frameworks are valid. Our main contributions are:

- Using methods from statistical mechanics, we recast the theoretical description of the posterior distribution of network outputs into a minimization problem with respect to a parameter which we call the “order parameter”. We find that different theories result from different choices of order parameters, in particular with regard to their dimensionality (see Fig. 1a).
- We derive a multi-scale adaptive theory that is valid across the full range of scaling regimes, from mean-field to standard scaling, and which allows us to systematically include finite-width corrections (see Fig. 1b). The latter point goes beyond previous adaptive approaches that are only valid for certain scaling regimes.
- We show that for the mean network output the multi-scale adaptive theory can be approximated in certain limits to yield an effective rescaling of the kernel. This explains why certain FL phenomena do not appear in rescaling theories, reconciling the two different perspectives.
- While rescaling theories approximate the mean network output well (especially when NNs have the same sample complexity as GPs as in linear networks), we demonstrate for mean-field scaling that the output covariance does not behave as predicted by rescaling

theories but rather clearly adapts to specific directions relevant to the task. These changes are correctly predicted by our multi-scale adaptive theory.

Overall, our findings suggest that a comprehensive understanding of FL requires moving beyond kernel rescaling towards high-dimensional kernel adaptation.

## 2. Related works

The limit of infinite network width and finite amount of training data has been studied extensively, yielding among others the NNGP kernel (Neal, 1995; Williams, 1998; Lee et al., 2018; Matthews et al., 2018; Avidan et al., 2024). This theory relates network behavior at initialization to training dynamics (Poole et al., 2016; Pennington et al., 2017; Schoenholz et al., 2017; Xiao et al., 2018). However, the NNGP cannot explain the often superior performance of finite-width networks (Li et al., 2015; Chizat et al., 2019; Lee et al., 2020; Aitchison, 2020; Refinetti et al., 2021), requiring the inclusion of finite-width effects in theories of FL.

Describing FL in neural networks in a Bayesian framework has lead to concurrent views: kernel rescaling (Li & Sompolinsky, 2021; 2022; Pacelli et al., 2023; Bassetti et al., 2024; Baglioni et al., 2024) and kernel adaptation (Naveh & Ringel, 2021a; Seroussi et al., 2023; Fischer et al., 2024b; Rubin et al., 2024). These differ in the choice of order parameters considered and in consequence also in the explained phenomena.

Beyond these two views, various works study other aspects of networks in the Bayesian framework: Canatar & Pehlevan (2022) investigate experimentally the effect of hyperparameters on adaptive FL. Zavatone-Veth & Pehlevan (2021) study properties of the network prior, whereas we focus on the network posterior. Hanin & Zlokapa (2023) obtain a rigorous non-asymptotic description of deep linear networks in terms of Meijer-G functions. Cui et al. (2023) exploit the Nishimori conditions that hold for Bayes-optimal inference, where student and teacher have the same architecture and the student uses the teacher’s weight distribution as a prior; the latter is assumed Gaussian i.i.d., which allows them to use the Gaussian equivalence principle (Goldt et al., 2020) to obtain closed-form solutions.

Our work is distinct from perturbative approaches such as (Antognini, 2019; Naveh et al., 2021; Cohen et al., 2021; Roberts et al., 2022; Hanin, 2024; Halverson et al., 2021) for the Bayesian setting or (Dyer & Gur-Ari, 2020; Huang & Yau, 2020; Aitken & Gur-Ari, 2020; Roberts et al., 2022; Bordelon & Pehlevan, 2023; Buzaglo et al., 2024) for gradient-based training that use the strength of non-Gaussian cumulants of the outputs as an expansion parameter; however, we perform an expansion in terms of fluctu-

ations around the mean outputs, which is able to capture phenomena that escape perturbative treatments, such as phase transitions; this technique corresponds to an infinite resummation of perturbative terms.

Another line of work focuses on the dynamics of FL: Saxe et al. (2014) derive exact learning dynamics for deep linear networks, while (Bordelon & Pehlevan, 2023) use dynamical mean-field theory to describe network behavior in the early stages of training of gradient descent training in different scaling regimes while we consider networks at equilibrium. Yang & Hu (2020) consider the effect of network training dynamics and learning rate scales in networks. Day et al. (2024) study the effect of weight initialization on generalization and training speed. A different viewpoint considers spectral properties of FL (Simon et al., 2023; Yang et al., 2024) as well as investigating the effects of learned representations directly (Petrini et al., 2023). Maillard et al. (2024) derive polynomial scaling limits of the required amount of training data.

## 3. Single hidden-layer linear network

We consider the following network architecture

$$h_\alpha = Vx_\alpha, f_\alpha = w^\top h_\alpha, y_\alpha = f_\alpha + \xi, \quad (1)$$

where  $\xi$  is Gaussian regularization noise  $\xi \stackrel{\text{i.i.d.}}{\sim} \mathcal{N}(0, \kappa)$ . We consider  $P$  tuples of training data  $\mathcal{D} = \{(x_\alpha, y_\alpha)\}_{1 \leq \alpha \leq P}$  with  $x_\alpha \in \mathbb{R}^D$  and  $y_\alpha \in \mathbb{R}$  as well as an unseen test point  $(x_*, y_*)$  denoted by ‘\*’. Here  $f_\alpha \in \mathbb{R}$  denotes the scalar network output. We study the Bayesian setting with Gaussian priors on the readin weights  $V \in \mathbb{R}^{N \times D}$  as  $V_{ij} \sim \mathcal{N}(0, g_v/D)$  and the readout weights  $w \in \mathbb{R}^N$  as  $w_i \sim \mathcal{N}(0, g_w/N^\gamma)$ . Here, we differentiate between two cases: (a) standard scaling for  $\gamma = 1$  and (b) mean-field scaling for  $\gamma = 2$ . Accordingly, we scale the regularization noise as  $\kappa = \kappa_0 N^{1-\gamma}$  so that it does not dominate the network output in mean-field scaling. To keep the notation concise, we use the shorthands  $f_{\mathcal{D}} = (f_\alpha)_{1 \leq \alpha \leq P}$ ,  $X = (x_\alpha)_{1 \leq \alpha \leq P}$  and  $y = (y_\alpha)_{1 \leq \alpha \leq P}$  in the following. Further, summations over repeated indices are implied  $V_{kl}x_l \equiv \sum_{l=1}^N V_{kl}x_l$ .

## 4. Multi-scale adaptive feature learning theory

In this section we compute the network posterior on the test data  $(x_*, y_*)$  by conditioning on the training data  $\mathcal{D}$  and derive a set of self-consistency equations for the average discrepancies  $\langle \Delta \rangle$  between labels  $y$  and mean posterior network outputs  $\langle f_{\mathcal{D}} \rangle$  on the training data. This description on the level of the discrepancies yields a high-resolution picture of network behavior: it allows us to explain kernel rescaling results in the proportional limit as well as predict directional aspects of FL.

#### 4.1. Predictor statistics of the neural network

We are interested in the Bayesian network posterior for the network output on training points  $f_{\mathcal{D}}$  and a test point  $f_*$ , which corresponds to training the network with Langevin stochastic gradient descent (LSGD) until convergence (Naveh et al., 2021) (see App. B.2 for details). We denote the joint vector of outputs as  $f := (f_{\mathcal{D}}, f_*) \in \mathbb{R}^{P+1}$ . Following along the lines of Segadlo et al. (2022a), we may write the joint distribution as

$$p(f_{\mathcal{D}}, f_*, y) = \mathcal{N}(y|f_{\mathcal{D}}, \kappa_0 N^{1-\gamma}) \quad (2)$$

$$\times \int d\tilde{f}_{\mathcal{D}} \int d\tilde{f}_* \exp[-i\tilde{f}^T f + W(i\tilde{f}_{\mathcal{D}}, i\tilde{f}_*)],$$

with  $\tilde{f} := (\tilde{f}_{\mathcal{D}}, \tilde{f}_*)$  the conjugate fields to  $f = (f_{\mathcal{D}}, f_*)$ . The cumulant-generating function  $W(i\tilde{f}_{\mathcal{D}}, i\tilde{f}_*)$  of the network prior is given by

$$W(i\tilde{f}_{\mathcal{D}}, i\tilde{f}_*) \quad (3)$$

$$= \ln \left\langle \exp \left( \sum_{a=1}^{P+1} i\tilde{f}_a w_j h_{aj} \right) \right\rangle_{w_j, h_{aj}} \quad (4)$$

$$= -\frac{N}{2} \left( \ln \det \left[ \mathbb{I} + \frac{g_w}{N^\gamma} C^{(xx)} \tilde{f} \tilde{f}^T \right] \right), \quad (5)$$

where the average  $\langle \dots \rangle_{w_j, h_j}$  is over the prior distribution on the network parameters and the hidden representations  $h_{aj} \stackrel{\text{i.i.d. over } j}{\sim} \mathcal{N}(0, C^{(xx)})$  with  $C^{(xx)} = g_w/D XX^T \in \mathbb{R}^{(P+1) \times (P+1)}$ . The detailed derivation can be found in App. A. The statistics of the conjugate fields  $(\tilde{f}_{\mathcal{D}}, \tilde{f}_*)$  are directly linked to the statistics of the network predictors  $f_{\mathcal{D}}$  via the output discrepancies  $\Delta = y - f_{\mathcal{D}}$  on the training data as in (33)

$$\langle \Delta \rangle = -i\kappa_0 N^{1-\gamma} \langle \tilde{f}_{\mathcal{D}} \rangle. \quad (6)$$

To obtain the statistics of the conjugate variables  $(\tilde{f}_{\mathcal{D}}, \tilde{f}_*)$  and thus also of the network outputs  $(f_{\mathcal{D}}, f_*)$ , we define a conditional cumulant-generating function  $\mathcal{W}(k, j_*|y) := \ln \langle \exp(j_* f_* + ik^T f_{\mathcal{D}}) \rangle_{f_*, \tilde{f}_{\mathcal{D}}}$  which takes the form

$$\mathcal{W}(k, j_*|y) = \ln \int d\tilde{f} \exp[ik^T \tilde{f}_{\mathcal{D}} + \mathcal{S}(\tilde{f}_{\mathcal{D}}, j_*|y)], \quad (7)$$

$$\mathcal{S}(\tilde{f}_{\mathcal{D}}, j_*|y) = -iy^T \tilde{f}_{\mathcal{D}} - \frac{\kappa_0}{2} N^{1-\gamma} \tilde{f}_{\mathcal{D}}^T \tilde{f}_{\mathcal{D}} \quad (8)$$

$$+ W(i\tilde{f}_{\mathcal{D}}, j_*).$$

Here, we introduced source terms  $(k, j_*)$  with  $k \in \mathbb{R}^P$ ,  $j_* \in \mathbb{R}$  from which we can obtain the statistics of  $(\tilde{f}_{\mathcal{D}}, f_*)$  as their derivatives. On the training points, we have

$$\langle \tilde{f}_{\mathcal{D}} \rangle = -i\nabla_k \mathcal{W}|_{k, j_*=0}, \quad \langle \tilde{f}_{\mathcal{D}} \tilde{f}_{\mathcal{D}}^T \rangle = -\nabla_k^2 \mathcal{W}|_{k, j_*=0}, \quad (9)$$

with  $\langle \dots \rangle$  being the covariance. On the test point, we get

$$\langle f_* \rangle = \partial_{j_*} \mathcal{W}|_{k, j_*=0}, \quad \langle f_*^2 \rangle = \partial_{j_*}^2 \mathcal{W}|_{k, j_*=0}. \quad (10)$$

However, the cumulant-generating function  $\mathcal{W}(k, j_*|y)$  in (7) in general does not have an analytical solution. Instead, we perform a systematic expansion in terms of fluctuations of the network output using its Legendre transform

$$\Gamma(\tilde{f}, j_*|y) = \text{extr}_k ik^T \tilde{f} - \mathcal{W}(k, j_*|y), \quad (11)$$

where we take the extremum with respect to  $k$ . This transform is a function of the mean conjugate field  $\tilde{f} = \langle \tilde{f}_{\mathcal{D}} \rangle$  (we drop the index  $\mathcal{D}$  for readability), defined self-consistently by the stationary condition given by

$$\partial_{\tilde{f}} \Gamma(\tilde{f}, j_*|y) \stackrel{!}{=} 0. \quad (12)$$

In that way, studying the Legendre transform  $\Gamma(\tilde{f}, j_*|y)$  is a natural way of constructing a minimization problem that yields the quantity we are interested in. It recasts the problem of computing the statistics of the posterior, which is the stationary solution of the stochastic minimization problem described by the LSGD training, into an effective deterministic optimization problem of  $\Gamma$  with regard to the mean discrepancies  $\tilde{f}$ ; intuitively, we may therefore think of  $\Gamma$  as an effective loss function that explicitly only depends on the mean discrepancies  $\langle \Delta \rangle \propto \tilde{f}$ , but implicitly takes fluctuations of  $\Delta$  into account. Moreover, it allows computing corrections to the mean network outputs in a systematic manner, building on a broad foundation of methods from statistical physics (Zinn-Justin, 1996; Helias & Dahmen, 2020).

Using the relationship between first-order parametric derivatives of the Legendre transform  $\Gamma(\tilde{f}, j_*|y)$  and the cumulant-generating function  $\mathcal{W}(k, j_*|y)$ , we obtain

$$\langle f_* \rangle = -\partial_{j_*} \Gamma|_{k, j_*=0}. \quad (13)$$

In the following sections, we consider approximations of the Legendre transform  $\Gamma(\tilde{f}, j_*|y)$  for different scaling regimes, and use these to systematically determine the network output statistics.

#### 4.2. Saddle-point approximation in mean-field scaling

In mean-field scaling, the exponent  $\mathcal{S}$  of the cumulant-generating function in (7) scales linearly with the network width, while the fluctuations of the network output scale as  $\langle \langle ff^T \rangle \rangle \sim 1/N$  and become negligible. Thus, we can perform a saddle-point approximation for the integral in (7) and obtain the tree-level approximation of the Legendre transform (Helias & Dahmen, 2020) by replacing  $\tilde{f}_{\mathcal{D}} \mapsto \tilde{f}$  in the exponent  $\mathcal{S}$ , yielding

$$\Gamma(\tilde{f}, j_*|y) \approx \Gamma_{\text{TL}}(\tilde{f}, j_*|y) = -\mathcal{S}(\tilde{f}, j_*|y). \quad (14)$$

We derive this result more rigorously in App. A using a large deviation principle (Touchette, 2009). From the stationary

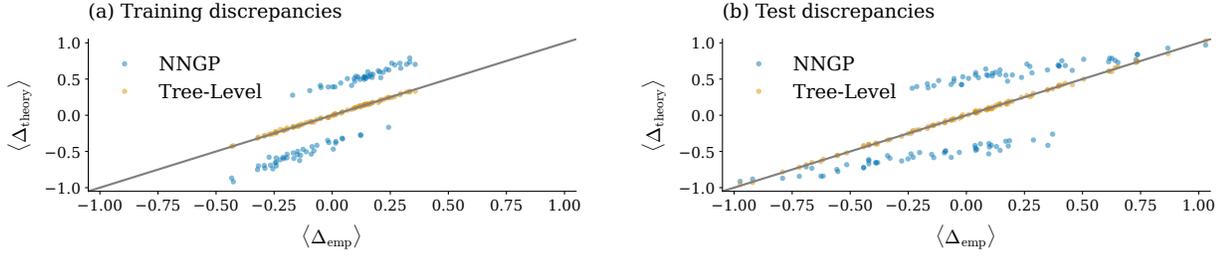


Figure 2. (a) Training discrepancies  $\langle \Delta \rangle = y - \langle f_{\mathcal{D}} \rangle$  and (b) test discrepancies  $\langle \Delta_* \rangle = y_* - \langle f_* \rangle$  on an Ising task in mean-field scaling. We show theoretical values for both NNGP and tree-level against empirical results, where the gray line marks the identity. In contrast to the NNGP, the tree-level approximation accurately matches the empirical values. Parameters:  $\gamma = 2$ ,  $P_{\text{train}} = 80$ ,  $N = 100$ ,  $D = 200$ ,  $\kappa_0 = 1$ ,  $P_{\text{test}} = 10^3$ ,  $g_v = g_w = 0.5$ ,  $\Delta p = 0.1$ .

condition in (12), we obtain a self-consistency equation for  $\bar{f}$  given by

$$\bar{f} = -i \left( \kappa_0 N^{-1} \mathbb{I} + C_{\text{TL}}(\bar{f}) C_{\mathcal{D}\mathcal{D}}^{(xx)} \right)^{-1} y, \quad (15)$$

$$C_{\text{TL}}(\bar{f}) = g_w N^{-1} \left[ \mathbb{I} + \frac{g_w}{N^2} C_{\mathcal{D}\mathcal{D}}^{(xx)} \bar{f} \bar{f}^{\text{T}} \right]^{-1}, \quad (16)$$

where  $C_{\mathcal{D}\mathcal{D}}^{(xx)} \in \mathbb{R}^{P \times P}$  refers to the training data submatrix of  $C^{(xx)}$ . In the remainder of this section,  $\bar{f}$  refers to the solution of (15). We obtain the discrepancies on the training points as

$$\langle \Delta \rangle_{\text{TL}} = \kappa_0 \left( \kappa_0 \mathbb{I} + C_{\text{TL}}(\bar{f}) C_{\mathcal{D}\mathcal{D}}^{(xx)} \right)^{-1} y. \quad (17)$$

For the test point, we get

$$\begin{aligned} \langle f_* \rangle_{\text{TL}} & \quad (18) \\ & = \left[ C_{\text{TL}}(\bar{f}) C_{\mathcal{D}^*}^{(xx)} \right]^{\text{T}} \left( \kappa_0 N^{1-\gamma} \mathbb{I} + C_{\text{TL}}(\bar{f}) C_{\mathcal{D}\mathcal{D}}^{(xx)} \right)^{-1} y \end{aligned}$$

where  $C_{\mathcal{D}^*}^{(xx)} := \{g_{v/D} x_{\alpha} \cdot x_{*}\}_{1 \leq \alpha \leq P} \in \mathbb{R}^{P \times 1}$ , recovering results by Seroussi et al. (2023). In Fig. 2, we compare theoretical values for training and test discrepancies against empirical measurements for networks trained on a linearly separable Ising task (see App. B.2 for details). Comparing to the NNGP as a baseline, we find that, while the NNGP fails to match network outputs, the multi-scale adaptive theory accurately predicts the values observed in trained networks.

### 4.3. Fluctuation corrections in standard scaling

In standard scaling, output fluctuations are not scaled down by the network width  $N$  and instead become non-negligible. To obtain the leading-order fluctuation corrections, we expand the exponent  $\mathcal{S}$  of the cumulant-generating function around its saddle-point  $\bar{f}$  to second order as

$$\mathcal{S}(\tilde{f}_{\mathcal{D}}, j_* | y) \approx \mathcal{S}(\bar{f}, j_*) + \frac{1}{2} (\tilde{f}_{\mathcal{D}} - \bar{f})^{\text{T}} \mathcal{S}^{(2)} (\tilde{f}_{\mathcal{D}} - \bar{f}), \quad (19)$$

where  $\mathcal{S}^{(2)}$  denotes the Hessian of  $\mathcal{S}(\tilde{f}, j_* | y)$  with respect to  $\tilde{f}_{\mathcal{D}}$  at the saddle-point  $\bar{f}$ . Calculating the Gaussian integral in (7), we obtain what is known as the one-loop approximation of the Legendre transform (Helias & Dahmen, 2020) as

$$\Gamma_{1\text{-Loop}}(\bar{f}, j_* | y) = -\mathcal{S}(\bar{f}, j_*) - \frac{1}{2} \log \det(-\mathcal{S}^{(2)}). \quad (20)$$

The self-consistency equation for  $\bar{f}_{\mathcal{D}}$  from the stationary condition in (12) is then given by

$$\bar{f}_{\alpha} = \left[ A(\bar{f}) \right]_{\alpha\beta}^{-1} \left[ -i y_{\beta} - \frac{1}{2} \left[ \mathcal{S}^{(2)} \right]_{\delta\epsilon}^{-1} \mathcal{S}_{\epsilon\delta\beta}^{(3)} \Big|_{j^*=0} \right], \quad (21)$$

where  $A(\bar{f}) = \kappa_0 \mathbb{I} + C_{\text{TL}}(\bar{f}) C_{\mathcal{D}\mathcal{D}}^{(xx)}$  and  $\mathcal{S}^{(n)}$  refers to the  $n$ -th derivative of the exponent with respect to  $\tilde{f}_{\mathcal{D}}$  evaluated at  $\bar{f}$  (see App. A.2 for details). In the remainder of this section,  $\bar{f}$  refers to the self-consistent solution of (21), which is not necessarily the same as the one of (15) in the previous section. This yields for the training discrepancies  $\langle \Delta \rangle_{1\text{-Loop}} = i \kappa_0 \bar{f}$  as in (6) and for the test point from (13)

$$\begin{aligned} \langle f_* \rangle_{1\text{-Loop}} & \quad (22) \\ & = \kappa_0^{-1} C_{\mathcal{D}^*}^{(xx)} C_{\text{TL}}(\bar{f})^{\text{T}} \langle \Delta \rangle + \frac{1}{2} \left( \mathcal{S}^{(2)} \right)_{\beta\alpha}^{-1} \mathcal{S}_{\alpha\beta}^{(3)} \Big|_{j^*=0}. \end{aligned}$$

In the next section, we will see how these expressions reduce to a kernel rescaling theory in the proportional limit  $N \propto P \rightarrow \infty$ , which in linear networks we refer to as one-loop simplified in Fig. 3, where we compare theoretical predictions to empirical measurements on the Ising task. We show results for the multi-scale adaptive theory presented here as well as the rescaling theory by Li & Sompolinsky (2021), which was derived for the standard scaling regime. Due to the weak FL in standard scaling, all theories match the network behavior relatively well. However, by taking the NNGP as a reference, the differences between the theories become discernable: The tree-level solution shows deviations from the other solutions, predicting overly small test

errors compared to the one-loop solution and compared to empirics. Furthermore, predictions of the one-loop solution agree to those of the rescaling theory by Li & Sompolinsky (2021).

The one-loop solution takes into account leading-order fluctuation corrections. The latter vanish in mean-field scaling, so one expects the one-loop approximation to converge to the tree-level result in this scaling regime. We show this explicitly in Fig. 1b, where we demonstrate how the different theories transition between the two scaling regimes by scaling  $\kappa_0 \mapsto \kappa_0/\chi$  and  $g_w \mapsto g_w/\chi$  with  $0.1/N < 1/\chi < 10$  determining the scale of fluctuations. As expected, train and test errors decrease for increasing FL in the mean-field regime. Due to non-negligible fluctuations, the tree-level and one-loop solutions differ in standard scaling. When further increasing the fluctuations scale, even the one-loop solution does not accurately predict empirical measurements anymore since this regime requires fluctuation corrections beyond first order. In principle, the multi-scale adaptive approach allows computing these higher-order correction terms (Helias & Dahmen, 2020). When decreasing the fluctuations towards the mean-field scaling regime, the one-loop solution converges to the tree-level solution. Notably, the here presented multi-scale adaptive approach accurately predicts train and test errors across both scaling regimes, including the intermediate regime.

## 5. Kernel rescaling theory as an approximation of the multi-scale adaptive theory

Existing rescaling theories (Li & Sompolinsky, 2021; 2022; Pacelli et al., 2023; Bassetti et al., 2024; Baglioni et al., 2024) and adaptive theories (Naveh & Ringel, 2021a; Seroussi et al., 2023; Fischer et al., 2024b; Rubin et al., 2024) make both qualitatively and quantitatively different predictions regarding network behavior. On the one hand, rescaling approaches predict that the mean network output is equivalent to that obtained by a rescaled NNGP kernel. On the other hand, adaptive approaches such as the multi-scale adaptive theory presented here, as well as other existing approaches, predict that the kernel adapts to the data in a richer manner, showing changes in specific directions that are determined by the training data’s statistics. While these approaches are quite different, in this section we expose the tight relation between them in two respects. First, (i) we show that the adaptive and the rescaling approach can both be derived from the same starting point; the expression for the joint distribution of the network outputs (2). Second, (ii) we show that the adaptive approach in the proportional limit  $N \propto P \rightarrow \infty$  can be approximated by a kernel rescaling for the mean outputs.

The differences between the two viewpoints stem from different choices of the order parameter used in the approxima-

tion of the posterior, utilizing either a saddle-point approximation or approximations including fluctuation corrections. Specifically, with point (i), we show in App. A.4 that the equations obtained by Li & Sompolinsky (2021) can be rederived from (2) by marginalizing over the hidden representations  $h$  in (4) and performing a change of variables so that the posterior is a function of a single scalar order parameter  $Q := \|w\|^2$ . A saddle-point approximation with respect to this variable yields a self-consistent equation for  $Q$  and consequently expressions for the predictor statistics on test and training points, such as the mean and fluctuations. As the order parameter is scalar here, it is limited to describing scalar changes to the kernel.

Conversely, the choice of the high-dimensional order parameter in the multi-scale adaptive approach, which in mean-field scaling reproduces equivalent equations to those of the approach in (Seroussi et al., 2023), results in structural changes to the kernel. Notably, the choice of a high-dimensional order parameter results in the need to correct for fluctuations that arise in standard scaling, requiring us to go beyond the saddle-point approximation by using fluctuation corrections.

Surprisingly, as we have shown in the previous section, for a linear network and considering only the mean predictor, the multi-scale adaptive approach converges to that of the rescaling one, even though they have qualitatively different kernels. This motivates point (ii) of this section, showing that for a linear network in the proportional limit  $N \propto P \rightarrow \infty$ , regardless of the initial choice of order parameter, the mean network output can be obtained from kernel regression (Rasmussen & Williams, 2006) with a rescaled NNGP kernel.

In the kernel rescaling case, the predictor for the mean output is obtained by replacing the NNGP kernel  $K_{\text{NNGP}} = g_w N^{1-\gamma} C_{\mathcal{D}\mathcal{D}}^{(xx)}$  with a rescaled kernel

$$K_{\text{rescaling}} = Q/(g_w N^{1-\gamma}) K_{\text{NNGP}}. \quad (23)$$

For the multi-scale adaptive approach presented here, the output statistics in mean-field scaling are obtained by using the kernel

$$K_{\text{adaptive, TL}} = \left[ \mathbb{I} + \frac{g_w}{N^\gamma} C_{\mathcal{D}\mathcal{D}}^{(xx)} \bar{f}_{\text{TL}} \bar{f}_{\text{TL}}^\top \right]^{-1} K_{\text{NNGP}}. \quad (24)$$

The appearing matrix product allows a non-trivial change of the NNGP kernel in certain meaningful directions, yielding additional insights. However, we derive an equivalent equation for the mean predictor by simplifying (4) using the matrix-determinant-lemma, which yields the mean output from a rescaled NNGP kernel given by

$$K_{\text{rescaling, TL}} = Q_{\text{TL}}(\bar{f})/(g_w N^{1-\gamma}) K_{\text{NNGP}}, \quad (25)$$

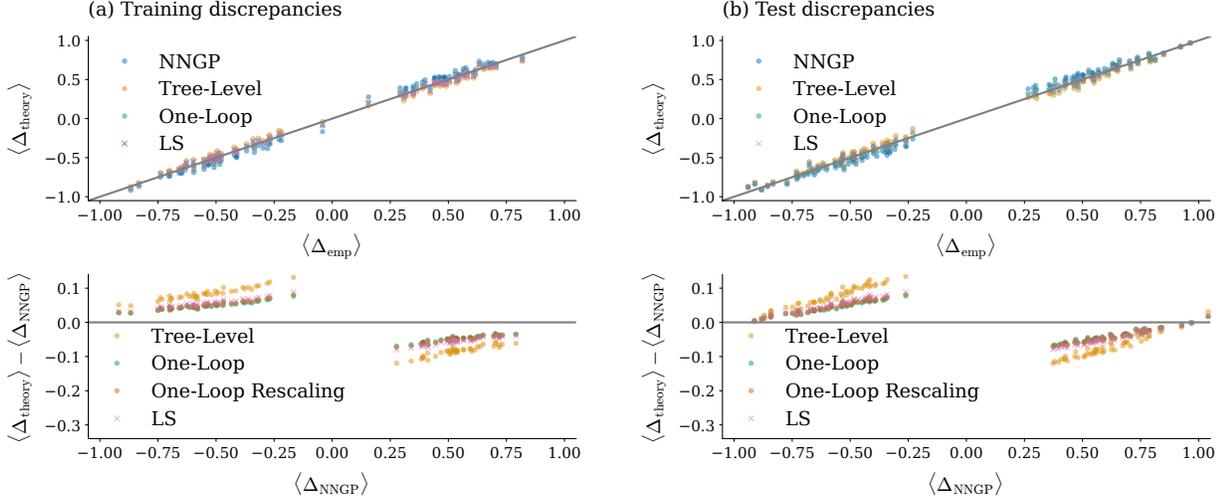


Figure 3. (a) Training discrepancies  $\langle \Delta \rangle = y - \langle f_{\mathcal{D}} \rangle$  and (b) test discrepancies  $\langle \Delta_* \rangle = y_* - \langle f_* \rangle$  on an Ising task in standard scaling. Upper row: theoretical values for different theories against empirical results; gray line marks the identity. Lower row: difference of theoretical values to the NNGP as a baseline against NNGP predictions, indicating small-scale differences between the different approaches. Results of the kernel approach by Li & Sompolinsky (2021) shown as reference (LS). Parameters:  $\gamma = 1$ ,  $P_{\text{train}} = 80$ ,  $N = 100$ ,  $D = 200$ ,  $\kappa_0 = 0.4$ ,  $P_{\text{test}} = 10^3$ ,  $g_v = 0.5$ ,  $g_w = 0.2$ ,  $\Delta p = 0.1$ .

where  $Q_{\text{TL}}(\bar{f}) = g_w N^{1-\gamma} / (1 + \frac{g_w}{N^\gamma} \bar{f}^\top C^{(xx)} \bar{f})$  and  $\bar{f}$  satisfies (15). So even though the adaptive approach in mean-field scaling considers a directional change to the kernel, in terms of the mean output this is equivalent to a rescaled kernel. In standard scaling, one cannot immediately express the mean output in terms of a rescaled kernel. However, in the proportional limit  $N \propto P \rightarrow \infty$ , certain fluctuation correction terms vanish, reducing the expressions to a rescaling form again (see App. A.3). The rescaling factor is given by

$$Q_{1\text{-loop}}(\bar{f}) \quad (26)$$

$$= Q_{\text{TL}}(\bar{f}) - \frac{Q_{\text{TL}}^2(\bar{f})}{N} \text{Tr} \left[ A^{-1}(\bar{f}) C_{\mathcal{D}\mathcal{D}}^{(xx)} \right],$$

where  $A(\bar{f}) := \kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) C_{\mathcal{D}\mathcal{D}}^{(xx)}$ , and  $\bar{f}$  satisfies (128). We thus find that known theoretical approaches are all derived from the same original posterior distribution by considering different order parameters, while their resulting predictions for the mean network output behave like a rescaled NNGP. However the rescaling behavior of mean predictors holds only for linear networks. Other properties, such as phase transitions in non-linear networks (Rubin et al., 2024) require an adaptive approach and would escape a description by a rescaled kernel.

## 6. Directional feature learning emerges in adaptive description

The power of NNs stems from their ability to detect high-dimensional features in the data, implying that in the transition from the lazy to the rich regime this would be reflected

in the network output statistics in a non-trivial manner. It is well established that the network weights adapt during training in an anisotropic manner, detecting relevant directions present in the training data (Seroussi et al., 2023; Fischer et al., 2024b); yet surprisingly, for the mean output of a linear network this adaptation seems to be equivalent to an isotropic rescaling of the NNGP kernel.

In this section, we demonstrate that the directional aspect of FL is nonetheless present in output fluctuations, which is only captured by the adaptive approach. Given a normalized feature direction  $\hat{\phi}$ , we define a directional FL measure  $\Phi(\hat{\phi})$  that indicates to which degree this feature is represented by the network relative to other learned features

$$\Phi(\hat{\phi}) := \frac{\hat{\phi}^\top \langle \langle f f^\top \rangle \rangle \hat{\phi}}{\text{Tr}(\langle \langle f f^\top \rangle \rangle)}. \quad (27)$$

Then,  $\Phi(\hat{\phi}) \rightarrow 1$  indicates that the feature direction  $\hat{\phi}$  dominates the covariance, implying that this feature has been perfectly learned, whereas  $\Phi(\hat{\phi}) \ll 1$  is an indication of weak directional FL. As derived in App. A, we obtain for the covariance of the network outputs on the training data

$$\langle \langle f f^\top \rangle \rangle_{\text{adaptive}} = \kappa \mathbb{I} - \kappa^2 \left( A + \frac{2Q_{\text{TL}}^2}{N\kappa_0^2} F \right)^{-1}, \quad (28)$$

where we observe a structural change in the covariance matrix in form of the term  $F := C_{\mathcal{D}\mathcal{D}}^{(xx)} \langle \Delta \rangle \langle \Delta \rangle^\top C_{\mathcal{D}\mathcal{D}}^{(xx)}$ , which is not present in a rescaling of the NNGP, whose covariance is

$$\langle \langle f f^\top \rangle \rangle_{\text{rescaling}} = \kappa \mathbb{I} - \kappa^2 (\kappa \mathbb{I} + Q C_{\mathcal{D}\mathcal{D}}^{(xx)})^{-1}. \quad (29)$$

We comment that in the original work by Li & Sompolinsky (2021), only the variance but no explicit form for the full covariance matrix has been derived. Nevertheless, the expressions derived in App. A.4 for the rescaling approach remain consistent with their solution for the mean network output and the variance. As evident from the expressions for the covariance, the directional FL measure  $\Phi$  differs significantly between the two approaches, which is illustrated most easily for a kernel  $C^{(xx)} \propto \mathbb{I}$ : the isotropy of the rescaling theory then results in the same value of  $\Phi(\hat{\phi})$  independent of the direction of  $\hat{\phi}$ , whereas the structural change of the covariance in the adaptive theory by the rank-one term  $\langle \Delta \rangle \langle \Delta \rangle^T$  in (28) may yield larger values of  $\Phi(\hat{\phi})$  for features  $\hat{\phi} \parallel \langle \Delta \rangle$ .

We show the directional aspect of FL in a teacher-student setting, where the teacher is given by  $y = Xw_*$  with  $X \sim \mathcal{N}(0, \mathbb{I})$  and the student is a linear network as in Section 3. In this setting, the teacher defines a feature direction  $\hat{y}_* = Xw_*/|Xw_*|$ , and for comparison, we consider another feature direction  $\hat{y}_\perp = Xw_\perp/|Xw_\perp|$ , orthogonal to the former in the sense that  $w_\perp \perp w_*$ . The latter can be thought of as the direction of a randomly selected teacher that differs in the weights of the hidden layer from that of the actual target teacher. In Fig. 4, we show the relative directional FL measure  $\Phi(\hat{y}_*)/\Phi(\hat{y}_\perp)$  between the target teacher and a random, orthogonal teacher direction. While the rescaling theory does not differentiate between these directions, the adaptive theory accurately predicts amplification of the teacher direction when entering the mean-field regime. The choice of a high-dimensional order parameter in the adaptive theory allows us to capture this directional property of FL, illustrating how this theory yields a richer picture of the network behavior.

## 7. Discussion

In this work we present a unified theoretical framework to understand feature learning (FL) in the Bayesian setting across scaling regimes, from lazy to rich learning. This framework describes both effects of data adaptation in trained networks, i.e. directional changes of the network’s output statistics in response to statistical dependencies present in the training data, as well as output rescaling phenomena that were described in previous works (Li & Sompolinsky, 2021; Pacelli et al., 2023). Our theory thus creates links between existing and so far unconnected previous theories. In the rich regime, the presented multi-scale adaptive theory clearly exposes directional aspects of FL, thus going beyond rescaling theories. We finally reconcile the apparent contradiction between directional adaptation and rescaling by recovering the latter as an approximation of the former on the level of the mean network output.

Furthermore, the here presented multi-scale adaptive theory

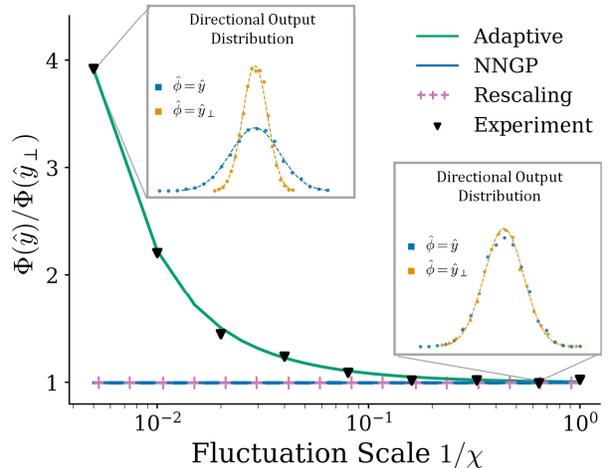


Figure 4. Relative directional feature learning in a teacher student setting as a function of the fluctuation scale  $1/\chi$ . Both NNGP and rescaling theory fail to capture directional feature learning, while the multi-scale adaptive theory accurately predicts network behavior. Insets show the output distribution in different directions; a detailed version can be found in Fig. 6. Parameters:  $P_{\text{train}} = 80$ ,  $N = 200$ ,  $D = 50$ ,  $\kappa_0 = 2$ ,  $g_v = 0.01$ ,  $g_w = 2$ .

applies to both standard and mean-field scaling and the entirety of the scaling spectrum. The latter is possible since the presented theoretical frameworks allows systematically computing fluctuation corrections depending on the scaling regime.

**Limitations** We study linear single-hidden-layer networks in this work to limit the approximations needed, providing a clearer picture on the relation between different FL theories. Extending the presented framework to non-linear networks is straightforward and will be a direction of future research.

**Outlook** We expect directional FL to be crucial for network performance in non-linear networks. Further, we plan to study the effect of network depth on FL. Beyond this, it will be valuable to extend the theoretical framework to other network architectures such as convolutional networks, residual networks, and transformers, using the respective network priors (Garriga-Alonso et al., 2019; Hron et al., 2020; Fischer et al., 2024a). To study the effect of noise in input data on FL (Lindner et al., 2023), we would like to include fluctuations of the input kernel in the theoretical framework.

## Impact Statement

This paper works towards understanding feature learning, thus aiming to advance explainability of networks. While the latter surely has societal impacts, these will be much further down the line.

## Acknowledgements

This work was partly funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) - 368482240/GRK2416. MK would like to thank the Institute for Advanced Simulation (IAS-6) at Juelich Research Center and its directors Markus Diesmann and Sonja Grün for their hospitality during regular visits.

## References

- Abbe, E., Boix-Adsera, E., Brennan, M., Bresler, G., and Nagaraj, D. The staircase property: How hierarchical structure can guide deep learning, 2021. URL <https://arxiv.org/abs/2108.10573>. 1
- Aitchison, L. Why bigger is not always better: on finite and infinite neural networks. In III, H. D. and Singh, A. (eds.), *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pp. 156–164. PMLR, 2020. URL <https://proceedings.mlr.press/v119/aitchison20a.html>. 2
- Aitken, K. and Gur-Ari, G. On the asymptotics of wide networks with polynomial activations, 2020. URL <https://arxiv.org/abs/2006.06687>. 2
- Antognini, J. M. Finite size corrections for neural network gaussian processes. pp. 1908.10030 [cs.LG], 2019. URL <https://arxiv.org/abs/1908.10030>. 2
- Avidan, Y., Li, Q., and Sompolinsky, H. Connecting ntk and nngp: A unified theoretical framework for wide neural network learning dynamics, 2024. URL <https://arxiv.org/abs/2309.04522>. 2
- Baglioni, P., Pacelli, R., Aiudi, R., Di Renzo, F., Vezzani, A., Burioni, R., and Rotondo, P. Predictive power of a bayesian effective action for fully connected one hidden layer neural networks in the proportional limit. 133:027301, 2024. doi: 10.1103/PhysRevLett.133.027301. URL <https://link.aps.org/doi/10.1103/PhysRevLett.133.027301>. 1, 2, 5
- Bassetti, F., Gherardi, M., Ingrosso, A., Pastore, M., and Rotondo, P. Feature learning in finite-width bayesian deep linear networks with multiple outputs and convolutional layers, 2024. URL <https://arxiv.org/abs/2406.03260>. 2, 5
- Bengio, Y., Courville, A., and Vincent, P. Representation learning: A review and new perspectives. 35 (8):1798–1828, aug 2013. doi: 10.1109/tpami.2013.50. URL <https://doi.org/10.1109/tpami.2013.50>. 1
- Bordelon, B. and Pehlevan, C. Self-consistent dynamical field theory of kernel evolution in wide neural networks\*. 2023(11):114009, nov 2023. doi: 10.1088/1742-5468/ad01b0. URL <https://dx.doi.org/10.1088/1742-5468/ad01b0>. 1, 2
- Bricken, T., Templeton, A., Batson, J., Chen, B., Jermyn, A., and team, A. Towards monosemanticity: Decomposing language models with dictionary learning, 2023. URL <https://transformer-circuits.pub/2023/monosemantic-features/index.html>. 1
- Buzaglo, G., Harel, I., Nacson, M. S., Brutzkus, A., Srebro, N., and Soudry, D. How uniform random weights induce non-uniform bias: Typical interpolating neural networks generalize with narrow teachers, 2024. URL <https://arxiv.org/abs/2402.06323>. 2
- Canatar, A. and Pehlevan, C. A kernel analysis of feature learning in deep neural networks. In *2022 58th Annual Allerton Conference on Communication, Control, and Computing (Allerton)*, pp. 1–8, 2022. doi: 10.1109/Allerton49937.2022.9929375. URL <https://doi.org/10.1109/Allerton49937.2022.9929375>. 2
- Chizat, L., Oyallon, E., and Bach, F. On lazy training in differentiable programming. volume 32, 2019. URL <https://openreview.net/pdf?id=rkgxDVS1LB>. 2
- Cohen, O., Malka, O., and Ringel, Z. Learning curves for overparametrized deep neural networks: A field theory perspective. 3:023034, 2021. doi: 10.1103/PhysRevResearch.3.023034. URL <https://link.aps.org/doi/10.1103/PhysRevResearch.3.023034>. 2
- Cui, H., Krzakala, F., and Zdeborova, L. Bayes-optimal learning of deep random networks of extensive-width. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202, pp. 6468–6521. PMLR, 23–29 Jul 2023. URL <https://proceedings.mlr.press/v202/cui23b.html>. 2
- Dandi, Y., Krzakala, F., Loureiro, B., Pesce, L., and Stephan, L. How two-layer neural networks learn, one (giant) step at a time, 2023. URL <https://arxiv.org/abs/2305.18270>. 1
- Day, H., Kahn, Y., and Roberts, D. A. Feature learning and generalization in deep networks with orthogonal weights, 2024. URL <https://arxiv.org/abs/2310.07765>. 2

- Dyer, E. and Gur-Ari, G. Asymptotics of wide networks from feynman diagrams. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=S1gFvANKDS>. 2
- Fischer, K., Dahmen, D., and Helias, M. Field theory for optimal signal propagation in resnets, 2024a. URL <https://arxiv.org/abs/2305.07715>. 7
- Fischer, K., Lindner, J., Dahmen, D., Ringel, Z., Krämer, M., and Helias, M. Critical feature learning in deep neural networks, 2024b. 1, 2, 5, 6, A
- Gabor, D. Theory of communication. *Journal of the Institution of Electrical Engineers - Part I: General*, 94:58–58, 1946. URL <https://api.semanticscholar.org/CorpusID:61327032>. 1
- Garriga-Alonso, A., Rasmussen, C. E., and Aitchison, L. Deep convolutional networks as shallow gaussian processes. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=Bklfsi0cKm>. 7
- Goldt, S., Reeves, G., Mézard, M., Krzakala, F., and Zdeborová, L. The Gaussian equivalence of generative models for learning with two-layer neural networks. 2020. URL <https://arxiv.org/abs/2006.14709v1>. 2
- Halverson, J., Maiti, A., and Stoner, K. Neural networks and quantum field theory. *Machine Learning: Science and Technology*, 2(3):035002, apr 2021. doi: 10.1088/2632-2153/abeca3. URL <https://doi.org/10.1088/2632-2153/abeca3>. 2
- Hanin, B. Random fully connected neural networks as perturbatively solvable hierarchies. *Journal of Machine Learning Research*, 25(267):1–58, 2024. URL <http://jmlr.org/papers/v25/23-0643.html>. 2
- Hanin, B. and Zlokapa, A. Bayesian interpolation with deep linear networks. 120(23):e2301345120, 2023. doi: 10.1073/pnas.2301345120. URL <https://www.pnas.org/doi/abs/10.1073/pnas.2301345120>. 2
- Helias, M. and Dahmen, D. *Statistical Field Theory for Neural Networks*. Springer International Publishing, 2020. doi: 10.1007/978-3-030-46444-8. 4.1, 4.2, 4.3, 4.3, A, A.2
- Hron, J., Bahri, Y., Sohl-Dickstein, J., and Novak, R. Infinite attention: NNGP and NTK for deep attention networks. In III, H. D. and Singh, A. (eds.), *Proceedings of the 37th International Conference on Machine Learning*, volume 119, pp. 4376–4386. PMLR, 13–18 Jul 2020. URL <https://proceedings.mlr.press/v119/hron20a.html>. 7
- Huang, J. and Yau, H.-T. Dynamics of deep neural networks and neural tangent hierarchy. In *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pp. 4542–4551. PMLR, 13–18 Jul 2020. URL <https://proceedings.mlr.press/v119/huang201.html>. 2
- Krogh, A. and Hertz, J. A simple weight decay can improve generalization. volume 4. Morgan-Kaufmann, 1991. URL [https://proceedings.neurips.cc/paper\\_files/paper/1991/file/8eefcfd5990e441f0fb6f3fad709e21-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/1991/file/8eefcfd5990e441f0fb6f3fad709e21-Paper.pdf). B.2
- Lee, J., Sohl-Dickstein, J., Pennington, J., Novak, R., Schoenholz, S., and Bahri, Y. Deep neural networks as gaussian processes. In *International Conference on Learning Representations*, Vancouver, 2018. OpenReview.net. URL <https://openreview.net/forum?id=B1EA-M-0Z>. 1, 2
- Lee, J., Schoenholz, S., Pennington, J., Adlam, B., Xiao, L., Novak, R., and Sohl-Dickstein, J. Finite versus infinite neural networks: an empirical study. volume 33, pp. 15156–15172. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/file/ad086f59924fffe0773f8d0ca22ea712-Paper.pdf>. 2
- Li, Q. and Sompolinsky, H. Statistical Mechanics of Deep Linear Neural Networks: The Back-propagating Kernel Renormalization. 11(3): 031059, 2021. doi: 10.1103/PhysRevX.11.031059. URL <https://journals.aps.org/prx/abstract/10.1103/PhysRevX.11.031059>. 1, 1, 2, 4.3, 5, 3, 6, 7, A.4, A.4.2, A.5
- Li, Q. and Sompolinsky, H. Globally gated deep linear networks, 2022. URL <https://arxiv.org/abs/2210.17449>. 2, 5
- Li, Y., Yosinski, J., Clune, J., Lipson, H., and Hopcroft, J. Convergent learning: Do different neural networks learn the same representations? In Storcheus, D., Ros-tamizadeh, A., and Kumar, S. (eds.), *Proceedings of the 1st International Workshop on Feature Extraction: Modern Questions and Challenges at NIPS 2015*, volume 44 of *Proceedings of Machine Learning Research*, pp. 196–212, Montreal, Canada, 11 Dec 2015. PMLR. URL <https://proceedings.mlr.press/v44/li15convergent.html>. 2
- Lindner, J., Dahmen, D., Krämer, M., and Helias, M. A theory of data variability in neural network bayesian in-

- ference. *arXiv preprint arXiv:2307.16695*, 2023. URL <https://arxiv.org/abs/2307.16695>. 7
- Luan, S., Zhang, B., Zhou, S., Chen, C., Han, J., Yang, W., and Liu, J. Gabor convolutional networks. In *2018 IEEE Winter Conference on Applications of Computer Vision (WACV)*, pp. 1254–1262, 2018. doi: 10.1109/WACV.2018.00142. 1
- MacKay, D. J. *Information theory, inference and learning algorithms*. Cambridge university press, 2003. 1
- Maillard, A., Troiani, E., Martin, S., Krzakala, F., and Zdeborova, L. Bayes-optimal learning of an extensive-width neural network from quadratically many samples. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=R8znYRjxj3>. 2
- Matthews, A. G. d. G., Hron, J., Rowland, M., Turner, R. E., and Ghahramani, Z. Gaussian process behaviour in wide deep neural networks. In *International Conference on Learning Representations*, 2018. URL <https://openreview.net/forum?id=H1-nGgWC->. 1, 2
- Naveh, G. and Ringel, Z. A self consistent theory of gaussian processes captures feature learning effects in finite CNNs. virtual, 2021a. NeurIPS 2021. URL <https://openreview.net/forum?id=vBYwwBxVcsE>. 2, 5
- Naveh, G. and Ringel, Z. A self consistent theory of gaussian processes captures feature learning effects in finite CNNs. In Beygelzimer, A., Dauphin, Y., Liang, P., and Vaughan, J. W. (eds.), *Advances in Neural Information Processing Systems*, 2021b. URL <https://openreview.net/forum?id=vBYwwBxVcsE>. 1
- Naveh, G., Ben David, O., Sompolinsky, H., and Ringel, Z. Predicting the outputs of finite deep neural networks trained with noisy gradients. 104:064301, Dec 2021. doi: 10.1103/PhysRevE.104.064301. URL <https://link.aps.org/doi/10.1103/PhysRevE.104.064301>. 2, 4.1, B.2
- Neal, R. M. *Bayesian learning for neural networks*. Springer, 1995. 2
- Neal, R. M. *Bayesian Learning for Neural Networks*. Springer New York, 1996. doi: 10.1007/978-1-4612-0745-0. URL <https://doi.org/10.1007/978-1-4612-0745-0>. 1
- Paccolat, J., Petrini, L., Geiger, M., Tyloo, K., and Wyart, M. Geometric compression of invariant manifolds in neural networks. *Journal of Statistical Mechanics: Theory and Experiment*, 2021(4):044001, apr 2021. doi: 10.1088/1742-5468/abf1f3. URL <https://dx.doi.org/10.1088/1742-5468/abf1f3>. 1
- Pacelli, R., Ariosto, S., Pastore, M., Ginelli, F., Gherardi, M., and Rotondo, P. A statistical mechanics framework for bayesian deep neural networks beyond the infinite-width limit. *Nat. Mach. Intell.*, 5(12):1497–1507, December 2023. ISSN 2522-5839. doi: 10.1038/s42256-023-00767-6. URL <https://doi.org/10.1038/s42256-023-00767-6>. 1, 2, 5, 7
- Pennington, J., Schoenholz, S. S., and Ganguli, S. Resurrecting the sigmoid in deep learning through dynamical isometry: theory and practice. 2017. URL <https://arxiv.org/abs/1711.04735>. 2
- Petrini, L., Cagnetta, F., Vanden-Eijnden, E., and Wyart, M. Learning sparse features can lead to overfitting in neural networks\*. 2023(11):114003, nov 2023. doi: 10.1088/1742-5468/ad01b9. URL <https://dx.doi.org/10.1088/1742-5468/ad01b9>. 2
- Poole, B., Lahiri, S., Raghu, M., Sohl-Dickstein, J., and Ganguli, S. Exponential expressivity in deep neural networks through transient chaos. In *Advances in Neural Information Processing Systems* 29. 2016. URL <https://proceedings.neurips.cc/paper/2016/file/148510031349642de5ca0c544f31b2ef-Paper.pdf>. 2
- Rai, M. and Rivas, P. A review of convolutional neural networks and gabor filters in object recognition. In *2020 International Conference on Computational Science and Computational Intelligence (CSCI)*, pp. 1560–1567, 2020. doi: 10.1109/CSCI51800.2020.00289. 1
- Rasmussen, C. and Williams, C. *Gaussian Processes for Machine Learning*. Adaptive Computation and Machine Learning. MIT Press, Cambridge, MA, USA, January 2006. 5
- Refinetti, M., Goldt, S., Krzakala, F., and Zdeborova, L. Classifying high-dimensional gaussian mixtures: Where kernel methods fail and neural networks succeed. In Meila, M. and Zhang, T. (eds.), *Proceedings of the 38th International Conference on Machine Learning*, volume 139, pp. 8936–8947. PMLR, 18–24 Jul 2021. URL <https://proceedings.mlr.press/v139/refinetti21b.html>. 2
- Risken, H. *The Fokker-Planck Equation*. Springer Verlag Berlin Heidelberg, 1996. doi: 10.1007/978-3-642-61544-3.4. URL [https://doi.org/10.1007/978-3-642-61544-3\\_4](https://doi.org/10.1007/978-3-642-61544-3_4). B.2

- Roberts, D. A., Yaida, S., and Hanin, B. *The Principles of Deep Learning Theory*. Cambridge University Press, May 2022. doi: 10.1017/9781009023405. URL <https://doi.org/10.1017/9781009023405>. 1, 2
- Rubin, N., Seroussi, I., and Ringel, Z. Grokking as a first order phase transition in two layer networks. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=3ROGsTX3IR>. 1, 2, 5, 5
- Saxe, A., McClelland, J., and Ganguli, S. Exact solutions to the nonlinear dynamics of learning in deep linear neural networks. In *International Conference on Learning Representations*, 2014. 2
- Schoenholz, S. S., Gilmer, J., Ganguli, S., and Sohl-Dickstein, J. Deep information propagation. *5th International Conference on Learning Representations, ICLR 2017 - Conference Track Proceedings*, 2017. URL <https://openreview.net/forum?id=H1W1UN9gg>. 2
- Segadlo, K., Epping, B., van Meegen, A., Dahmen, D., Krämer, M., and Helias, M. Unified field theoretical approach to deep and recurrent neuronal networks. 2022 (10):103401, 2022a. URL <https://dx.doi.org/10.1088/1742-5468/ac8e57>. 4.1
- Segadlo, K., Epping, B., van Meegen, A., Dahmen, D., Krämer, M., and Helias, M. Unified field theoretical approach to deep and recurrent neuronal networks. 2022b. accepted. A
- Seroussi, I., Naveh, G., and Ringel, Z. Separation of scales and a thermodynamic description of feature learning in some cnns. 14(1):908, 2023. URL <https://doi.org/10.1038/s41467-023-36361-y>. 1, 2, 4.2, 5, 6
- Simon, J. B., Dickens, M., Karkada, D., and Dewese, M. The eigenlearning framework: A conservation law perspective on kernel ridge regression and wide neural networks. *Transactions on Machine Learning Research*, 2023. ISSN 2835-8856. URL <https://openreview.net/forum?id=FDbQGCAViI>. 2
- Templeton, A., Conerly, T., and team, A. Scaling monosemanticity: Extracting interpretable features from claude 3 sonnet, 2024. URL <https://transformer-circuits.pub/2024/scaling-monosemanticity>. 1
- Touchette, H. The large deviation approach to statistical mechanics. 478(1):1–69, 2009. ISSN 0370-1573. URL <https://www.sciencedirect.com/science/article/pii/S0370157309001410>. 4.2, A, A.2, A.4.1
- Williams, C. K. Computation with infinite neural networks. 10(5):1203–1216, 1998. doi: 10.1162/089976698300017412. URL <https://doi.org/10.1162/089976698300017412>. 1, 2
- Xiao, L., Bahri, Y., Sohl-Dickstein, J., Schoenholz, S. S., and Pennington, J. Dynamical Isometry and a Mean Field Theory of CNNs: How to Train 10,000-Layer Vanilla Convolutional Neural Networks. 2018. URL <https://arxiv.org/abs/1806.05393>. 2
- Yang, G. and Hu, E. J. Feature Learning in Infinite-Width Neural Networks. 2020. URL <https://arxiv.org/abs/2011.14522>. 2
- Yang, G., Simon, J. B., and Bernstein, J. A spectral condition for feature learning, 2024. URL <https://arxiv.org/abs/2310.17813>. 1, 2
- Zavatone-Veth, J. A. and Pehlevan, C. Exact marginal prior distributions of finite bayesian neural networks. virtual, 2021. NeurIPS 2021. URL <https://openreview.net/forum?id=MxE7xFzv0N8>. 2
- Zinn-Justin, J. *Quantum field theory and critical phenomena*. Clarendon Press, Oxford, 1996. 4.1

## A. Universal theory of train and test statistics

We are interested in the training discrepancies  $\langle \Delta_\alpha \rangle = y_\alpha - \langle f_\alpha \rangle$  with  $\langle f_\alpha \rangle$  denoting the mean network output, and in the mean network output  $\langle f_* \rangle$  for a test point  $x_*$  after conditioning on the training data  $\mathcal{D} = \{(x_\alpha, y_\alpha)\}_{1 \leq \alpha \leq P}$ . For clarity, in the appendix we make all index notations explicit instead of using  $\mathcal{D}$  as in the main text, and denote summations over training data points with Greek letters. We refer to the mean network outputs as predictors. The joint prior distribution for  $(f, f_*, y)$  can be computed as in (Segadlo et al., 2022b; Fischer et al., 2024b) and is given by

$$p(f, f_*, y) = \mathcal{N}(y|f, \kappa_0 N^{1-\gamma}) \int d^{(P)} \tilde{f} \int d\tilde{f}_* \exp \left( - \sum_{\alpha=1}^{P+1} i \tilde{f}_\alpha f_\alpha + W(i\tilde{f}, i\tilde{f}_*) \right), \quad (30)$$

$$W(\tilde{f}_{\mathcal{D}}, \tilde{f}_*) = \ln \left\langle \exp \left( \sum_{a=1}^{P+1} \tilde{f}_a \sum_{j=1}^N w_j h_{aj} \right) \right\rangle_{w_i, h_{ai}}, \quad (31)$$

where we use the shorthands  $\int d^{(P)} \tilde{f} = \prod_{\alpha=1}^P \int_{-\infty}^{\infty} d\tilde{f}_\alpha / (2\pi)$ , the  $P+1$  index corresponds to the test point, and  $i$  is the imaginary unit. The i.i.d. distribution of the readin weights  $V_{kl}$  implies that  $h_{\alpha j} \stackrel{\text{i.i.d. over } j}{\sim} \mathcal{N}(0, C^{(xx)})$  with  $C^{(xx)} = g_v / D X X^T \in \mathbb{R}^{P \times P}$ . To keep notation concise, summations over repeated indices on the right are implied in the following.

We may obtain training discrepancies  $\langle \Delta_\alpha \rangle$  and the test predictor  $\langle f_* \rangle$  from the joint cumulant-generating function  $\mathcal{W}$  for the test point defined as

$$\mathcal{W}(j_*|y) = \ln \int df_* \int df \exp(j_* f_*) p(f, f_*, y). \quad (32)$$

Taking its derivatives w.r.t. to either training labels  $y_\alpha$  or the source term  $j_*$  yields the posterior of the desired quantities

$$\langle \Delta_\alpha \rangle = -\kappa_0 N^{1-\gamma} \frac{\partial \mathcal{W}(j_*|y)}{\partial y_\alpha} \Big|_{j_*=0}, \quad (33)$$

$$\langle f_* \rangle = \frac{\partial \mathcal{W}(j_*|y)}{\partial j_*} \Big|_{j_*=0}, \quad (34)$$

because the outer derivative of the logarithm produces the normalization by the model evidence (marginal likelihood)  $1/p(y) = 1/\int df \int df_* p(f, f_*, y)$ .

Likewise, the variances follow as

$$\langle\langle \Delta_\alpha \Delta_\beta \rangle\rangle = \kappa_0 N^{1-\gamma} - \kappa_0^2 N^{2-2\gamma} \frac{\partial^2 \mathcal{W}(j_*|y)}{\partial y_\alpha \partial y_\beta} \Big|_{j_*=0}, \quad (35)$$

$$\langle\langle f_*^2 \rangle\rangle = \frac{\partial^2 \mathcal{W}(j_*|y)}{\partial (j_*)^2} \Big|_{j_*=0}, \quad (36)$$

By inserting (30) into (32) and performing the integration over  $f$ , we can rewrite  $\mathcal{W}$  as

$$\mathcal{W}(j_*|y) = \ln \int d^{(P)} \tilde{f} \exp \left( - i y_\alpha \tilde{f}_\alpha - \frac{\kappa_0}{2} N^{1-\gamma} \tilde{f}_\alpha \tilde{f}_\alpha + W(i\tilde{f}_{\mathcal{D}}, j_*) \right). \quad (37)$$

Comparing (33), (35), and (37), we note that  $y$  acts as a linear source term for  $\tilde{f}_{\mathcal{D}}$ , from which we see that the physical meaning of the field  $\tilde{f}_{\mathcal{D}}$  is related to the discrepancy between target and network output

$$\langle \Delta_\alpha \rangle = \kappa_0 N^{1-\gamma} \langle i \tilde{f}_\alpha \rangle, \quad (38)$$

$$\langle\langle \Delta_\alpha \Delta_\beta \rangle\rangle = \kappa_0 N^{1-\gamma} \delta_{\alpha\beta} + \kappa_0^2 N^{2-2\gamma} \langle\langle \tilde{f}_\alpha \tilde{f}_\beta \rangle\rangle. \quad (39)$$

For computational convenience, we now introduce a source term  $k$

$$\mathcal{W}(k, j_*|y) = \ln \int d\tilde{f} \exp \left( \underbrace{ik_\alpha \tilde{f}_\alpha - iy_\alpha \tilde{f}_\alpha - \frac{\kappa_0}{2} N^{1-\gamma} \tilde{f}_\alpha \tilde{f}_\alpha + W(i\tilde{f}, j_*)}_{\mathcal{S}} \right), \quad (40)$$

allowing us to compute moments of  $\tilde{f}$  by differentiating by  $k$  instead of  $y$  and subsequently setting  $k = 0$ . We define the latter part of the exponent of  $\mathcal{W}$  as the action

$$\mathcal{S}(\tilde{f}, j_* | y) := -iy_\alpha \tilde{f}_\alpha - \frac{\kappa_0}{2} N^{1-\gamma} \tilde{f}_\alpha \tilde{f}_\alpha + W(i\tilde{f}, j_* | y). \quad (41)$$

Depending on the scaling in  $\gamma$ , the network outputs  $f$  fully concentrate on their mean values or require corrections due to non-negligible fluctuations. To treat both cases jointly and systematically, we introduce the so-called effective action (Helias & Dahmen, 2020) as

$$\Gamma(\tilde{f}, j_* | y) = \text{extr}_k ik^\top \tilde{f} - \mathcal{W}(k, j_* | y), \quad (42)$$

where we explicitly keep the dependence on the source term  $j_*$  for the test point in order to compute parametric derivatives to obtain test point statistics. This corresponds to the Legendre transform of the cumulant-generating function  $\mathcal{W}$ ; in the case that  $\mathcal{W}(k, j_* | y)$  has a scaling form, a large deviation principle can be applied and the effective action corresponds to the rate function (Touchette, 2009).

The argument  $\tilde{f}$  is implicitly defined by the stationary point (sometimes referred to as the equation of state)

$$\frac{\partial \Gamma(\tilde{f}, j_* | y)}{\partial \tilde{f}_\alpha} = ik_\alpha = 0, \quad (43)$$

as we set the source term  $k$  to 0 by definition. Using the definition of  $\Gamma$  in (42), the supremum condition yields a self-consistency equation for  $\tilde{f}$

$$i\tilde{f}(j_*) = \frac{\partial \mathcal{W}(k, j_* | y)}{\partial k}. \quad (44)$$

In the following we determine approximations of the Legendre transform  $\Gamma(\tilde{f}, j_* | y)$  to different orders of statistical fluctuations, corresponding to different scaling regimes. From the definition of the effective action  $\Gamma$  follows as well that we obtain the mean output on that test point from

$$\langle f_* \rangle = \frac{\partial \mathcal{W}(k, j_* | y)}{\partial j_*} \Big|_{k, j_* = 0} = - \frac{\partial \Gamma(\tilde{f}, j_* | y)}{\partial j_*} \Big|_{j_* = 0}. \quad (45)$$

### A.1. Cumulant-generating function $W$ of the network prior

We compute the cumulant-generating function  $W$  of the network prior by first taking the average over network weights  $V, w$  and subsequently over the hidden-layer representations  $h$ . We have

$$W(i\tilde{f}, j_*) = \ln \left\langle \exp \left( (i\tilde{f}_\alpha h_{\alpha j} + j_* h_{*j}) w_j \right) \right\rangle_{w_j \sim \mathcal{N}(0, g_w / N^\gamma), h_{\alpha j} \stackrel{\text{i.i.d. in } j}{\sim} \mathcal{N}(0, \hat{C}^{(xx)})} \quad (46)$$

$$= N \ln \left\langle \exp \left( (i\tilde{f}_\alpha h_\alpha + j_* h_*) w \right) \right\rangle_{w \sim \mathcal{N}(0, g_w / N^\gamma), h_\alpha \sim \mathcal{N}(0, \hat{C}^{(xx)})} \quad (47)$$

$$= N \ln \left\langle \exp \left( -\frac{g_w}{2N^\gamma} \tilde{f}_\alpha h_\alpha \tilde{f}_\beta h_\beta + \frac{g_w}{N^\gamma} i\tilde{f}_\alpha h_\alpha j_* h_* + \frac{g_w}{2N^\gamma} j_*^2 h_*^2 \right) \right\rangle_{h \sim \mathcal{N}(0, \hat{C}^{(xx)})}, \quad (48)$$

where we used from the first to the second line that  $w_j$  and  $h_{\alpha j}$  are i.i.d. distributed over neuron index  $j$ . The covariance matrix of the hidden-layer representation  $h_{\alpha j}$  likewise is i.i.d. Gaussian in  $j$  with covariance matrix in the index  $\alpha$  given by

$$\hat{C}^{(xx)} = \begin{bmatrix} C^{(xx)} & \left\{ C_{\alpha*}^{(xx)} \right\}_{\alpha=1}^P \\ \left\{ C_{*\alpha}^{(xx)} \right\}_{\alpha=1}^P & C_{**}^{(xx)} \end{bmatrix} \quad (49)$$

where  $C^{(xx)} = g_v / D X X^\top$ , and  $C_{*\alpha}^{(xx)} = g_v / D x_\alpha \cdot x_*$ . We compute the Gaussian integral over the hidden-layer representations  $h$ , yielding

$$W(i\tilde{f}, j_*) = -\frac{N}{2} \ln \det \left[ \mathbb{I} - \frac{g_w}{N^\gamma} \hat{C}^{(xx)} \begin{pmatrix} i\tilde{f} \\ j_* \end{pmatrix} \begin{pmatrix} i\tilde{f}^\top & j_* \end{pmatrix} \right]. \quad (50)$$

## A.2. Tree-level approximation

To compute the output statistics, one technically requires the exact effective action  $\Gamma$  in (42). However, in general it does not have an analytical solution and we instead determine a systematic expansion. A well-established method from both statistical physics and quantum field theory is the loopwise expansion (Helias & Dahmen, 2020), expands the effective action  $\Gamma(\tilde{f})$  in terms of fluctuations of  $\tilde{f}$  around its mean value  $\bar{\tilde{f}}$ . The lowest-order term of the loopwise expansion is called the tree-level approximation, which hence corresponds to a standard mean-field approximation: one replaces  $\tilde{f}_{\mathcal{D}}$  by its mean  $\bar{\tilde{f}}$  in the action itself

$$\Gamma_{\text{TL}}(\bar{\tilde{f}}, j_* | y) = -S(\bar{\tilde{f}}, j_* | y) \quad (51)$$

$$= iy_{\alpha} \bar{\tilde{f}}_{\alpha} + \frac{\kappa_0}{2} N^{1-\gamma} \bar{\tilde{f}}_{\alpha} \bar{\tilde{f}}_{\alpha} - W(i\bar{\tilde{f}}, j_*). \quad (52)$$

The average value of  $\bar{\tilde{f}}_{\alpha}$  is given by the equation of state (43) of the effective action

$$\left. \frac{\partial \Gamma_{\text{TL}}(\bar{\tilde{f}}, j_* | y)}{\partial \bar{\tilde{f}}_{\alpha}} \right|_{j_*=0} = 0. \quad (53)$$

From this we obtain a self-consistency equation for  $\bar{\tilde{f}}_{\alpha}$  as

$$\bar{\tilde{f}} = -i \left( \kappa_0 N^{1-\gamma} \mathbb{I} + C_{\text{TL}}(\bar{\tilde{f}}) C^{(xx)} \right)^{-1} y, \quad (54)$$

$$C_{\text{TL}}(\bar{\tilde{f}}) = g_w N^{1-\gamma} \left[ \mathbb{I} + \frac{g_w}{N^{\gamma}} C^{(xx)} \bar{\tilde{f}} \bar{\tilde{f}}^{\top} \right]^{-1}. \quad (55)$$

Using the relation between the statistics of the discrepancies  $\Delta$  and  $\tilde{f}_{\mathcal{D}}$  (38), we obtain for the training discrepancies

$$\langle \Delta_{\alpha} \rangle = -\kappa_0 N^{1-\gamma} \left. \frac{\partial \mathcal{W}(k, j_* | y)}{\partial k_{\alpha}} \right|_{j_*=0} \quad (56)$$

$$= \kappa_0 \left( \kappa_0 \mathbb{I} + C_{\text{TL}}(\bar{\tilde{f}}) C^{(xx)} \right)^{-1}_{\alpha\beta} y_{\beta}. \quad (57)$$

For the test point, we get

$$\langle f_* \rangle_{\text{TL}} = - \left. \frac{\partial \Gamma_{\text{TL}}(\bar{\tilde{f}}, j_* | y)}{\partial j_*} \right|_{j_*=0} = - \left. \frac{\partial W(i\bar{\tilde{f}}, j_*)}{\partial j_*} \right|_{j_*=0} \quad (58)$$

$$= \frac{g_w}{N^{1-\gamma}} C_{*\alpha}^{(xx)} \left( \mathbb{I} + \frac{g_w}{N^{\gamma}} C^{(xx)} \bar{\tilde{f}} \bar{\tilde{f}}^{\top} \right)^{-1}_{\alpha\beta} i \bar{\tilde{f}}_{\beta}. \quad (59)$$

Where substituting the self-consistency equation for  $\bar{\tilde{f}}$ , we obtain

$$\langle f_* \rangle_{\text{TL}} = C_{\text{TL}}(\bar{\tilde{f}})_{\delta\alpha} C_{*\delta}^{(xx)} \left[ \left( \kappa_0 N^{1-\gamma} \mathbb{I} + C_{\text{TL}}(\bar{\tilde{f}}) \right)^{-1} \right]_{\alpha\beta} y_{\beta} \quad (60)$$

In mean-field scaling ( $\gamma = 2$ ) and for  $N \rightarrow \infty$  this result becomes exact using the Gärtner-Ellis theorem: the output cumulant-generating function  $\mathcal{W}$  in (7) has a scaling form as

$$iy_{\alpha} \tilde{f}_{\alpha} + \frac{\kappa_0}{2N} \tilde{f}_{\alpha} \tilde{f}_{\alpha} - W(i\tilde{f}_{\mathcal{D}}, j_*) = N \lambda_f(\tilde{f}_{\mathcal{D}}/N) \quad (61)$$

with  $\lambda_f(k) = iy_{\alpha} k_{\alpha} + \frac{\kappa_0}{2} k_{\alpha} k_{\alpha} - W(ik, j_*)$ . Thus, we can approximate the probability distribution of network outputs as (Touchette, 2009)

$$-p(y|C^{(xx)})/N \approx \Gamma_{\text{TL}}(\bar{\tilde{f}}, j_* | y). \quad (62)$$

Due to the strong suppression of fluctuations in mean-field scaling with  $N \rightarrow \infty$ , the tree-level approximation is sufficient to describe the network behavior and in particular

$$\lim_{N \rightarrow \infty} -p(y|C^{(xx)})/N = \Gamma_{\text{TL}}(\bar{\tilde{f}}, j_* | y). \quad (63)$$

However, in the case of larger output fluctuations as in standard scaling ( $\gamma = 1$ ), we need to take into account the output fluctuations systematically by including higher-order corrections to the tree-level result. We derive the leading-order correction in the following section.

### A.3. One-Loop corrections in standard scaling

While in mean-field scaling ( $\gamma = 2$ ) the cumulant-generating function has a scaling form and the network outputs  $f$  concentrate, we need to account for their fluctuations in standard scaling ( $\gamma = 1$ ). In the following, we thus set  $\gamma = 1$ . To leading order, also called one-loop approximation, we have

$$\Gamma_{1\text{-Loop}}(\bar{f}, j_* | y) = -\mathcal{S}(\bar{f}, j_*) - \frac{1}{2} \log \det(-\mathcal{S}^{(2)}). \quad (64)$$

The self-consistency equation for  $\bar{f}$  then becomes

$$\left. \frac{\partial \Gamma_{1\text{-Loop}}(\bar{f}, j_* | y)}{\partial \bar{f}_\delta} \right|_{j^*=0} = - \left. \frac{\partial \mathcal{S}(\bar{f}, j_*)}{\partial \bar{f}_\delta} \right|_{j^*=0} - \frac{1}{2} \sum_{\alpha\beta} (-\mathcal{S}^{(2)})_{\beta\alpha}^{-1} \left. \frac{\partial^3 (-\mathcal{S}(\bar{f}, j_*))}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial \bar{f}_\delta} \right|_{j^*=0} \stackrel{!}{=} 0. \quad (65)$$

By applying the matrix-determinant lemma on (50), we can simplify the cumulant-generating function  $W$  of the network prior as

$$W(i\tilde{f}_D, j_*) = -\frac{N}{2} \left( \ln \det \left[ \mathbb{I} - \frac{g_w}{N^\gamma} \hat{C}^{(xx)} \begin{pmatrix} i\tilde{f} & j_* \end{pmatrix} \begin{pmatrix} i\tilde{f}^\top \\ j_* \end{pmatrix} \right] \right) \quad (66)$$

$$= -\frac{N}{2} \left( \ln \left[ 1 - \frac{g_w}{N^\gamma} \begin{pmatrix} i\tilde{f} & j_* \end{pmatrix} \hat{C}^{(xx)} \begin{pmatrix} i\tilde{f} \\ j_* \end{pmatrix} \right] \right) \quad (67)$$

$$= -\frac{N}{2} \ln \left[ 1 - \frac{g_w}{N^\gamma} \begin{pmatrix} i\tilde{f}_\alpha & j_* \end{pmatrix} \begin{pmatrix} C^{(xx)} & C_{\alpha*}^{(xx)} \\ C_{*\beta}^{(xx)} & C_{**}^{(xx)} \end{pmatrix} \begin{pmatrix} i\tilde{f}_\beta \\ j_* \end{pmatrix} \right]. \quad (68)$$

Given this form of the cumulant-generating function  $W$ , taking the derivative of  $\mathcal{S}$  with respect to  $\bar{f}$  in (53) yields a different expression than in the previous section

$$- \left. \frac{\partial \mathcal{S}(\bar{f}, j_*)}{\partial \bar{f}_\rho} \right|_{j^*=0} = iy_\rho + \kappa_0 \bar{f}_\rho + Q_{\text{TL}}(\bar{f}) C_{\rho\delta}^{(xx)} \bar{f}_\delta, \quad (69)$$

$$Q_{\text{TL}}(\bar{f}) = \frac{g_w}{1 + \frac{g_w}{N^\gamma} \bar{f}^\top C^{(xx)} \bar{f}}. \quad (70)$$

Note that in this form the tree-level equation for  $\bar{f}$  (58) can be written as

$$\bar{f} = -i \left( \kappa_0 N^{1-\gamma} \mathbb{I} + Q_{\text{TL}}(\bar{f}) C^{(xx)} \right)^{-1} y, \quad (71)$$

thereby obtaining an expression in which the input kernel  $C^{(xx)}$  is only rescaled by a scalar, which we call a kernel rescaling expression. For the second and third derivatives, we obtain

$$\left. \frac{\partial^2 (-\mathcal{S}(\bar{f}, j_*))}{\partial \bar{f}_\alpha \partial \bar{f}_\beta} \right|_{j^*=0} = \kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) C_{\alpha\beta}^{(xx)} - \frac{2}{N} Q_{\text{TL}}(\bar{f}) C_{\alpha\delta}^{(xx)} \bar{f}_\delta Q_{\text{TL}}(\bar{f}) C_{\beta\epsilon}^{(xx)} \bar{f}_\epsilon \quad (72)$$

$$= A(\bar{f})_{\alpha\beta} - \frac{2}{N} Q_{\text{TL}}^2(\bar{f}) \left[ C^{(xx)} \bar{f} \bar{f}^\top C^{(xx)} \right]_{\alpha\beta}, \quad (73)$$

$$\left. \frac{\partial^3 (-\mathcal{S}(\bar{f}, j_*))}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial \bar{f}_\delta} \right|_{j^*=0} = -\frac{2}{N} Q_{\text{TL}}^2(\bar{f}) \left[ C_{\alpha\beta}^{(xx)} C_{\delta\epsilon}^{(xx)} \bar{f}_\epsilon + C_{\alpha\delta}^{(xx)} C_{\beta\epsilon}^{(xx)} \bar{f}_\epsilon + C_{\beta\delta}^{(xx)} C_{\alpha\epsilon}^{(xx)} \bar{f}_\epsilon \right] \quad (74)$$

$$+ \frac{8}{N^2} Q_{\text{TL}}^3(\bar{f}) C_{\alpha\alpha'}^{(xx)} \bar{f}_{\alpha'} C_{\beta\beta'}^{(xx)} \bar{f}_{\beta'} C_{\delta\delta'}^{(xx)} \bar{f}_{\delta'} \quad (75)$$

$$= -\frac{2}{N} Q_{\text{TL}}^2(\bar{f}) \left( C_{\alpha\beta}^{(xx)} \left[ C^{(xx)} \bar{f} \right]_\delta + C_{\alpha\delta}^{(xx)} \left[ C^{(xx)} \bar{f} \right]_\beta + C_{\beta\delta}^{(xx)} \left[ C^{(xx)} \bar{f} \right]_\alpha \right) \quad (76)$$

$$+ \frac{8}{N^2} Q_{\text{TL}}^3(\bar{f}) \left[ C^{(xx)} \bar{f} \right]_\alpha \left[ C^{(xx)} \bar{f} \right]_\beta \left[ C^{(xx)} \bar{f} \right]_\delta. \quad (77)$$

Here, we use the shorthand  $A(\bar{f}) = \kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) C^{(xx)}$ . Overall, we obtain

$$\bar{f}_\delta = \left[ A(\bar{f})^{-1} \right]_{\delta\epsilon} \left[ -iy_\epsilon + \frac{1}{2} \sum_{\alpha\beta} (-\mathcal{S}^{(2)})_{\beta\alpha}^{-1} \frac{\partial^3(-\mathcal{S}(\bar{f}, j_*))}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial \bar{f}_\epsilon} \Big|_{j^*=0} \right]. \quad (78)$$

Similarly to the previous section, the training discrepancies are given by

$$\langle \Delta_\alpha \rangle = i\kappa_0 \bar{f}_\alpha. \quad (79)$$

For the test predictor, we have

$$\langle f^* \rangle_{\text{1-Loop}} = - \frac{\partial \Gamma_{\text{1-Loop}}(\bar{f}, j_* | y)}{\partial j^*} \Big|_{j^*=0} \quad (80)$$

$$= - \frac{\partial W(\bar{f}, j_*)}{\partial j^*} \Big|_{j^*=0} - \frac{1}{2} \sum_{\alpha\beta} (-\mathcal{S}^{(2)})_{\beta\alpha}^{-1} \frac{\partial^3(-\mathcal{S}(\bar{f}, j_*))}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial j_*} \Big|_{j^*=0} \quad (81)$$

$$= Q_{\text{TL}}(\bar{f}) C_{*\alpha}^{(xx)} \bar{f}_\alpha - \frac{1}{2} \sum_{\alpha\beta} (-\mathcal{S}^{(2)})_{\beta\alpha}^{-1} \frac{\partial^3(-\mathcal{S}(\bar{f}, j_*))}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial j_*} \Big|_{j^*=0}. \quad (82)$$

The appearing derivatives of the action are structurally similar but we replace the training point  $x_\gamma$  by the test point  $x_*$ , yielding

$$\frac{\partial^3(-\mathcal{S}(\bar{f}, j_*))}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial j_*} \Big|_{j^*=0} = - \frac{2}{N} Q_{\text{TL}}^2(\bar{f}) \left( C_{\alpha\beta}^{(xx)} \left[ C^{(xx)} \bar{f} \right]_* + C_{\alpha*}^{(xx)} \left[ C^{(xx)} \bar{f} \right]_\beta + C_{\beta*}^{(xx)} \left[ C^{(xx)} \bar{f} \right]_\alpha \right) \quad (83)$$

$$+ \frac{8}{N^2} Q_{\text{TL}}^3(\bar{f}) \left[ C^{(xx)} \bar{f} \right]_\alpha \left[ C^{(xx)} \bar{f} \right]_\beta \left[ C^{(xx)} \bar{f} \right]_*. \quad (84)$$

When solving these equations, we backtransform to the imaginary variables  $\bar{f} \mapsto i\tilde{f}$ , which changes multiple signs and absorbs the appearing imaginary units.

#### A.4. Kernel rescaling approach

We here derive the results by [Li & Sompolinsky \(2021\)](#) in our multi-scale adaptive theory including regularization noise  $\kappa_0$ . In contrast to [App. A.1](#), we here first take the average over hidden layer representations  $h_{\alpha j}$  and subsequently over readout weights  $w_j$ , leading to a different approximation of the network output posterior distribution.

Using that  $h_{\alpha j} \sim \mathcal{N}(0, C^{(xx)})$  i.i.d. over the neuron index  $j$ , we can rewrite the cumulant-generating function  $W$  conditioned on readout weights  $w$  as

$$W(\tilde{f}_{\mathcal{D}} | w) = \ln \left\langle \exp(-\tilde{f}_\alpha w_j h_{\alpha j}) \right\rangle_{h_{\alpha j}} = -\frac{1}{2} \tilde{f}_\alpha C_{\alpha\beta}^{(xx)} \tilde{f}_\beta \|w\|^2, \quad (85)$$

where we drop the test point here to keep notation concise. The result for the test point will follow naturally later. We observe that the readout weights only appear in the form of the squared norm  $\|w\|^2$ . The distribution of the network output is hence

$$p(y, f | C^{(xx)}) = \mathcal{N}(y | f, \kappa_0) \int d\tilde{f}_{\mathcal{D}} \left\langle \exp \left( -i\tilde{f}_\alpha f_\alpha - \frac{1}{2} \tilde{f}_\alpha C_{\alpha\beta}^{(xx)} \tilde{f}_\beta \|w\|^2 \right) \right\rangle_{w_i \stackrel{\text{i.i.d.}}{\sim} \mathcal{N}(0, \frac{g_w}{N})}. \quad (86)$$

Since both, the prior measure of the weights  $w \sim \mathcal{N}(w | 0, g_w N^{-1}) \propto \exp(N \|w\|^2 / 2g_w)$  and the explicit appearance of  $w$ , is only in the form of  $\|w\|^2$ , we may introduce this quantity as an auxiliary variable, which we name  $Q := \|w\|^2 = \sum_{i=1}^N w_i^2$  and which corresponds to the Euclidian norm of the readout weight vector  $w$ . Note that, given  $\|w\|^2$ , the integral over  $\tilde{f}_{\mathcal{D}}$  simply yields  $f_{\|w\|^2} \sim \mathcal{N}(0, \|w\|^2 C^{(xx)})$ , so

$$p(y, f | C^{(xx)}) = \mathcal{N}(y | f, \kappa_0) \int dQ \mathcal{N}(f | 0, Q C^{(xx)}) p(Q). \quad (87)$$

Here the distribution of the squared norm is

$$p(Q) = \langle \delta[-Q + \|w\|^2] \rangle_{w_i \text{ i.i.d. } \mathcal{N}(0, \frac{g_w}{N})} \quad (88)$$

$$= \int_{-i\infty}^{i\infty} \frac{d\tilde{Q}}{2\pi i} \langle \exp(\tilde{Q}[-Q + \|w\|^2]) \rangle_{w_i \text{ i.i.d. } \mathcal{N}(0, \frac{g_w}{N})} \quad (89)$$

$$= \int_{-i\infty}^{i\infty} \frac{d\tilde{Q}}{2\pi i} \exp(-\tilde{Q}Q + W(\tilde{Q})), \quad (90)$$

where  $W(\tilde{Q}) = \ln \langle \exp(\tilde{Q} \|w\|^2) \rangle_{w_i \text{ i.i.d. } \mathcal{N}(0, \frac{g_w}{N})}$  is the cumulant-generating function of  $Q$ . Using that the  $w_j$  are i.i.d, we get

$$W(\tilde{Q}) = N \ln \langle \exp(\tilde{Q} \|w\|^2) \rangle_{w \sim \mathcal{N}(0, g_w/N)} \quad (91)$$

$$= -\frac{N}{2} \ln \left[ 1 - \frac{2g_w}{N} \tilde{Q} \right], \quad (92)$$

where we performed the one-dimensional Gaussian integral over  $w$ . Up to here, all steps are exact

(87) shows that the auxiliary variable  $Q$  being a scalar may only carry fluctuations of the overall scaling of the kernel and hence all descriptions and approximations in terms of  $Q$  can only change the scale of the kernel. .

#### A.4.1. APPROXIMATION OF NETWORK PRIOR FOR WIDE NETWORKS

One expects that  $Q$  concentrates since  $Q = \|w\|^2 = \sum_{i=1}^N w_i^2$  for large  $N$  and i.i.d.  $w_i \sim \mathcal{N}(0, g_w/N)$ . The cumulant-generating function  $W$  can be written as a scaling form  $\lambda_N(k) := N^{-1} W(Nk) = -\frac{1}{2} \ln [1 - 2g_w k]$  and its limit  $N \rightarrow \infty$  then exists trivially, so that we may approximate  $p(Q)$  with the Gärtner-Ellis theorem (Touchette, 2009) as

$$\ln p(Q) \simeq \sup_{\tilde{Q}} -Q\tilde{Q} + W(\tilde{Q}) \quad (93)$$

$$= -\frac{N}{2g_w} \left[ 1 - \frac{g_w}{Q} \right] Q - \frac{N}{2} \ln \left[ \frac{g_w}{Q} \right] \quad (94)$$

$$= -\frac{N}{2} \left[ \frac{Q}{g_w} - 1 - \ln \frac{Q}{g_w} \right] =: -\Gamma(Q). \quad (95)$$

Intuitively, by the scaled cumulant-generating function of the form  $NW(\tilde{Q}/N) = -\frac{N}{2} \ln [1 - 2g_w \frac{\tilde{Q}}{N}]$  the mean of is of order  $\langle Q \rangle = \mathcal{O}(1)$  and all higher-order cumulants of  $Q$  are being suppressed by at least  $\mathcal{O}(N^{-1})$ . So on exponential scales, one may parametrize the probability by the mean, namely one obtains the distribution of  $Q$  from the rate function as  $e^{-\Gamma(Q)}$ .

To obtain (93), the supremum condition has been used  $0 \stackrel{!}{=} -Q + g_w [1 - 2g_w \frac{\tilde{Q}}{N}]^{-1}$ , solved for  $1 - \frac{2g_w}{N} \tilde{Q} = \frac{g_w}{Q}$  and  $\tilde{Q} = \frac{N}{2g_w} [1 - \frac{g_w}{Q}]$  and inserted into the first line of (93) to obtain the second line. The rate function, being the Legendre transform of  $W$ , obeys the equation of state

$$\frac{d}{dQ} \Gamma(Q) = \tilde{Q} = \frac{N}{2g_w} \left[ 1 - \frac{g_w}{Q} \right]. \quad (96)$$

So the final expression for the joint probability of  $y$  and  $f$ , the network prior, is

$$\begin{aligned} p(y, f | C^{(xx)}) &\simeq \mathcal{N}(y|f, \kappa_0) \int dQ \mathcal{N}(f|0, Q C^{(xx)}) e^{-\Gamma(Q)}, \\ &= \int dQ e^{S(Q|f, y)}, \end{aligned} \quad (97)$$

where the action  $S(Q|f, y)$  is

$$\begin{aligned} S(Q|f, y) &= -\frac{\|y - f\|^2}{2\kappa_0} - \frac{P}{2} \ln \kappa_0 \\ &\quad - \frac{1}{2} f^\top (QC^{(xx)})^{-1} f - \frac{1}{2} \ln \det (QC^{(xx)}) - \Gamma(Q). \end{aligned} \quad (98)$$

#### A.4.2. MAXIMUM A POSTERIORI ESTIMATE FOR $Q$

To obtain the posterior distribution for  $Q$  we marginalize (97) over the network outputs  $f$ , which yields

$$\begin{aligned} p(y|C^{(xx)}) &\equiv \int df p(y, f|C^{(xx)}) \\ &= \int dQ \exp(S(Q|y)), \end{aligned} \quad (99)$$

which yields the action

$$S(Q|y) = -\frac{1}{2}y^\top (QC^{(xx)} + \kappa_0\mathbb{I})^{-1}y - \frac{1}{2} \ln \det (QC^{(xx)} + \kappa_0\mathbb{I}) - \Gamma(Q), \quad (100)$$

and which reproduces Eq. A11 in Li & Sompolinsky (2021) after inserting the rate function (93). When computing the maximum a posteriori value  $Q_{\text{LS}}$ , it only depends on the numerator of

$$p(Q|y) = \frac{p(y|Q)p(Q)}{p(y)}, \quad (101)$$

since the form of (99) is  $p(y) = \int dQ p(y|Q)p(Q)$ . Thus, computing the  $Q$ -integral in saddle point approximation comprises to the maximum a posteriori (MAP)  $Q_{\text{LS}}$  as  $\ln p(y|Q)p(Q) = S(Q|y) + \text{const}$  has the same stationary point as  $p(y|Q)p(Q)$ .

The length  $Q = \|w\|^2$  in their theory is obtained by the maximum of (100), which is given by

$$0 \stackrel{!}{=} \frac{\partial S}{\partial Q} = \frac{1}{2}y^\top (QC^{(xx)} + \kappa_0\mathbb{I})^{-1}C^{(xx)}(QC^{(xx)} + \kappa_0\mathbb{I})^{-1}y - \text{tr} C^{(xx)}(QC^{(xx)} + \kappa_0\mathbb{I})^{-1} - \frac{N}{2} \left( \frac{1}{g_w} - \frac{1}{Q} \right). \quad (102)$$

This yields the tree-level approximation for  $\|w\|^2 = Q_{\text{LS}}$ .

#### A.4.3. PREDICTOR STATISTICS

To obtain predictions beyond the length of the readout  $\|w\|$ , we start from 99. We obtain the training discrepancies from

$$\frac{\partial}{\partial y_\alpha} \ln p(y|C^{(xx)}) \stackrel{\text{MAP } Q}{\simeq} \frac{d}{dy_\alpha} \sup_Q S(Q|y) \quad (103)$$

$$= \frac{\partial}{\partial y_\alpha} S(Q_{\text{LS}}|y) + \underbrace{\frac{\partial S}{\partial Q} \frac{\partial Q}{\partial y_\alpha}}_{=0} \Big|_{Q=Q^*}, \quad (104)$$

where the derivative by  $Q$  vanishes because  $Q_{\text{LS}}$  has been determined by the supremum condition as the stationary point of the action. The partial derivative by  $y_\alpha$  only acts on  $-y^\top (QC^{(xx)} + \kappa_0\mathbb{I})^{-1}y/2$  in the expression for (100)

$$\langle \Delta_\alpha \rangle = \kappa_0 (Q_{\text{LS}}C^{(xx)} + \kappa_0\mathbb{I})^{-1}y. \quad (105)$$

In consequence, the test predictor is identical to the NNGP predictor with a different regularizer  $\kappa_0/Q_{\text{LS}}$

$$\langle f_* \rangle_{\text{LS}} = [C_{*\alpha}^{(xx)}] (C^{(xx)} + \kappa_0/Q_{\text{LS}}\mathbb{I})_{\alpha\beta}^{-1}y_\beta. \quad (106)$$

To compute the variance of the predictor, we generalize(86) such that instead of the variance  $\kappa_0\mathbb{I}$  in  $\mathcal{N}(y|f, \kappa_0\mathbb{I})$ , we insert a general covariance matrix  $K$  into the Gaussian measure  $\mathcal{N}(y|f, K)$  and perform an integration over  $f$

$$p(y|K, C^{(xx)}) = \int df \mathcal{N}(y|f, K) \left\langle \prod_{\alpha=1}^P \delta \left[ f_\alpha - \sum_{i=1}^N w_i \phi(h_{\alpha i}) \right] \right\rangle_{w_i \stackrel{\text{i.i.d.}}{\sim} \mathcal{N}(0, \frac{g_w}{N}), h_{\alpha i} \stackrel{\text{i.i.d. over } i}{\sim} \mathcal{N}(0, C^{(xx)})}. \quad (107)$$

The presence of the general matrix  $K$  allows us to measure the statistics of the discrepancies  $\Delta_\alpha = y_\alpha - z_\alpha$ , because writing the Gaussian  $\mathcal{N}(y|f, K) \propto \exp\left(-\frac{1}{2}(y-f)^\top K^{-1}(y-f) + \frac{1}{2} \ln \det(K^{-1})\right)$  explicitly we observe that derivatives by  $[K^{-1}]_{\alpha\beta}$  yield

$$\frac{\partial}{\partial [K^{-1}]_{\alpha\beta}} \ln p(y|K, C^{(xx)}) \Big|_{K=\kappa_0 \mathbb{I}} = -\frac{1}{2} \langle (y-f)_\alpha (y-f)_\beta \rangle + \frac{1}{2} \kappa_0 \delta_{\alpha\beta}. \quad (108)$$

With the same manipulations that led to (99) one then has

$$p(y|K, C^{(xx)}) \equiv \int dQ \exp(S(Q|K, z)), \quad (109)$$

where the action, corresponding to (100), is

$$S(Q|y, K) = -\frac{1}{2} y^\top (C+K)^{-1} y - \frac{1}{2} \ln \det(C+K) - \frac{N}{2} \left( \frac{Q}{g_w} - \ln Q \right) \Big|_{C=QC^{(xx)}}. \quad (110)$$

So in the approximation replacing  $Q$  by its MAP  $Q_{\text{LS}}$  we get

$$\frac{\partial}{\partial [K^{-1}]_{\alpha\beta}} \ln p(y|K, C^{(xx)}) \Big|_{K=\kappa_0 \mathbb{I}} = \frac{d}{d[K^{-1}]_{\alpha\beta}} \sup_Q S(Q|y, K) \Big|_{K=\kappa_0 \mathbb{I}} \quad (111)$$

$$= \frac{\partial}{\partial [K^{-1}]_{\alpha\beta}} S(Q_{\text{LS}}|y, K) \Big|_{K=\kappa_0 \mathbb{I}}, \quad (112)$$

where the inner derivative by  $\partial S/\partial Q$  drops out due to stationarity at  $Q_{\text{LS}}$ , which is given by the solution of (102). The latter partial derivative evaluates to

$$\frac{\partial}{\partial [K^{-1}]_{\alpha\beta}} S(Q|y, K) \Big|_{K=\kappa_0 \mathbb{I}} = \left[ -\frac{1}{2} K [C+K]^{-1} y y^\top [C+K]^{-1} K + \frac{1}{2} K (C+K)^{-1} K \right]_{\alpha\beta} \Big|_{K=\kappa_0 \mathbb{I}, C=Q_{\text{LS}} C^{(xx)}} \quad (113)$$

$$= \kappa_0^2 \left[ -\frac{1}{2} [C+\kappa_0 \mathbb{I}]^{-1} y y^\top [C+\kappa_0 \mathbb{I}]^{-1} + \frac{1}{2} (C+\kappa_0 \mathbb{I})^{-1} \right]_{\alpha\beta} \Big|_{C=Q_{\text{LS}} C^{(xx)}}, \quad (114)$$

where we used that  $\partial K_{\gamma\delta}/\partial [K^{-1}]_{\alpha\beta} = -K_{\gamma\alpha} K_{\beta\delta}$ , which follows by symmetry from  $\partial K_{\gamma\delta}^{-1}/\partial K_{\alpha\beta} = -K_{\gamma\alpha}^{-1} K_{\beta\delta}^{-1}$ .

So the second moment of the discrepancies with (108) is

$$\begin{aligned} \langle \Delta_\alpha \Delta_\beta \rangle &= \kappa_0 \delta_{\alpha\beta} + \kappa_0^2 \left[ [C+\kappa_0 \mathbb{I}]^{-1} y y^\top [C+\kappa_0 \mathbb{I}]^{-1} - (C+\kappa_0 \mathbb{I})^{-1} \right]_{\alpha\beta} \Big|_{C=Q_{\text{LS}} C^{(xx)}} \\ &= \langle \Delta_\alpha \rangle \langle \Delta_\beta \rangle + \kappa_0 \delta_{\alpha\beta} - \kappa_0^2 (C+\kappa_0 \mathbb{I})_{\alpha\beta}^{-1} \Big|_{C=Q_{\text{LS}} C^{(xx)}}, \end{aligned} \quad (115)$$

where we used (105) in the last step. Because  $\Delta = y - f$  and  $y$  as the target does not fluctuate, the latter two terms in (115) are the variance

$$\langle \langle \Delta_\alpha, \Delta_\beta \rangle \rangle = \langle \langle f_\alpha, f_\beta \rangle \rangle \quad (116)$$

$$= \kappa_0 \delta_{\alpha\beta} - \kappa_0^2 (C+\kappa_0 \mathbb{I})_{\alpha\beta}^{-1} \quad (117)$$

$$= C - C [C+\kappa_0 \mathbb{I}]^{-1} C \Big|_{C=Q_{\text{LS}} C^{(xx)}}, \quad (118)$$

which is the usual expression for the variance of the NNGP predictor of a Gaussian process with the kernel  $C = Q_{\text{LS}} C^{(xx)}$ .

### A.5. Connecting kernel rescaling and adaptive approach

While the kernel rescaling approach holds in the proportional limit  $N \propto P \rightarrow \infty$ , the one-loop approximation holds also for large but finite  $P, N \gg 1$ . As we have seen in Fig. 3 in the main text, they yield almost identical results in certain settings.

By considering the proportional limit, we may connect these two approaches: some correction terms vanish in this limit, leaving only a scalar term.

To this end, we look at the scaling of each correction term with both  $P$  and  $N$ . We have

$$-S^{(2)} = \kappa_0 \mathbb{I} + Q_{\text{TL}} C^{(xx)} - \frac{2}{N} Q_{\text{TL}}^2 C^{(xx)} \bar{f} \bar{f}^\top C^{(xx)} \quad (119)$$

$$= \kappa_0 \mathbb{I} + Q_{\text{TL}} C^{(xx)} + \mathcal{O}(1/N), \quad (120)$$

since  $(Q C^{(xx)} + \kappa) \bar{f} \propto y = \mathcal{O}(1)$  and thus also  $C^{(xx)} \bar{f} = \mathcal{O}(1)$ . Here, we drop the dependence of  $Q_{\text{TL}}$  on  $\bar{f}$  for brevity. The fluctuation correction is given by

$$\frac{1}{2} \sum_{\alpha\beta} (-S^{(2)})_{\beta\alpha}^{-1} \frac{\partial^3 (-\mathcal{S}(\bar{f}, j_*))}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial \bar{f}_\delta} \Big|_{j^*=0} \quad (121)$$

$$= -\frac{1}{N} Q_{\text{TL}}^2 \sum_{\alpha\beta} (-S^{(2)})_{\beta\alpha}^{-1} \left( C_{\alpha\beta}^{(xx)} [C^{(xx)} \bar{f}]_\gamma + C_{\alpha\gamma}^{(xx)} [C^{(xx)} \bar{f}]_\beta + C_{\beta\gamma}^{(xx)} [C^{(xx)} \bar{f}]_\alpha \right) \quad (122)$$

$$+ \frac{4}{N^2} Q_{\text{TL}}^3 \sum_{\alpha\beta} (-S^{(2)})_{\beta\alpha}^{-1} [C^{(xx)} \bar{f}]_\alpha [C^{(xx)} \bar{f}]_\beta [C^{(xx)} \bar{f}]_\gamma \quad (123)$$

Looking at the individual terms, we have for the first term in the second line

$$\frac{1}{N} Q_{\text{TL}}^2 \text{Tr} \left[ (\kappa_0 \mathbb{I} + Q_{\text{TL}} C^{(xx)} + \mathcal{O}(1/N))^{-1} C^{(xx)} \right] C_{\gamma\delta}^{(xx)} \bar{f}_\delta = \mathcal{O}(P/N), \quad (124)$$

where the factor  $P$  results from the appearing trace. Assuming the regularization noise  $\kappa_0$  to be small compared to the kernel  $C^{(xx)}$ , we see for the other terms that they scale as

$$\frac{1}{N} Q_{\text{TL}}^2 \sum_{\alpha\beta} (\kappa_0 \mathbb{I} + Q_{\text{TL}} C^{(xx)} + \mathcal{O}(1/N))_{\beta\alpha}^{-1} \left( C_{\alpha\gamma}^{(xx)} C_{\beta\delta}^{(xx)} \bar{f}_\delta + C_{\beta\gamma}^{(xx)} C_{\alpha\delta}^{(xx)} \bar{f}_\delta \right) \approx \frac{4}{N} Q_{\text{TL}} C_{\gamma\delta}^{(xx)} \bar{f}_\delta = \mathcal{O}(1/N), \quad (125)$$

$$\frac{4}{N^2} Q_{\text{TL}}^3 \sum_{\alpha\beta} (\kappa_0 \mathbb{I} + Q_{\text{TL}} C^{(xx)} + \mathcal{O}(1/N))_{\beta\alpha}^{-1} [C^{(xx)} \bar{f}]_\alpha [C^{(xx)} \bar{f}]_\beta [C^{(xx)} \bar{f}]_\gamma = \mathcal{O}(P/N^2). \quad (126)$$

In the proportional limit  $P \propto N \rightarrow \infty$ , only the first term does not vanish and the self-consistency equation for  $\bar{f}$  becomes

$$iy + \kappa_0 \bar{f} + Q_{\text{TL}}(\bar{f}) C^{(xx)} \bar{f} - \frac{1}{N} Q_{\text{TL}}^2(\bar{f}) \text{Tr} \left[ (\kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) C^{(xx)})^{-1} C^{(xx)} \right] C^{(xx)} \bar{f} \stackrel{!}{=} 0, \quad (127)$$

yielding

$$i\bar{f} = \left( \kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) \left( 1 - \frac{1}{N} Q_{\text{TL}}(\bar{f}) \text{Tr} \left[ (\kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) C^{(xx)})^{-1} C^{(xx)} \right] \right) \right) C^{(xx)}^{-1} y. \quad (128)$$

The rescaling factor is thus given by

$$Q_{\text{1-Loop}} := Q_{\text{TL}} - \frac{1}{N} Q_{\text{TL}}^2 \text{Tr} \left[ (\kappa_0 \mathbb{I} + Q_{\text{TL}} C^{(xx)})^{-1} C^{(xx)} \right], \quad (129)$$

where  $Q_{\text{TL}} = Q_{\text{TL}}(\bar{f})$  depends on the self-consistent solution in (128). The tree-level solution is the leading term here and receives a correction due to the output fluctuations. We cannot directly compare the expression for this rescaling factor to the one in (Li & Sompolinsky, 2021), since the latter is given by the self-consistency equation (100) and the former by the self-consistency equation (128) for the training discrepancies inserted into (129). Nevertheless, Fig. 3 in the main text shows that these two expressions yield the same value and thus the same predictions for the mean discrepancies numerically.

## B. Details of experiments

### B.1. Self-consistency equations for numerics

In App. A, we derive train and test statistics in a framework involving imaginary variables  $\bar{f}$ . To solve the resulting self-consistency equations, we need to account for their imaginary nature and substitute in all of the results above  $\bar{f} \rightarrow i\bar{f}$ ,

changing various signs in the process. The final expressions read as follows: In tree-level approximation, we have

$$\bar{f} = N^{\gamma-1} \left( \kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}_\alpha) C^{(xx)} \right)^{-1} y, \quad (130)$$

$$Q_{\text{TL}}(\bar{f}) = \frac{g_w}{1 - \frac{g_w}{N^\gamma} \bar{f}^\top C^{(xx)} \bar{f}}, \quad (131)$$

$$\langle \Delta \rangle_{\text{TL}} = \kappa_0 N^{1-\gamma} \bar{f} = \kappa_0 \left( \kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) C^{(xx)} \right)^{-1} y, \quad (132)$$

$$\langle f_* \rangle_{\text{TL}} = Q_{\text{TL}}(\bar{f}) C_{*\alpha}^{(xx)} \left( \kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) C^{(xx)} \right)^{-1}_{\alpha\beta} y_\beta. \quad (133)$$

In one-loop approximation, we have for the train discrepancies

$$\bar{f}_\delta = [A(\bar{f})]_{\delta\epsilon}^{-1} \left[ y_\epsilon + \frac{1}{2} \sum_{\alpha\beta} (-S^{(2)})_{\beta\alpha}^{-1} \frac{\partial^3(-S)}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial \bar{f}_\epsilon} \right], \quad (134)$$

$$A(\bar{f}) = \kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) C^{(xx)}, \quad (135)$$

$$\left. \frac{\partial^2(-S)}{\partial \bar{f}_\alpha \partial \bar{f}_\beta} \right|_{j^*=0} = A(\bar{f}) + \frac{2}{N} Q_{\text{TL}}^2(\bar{f}) C^{(xx)} \bar{f} \bar{f}^\top C^{(xx)}, \quad (136)$$

$$\left. \frac{\partial^3(-S)}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial \bar{f}_\delta} \right|_{j^*=0} = \frac{2}{N} Q_{\text{TL}}^2(\bar{f}) \left( C_{\alpha\beta}^{(xx)} [C^{(xx)} \bar{f}]_\delta + C_{\alpha\delta}^{(xx)} [C^{(xx)} \bar{f}]_\beta + C_{\beta\delta}^{(xx)} [C^{(xx)} \bar{f}]_\alpha \right) \quad (137)$$

$$+ \frac{8}{N^2} Q_{\text{TL}}^3(\bar{f}) [C^{(xx)} \bar{f}]_\alpha [C^{(xx)} \bar{f}]_\beta [C^{(xx)} \bar{f}]_\delta,$$

$$\langle \Delta_\alpha \rangle_{1\text{-Loop}} = \kappa_0 N^{1-\gamma} \bar{f}_\alpha, \quad (138)$$

and for the test predictors

$$\langle f^* \rangle_{1\text{-Loop}} = Q_{\text{TL}}(\bar{f}) C_{*\alpha}^{(xx)} \bar{f}_\alpha - \frac{1}{2} \sum_{\alpha\beta} (-S^{(2)})_{\beta\alpha}^{-1} \frac{\partial^3(-S)}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial j_*} \Big|_{j^*=0}. \quad (139)$$

$$\left. \frac{\partial^3(-S)}{\partial \bar{f}_\alpha \partial \bar{f}_\beta \partial j_*} \right|_{j^*=0} = \frac{2}{N} Q_{\text{TL}}^2(\bar{f}) \left( C_{\alpha\beta}^{(xx)} [C^{(xx)} \bar{f}]_* + C_{\alpha*}^{(xx)} [C^{(xx)} \bar{f}]_\beta + C_{\beta*}^{(xx)} [C^{(xx)} \bar{f}]_\alpha \right) \quad (140)$$

$$+ \frac{8}{N^2} Q_{\text{TL}}^3(\bar{f}) [C^{(xx)} \bar{f}]_\alpha [C^{(xx)} \bar{f}]_\beta [C^{(xx)} \bar{f}]_*,$$

Finally, in the proportional limit  $P \propto N \rightarrow \infty$  this reduces to

$$\bar{f} = \left( \kappa_0 \mathbb{I} + Q_{1\text{-Loop}}(\bar{f}) C^{(xx)} \right)^{-1} y, \quad (141)$$

$$Q_{1\text{-Loop}}(\bar{f}) = Q_{\text{TL}}(\bar{f}) - \frac{1}{N} Q_{\text{TL}}^2(\bar{f}) \text{Tr} \left[ (\kappa_0 \mathbb{I} + Q_{\text{TL}}(\bar{f}) C^{(xx)})^{-1} C^{(xx)} \right], \quad (142)$$

$$\langle \Delta \rangle = \kappa_0 N^{1-\gamma} \left( \kappa_0 \mathbb{I} + Q_{1\text{-Loop}}(\bar{f}) C^{(xx)} \right)^{-1} y, \quad (143)$$

$$\langle f^* \rangle_{1\text{-Loop, rescaling}} = [Q_{1\text{-Loop}}(\bar{f}) C_{*\alpha}^{(xx)}] (\kappa_0 \mathbb{I} + Q_{1\text{-Loop}}(\bar{f}) C^{(xx)})^{-1}_{\alpha\beta} y_\beta. \quad (144)$$

## B.2. Network tasks and training

**Ising task** We use a linearly separable Ising task: Each pattern  $x_\alpha$  in the Ising task is  $D$ -dimensional and  $x_{\alpha i} \in \{\pm 1\}$ . If the pattern belongs to class  $-1$ , each  $x_{\alpha i}$  realizes  $x_{\alpha i} = +1$  with a probability of  $p_1 = 0.5 - \Delta p$  and the value  $x_{\alpha i} = -1$  with  $p_2 = 0.5 + \Delta p$ . The value for each pattern element  $x_{\alpha i}$  is drawn independently. If the pattern belongs to class  $+1$ , the probabilities for  $x_{\alpha i} = 1$  and  $x_{\alpha i} = -1$  are inverted. The task complexity decreases with larger  $\Delta p$ . We use  $\Delta p = 0.1$  throughout, corresponding to an oracle accuracy on the classification task of  $P_{\text{oracle}} = 99, 78\%$ .

**Teacher-student task** In this setting, the target is given by a  $y_\alpha = w_* \cdot x_\alpha$ , where  $x_\alpha \in \mathbb{R}^D$  is standard normally distributed  $x_{\alpha i} \sim \mathcal{N}(0, \mathbb{I})$ . The teacher direction  $w_* \in \mathbb{R}^D$  is chosen to be  $\hat{e}_1$  in the standard basis.

**Network training** We train networks using Langevin stochastic gradient descent (LSGD) as detailed in (Naveh et al., 2021) so that the trained networks are effectively sampled from the posterior distribution (30). Here evolving network parameters  $\Theta$  such as weights  $V, w$  with the stochastic differential equation

$$\begin{aligned} \partial_t \Theta(t) &= -\rho \Theta(t) - \nabla_{\Theta} \mathcal{L}(\Theta(t); y) + \sqrt{2T} \zeta(t), \\ \langle \zeta_i(t) \zeta_j(s) \rangle &= \delta_{ij} \delta(t-s), \end{aligned} \quad (145)$$

with the squared error loss  $\mathcal{L}(\Theta; y) = \sum_{\alpha=1}^P (f_{\alpha}(\Theta) - y_{\alpha})^2$ ,  $\zeta$  a unit variance Gaussian white noise, and  $f_{\alpha}(\Theta)$  denoting the network output for sample  $\alpha = 1, \dots, P$ , leads to sampling from the equilibrium distribution for  $\Theta$  for large times  $t$  which reads

$$\lim_{t \rightarrow \infty} p(\Theta(t)) \sim \exp\left(-\frac{\rho}{2T} \|\Theta\|^2 - \frac{1}{T} \mathcal{L}(\Theta; y)\right). \quad (146)$$

Using the Fokker-Planck equation (Risken, 1996) one can derive this density for  $\Theta$ . Further, this implies a distribution on the network output

$$\begin{aligned} p(Y|X) &\propto \int d\Theta \exp\left(-\frac{\rho}{2T} \|\Theta\|^2 - \frac{1}{T} \|f - y\|^2\right) \\ &\propto \left\langle \exp\left(-\frac{1}{T} \|f - y\|^2\right) \right\rangle_{\Theta_k \stackrel{\text{i.i.d.}}{\sim} \mathcal{N}(0, T/\rho)} \\ &\propto \mathcal{N}(y|f, T/2) \langle \delta[f - f(\Theta)] \rangle_{\Theta_k \stackrel{\text{i.i.d.}}{\sim} \mathcal{N}(0, T/\rho)}, \end{aligned} \quad (147)$$

In fact,  $p(f|X) \equiv \langle \delta[f - f(\Theta)] \rangle_{\Theta_k \stackrel{\text{i.i.d.}}{\sim} \mathcal{N}(0, T/\rho)}$ , leads to the posterior in (7) if one identifies  $\kappa_0 = T/2$  with the regularization noise and  $T/\rho = g/N$  with the variance of the parameter  $\Theta_k$ . Implementing the sampling in practice this corresponds to requiring different weight decay  $\rho$  for each parameter, as weight variances can differ in the input and output layer.

The time discrete version of (145) is implemented in our PyTorch code as

$$\begin{aligned} \Theta_t &= \Theta_{t-1} - \eta (\rho \Theta_{t-1} + \nabla_{\Theta} \mathcal{L}(\Theta_{t-1}; y)) + \sqrt{2T\eta} \zeta_t, \\ \langle \zeta_t \zeta_s \rangle &= \delta_{ts}, \end{aligned} \quad (148)$$

with standard normal  $\zeta_t$  and finite time step  $\eta$ , which can also be interpreted as a learning rate. To accurately reflect the time evolution according to (145) the learning rate  $\eta$  needs to be small enough.

Hence the LSGD we implement corresponds to full-batch gradient descent with the addition of i.i.d. distributed standard normal noise and weight decay regularization (Krogh & Hertz, 1991). The value for  $\kappa_0$  corresponds to a tradeoff in the optimization between the weight priors and the likelihood in terms of the loss  $\mathcal{L}$ . Choosing large  $\kappa_0$  corresponds to large  $T = 2\kappa_0$  and hence a large noise in the LSGD and therefore putting more emphasis on the Gaussian parameter priors. Small regularization values  $\kappa_0$  favor the training data in terms of the loss in the exponent of (146).

To faithfully compare the numerical results with our theoretical results, the LSGD needs to sample from the equilibrium distribution. For this it needs to be ensured that the distribution is equilibrated by evolving the networks for 10.000 steps. We ensure uncorrelated network samples by initializing different networks with different random seeds.

For the Ising task, we average over  $N_{\text{networks}} = 100$  with different initial weights to obtain the training and test predictors. For the teacher-student task, we average over  $N_{\text{networks}} = 5.000$  with different initial weights to obtain the covariance of the network output projected onto different directions.

## C. Additional figures

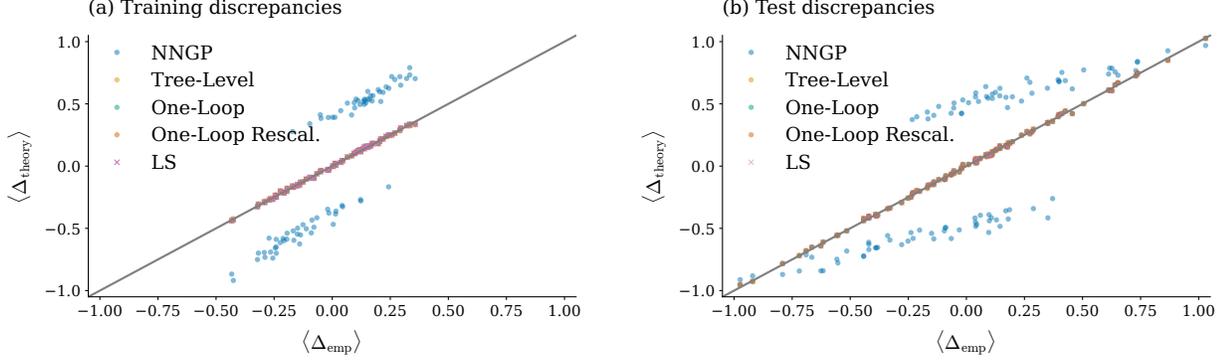


Figure 5. Scatter plots of (a) training discrepancies  $\langle \Delta_\alpha \rangle = y_\alpha - \langle f_\alpha \rangle$  and (b) test discrepancies  $\langle \Delta_* \rangle = y_* - \langle f_* \rangle$  on an Ising task in mean-field scaling. We show theoretical values for NNGP and different feature learning theories against empirical results, where the gray line marks the identity. In contrast to the NNGP, the tree-level approximation accurately matches the empirical values. Further, the different feature learning theories lie on top of one another in mean-field scaling. Parameters:  $\gamma = 2$ ,  $P_{\text{train}} = 80$ ,  $N = 100$ ,  $D = 200$ ,  $\kappa_0 = 0.4$ ,  $P_{\text{test}} = 10^3$ ,  $g_v = 0.5$ ,  $g_w = 0.2$ ,  $\Delta p = 0.1$ .

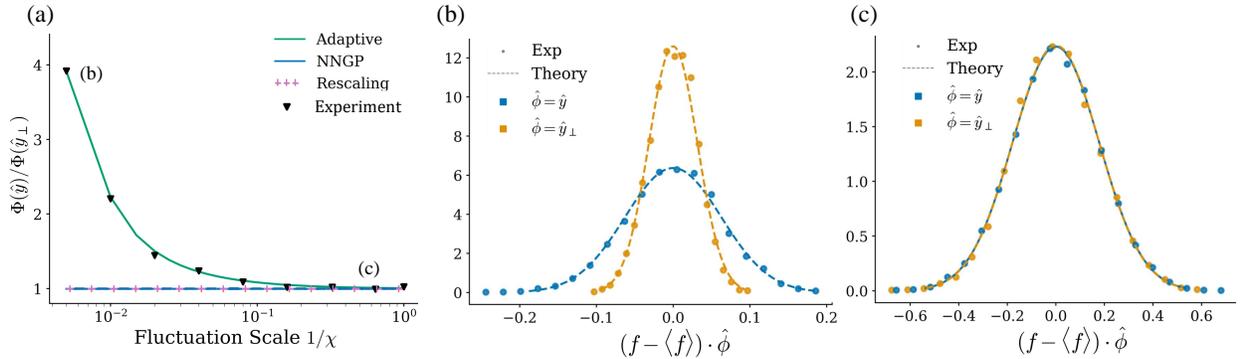


Figure 6. (a) Directional feature learning in a teacher-student setting as a function of the fluctuation scale  $1/\chi$ . Both NNGP and rescaling theory fail to capture directional feature learning, while the multi-scale adaptive theory accurately predicts network behavior. Output distribution in different directions (b) in mean field scaling ( $\chi = N$ ) and (c) in standard scaling ( $\chi = 128$ ). Parameters:  $P_{\text{train}} = 80$ ,  $N = 200$ ,  $D = 50$ ,  $\kappa_0 = 2$ ,  $g_v = 0.01$ ,  $g_w = 2$ .