

Combined Search and Encoding for Seeds, with an Application to Minimal Perfect Hashing

Hans-Peter Lehmann  


Karlsruhe Institute of Technology, Germany

Peter Sanders  

Karlsruhe Institute of Technology, Germany

Stefan Walzer  

Karlsruhe Institute of Technology, Germany

Jonatan Ziegler 

Karlsruhe Institute of Technology, Germany

Abstract

Randomised algorithms often employ methods that can fail and that are retried with independent randomness until they succeed. Randomised data structures therefore often store indices of successful attempts, called seeds. If n such seeds are required (e.g., for independent substructures) the standard approach is to compute for each $i \in [n]$ the smallest successful seed S_i and store $\vec{S} = (S_1, \dots, S_n)$.

The central observation of this paper is that this is not space-optimal. We present a different algorithm that computes a sequence $\vec{S}' = (S'_1, \dots, S'_n)$ of successful seeds such that the entropy of \vec{S}' undercuts the entropy of \vec{S} by $\Omega(n)$ bits in most cases. To achieve a memory consumption of $\text{OPT} + \varepsilon n$, the expected number of inspected seeds increases by a factor of $\mathcal{O}(1/\varepsilon)$.

We demonstrate the usefulness of our findings with a novel construction for minimal perfect hash functions with space requirement $(1 + \varepsilon)\text{OPT}$. The construction time is $\mathcal{O}(n/\varepsilon)$ while all previous approaches have construction times that increase exponentially with $1/\varepsilon$. Our implementation beats the construction throughput of the state of the art by up to two orders of magnitude.

2012 ACM Subject Classification Theory of computation \rightarrow Randomness, geometry and discrete structures; Theory of computation \rightarrow Data compression; Theory of computation \rightarrow Data structures design and analysis

Keywords and phrases Random Seed, Encoding, Bernoulli Process, Backtracking, Perfect Hashing.

Funding This project has received funding from the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation programme (grant agreement No. 882500). This work was also supported by funding from the pilot program Core Informatics at KIT (KiKIT) of the Helmholtz Association (HGF).



Acknowledgements This paper is based on the bachelor’s thesis of Jonatan Ziegler [24].

1 Introduction

The construction of randomised data structures can sometimes fail, so the data structures need to store indices of successful attempts called *seeds*. In this paper, we present a technique that finds and encodes successful seeds in a space-efficient and time-efficient way.

When searching a single seed, we may imagine an infinite sequence of i.i.d. Bernoulli random variables, called a *Bernoulli process*, that indicate which natural numbers lead to success and that can be inspected one by one. To model the task of finding a *sequence* of seeds we use a *sequence* of Bernoulli processes as follows. In this paper $[n] := \{1, \dots, n\}$.

► **Definition 1** (Seed Search and Encoding Problem (SSEP)). *Let $n \in \mathbb{N}$ and $p_1, \dots, p_n \in (0, 1]$. Given for each $i \in [n]$ a Bernoulli process $\vec{B}^{(i)} = (B_j^{(i)})_{j \in \mathbb{N}_0}$ with parameter p_i , the task is to craft a bitstring M that encodes for each $i \in [n]$ a successful seed $S_i \in \mathbb{N}_0$, i.e. $B_{S_i}^{(i)} = 1$.*

Our primary goals are to minimise the length of M in bits, and to minimise for each $i \in [n]$ the number T_i inspected Bernoulli random variables from $\vec{B}^{(i)}$. Moreover, the time to decode S_i given p_1, \dots, p_n , M and $i \in [n]$ should be constant. The optimal values for the expectation of $|M|$ and T_i are the following (proved later in Appendix A).

$$M^{\text{OPT}} = \sum_{i=1}^n \log_2(1/p_i) \text{ and } T_i^{\text{OPT}} = 1/p_i \text{ for } i \in [n]. \quad (1)$$

1.1 Ad-Hoc Solutions

We briefly consider two natural strategies for solving the SSEP to build intuition. The obvious strategy (MIN) is to encode the smallest successful seeds, i.e. define

$$S_i := \min\{j \in \mathbb{N}_0 \mid B_j^{(i)} = 1\} \text{ and } \vec{S}_{\text{MIN}} := (S_1, \dots, S_n) \quad (\text{MIN})$$

and let M be an optimal encoding of \vec{S}_{MIN} . Perhaps surprisingly, this requires $\Omega(n)$ bits more than the optimum if p_1, \dots, p_n are bounded away from 1.

► **Lemma 2** (MIN is fast but not space-efficient, proof in Appendix B).

If M encodes \vec{S}_{MIN} then $\mathbb{E}[T_i] = T_i^{\text{OPT}}$ for all $i \in [n]$ but $\mathbb{E}[|M|] \geq M^{\text{OPT}} + \sum_{i=1}^n 1 - p_i$.

Another simple strategy (UNI) is to encode the smallest seed that is simultaneously successful for all Bernoulli processes, i.e. we define

$$S_* = \min\{j \in \mathbb{N}_0 \mid \forall i \in [n] : B_j^{(i)} = 1\} \text{ and } S_i = S_* \text{ for all } i \in [n]. \quad (\text{UNI})$$

This yields a bitstring M of minimal length but requires total time $\sum_{i=1}^n T_i = \exp(\Omega(n))$ if p_1, \dots, p_n are bounded away from 1.

► **Lemma 3** (UNI is space-efficient but slow, proof in Appendix B).

If M encodes S_* then $\mathbb{E}[|M|] = M^{\text{OPT}} + \mathcal{O}(1)$ but $\mathbb{E}[\sum_{i=1}^n T_i] \geq \prod_{i=1}^n 1/p_i \gg \sum_{i=1}^n T_i^{\text{OPT}}$.

1.2 The CONSENSUS Algorithm

We present an algorithm for the SSEP designed to simultaneously get close to both optima. We call it *Combined Search and Encoding for Successful Seeds*, or CONSENSUS for short. We summarise the guarantees of the stronger of two variants here, stated more fully in Theorem 7.

► **Theorem 4** (Main Theorem). *For any $\varepsilon > 0$ the full CONSENSUS algorithm with high probability solves the SSEP with $|M| \leq M^{\text{OPT}} + \varepsilon n + \mathcal{O}(\log n)$ and $\mathbb{E}[T_i] = \mathcal{O}(T_i^{\text{OPT}}/\varepsilon)$ for all $i \in [n]$. Each seed S_i is a bitstring of fixed length found at a predetermined offset in M that is easy to compute given $\sum_{j=1}^i \log_2 1/p_j$.*

Note that if the geometric mean of p_1, \dots, p_n is at most $\frac{1}{2}$ then $M^{\text{OPT}} \geq n$ and the leading term εn in our space overhead is at most $\varepsilon M^{\text{OPT}}$.¹

¹ It is possible to get $\mathbb{E}[|M|] \leq M^{\text{OPT}} + \varepsilon \min(M^{\text{OPT}}, n) + \mathcal{O}(\log n)$ and $\mathbb{E}[T_i] = \mathcal{O}(T_i^{\text{OPT}}/\varepsilon)$ in general. This requires work if many p_i are close to 1 such that $n > M^{\text{OPT}}$. In that case we can “summarise” subsequences of p_1, \dots, p_n using essentially the UNI strategy and then apply our main theorem to a shorter sequence $\tilde{p}_1, \dots, \tilde{p}_{n'}$ with $n' \leq M^{\text{OPT}} + \mathcal{O}(1)$. We decided against integrating this improvement into our arguments as it interferes with clarity.

Intuition. First reconsider the MIN-strategy. It involves the sequence $\vec{S}_{\text{MIN}} = (S_1, \dots, S_n)$ with some entropy $H(\vec{S}_{\text{MIN}})$. There are two issues with storing \vec{S}_{MIN} . The superficial issue is that each number in the sequence follows a geometric distribution, and it is not obvious how to encode \vec{S}_{MIN} in space close to $H(\vec{S}_{\text{MIN}})$ while preserving fast random access to each component.² The deeper issue is that \vec{S}_{MIN} is not what a space-optimal approach should encode in the first place. This is demonstrated by the fact that even an optimal encoding of \vec{S}_{MIN} needs space $H(\vec{S}_{\text{MIN}})$, which UNI undercuts by $\Omega(n)$ bits.

CONSENSUS deals with both issues simultaneously. The idea is to store for each $i \in [n]$ a natural number $1 \leq \sigma_i \leq 2^\varepsilon/p_i$. This allows for fixed width encoding of σ_i using $\varepsilon + \log_2 1/p_i$ bits. If we simply used $S_i = \sigma_i$ then the expected number of successful choices for σ_i would be $2^\varepsilon > 1$. The problem would be, of course, that the actual number of successful choices might be zero for many $i \in [n]$. So instead we interpret σ_i as a *seed fragment* and define S_i to be a concatenation of seed fragments up to and including σ_i . This way, if we run out of choices for σ_i , we can hope that a different successful choice for earlier seed fragments will allow for a successful choice for σ_i as well. We can construct the sequence $(\sigma_1, \dots, \sigma_n)$ using backtracking. We explain our algorithm in detail in Section 2. The main technical challenge is to bound the additional cost this brings.

1.3 Motivation: Seed Sequences in Randomised Data Structures

Randomised data structures frequently use seeds to initialise pseudo-random number generators or as additional inputs to hash functions. Since a seed normally counts how often a construction has been restarted, a seed $S \in \mathbb{N}_0$ implies that work $\Omega(S + 1)$ has been carried out, meaning any reasonably fast algorithm yields seeds that are only a few bits to a few bytes in size. This does not, however, imply that seeds contribute only negligibly to overall memory consumption. That is because some data structures partition their input into many small parts called *buckets* and store a seed for each of these buckets. The seeds may even make up the majority of the stored data. This is the case for many constructions of perfect hash functions, but also occurs in a construction of compressed static functions [2], which, in turn, enable space-efficient solutions to the approximate membership problem and the relative membership problem. The way we phrased the SSEP implicitly assumes that buckets are handled independently. We discuss a slight generalisation in Appendix C.

Minimal Perfect Hash Functions. As an application of CONSENSUS we discuss the construction of minimal perfect hash functions (MPHF). An MPHF on a set X of keys maps these keys to a range $[|X|]$ without collisions. The function does not necessarily have to store X explicitly. The space lower bound is $\text{OPT}_{\text{MPHF}} = |X| \log_2(e) - \mathcal{O}(\log |X|)$ bits if the universe of possible keys is sufficiently large. Many approaches for constructing MPHFs involve a brute force search for seed values that map certain subsets of the keys in favourable ways [21, 6, 11, 20, 19]. Those that do, all employ a variant of the MIN-strategy. For this reason they can achieve a space budget of $(1 + \varepsilon) \cdot \text{OPT}_{\text{MPHF}}$ only in time $|X| \cdot \exp(\Omega(1/\varepsilon))$. In this paper we break this barrier for the first time. While we give the details in Section 5, the clean version of our result is the following.

► **Theorem 5** (Bucketed CONSENSUS-RecSplit). *For any $\varepsilon \in [n^{-3/7}, 1]$ there is an MPHF data structure with space requirement $(1 + \mathcal{O}(\varepsilon))\text{OPT}_{\text{MPHF}}$, expected construction time $\mathcal{O}(n/\varepsilon)$ and expected query time $\mathcal{O}(\log 1/\varepsilon)$.*

² The standard solution using Golomb-Rice coding [9, 22] comes with $\Omega(n)$ bits of overhead.

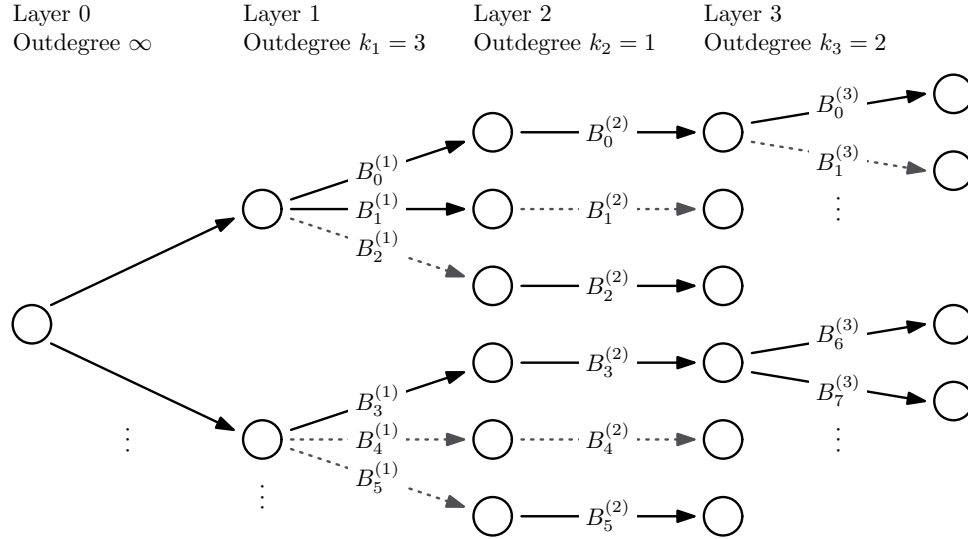


Figure 1 A visualisation of the tree underlying the search of the simplified CONSENSUS algorithm.

1.4 Overview of the Paper

The structure of the paper is as follows. In Section 2, we explain CONSENSUS in detail, as well as state the main theoretic results. In Sections 3 and 4 we then prove the results. We give an application of CONSENSUS to minimal perfect hashing in Section 5 and also briefly evaluate our practical implementation. Finally, we conclude the paper in Section 6.

2 Combined Search and Encoding for Successful Seeds

In this section we present two variants of our CONSENSUS algorithm. The first aims for conceptual clarity but produces seeds of length $\Omega(n)$ bits that cannot be decoded efficiently. The second is more technical but solves this problem.

In the following we always assume that $n \in \mathbb{N}$, $p_1, \dots, p_n \in (0, 1]$ and $\varepsilon \in (0, 1]$ are given and $\vec{B}^{(i)} = (B_j^{(i)})_{j \in \mathbb{N}_0}$ is a Bernoulli process with parameter p_i for all $i \in [n]$.

A Branching Process. Let $k_1, \dots, k_n \in \mathbb{N}$ be a sequence of numbers.³ Consider the infinite tree visualised in Figure 1. It has $n + 2$ layers, indexed from 0 to $n + 1$. The root in layer 0 has an infinite number of children and nodes in layer $1 \leq i \leq n$ have k_i children each, with 0-based indexing in both cases. Edges between layer i and $i + 1$ are associated with the variables $B_0^{(i)}, B_1^{(i)}, B_2^{(i)}, \dots$ from top to bottom where $B_j^{(i)} = 0$ indicates a *broken* edge depicted as a dotted line. For convenience, we make another definition. For any $0 \leq \ell \leq n$ and any sequence $(\sigma_0, \sigma_1, \dots, \sigma_\ell) \in \mathbb{N}_0 \times \{0, \dots, k_1 - 1\} \times \dots \times \{0, \dots, k_\ell - 1\}$ consider the node reached from the root by taking in layer $0 \leq i \leq \ell$ the edge to the σ_i -th child. We define $\sigma_0 \circ \dots \circ \sigma_\ell$ to be the index of the reached node within layer ℓ .

The Simplified CONSENSUS Algorithm. In CONSENSUS, we search for a non-broken path from the root of the tree to a leaf node using a DFS, see Algorithm 1. Note that such a path

³ It may help to imagine that $k_i \approx 2^\varepsilon / p_i$.

■ **Algorithm 1** Simplified CONSENSUS.

Input: $n, (p_1, \dots, p_n), (k_1, \dots, k_n)$ and $B_0^{(i)}, B_1^{(i)}, \dots \sim \text{Ber}(p_i)$ for all $i \in [n]$.
Output: $(\sigma_0, \dots, \sigma_n)$ with $0 \leq \sigma_i < k_i$ such that $B_{\sigma_0 \circ \sigma_1 \circ \dots \circ \sigma_i}^{(i)} = 1$ for all $i \in [n]$.

Algorithm Simplified-CONSENSUS:

```

for  $\sigma_0 \in \{0, 1, 2, \dots\}$  do
   $(\sigma_1, i) \leftarrow (0, 1)$ 
  while  $i > 0$  do
    if  $B_{\sigma_0 \circ \dots \circ \sigma_i}^{(i)} = 1$  then
      if  $i = n$  then
        return  $M = (\sigma_0, \dots, \sigma_n)$ 
       $i \leftarrow i + 1$ 
       $\sigma_i \leftarrow 0$ 
    else // backtrack and/or next seed
      while  $i > 0$  and  $\sigma_i = k_i - 1$  do
         $i \leftarrow i - 1$ 
      if  $i > 0$  then
         $\sigma_i \leftarrow \sigma_i + 1$ 

```

■ **Algorithm 2** Full CONSENSUS.

Input: $n, w, (p_1, \dots, p_n), (\ell_1, \dots, \ell_n)$ and $B_0^{(i)}, \dots, B_{2^w-1}^{(i)} \sim \text{Ber}(p_i)$ for all $i \in [n]$.
Output: either \perp or M as in Figure 2 such that $B_{S_i}^{(i)} = 1$ for all $i \in [n]$.

Algorithm Full-CONSENSUS:

```

for  $\sigma_0 \in \{0, 1, \dots, 2^w - 1\}$  do
   $(\sigma_1, i) \leftarrow (0, 1)$ 
  while  $i > 0$  do
    if  $B_{S_i}^{(i)} = 1$  then // !
      if  $i = n$  then
        return  $M = (\sigma_0, \dots, \sigma_n)$ 
       $i \leftarrow i + 1$ 
       $\sigma_i \leftarrow 0$ 
    else // backtrack and/or next seed
      while  $i > 0$  and  $\sigma_i = 2^{\ell_i} - 1$  do
         $i \leftarrow i - 1$ 
      if  $i > 0$  then
         $\sigma_i \leftarrow \sigma_i + 1$ 
  return  $\perp$ 

```


exists with probability 1 because the root has infinitely many children. The path is given by the sequence of choices $(\sigma_0, \dots, \sigma_n) \in \mathbb{N}_0 \times \{0, \dots, k_1 - 1\} \times \dots \times \{0, \dots, k_n - 1\}$ made in each layer. The returned sequence can be encoded as a bitstring M . Then $S_i := \sigma_0 \circ \dots \circ \sigma_i$ is a successful seed for each $i \in [n]$ by construction. The merits of the approach are summarised in the following theorem.

► **Theorem 6** (Performance of Simplified CONSENSUS). *Given $n \in \mathbb{N}$, $p_1, \dots, p_n \in (0, 1]$ and $\varepsilon \in (0, 1]$ let $k_1, \dots, k_n \in \mathbb{N}$ be a sequence of numbers satisfying⁴ $\prod_{j=1}^i p_j k_j 2^{-\varepsilon} \in [1, 2]$ for all $i \in [n]$. Then Algorithm 1 solves the SSEP with $\mathbb{E}[T_i] = \mathcal{O}(T_i^{\text{OPT}}/\varepsilon)$ and $\mathbb{E}[|M|] \leq M^{\text{OPT}} + \varepsilon n + \log_2 1/\varepsilon + \mathcal{O}(1)$.*

Full CONSENSUS Algorithm. The main issues with the simplified CONSENSUS algorithm are that $(\sigma_0, \dots, \sigma_n)$ is awkward to encode in binary and that using $\sigma_0 \circ \dots \circ \sigma_i$ directly as the seed S_i makes for seeds of size $\Omega(n)$ bits, which are inefficient to compute and handle. We solve these issues with three interventions.

1. We introduce a word size $w \in \mathbb{N}$ and encode σ_0 using w bits (hoping that it does not overflow, see below).
2. We demand that $k_1, \dots, k_n \in \mathbb{N}$ are powers of two, i.e. $k_i = 2^{\ell_i}$ for $\ell_i \in \mathbb{N}_0$. With our definition of “ \circ ”, the binary representation of the number $\sigma_0 \circ \dots \circ \sigma_i$ now simply arises by concatenating the binary representations of $\sigma_0, \dots, \sigma_i$ (where σ_j is encoded using ℓ_j bits and σ_0 is encoded using w bits).

⁴ Ideally we would want $k_j := \frac{2^\varepsilon}{p_j}$ but the integer constraint on the k_j forces us to be more lenient.

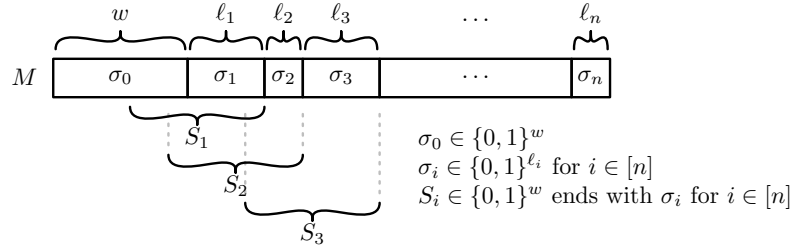

■ **Figure 2** The bitstring M returned by the full CONSENSUS algorithm and the notation used to refer to relevant substrings.

3. Instead of defining S_i to be $\sigma_0 \circ \dots \circ \sigma_i$, we define it to be the w -bit suffix of $\sigma_0 \circ \dots \circ \sigma_i$. The intuition, justified in our analysis, is that the search algorithm is unlikely to encounter two sequences $(\sigma_0, \dots, \sigma_i)$ and $(\sigma'_0, \dots, \sigma'_i)$ with the same w -bit suffix and will therefore not notice the truncation.

The full algorithm is given as Algorithm 2, using notation defined in Figure 2. Our formal result is as follows.

► **Theorem 7** (Performance of Full CONSENSUS). *Let $c > 0$ be an arbitrary constant. Given $n \in \mathbb{N}$, $p_1, \dots, p_n \in (n^{-c}, 1]$ and $\varepsilon \in (n^{-c}, 1]$, let $\ell_1, \dots, \ell_n \in \mathbb{N}_0$ be the unique sequence of numbers such that*

$$\sum_{j=1}^i \ell_j := \left\lceil \varepsilon i + \sum_{j=1}^i \log_2(1/p_j) \right\rceil \text{ for } i \in [n].$$

Assume we run Algorithm 2 with these parameters and $w \geq (2 + 7c) \log_2 n$.⁵ Then there is an event E with $\Pr[E] = 1 - \mathcal{O}(n^{-c})$ that implies that the run solves the SSEP, producing a bitstring M with $|M| = \lceil M^{\text{OPT}} + \varepsilon n + w \rceil$ containing $S_i \in \{0, 1\}^w$ at offset $\sum_{j=1}^i \ell_j$ for all $i \in [n]$. Moreover, $\mathbb{E}[T_i \mid E] = \mathcal{O}(T_i^{\text{OPT}}/\varepsilon)$ for all $i \in [n]$.

In particular the result guarantees that S_i can be inferred efficiently given M and i provided that $\sum_{j=1}^i \log_2(1/p_j)$ can be computed efficiently given i . In practice it is fine to use approximations of p_i .⁶ Note that the expectation of T_i is only bounded conditioned on a good event E , which is defined in Section 4. To obtain an unconditionally bounded expectation, Algorithm 2 should be modified to give up early in failure cases.⁷

Special Cases and Variants. An important special case is $p_1 = \dots = p_n = p$. With $b = \log_2 1/p$ the space lower bound is then simply $M^{\text{OPT}} = bn$ bits. If we apply Theorem 7 with $\varepsilon \in (0, 1)$ then the lengths ℓ_1, \dots, ℓ_n of the seed fragments $\sigma_1, \dots, \sigma_n$ are all either $\lceil b + \varepsilon \rceil$ or $\lfloor b + \varepsilon \rfloor$ with an average approaching b . Assuming $b \notin \mathbb{N}$ it may be tempting to use $\varepsilon = \lceil b \rceil - b$ such that all seed fragments have the same length $b + \varepsilon \in \mathbb{N}$. Similarly, we could pick ε such that $b + \varepsilon$ is a “nice” rational number, e.g. $b + \varepsilon = b' + \frac{1}{2}$ for $b' \in \mathbb{N}$ such that ℓ_1, \dots, ℓ_n alternate between $b' + 1$ and b' .

⁵ We have not attempted to improve the constant “ $2 + 7c$ ”. We expect that $w = 64$ is enough in most practical settings.

⁶ Our implementation uses fixed point arithmetic (integers counting “microbits”) to avoid issues related to floating point arithmetic not being associative and distributive.

⁷ To do so we need not decide whether E occurs. We can simply abort execution when the T_i exceed their expectation in a way that, given E , would have probability $\mathcal{O}(n^{-c})$.

In some cases it may be reasonable to choose $\varepsilon > 1$. Even though CONSENSUS ceases to be more space efficient than MIN, it still has the advantage that seeds are bitstrings of fixed lengths in predetermined locations. We decided against formally covering this case in Theorem 7, but argue for the following modification in Appendix D.

► **Remark 8.** The guarantees of Theorem 7 also hold for $\varepsilon \in [1, \log n]$, except that

$$\mathbb{E}[T_i | E] = T_i^{\text{OPT}}(1 + \exp(-\Omega(2^\varepsilon)) + n^{-c}) \quad (\text{instead of } \mathbb{E}[T_i | E] = \mathcal{O}(T_i^{\text{OPT}}/\varepsilon)).$$

It may also be worthwhile to consider variants of CONSENSUS that use different values of the overhead parameter ε in different parts of M to minimise some overall cost. Such an idea makes sense in general if we augment the SSEP to include specific costs c_i associated with testing the Bernoulli random variables belonging to the i th family.

3 Analysis of Simplified CONSENSUS

We begin by reducing the claim of Theorem 6 to a purely mathematical statement given in Lemma 9, which we prove in Section 3.2.

3.1 Reduction of Theorem 6 to Lemma 9

Recall the tree defined in Section 2 and illustrated in Figure 1. For any $i \in [n+1]$ consider a node v in layer i . Let q_i be the probability that there is an unbroken path from v to a node in layer $n+1$. In the last layer, we have $q_{n+1} = 1$ by definition. For all $1 \leq i \leq n$ we have $q_i = 1 - (1 - p_i q_{i+1})^{k_i}$ since $p_i q_{i+1}$ is the probability that an unbroken path via a specific child of v exists, and since there is an independent chance for each of the k_i children. The technical challenge of this section is to show that the q_i are not too small.

► **Lemma 9.** *Under the conditions of Theorem 6 we have $q_i = \Omega(\varepsilon)$ for all $i \in [n]$.*

This lemma implies Theorem 6 as follows.

Proof of Theorem 6. Let T_i for $i \in [n]$ be the number of Bernoulli random variables from the family $(B_j^{(i)})_{j \in \mathbb{N}_0}$ that are inspected. This corresponds to the number of edges between layers i and $i+1$ that are inspected by the DFS. With probability p_i such an edge is unbroken and, if it is unbroken, then with probability q_{i+1} the DFS will never backtrack out of the corresponding subtree and hence never inspect another edge from the same layer. This implies $T_i \sim \text{Geom}(p_i q_{i+1})$ and thus $\mathbb{E}[T_i] = \frac{1}{p_i q_{i+1}} = \mathcal{O}(T_i^{\text{OPT}}/\varepsilon)$ where the last step uses $T_i^{\text{OPT}} = 1/p_i$ and Lemma 9.


Concerning the space to encode $M = (\sigma_0, \dots, \sigma_n)$, there are two parts to consider. The “fixed width” numbers $(\sigma_1, \dots, \sigma_n) \in \{0, \dots, k_1 - 1\} \times \dots \times \{0, \dots, k_n - 1\}$ can be encoded using $\lceil \log_2 \prod_{i \in [n]} k_i \rceil$ bits. By the assumption on $(k_i)_{i \in [n]}$ we have $\prod_{i \in [n]} k_i \leq 2 \cdot \prod_{i \in [n]} 2^\varepsilon / p_i$ and can bound the space by

$$1 + \log_2 \prod_{i \in [n]} k_i \leq 1 + \log_2 \left(2 \prod_{i \in [n]} \frac{2^\varepsilon}{p_i} \right) \leq 2 + \varepsilon n + \sum_{i \in [n]} \log_2 \frac{1}{p_i} = M^{\text{OPT}} + \varepsilon n + \mathcal{O}(1).$$

The “variable width” number $1 + \sigma_0 \in \mathbb{N}$ has distribution $1 + \sigma_0 \sim \text{Geom}(q_1)$ because σ_0 is the 0-based index of the first node in layer 1 with an unbroken path to layer $n+1$. Again by Lemma 9 we have $\mathbb{E}[1 + \sigma_0] = \frac{1}{q_1} = \mathcal{O}(1/\varepsilon)$. Using Jensen’s inequality [12], the expected number of bits to encode σ_0 is hence bounded by

$$\mathbb{E}[\lceil \log_2(1 + \sigma_0) \rceil] \leq 1 + \log_2 \mathbb{E}[1 + \sigma_0] = 1 + \log_2(\mathcal{O}(1/\varepsilon)) = \log_2 1/\varepsilon + \mathcal{O}(1).$$

Summing the contributions of both parts yields a bound on $\mathbb{E}[|M|]$ as claimed. ◀

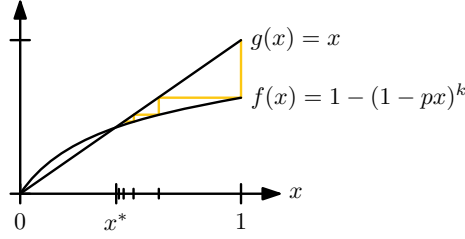

■ **Figure 3** For $p_1 = \dots = p_n = \frac{1}{4}$ and $k_1 = \dots = k_n = 5$ (thus $\varepsilon = \log_2(5/4) \approx 0.32$) the values $q_{n+1}, q_n, q_{n-1}, \dots$ (marked as ticks on the x -axis) arise by iteratively applying $f(x) = 1 - (1 - px)^k$ to the starting value of 1. Each q_i is at least the fixed point $x^* \approx 0.45$ of f .

3.2 Proof of Lemma 9

To understand the proof of Lemma 9 it may help to consider a simplified case first. Assume $p_1 = \dots = p_n = p$ and $k_1 = \dots = k_n = k$ with $kp = 2^\varepsilon$, i.e. k is slightly larger than $\frac{1}{p}$. We have $q_i = 1 - (1 - pq_{i+1})^k$, which motivates defining $f(x) = 1 - (1 - px)^k$ such that q_i arises by iteratively applying f to an initial value of $q_{n+1} = 1$. From the illustration in Figure 3 we see that q_i can never drop below the largest fixed point x^* of f , and it is not hard to show that $x^* = \Omega(\varepsilon)$.

Our full proof has to deal with a setting that is much less clean. The values p_i and k_i depend on i , yielding a distinct function f_i for each $i \in [n]$ and $p_i k_i \approx 2^\varepsilon$ is only true in the sense of a geometric average over $\Omega(1/\varepsilon)$ consecutive indices. We hence analyse compositions $f_a \circ \dots \circ f_{b-1}$ for sufficiently large $b - a = \Theta(1/\varepsilon)$. We begin with some definitions.

- Let $f_i(x) = 1 - (1 - p_i x)^{k_i}$. Note that this gives $q_i = (f_i \circ \dots \circ f_n)(1)$ for $i \in [n + 1]$.
- For any set $I = \{a, \dots, b - 1\}$ let $P_I = \prod_{i \in I} p_i$, $K_I = \prod_{i \in I} k_i$, and $F_I = f_a \circ \dots \circ f_{b-1}$. Note that the assumption of Theorem 6 gives

$$P_I K_I \cdot 2^{-\varepsilon|I|} = \underbrace{P_{\{1, \dots, b-1\}} K_{\{1, \dots, b-1\}} 2^{-\varepsilon(b-1)}}_{\in [1, 2]} \left(\underbrace{P_{\{1, \dots, a-1\}} K_{\{1, \dots, a-1\}} 2^{-\varepsilon(a-1)}}_{\in [1, 2]} \right)^{-1} \in [\frac{1}{2}, 2].$$

- Let $\varepsilon_0 := \lceil 2\varepsilon^{-1} \rceil^{-1}$. Its role is to be a number satisfying $\varepsilon_0 = \Theta(\varepsilon)$, $\varepsilon_0^{-1} \in \mathbb{N}$, and $(2^\varepsilon)^{\varepsilon_0^{-1}} \in [4, 8]$. In particular, if $I = \{a, \dots, b - 1\}$ with $b - a = \varepsilon_0^{-1}$ then

$$P_I K_I = \underbrace{P_I K_I 2^{-\varepsilon|I|}}_{\in [\frac{1}{2}, 2]} \cdot \underbrace{2^{\varepsilon|I|}}_{\in [4, 8]} \in [2, 16].$$

- Lastly, let $C = 8$ and $\varepsilon_1 = \varepsilon_0 / C$.

These definitions are designed to make the proof of the following lemma as simple as possible. No attempt was made to optimise constant factors.

► **Lemma 10.** *Let $I = \{a, \dots, b - 1\} \subseteq [n]$. The following holds.*

- (i) For all $i \in [n]$ and $x \in [0, 1]$: $f_i(x) \geq p_i k_i x - (p_i k_i x)^2 / 2$.
- (ii) If $b - a \leq \varepsilon_0^{-1}$ then $F_I(x) \geq P_I K_I x (1 - C|I|x)$ for $x \in [0, \varepsilon_1]$.
- (iii) If $b - a = \varepsilon_0^{-1}$ then $F_I(\varepsilon_1/2) \geq \varepsilon_1/2$.

Proof.

- (i) e^{-x} satisfies the following bounds: $1 - x \leq e^{-x} \leq 1 - x + x^2/2$ for $x > 0$. We get the left claim by integrating $e^{-x} \leq 1$ for $t \in [0, x]$ to get $1 - e^{-x} \leq x$. Integrating again for $t \in [0, x]$ gives the right claim. Applying to $f_i(x)$ we get

$$f_i(x) = 1 - (1 - p_i x)^{k_i} \geq 1 - e^{-p_i k_i x} \geq 1 - (1 - p_i k_i x + (p_i k_i x)^2/2) = p_i k_i x - (p_i k_i x)^2/2.$$

- (ii) We use induction on $b - a$. For $b - a = 0$ we have $I = \emptyset$, $F_I = \text{id}$ as well as $P_I = K_I = 1$ and the claim holds. Let now $I = \{a, \dots, b - 1\}$ with $b - a \leq \varepsilon_0^{-1}$ and $I' = \{a + 1, \dots, b - 1\}$. We assume the claim holds for I' . Let $x \in [0, \varepsilon_1]$.

$$\begin{aligned} F_I(x) &= (f_a \circ F_{I'})(x) \stackrel{\text{monotonic}}{\geq} f_a(F_{I'}(x)) \stackrel{\text{induction}}{\geq} f_a(P_{I'} K_{I'} x (1 - C|I'|x)) \\ &\stackrel{(i)}{\geq} p_a k_a P_{I'} K_{I'} x (1 - C|I'|x) - (p_a k_a P_{I'} K_{I'} x (1 - C|I'|x))^2/2 \\ &= P_I K_I x (1 - C|I'|x) - (P_I K_I x (1 - C|I'|x))^2/2 \\ &\leq C \varepsilon_0^{-1} \varepsilon_1 = 1 < 2 \text{ and hence } (1 - C|I'|x)^2 \leq 1 \\ &\geq P_I K_I x (1 - C|I'|x) - (P_I K_I x)^2/2 = P_I K_I x (1 - x(C|I'| + \underbrace{P_I K_I}_2/2)) \\ &\geq P_I K_I x (1 - x(C|I'| + C)) = P_I K_I x (1 - C|I|x). \end{aligned}$$

- (iii) By applying (ii) and using $C \varepsilon_0^{-1} \varepsilon_1 = 1$ we get

$$F_I(\varepsilon_1/2) \stackrel{(ii)}{\geq} \underbrace{P_I K_I}_{\geq 2} \frac{\varepsilon_1}{2} \underbrace{(1 - C \varepsilon_0^{-1} \frac{\varepsilon_1}{2})}_{=\frac{1}{2}} \geq \varepsilon_1/2. \quad \blacktriangleleft$$

The proof of Lemma 9 is now immediate:

Proof of Lemma 9. Let $i \in [n]$. Partition $I = \{i, \dots, n\}$ into contiguous intervals I_1, \dots, I_k such that $F_I = F_{I_1} \circ \dots \circ F_{I_k}$ with $|I_1| \leq \varepsilon_0^{-1}$ and $|I_j| = \varepsilon_0^{-1}$ for $j \in \{2, \dots, k\}$. Then by repeated applications of Lemma 10 (iii), one application of Lemma 10 (ii) and the monotonicity of the relevant functions we get

$$\begin{aligned} q_i &= F_I(1) \geq F_I(\varepsilon_1/2) = F_{I_1}(F_{I_2}(\dots(F_{I_k}(\varepsilon_1/2))\dots)) \stackrel{(iii)}{\geq} F_{I_1}(\varepsilon_1/2) \\ &\stackrel{(ii)}{\geq} P_{I_1} K_{I_1} \frac{\varepsilon_1}{2} (1 - C|I_1| \frac{\varepsilon_1}{2}) = \underbrace{P_{I_1} K_{I_1} 2^{-\varepsilon|I_1|}}_{\geq \frac{1}{2}} \underbrace{2^{\varepsilon|I_1|}}_{\geq 1} \frac{\varepsilon_1}{2} \underbrace{(1 - C|I_1| \frac{\varepsilon_1}{2})}_{\leq \frac{1}{2}} \geq \frac{\varepsilon_1}{8}. \quad \blacktriangleleft \end{aligned}$$

4 Analysis of Full CONSENSUS

It should be clear that full CONSENSUS performs a DFS in a tree as depicted in Figure 1 in much the same way as simplified CONSENSUS, with two differences. First, the root node only has 2^w children (not infinitely many) and the probability that an unbroken path exists is therefore strictly less than 1. Secondly, when examining the outgoing edge of index σ_i of some node in layer i , then its status is no longer linked to B_Σ^i for $\Sigma = \sigma_0 \circ \dots \circ \sigma_i$. Instead Σ is divided as $\Sigma = \text{prefix}(\Sigma) \circ \text{suffix}(\Sigma)$ where $\text{suffix}(\Sigma) \in \{0, 1\}^w$ and $B_{\text{suffix}(\Sigma)}^i$ is used. To prepare for the proof of Theorem 7, we present a coupling to, and a claim about simplified CONSENSUS.

A Coupling between Simplified and Full CONSENSUS. Consider the following natural coupling. Let $B_j^{(i)}$ for $i \in [n]$ and $j \in \mathbb{N}_0$ be the random variables underlying simplified CONSENSUS and $\tilde{B}_S^{(i)}$ for $i \in [n]$ and $S \in \{0, 1\}^w$ the random variables underlying full CONSENSUS. The coupling should ensure that $B_\Sigma^{(i)} = \tilde{B}_{\text{suffix}(\Sigma)}^{(i)}$ for all pairs (i, Σ) such that simplified CONSENSUS inspects $B_\Sigma^{(i)}$ and does not at an earlier time inspect $B_{\Sigma'}^{(i)}$ with $\text{suffix}(\Sigma') = \text{suffix}(\Sigma)$. In other words, for any pair (i, S) , if simplified consensus inspects at least one variable $B_\Sigma^{(i)}$ with $\text{suffix}(\Sigma) = S$ then $\tilde{B}_S^{(i)}$ equals the earliest such variable that is inspected.

This implies that the runs of simplified and full CONSENSUS behave identically as long as, firstly, σ_0 never reaches 2^w and, secondly, simplified CONSENSUS never *repeats a suffix*, by which we mean inspecting $B_\Sigma^{(i)}$ for some pair (i, Σ) such that $B_{\Sigma'}^{(i)}$ with $\text{suffix}(\Sigma) = \text{suffix}(\Sigma')$ was previously inspected. In the following, by a *step* of CONSENSUS we mean one iteration of its main while-loop, which involves inspecting exactly one random variable.

▷ **Claim 11.** Simplified CONSENSUS repeats a suffix in step t with probability at most $\frac{t}{2^w}$.

Proof. Assume simplified CONSENSUS is about to inspect $B_{\Sigma^*}^{(i)}$. Call $S \in \{0, 1\}^w$ a *blocked suffix* if there exists $\Sigma \in \{0, 1\}^*$ such that $S = \text{suffix}(\Sigma)$ and $B_\Sigma^{(i)}$ was previously inspected. This necessitates $\text{prefix}(\Sigma) < \text{prefix}(\Sigma^*)$. Clearly, step t repeats a suffix if $\text{suffix}(\Sigma^*)$ is blocked. A crucial observation is that the DFS has exhaustively explored all branches of the tree associated with any prefix less than Σ^* and the order in which this exploration has been carried out is no longer relevant. The symmetry between all nodes of the same layer therefore implies that every suffix is blocked with the same probability. Since at most t suffixes can be blocked at step t , the probability that Σ^* is blocked (given our knowledge of (i, Σ^*)) is at most $\frac{t}{2^w}$. ◀

Proof of Theorem 7. First note that the choice of (ℓ_1, \dots, ℓ_n) made in Theorem 7 amounts to a valid choice of $(k_1 = 2^{\ell_1}, \dots, k_n = 2^{\ell_n})$ for applying Theorem 6. Indeed, for each $i \in [n]$ there exists some $\text{err}_i \in [1, 2)$ related to rounding up such that

$$\begin{aligned} \prod_{j=1}^i p_j k_j 2^{-\varepsilon} &= \left(\prod_{j=1}^i p_j \right) 2^{\sum_{j=1}^i \ell_j} 2^{-\varepsilon i} = \left(\prod_{j=1}^i p_j \right) 2^{\lceil \varepsilon i + \sum_{j=1}^i \log_2(1/p_i) \rceil} 2^{-\varepsilon i} \\ &= \left(\prod_{j=1}^i p_j \right) 2^{\varepsilon i + \sum_{j=1}^i \log_2(1/p_i)} \cdot \text{err}_i 2^{-\varepsilon i} = \text{err}_i \in [1, 2] \end{aligned}$$

as required. The number $T = \sum_{i=1}^n T_i$ of steps taken by simplified CONSENSUS satisfies $\mathbb{E}[T] = \mathcal{O}(\sum_{i=1}^n \frac{1}{p_i \varepsilon}) = \mathcal{O}(n^{1+2c})$. By Markov's inequality T exceeds its expectation by a factor of n^c with probability at most n^{-c} so with probability at least $1 - \mathcal{O}(n^{-c})$ simplified CONSENSUS terminates within $T_{\text{limit}} = n^{1+3c}$ steps.

By Claim 11 and a union bound the probability that simplified CONSENSUS repeats a suffix within its first T_{limit} steps is at most $\sum_{t=1}^{T_{\text{limit}}} t/2^w = \mathcal{O}(T_{\text{limit}}^2/2^w) = \mathcal{O}(n^{2+6c}/2^w)$. By choosing $w \geq (2 + 7c) \log_2 n$ this probability is $\mathcal{O}(n^{-c})$. This choice also guarantees that σ_0 never exceeds 2^w during the first T_{limit} steps. Let now $E = \{T \leq T_{\text{limit}}\} \cap \{\text{no repeated suffix in the first } T_{\text{limit}} \text{ steps}\}$. By a union bound $\Pr[E] = 1 - \mathcal{O}(n^{-c})$ and by our coupling E implies that simplified and full CONSENSUS explore the same sequence of nodes in their DFS and terminate with the same sequence $\sigma_0, \dots, \sigma_n$ with $\sigma_0 < 2^w$. In particular full CONSENSUS succeeds in that case as claimed.

The updated bound on $|M|$ simply reflects that σ_0 , which in simplified CONSENSUS had expected length $\log_2 1/\varepsilon + \mathcal{O}(1)$ now has fixed length $w = \mathcal{O}(\log n)$. Lastly, if T_i and \tilde{T}_i

denote the number of Bernoulli trials from the i -th family inspected by simplified and full CONSENSUS, respectively, then conditioned on E we have $T_i = \tilde{T}_i$ so

$$\mathbb{E}[\tilde{T}_i | E] = \mathbb{E}[T_i | E] \leq \mathbb{E}[T_i] / \Pr[E] = \mathcal{O}(\mathbb{E}[T_i]) = \mathcal{O}(T_i^{\text{OPT}} / \varepsilon). \quad \blacktriangleleft$$

5 Application to Minimal Perfect Hashing

In this section, we apply the CONSENSUS idea to the area of minimal perfect hash functions (MPHF). Recall from Section 1.3 that an MPHF for a given set X of n keys maps each key in X to a unique integer from $[n]$.

5.1 Existing Strategies for Constructing MPHFs

We begin with a brief overview of established techniques with a focus on those we need. Detailed explanations are found in [17].

Partitioning. Most approaches randomly partition the input into small *buckets* using a hash function and then construct an MPHF on each bucket separately. The natural way to obtain an MPHF on the entire input involves storing the bucket-MPHFs and prefix sums for the bucket sizes. Storing the prefix sums can be avoided when the partitioning uses a k -perfect hash function, as is done in ShockHash-Flat [19], and as we do in Section 5.3.


Hagerup and Tholey demonstrate that partitioning into tiny buckets of size $\mathcal{O}(\frac{\log n}{\log \log n})$ when suitably combined with exhaustive tabulation of MPHFs on tiny inputs yields an approach with construction time $\mathcal{O}(n)$, query time $\mathcal{O}(1)$ and space overhead $\varepsilon = \mathcal{O}(\frac{\log^2 \log n}{\log n})$. Unfortunately the approach requires astronomical values of $n \geq \max(\exp(\omega(1/\varepsilon)), 2^{150})$ [4].

Below we explain *monolithic* variants of MPHFs, i.e. constructions not using partitioning, which are typically combined with partitioning to obtain faster *bucketed* variants.

Recursive Splitting. A recursive splitting strategy [6] involves a predefined *splitting tree*, which is a rooted tree with n leaves.⁸ See Figure 4 (left) for an example with $n = 11$. An MPHF for an input set of size n is given by a family of functions containing for each internal node v of the tree a *splitting hash function* f_v that maps keys to the children of v . Together, the family $(f_v)_v$ must describe a recursive partitioning of the input set into parts of size 1. The MPHF is queried for a key x by starting at the root and evaluating the splitting hash functions on x and following the resulting path until a leaf is reached, the index of which is returned. Each f_v is identified by a seed that is found using trial and error. In the original paper [6] seeds are stored using Golomb-Rice coding [9, 22]. To keep the space overhead low, the last layer of the splitting tree uses ℓ -way splits for relatively large ℓ (5–16 in practice), which makes splitting hash functions costly to find.

Multiple-Choice Hashing. We randomly assign a set $\{h_1(x), \dots, h_k(x)\} \subseteq [n(1 + \varepsilon)]$ of candidates to each key hoping that a choice $\sigma(x) \in \{1, \dots, k\}$ can be made for each key such that $x \mapsto h_{\sigma(x)}(x)$ is injective. A perfect hash function is then given by a retrieval data structure that stores σ [5, 8, 18]. A recent variant ShockHash [20, 19] achieves record space efficiency by using the aggressive configuration $\varepsilon = 0$ and $k = 2$ (combined with partitioning and recursive splitting). Many retries are needed until σ exists.

⁸ In the original paper [6], the lowest level is suppressed, with correspondingly changed terminology.

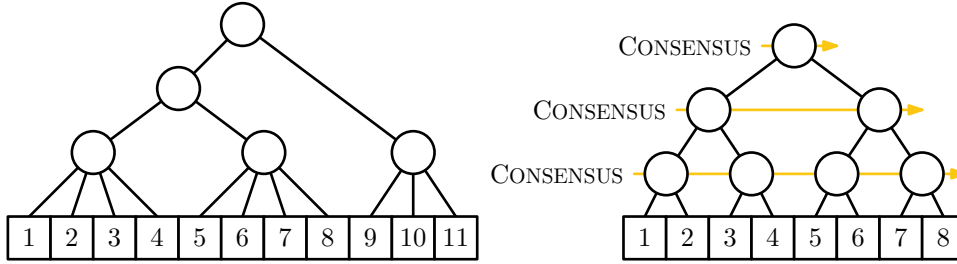

■ **Figure 4** A general splitting tree and a balanced binary splitting tree as used in Section 5.2.

Bucket Placement. A general strategy with many variants assigns a random bucket $f(x) \in \{1, \dots, b\}$ to each key and considers for each bucket $i \in [b]$ several (hash) functions $g_{i,1}, g_{i,2}, \dots$ with range $[n]$. A choice $\sigma(i)$ is stored for each bucket such that $x \mapsto g_{f(x), \sigma(f(x))}(x)$ is a bijection. Typically, the values $\sigma(i)$ are chosen greedily in decreasing order of bucket sizes [21, 11, 1], but backtracking has also been considered [23, 7] (in a different sense than CONSENSUS).

5.2 Monolithic CONSENSUS-RecSplit

We now describe a variant of recursive splitting in an idealised setting with $n = 2^d$ that uses CONSENSUS to be particularly space efficient. The idea is simple. The data structure consists of $n - 1$ two-way splitting hash functions, i.e. hash functions with range $\{0, 1\}$, arranged in a balanced binary tree with n leaves, see Figure 4 (right).

This means that during construction for a key set S we have to select the splitting hash functions from top to bottom such that each function splits the part of S arriving at its node perfectly in half. The data structure is entirely given by a sequence of $n - 1$ seeds that identify the splitting hash functions. If we search and encode these seeds using the CONSENSUS algorithm, we obtain the following result.

► **Theorem 12** (Monolithic CONSENSUS-RecSplit). *Let $n = 2^d$ for $d \in \mathbb{N}$ and $\varepsilon \in [\frac{1}{n}, 1]$. Monolithic-RecSplit is an MPH data structure with space requirement $\text{OPT}_{\text{MPHF}} + \mathcal{O}(\varepsilon n + \log^2 n)$, expected construction time $\mathcal{O}(\max(n^{3/2}, \frac{n}{\varepsilon}))$ and query time $\mathcal{O}(\log n)$.*

Proof. We use a separate CONSENSUS data structure per level of the splitting tree and construct them from top to bottom. Consider level $\ell \in \{0, \dots, d - 1\}$ of the tree, which contains 2^ℓ nodes responsible for $n_\ell = 2^{d-\ell}$ keys each. The probability that a given seed for a splitting hash function amounts to a perfect split for n_ℓ keys is $p(n_\ell) = \binom{n_\ell}{n_\ell/2} \cdot 2^{-n_\ell}$ by a simple counting argument. A standard approximation gives $p(n_\ell) = \Theta(1/\sqrt{n_\ell})$.

By applying Theorem 7 with $p_1 = \dots = p_{2^\ell} = p(n_\ell)$, $\varepsilon_\ell = \min(1, \varepsilon \cdot n_\ell^{3/4})$ and $w = \mathcal{O}(\log n)$ we obtain a data structure encoding 2^ℓ successful seeds. The expected number of seeds inspected is $\mathcal{O}(\frac{1}{p(n_\ell)\varepsilon_\ell})$ for each node, which corresponds to expected work of $\mathcal{O}(\frac{n_\ell}{p(n_\ell)\varepsilon_\ell}) = \mathcal{O}(n_\ell^{3/2}/\varepsilon_\ell)$ per node when seeds are tested by hashing all n_ℓ relevant keys.⁹ For the total

⁹ Deriving the work per node by ε_ℓ gives $n_\ell^{3/2}/\varepsilon_\ell^2$. Our choice of $\varepsilon_\ell \sim n_\ell^{3/4}$ (as long as $\min(1, \cdot)$ does not kick in) is desired to ensure that using extra bits amounts to roughly the same reduction of work in each level, such that we have a consistent trade-off between time and space.

expected work w_ℓ in level ℓ there are, up to constant factors, the following two options.

$$\begin{aligned} \text{if } \varepsilon_\ell = \varepsilon \cdot n_\ell^{3/4} \text{ then } w_\ell &= \frac{n_\ell^{3/2}}{\varepsilon n_\ell^{3/4}} \cdot 2^\ell = \frac{n_\ell^{3/4} 2^\ell}{\varepsilon} = \frac{2^{(d-\ell) \cdot 3/4 + \ell}}{\varepsilon} = \frac{n^{3/4} \cdot 2^{\ell/4}}{\varepsilon}. \\ \text{if } \varepsilon_\ell = 1 \text{ then } w_\ell &= n_\ell^{3/2} \cdot 2^\ell = 2^{(d-\ell) \cdot 3/2 + \ell} = n^{3/2} \cdot 2^{-\ell/2}. \end{aligned}$$

The formula for the first case is maximised for $\ell = d - 1$ giving $w_{d-1} = \Theta(n/\varepsilon)$. The formula for the second case is maximised for $\ell = 0$ giving $w_0 = n^{3/2}$. Since both formulas describe geometric series we get $\sum_{\ell=0}^{d-1} w_\ell = \mathcal{O}(w_0 + w_{d-1}) = \mathcal{O}(n^{3/2} + n/\varepsilon) = \mathcal{O}(\max(n^{3/2}, n/\varepsilon))$ as desired.

The space requirement for level ℓ is $|M_\ell| = 2^\ell \cdot \log_2(1/p(n_\ell)) + \varepsilon_\ell 2^\ell + \mathcal{O}(\log n)$. To bound the sum $\sum_{\ell=0}^{d-1} |M_\ell|$ we look at the terms in $|M_\ell|$ separately. For the first, we will use that $\prod_{\ell=0}^{d-1} p(2^{d-\ell})^{2^\ell} = \frac{n!}{n^n}$, which can be check by induction: The base case $d = 0$ is clear and for $d > 0$ we have

$$\begin{aligned} \prod_{\ell=0}^{d-1} p(2^{d-\ell})^{2^\ell} &= p(n) \cdot \prod_{\ell=1}^{d-1} p(2^{d-\ell})^{2^\ell} = p(n) \cdot \left(\prod_{\ell=1}^{d-1} p(2^{d-\ell})^{2^{\ell-1}} \right)^2 \\ &= p(n) \cdot \left(\prod_{\ell=0}^{d-2} p(2^{d-1-\ell})^{2^\ell} \right)^2 \stackrel{\text{Ind.}}{=} p(n) \cdot \left(\frac{(n/2)!}{(n/2)^{n/2}} \right)^2 = \binom{n}{n/2} 2^{-n} \cdot \left(\frac{(n/2)!}{(n/2)^{n/2}} \right)^2 = \frac{n!}{n^n}. \end{aligned}$$

The leading terms in $|M_\ell|$ therefore add up to

$$\sum_{\ell=0}^{d-1} 2^\ell \cdot \log_2(1/p(n_\ell)) = \log_2 \left(1 / \prod_{\ell=0}^{d-1} p(n_\ell)^{2^\ell} \right) = \log_2 \left(\frac{n^n}{n!} \right) = n \log_2 e - \mathcal{O}(\log n).$$

The overhead terms $\varepsilon_\ell \cdot 2^\ell$ are geometrically increasing in ℓ and their sum is therefore dominated by the last term $\varepsilon_{d-1} 2^{d-1} = \mathcal{O}(\varepsilon n)$. This is because

$$\frac{\varepsilon_{\ell+1} \cdot 2^{\ell+1}}{\varepsilon_\ell \cdot 2^\ell} = \frac{\min(1, \varepsilon \cdot n_{\ell+1}^{3/4})}{\min(1, \varepsilon \cdot n_\ell^{3/4})} \cdot 2 = \frac{\min(1, \varepsilon \cdot (2^{d-\ell-1})^{3/4})}{\min(1, \varepsilon \cdot (2^{d-\ell})^{3/4})} \cdot 2 \geq 2^{-3/4} \cdot 2 = 2^{1/4} > 1.$$

Overall we get as claimed

$$\text{space} = \sum_{\ell=0}^{d-1} |M_\ell| \leq n \log_2 e + \mathcal{O}(\varepsilon n) + \mathcal{O}(\log^2 n).$$

A query needs to extract one seed from each of the $d = \log_2 n$ CONSENSUS data structures. Since each uses uniform values for $p_1 = \dots = p_{n_\ell}$, the product $\prod_{j=1}^i p_j = p(n_\ell)^i$ is easy to compute in constant time, which is sufficient to find each seed in constant time, so we get a query time of $\mathcal{O}(d)$ in total. \blacktriangleleft

5.3 Bucketed CONSENSUS-RecSplit

We now replace the upper layers of Monolithic CONSENSUS-RecSplit with a minimal k -perfect hash function. This reduces query time as there are fewer layers to traverse and reduces construction time because the splits in the top layers are the most expensive ones to compute. Most importantly, it makes it possible to efficiently handle input sizes that are not powers of two.

For any $k \in \mathbb{N}$ a minimal k -perfect hash function for a set S of n keys is a data structure mapping the elements of S to buckets indexed with $[[n/k]]$ such that each bucket $i \in [[n/k]]$

receives exactly k keys. If k does not divide n then bucket $\lceil n/k \rceil$ receives between 1 and $k - 1$ leftover keys. It has long been known that the space lower bound for such a data structure is $\approx n(\log_2 e - \frac{1}{k} \log_2 \frac{k^k}{k!})$ [1], shown to be $\approx \frac{n}{2k} \log 2\pi k$ in [13]. In Appendix E we outline a compact minimal k -perfect hash function with, in expectation, $\mathcal{O}(\frac{n}{k} \log k)$ bits of space, constant query time, and linear construction time.

We call our resulting MPHFBucketed CONSENSUS-RecSplit. Its performance is as follows (previously stated in Section 1.3).

► **Theorem 5** (Bucketed CONSENSUS-RecSplit). *For any $\varepsilon \in [n^{-3/7}, 1]$ there is an MPHFBucketed CONSENSUS-RecSplit structure with space requirement $(1 + \mathcal{O}(\varepsilon))\text{OPT}_{\text{MPHF}}$, expected construction time $\mathcal{O}(n/\varepsilon)$ and expected query time $\mathcal{O}(\log 1/\varepsilon)$.*

Proof. The idea is to use our monolithic construction but replace the top-most layers with a k -perfect hash function. More precisely, we choose $k = 2^{\lfloor \frac{4}{3} \log_2 1/\varepsilon \rfloor} = \Theta(\varepsilon^{-4/3})$ and construct a minimal k -perfect hash function F for the input set. As discussed in Lemma 16 the construction time of F is $\mathcal{O}(n)$, the expected query time is $\mathcal{O}(1)$ and the space consumption is $\mathcal{O}(\frac{n}{k} \log k) = \mathcal{O}(\varepsilon n)$ bits, all well within the respective budgets. The resulting $\lceil n/k \rceil$ buckets of k keys each (a power of 2) are recursively split like in our monolithic data structure, which takes at most $\text{OPT}_{\text{MPHF}} + \mathcal{O}(\varepsilon n)$ bits of space (the $\mathcal{O}(\log^2 n)$ term is dominated by $\mathcal{O}(\varepsilon n)$). Since we make no assumptions on n there might be up to $k - 1$ leftover keys assigned to an extra bucket. For these we construct a separate MPHFBucketed CONSENSUS-RecSplit F' with range $\{\lceil n/k \rceil \cdot k + 1, \dots, n\}$. Since $k \sim \varepsilon^{-4/3} = \varepsilon \cdot \varepsilon^{-7/3} \leq \varepsilon n$ pretty much any compact (not necessarily succinct) MPHFBucketed CONSENSUS-RecSplit is good enough here, provided it supports queries in logarithmic time. Queries evaluate F first and, if mapped to a regular bucket, evaluate a sequence of $\log_2 k$ splits, or, if mapped to the extra bucket, evaluate F' . This takes $\mathcal{O}(\log k) = \mathcal{O}(\log 1/\varepsilon)$ time in the worst case.

Concerning construction time, note that the top-most level in use has nodes of size $n_\ell = k \leq \varepsilon^{-4/3}$ and the definition of ε_ℓ we made simplifies to $\varepsilon_\ell = n_\ell^{3/4} \cdot \varepsilon$ without the “ $\min(1, \cdot)$ ”. By an argument in Theorem 12, the construction time is then dominated by the bottom layer and bounded by $\mathcal{O}(n/\varepsilon)$ as claimed. ◀


5.4 Experiments

To demonstrate that CONSENSUS-RecSplit is viable in practice, we give an implementation and compare it to other MPHFBucketed CONSENSUS-RecSplit constructions from the literature.¹⁰ We only include the most space-efficient previous approaches with space consumption below 1.6 bits per key and refer to [17] for a detailed comparison of state-of-the-art perfect hashing approaches with larger space consumption.

Our implementation departs from the algorithmic description in Section 5.3 by using the threshold-based k -perfect hash function introduced in [19] instead of the one outlined in Appendix E. We postpone further tuning and parallelisation efforts to a future paper.

Figure 5 shows the trade-off between space consumption and construction time of CONSENSUS-RecSplit. The performance of all previous approaches degrades abruptly for smaller overheads because of their exponential dependency on $1/\varepsilon$ while CONSENSUS-RecSplit shows an approximately linear dependence on $1/\varepsilon$ as predicted in Theorem 5. The space lower bound for MPHFBucketed CONSENSUS-RecSplit is $\log_2 e \approx 1.443$ bits per key. The previously most space-efficient

¹⁰We run single-threaded experiments on an Intel i7 11700 processor with a base clock speed of 2.5 GHz. We use the GNU C++ compiler version 11.2.0 with optimization flags `-O3 -march=native`. Like previous papers, we use 100 million random string keys as input. The source code is available on GitHub [15, 16].

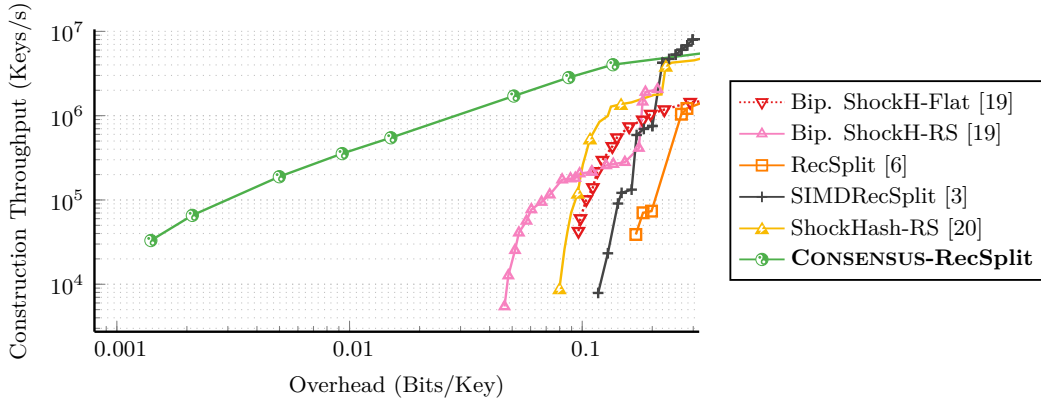

■ **Figure 5** Experimental evaluation of very space-efficient MPHf algorithms, showing the trade-off between space consumption and construction throughput. Because CONSENSUS-RecSplit is focused on space consumption, we only include approaches that achieve below 1.6 bits per key.

approach, bipartite ShockHash-RS [19], achieves 1.489 bits per key. In about 15% of the construction time, CONSENSUS-RecSplit achieves a space consumption of just 1.444 bits per key. At a space consumption of 1.489 bits per key, CONSENSUS-RecSplit is more than 350 times faster to construct than the previous state of the art.

Queries take 150–250 ns depending on k and therefore the depth of the splitting tree, so their performance is not too far from compact configurations of RecSplit (100 ns) and bipartite ShockHash-RS (125 ns). Future work can improve on the query performance by storing the seeds needed for each query closer to each other.

6 Conclusion

This paper concerns data structures that store sequences of successful seeds, i.e. values known to influence pseudo-random processes in desirable ways. Normally these seeds are first found independently of each other using trial and error and then encoded separately. In this paper we show that, perhaps surprisingly, this wastes $\Omega(1)$ bits per seed compared to a lower bound.

We present the CONSENSUS approach, which **combines search and encoding of successful seeds** and reduces the space overhead to $\mathcal{O}(\varepsilon)$ bits at the price of increasing the required work by a factor of $\mathcal{O}(1/\varepsilon)$.

To demonstrate the merits of our ideas in practice, we apply it to the construction of minimal perfect hash functions. CONSENSUS-RecSplit is the first MPHf to achieve a construction time that only depends linearly on the inverse space overhead. Despite using the same recursive splitting idea as [6], the space overhead is, for the same construction throughput, up to two orders of magnitude smaller in practice.

Future Work. Given our promising results, we intend to continue working on CONSENSUS-RecSplit, in particular looking into avenues for parallelisation and improving query times.

We also believe that CONSENSUS can be applied to other randomised data structures, including but not limited to other perfect or k -perfect hash functions, retrieval data structures and AMQ-filters.

References

- 1 Djamal Belazzougui, Fabiano C. Botelho, and Martin Dietzfelbinger. Hash, displace, and compress. In *ESA*, volume 5757 of *Lecture Notes in Computer Science*, pages 682–693. Springer, 2009. doi:10.1007/978-3-642-04128-0_61.
- 2 Djamal Belazzougui and Rossano Venturini. Compressed static functions with applications. In *SODA*, pages 229–240. SIAM, 2013. doi:10.1137/1.9781611973105.17.
- 3 Dominik Bez, Florian Kurpicz, Hans-Peter Lehmann, and Peter Sanders. High performance construction of RecSplit based minimal perfect hash functions. In *ESA*, volume 274 of *LIPICs*, pages 19:1–19:16. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2023. doi:10.4230/LIPICs.ESA.2023.19.
- 4 Fabiano C. Botelho, Rasmus Pagh, and Nivio Ziviani. Practical perfect hashing in nearly optimal space. *Inf. Syst.*, 38(1):108–131, 2013. doi:10.1016/J.IS.2012.06.002.
- 5 Fabiano C. Botelho, Rasmus Pagh, and Nivio Ziviani. Practical perfect hashing in nearly optimal space. *Inf. Syst.*, 38(1):108–131, 2013. doi:10.1016/J.IS.2012.06.002.
- 6 Emmanuel Esposito, Thomas Mueller Graf, and Sebastiano Vigna. RecSplit: Minimal perfect hashing via recursive splitting. In *ALENEX*, pages 175–185. SIAM, 2020. doi:10.1137/1.9781611976007.14.
- 7 Edward A. Fox, Lenwood S. Heath, Qi Fan Chen, and Amjad M. Daoud. Practical minimal perfect hash functions for large databases. *Commun. ACM*, 35(1):105–121, 1992. doi:10.1145/129617.129623.
- 8 Marco Genuzio, Giuseppe Ottaviano, and Sebastiano Vigna. Fast scalable construction of (minimal perfect hash) functions. In *SEA*, volume 9685 of *Lecture Notes in Computer Science*, pages 339–352. Springer, 2016. doi:10.1007/978-3-319-38851-9_23.
- 9 Solomon W. Golomb. Run-length encodings. *IEEE Trans. Inf. Theory*, 12(3):399–401, 1966. doi:10.1109/TIT.1966.1053907.
- 10 Gaston H. Gonnet and Per-Åke Larson. External hashing with limited internal storage. *J. ACM*, 35(1):161–184, 1988. doi:10.1145/42267.42274.
- 11 Stefan Hermann, Hans-Peter Lehmann, Giulio Ermanno Pibiri, Peter Sanders, and Stefan Walzer. PHOBIC: perfect hashing with optimized bucket sizes and interleaved coding. In *ESA*, volume 308 of *LIPICs*, pages 69:1–69:17. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2024. doi:10.4230/LIPICs.ESA.2024.69.
- 12 Johan Ludwig William Valdemar Jensen. Sur les fonctions convexes et les inégalités entre les valeurs moyennes. *Acta mathematica*, 30(1):175–193, 1906. doi:10.1007/BF02418571.
- 13 Florian Kurpicz, Hans-Peter Lehmann, and Peter Sanders. PaCHash: Packed and compressed hash tables. In *ALENEX*, pages 162–175. SIAM, 2023. doi:10.1137/1.9781611977561.CH14.
- 14 Per-Åke Larson and M. V. Ramakrishna. External perfect hashing. In *SIGMOD Conference*, pages 190–200. ACM Press, 1985. doi:10.1145/318898.318916.
- 15 Hans-Peter Lehmann. MPH Experiment - GitHub. <https://github.com/ByteHamster/MPHF-Experiments>, 2023.
- 16 Hans-Peter Lehmann. ConsensusRecSplit - GitHub. <https://github.com/ByteHamster/ConsensusRecSplit>, 2024.
- 17 Hans-Peter Lehmann. *Fast and Space-Efficient Perfect Hashing*. PhD thesis, Karlsruhe Institute of Technology, Germany, 2024. doi:10.5445/IR/1000176432.
- 18 Hans-Peter Lehmann, Peter Sanders, and Stefan Walzer. SicHash - small irregular cuckoo tables for perfect hashing. In *ALENEX*, pages 176–189. SIAM, 2023. doi:10.1137/1.9781611977561.CH15.
- 19 Hans-Peter Lehmann, Peter Sanders, and Stefan Walzer. ShockHash: Near optimal-space minimal perfect hashing beyond brute-force. *CoRR*, abs/2310.14959, 2024. doi:10.48550/ARXIV.2310.14959.
- 20 Hans-Peter Lehmann, Peter Sanders, and Stefan Walzer. ShockHash: Towards optimal-space minimal perfect hashing beyond brute-force. In *ALENEX*, pages 194–206. SIAM, 2024. doi:10.1137/1.9781611977929.15.

- 21 Giulio Ermanno Pibiri and Roberto Trani. PTHash: Revisiting FCH minimal perfect hashing. In *SIGIR*, pages 1339–1348. ACM, 2021. doi:10.1145/3404835.3462849.
- 22 Robert F. Rice. Some practical universal noiseless coding techniques. *Jet Propulsion Laboratory, JPL Publication*, 1979.
- 23 Wei-Pang Yang and M. W. Du. A backtracking method for constructing perfect hash functions from a set of mapping functions. *BIT*, 25(1):148–164, 1985. doi:10.1007/BF01934995.
- 24 Jonatan Ziegler. Compacting minimal perfect hashing using symbiotic random search. Bachelor’s thesis, Karlsruhe Institute for Technology (KIT), 2025. doi:10.5445/IR/1000177814.

A Lower Bounds

We now prove that the values defined in Equation (1) indeed constitute lower bounds as the naming suggests.

► **Lemma 13** (Information Theoretic Lower Bounds).

Solving the SSEP requires $\mathbb{E}[|M|] \geq M^{\text{OPT}}$ and $\mathbb{E}[T_i] \geq T_i^{\text{OPT}}$ for all $i \in [n]$.

Proof. Any outcome m of the random variable M encodes a sequence s_1, \dots, s_n of seeds, which are jointly successful with probability $p_1 \cdot \dots \cdot p_n$, hence $\Pr[M = m] \leq p_1 \cdot \dots \cdot p_n$. We can bound the expected size of M using its entropy $H(M)$ as follows¹¹

$$\begin{aligned} \mathbb{E}[|M|] &\geq H(M) = \sum_{m \in \{0,1\}^*} \Pr[M = m] \log_2 \left(\frac{1}{\Pr[M = m]} \right) \\ &\geq \sum_{m \in \{0,1\}^*} \Pr[M = m] \log_2 \left(\frac{1}{p_1 \cdot \dots \cdot p_n} \right) = \sum_{i=1}^n \log_2 1/p_i = M^{\text{OPT}}. \end{aligned}$$

Concerning T_i , any correct approach must inspect random variables from $\vec{B}^{(i)}$ until at least the first success. In expectation this takes $1/p_i$ trials and $\mathbb{E}[T_i] \geq 1/p_i = T_i^{\text{OPT}}$ follows. ◀

B Properties of the Ad-Hoc Approaches

For completeness, we prove the claims we made about the performance of the approaches MIN and UNI considered in the introduction.

► **Lemma 2** (MIN is fast but not space-efficient).

If M encodes \vec{S}_{MIN} then $\mathbb{E}[T_i] = T_i^{\text{OPT}}$ for all $i \in [n]$ but $\mathbb{E}[|M|] \geq M^{\text{OPT}} + \sum_{i=1}^n 1 - p_i$.

Proof of Lemma 2. It is clear that $T_i \sim \text{Geom}(p_i)$ with $\mathbb{E}[T_i] = 1/p_i = T_i^{\text{OPT}}$. The entropy of $X \sim \text{Geom}(p)$ can be bounded as follows using $-\ln(1-p) \geq p$ for $p \in (0, 1)$.

$$H(X) = \frac{-p \log_2 p - (1-p) \log_2(1-p)}{p} \geq -\log_2 p + (1-p) \log_2 e \geq \log_2 1/p + 1 - p.$$

Since M encodes a sequence of independent S_1, \dots, S_n with $S_i \sim \text{Geom}(p_i)$ we have

$$\mathbb{E}[|M|] \geq H(M) = \sum_{i=1}^n H(S_i) \geq \sum_{i=1}^n \log 1/p_i + \sum_{i=1}^n 1 - p_i = M^{\text{OPT}} + \sum_{i=1}^n 1 - p_i. \quad \blacktriangleleft$$

► **Lemma 3** (UNI is space-efficient but slow).

If M encodes S_ then $\mathbb{E}[|M|] = M^{\text{OPT}} + \mathcal{O}(1)$ but $\mathbb{E}[\sum_{i=1}^n T_i] \geq \prod_{i=1}^n 1/p_i \gg \sum_{i=1}^n T_i^{\text{OPT}}$.*

Proof of Lemma 3. Using $\frac{x \ln x}{x-1} \leq 1$ for $x \in (0, 1)$ we can upper bound the entropy of $X \sim \text{Geom}(p)$ as

$$H(X) = \frac{-p \log_2 p - (1-p) \log_2(1-p)}{p} \leq -\log_2 p + \log_2 e,$$

which we can apply to $S_* \sim \text{Geom}(p_1 \cdot \dots \cdot p_n)$ to get, using a suitable encoding M of S_* :

$$\mathbb{E}[|M|] = H(S_*) + \mathcal{O}(1) = -\log_2(p_1 \cdot \dots \cdot p_n) + \mathcal{O}(1) = M^{\text{OPT}} + \mathcal{O}(1).$$

¹¹ $\mathbb{E}[|M|] \geq H(M)$ assumes that M properly encodes its content by being, e.g. a prefix free code.

The number of options that need to be considered is $\mathbb{E}[S_*]$, where considering an option requires inspecting a random variable from at least one Bernoulli process. Hence

$$\mathbb{E}\left[\sum_{i=1}^n T_i\right] \geq \mathbb{E}[S_*] = \prod_{i=1}^n \frac{1}{p_i}. \quad \blacktriangleleft$$

C On Interactions Between Seeds

In some data structures, including RecSplit, on which our Theorems 5 and 12 are based, seeds in a sequence S_1, \dots, S_n need to be determined one after the other and the choice of S_1, \dots, S_i may influence which choices for S_{i+1} are successful. We sidestep the issue in Theorem 12 by solving a sequence of SSEP instances, but alternatively we could have considered the following generalisation of the SSEP.

► **Definition 14** (The Sequential Seed Search and Encoding Problem (SSSEP)). *Let $n \in \mathbb{N}$ and $p_1, \dots, p_n \in (0, 1]$. Assume for each $i \in [n]$, each $(s_1, \dots, s_i) \in \mathbb{N}_0^i$ and each $j \in \mathbb{N}_0$ there is a random variable $B_j^{(s_1, \dots, s_{i-1})} \sim \text{Ber}(p_i)$ such that any subset of these variables arising from a set of pairwise distinct (i, j) is independent. The task is to craft a bitstring M that encodes for each $i \in [n]$ a seed S_i such that $B_{S_i}^{(S_1, \dots, S_{i-1})} = 1$.*

More plainly, the SSSEP acknowledges that whether or not a seed is successful in position i may depend on the choice of previous seeds, but insists that a fresh seed s_i , i.e. one not previously inspected at index i , yields a fresh chance for success.

It is not hard to check that our CONSENSUS algorithms are applicable in the generalised setting: Simplified CONSENSUS never tries the same seed in the same location and while full CONSENSUS might do so, we treat this as a failure case in our analysis. Hence:

► **Corollary 15.** *The algorithms for the SSEP analysed in this paper offer the same guarantees when applied to the SSSEP.*

D Notes on CONSENSUS with $\varepsilon > 1$

We now provide some technical considerations relating to the claim made in Remark 8. The issue is that the bound $q_i = \Omega(\varepsilon)$ as stated in Lemma 9 clearly fails for $\varepsilon = \omega(1)$. However, a simpler argument can be used to obtain a different bound on q_i when $\varepsilon \geq 2$ (for $\varepsilon \in (1, 2)$ the old argument still works). The assumption from Theorem 6 guarantees $k_i \geq 2^{\varepsilon-1}/p_i$ for all $i \in [n]$ and the following induction shows $q_i \geq 1 - \exp(-2^{\varepsilon-2})$ and thus also $q_i \geq \frac{1}{2}$. As before, the induction works backwards from $q_{n+1} = 1$.

$$q_i = 1 - (1 - p_i q_{i+1})^{k_i} \geq 1 - \exp(-p_i q_{i+1} k_i) \geq 1 - \exp(-q_{i+1} 2^{\varepsilon-1}) \stackrel{\text{Ind.}}{\geq} 1 - \exp(-2^{\varepsilon-2}).$$

In simplified CONSENSUS we get $T_i \sim \text{Geom}(p_i q_{i+1})$ as before and using $\frac{1}{1-x} = 1 + \mathcal{O}(x)$ for $x \in [0, \frac{1}{2}]$ we get

$$\mathbb{E}[T_i] = \frac{1}{p_i q_{i+1}} = \frac{T_i^{\text{OPT}}}{q_{i+1}} \leq \frac{T_i^{\text{OPT}}}{1 - \exp(-2^{\varepsilon-2})} \leq T_i^{\text{OPT}} (1 + \exp(-\Omega(2^\varepsilon))).$$

The additional term n^{-c} in the statement of Remark 8 relates to the conditioning on E that is required in our analysis of full CONSENSUS.

E Compact k -Perfect Hashing

The idea of k -perfect hashing has been around for a long time [1, 10, 14], mostly in the context of non-minimal external memory hash tables. However, we could not find a description of a minimal k -perfect hash function data structure combined with compactness guarantees. We outline one possibility here, based on a specialization of PaCHash [13]. Note that our implementation of CONSENSUS-RecSplit uses a more sophisticated minimal k -perfect hash function with better constant factors. We intend to elaborate on the details in a follow-up paper.

► **Lemma 16.** *Given $k \in \mathbb{N}$, there exists a minimal k -perfect hash function with expected $\mathcal{O}(1)$ -time queries, space $\mathcal{O}(\frac{n}{k} \log k)$ and construction time $\mathcal{O}(n)$.*

Proof sketch. Let $S \subseteq \mathcal{U}$ be an input set of size n and $h : \mathcal{U} \rightarrow [n]$ a random hash function. Let (x_1, \dots, x_n) contain the elements of S sorted by $h(x)$ with ties broken arbitrarily. Our minimal k -perfect hash function F will be $F(x_i) = \lceil i/k \rceil$. To represent it, we store *threshold* values $t_i = h(x_{k \cdot i})$ for $i = 1, \dots, \lfloor n/k \rfloor$ in a succinct predecessor query data structure D . The data structure can achieve expected constant time queries in this setting and space $\mathcal{O}(\log \binom{n}{n/k}) = \mathcal{O}(\frac{n}{k} \log k)$ bits [13]. A minimal k -perfect hashing query for $x \in S$ considers the rank r of $h(x)$ in D . In most cases we can conclude $F(x) = r + 1$. Unfortunately, the answer is ambiguous if $h(x)$ coincides with one or several thresholds $t_r = \dots = t_{r+\ell}$. For such keys we store a $\lceil \log_2(\ell + 2) \rceil$ bit value in a retrieval data structure that disambiguates between the possible values $r, \dots, r + \ell + 1$ for $F(x)$. It is not hard to see that the expected additional space this takes is a lower order term, provided that a compact variable-length retrieval data structure is used, e.g. [2]. We omit the details. ◀