

Individualised Treatment Effects Estimation with Composite Treatments and Composite Outcomes

Vinod Kumar Chauhan^{1,*}, Lei Clifton^{1,2}, Gaurav Nigam^{1,3} and David A. Clifton^{1,4,#}

Abstract—Estimating individualised treatment effect (ITE) – that is the causal effect of a set of variables (also called exposures, treatments, actions, policies, or interventions), referred to as *composite treatments*, on a set of outcome variables of interest, referred to as *composite outcomes*, for a unit from observational data – remains a fundamental problem in causal inference with applications across disciplines, such as healthcare, economics, education, social science, marketing, and computer science. Previous work in causal machine learning for ITE estimation is limited to simple settings, like single treatments and single outcomes. This hinders their use in complex real-world scenarios; for example, consider studying the effect of different ICU interventions, such as beta-blockers and statins for a patient admitted for heart surgery, on different outcomes of interest such as atrial fibrillation and in-hospital mortality. The limited research into composite treatments and outcomes is primarily due to data scarcity for all treatments and outcomes. To address the above challenges, we propose a novel and innovative hypernetwork-based approach, called *H-Learner*, to solve ITE estimation under composite treatments and composite outcomes, which tackles the data scarcity issue by dynamically sharing information across treatments and outcomes. Our empirical analysis with binary and arbitrary composite treatments and outcomes demonstrates the effectiveness of the proposed approach compared to existing methods.

I. INTRODUCTION

Causal inference helps to answer fundamental “what if” questions regarding the effect of a set of variables on a set of outcome variables of interest. For instance, one might be interested in estimating the risk of cancer for an individual if they were to quit smoking. Such questions are prevalent in science, including healthcare, economics, education, social science, marketing, and computer science. While randomised controlled trials remain the gold standard

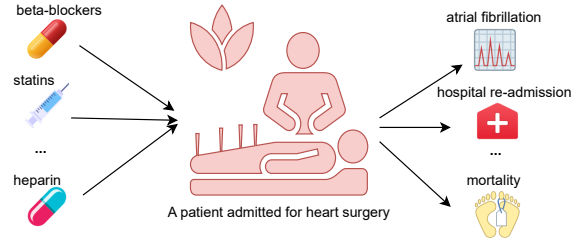


Fig. 1: Example: An intensive care unit patient, admitted for heart surgery, needs composite treatments to optimise composite outcomes.

for causal effect estimation, they can be time-consuming, expensive, ethically challenging, and more importantly not suitable for individual-level causal effect estimation due to their strict inclusion criteria and small and less representative samples. By contrast, non-experimental approaches based on observational datasets (e.g., electronic health records) address many of these limitations and can complement randomised controlled trials. Recently, there has been notable progress in causal machine learning [2], [8], a discipline that integrates rigorous causal inference methodologies with state-of-the-art machine learning techniques, particularly for the analysis of observational data.

Existing research in individualised treatment effects (ITE), also referred to as conditional average treatment effects estimation or heterogeneous treatment effects estimation in the machine learning literature [39], is mostly focused on simple settings considering single treatments, such as binary treatments, and single outcomes [13], [6], [20], [10], [30]. However, the real world is complex and might involve *composite treatments*, i.e., multiple simultaneous treatments (often referred to as polypharmacy in clinical literature [17]), as well as *composite outcomes*, where we aim to optimise multiple simultaneous outcomes of interest. Thus, existing methods are not always suitable for practical adoption in these multi-faceted scenarios.

Motivating example: Suppose a patient is admitted to a hospital for heart surgery. Approximately 20–50% of such patients are at risk of atrial fibrillation within the first seven days after surgery [15], which is associated with an increased risk of heart failure, dementia, and stroke [31]. During the surgery, clinicians can choose from more than ten interventions (e.g., beta-blockers, statins, and others) to manage multiple outcomes, including atrial fibrillation, mortality, and readmission to the intensive care unit, as depicted in Fig. 1.

¹Institute of Biomedical Engineering, University of Oxford UK

²Nuffield Department of Primary Care Health Sciences, University of Oxford UK

³Nuffield Department of Medicine, University of Oxford, Oxford, UK

⁴Oxford-Suzhou Institute of Advanced Research (OSCAR), Suzhou, China

*Corresponding author: V.K. Chauhan (vinod.kumar@eng.ox.ac.uk).

#This work was supported in part by the National Institute for Health Research (NIHR) Oxford Biomedical Research Centre (BRC) and in part by InnoHK Project Programme 3.2: Human Intelligence and AI Integration (HIAI) for the Prediction and Intervention of CVDs: Warning System at Hong Kong Centre for Cerebro-cardiovascular Health Engineering (COCHE). DAC was supported by an NIHR Research Professorship, an RAEng Research Chair, the InnoHK Hong Kong Centre for Cerebro-cardiovascular Health Engineering (COCHE), the NIHR Oxford Biomedical Research Centre (BRC), and the Pandemic Sciences Institute at the University of Oxford. GN is funded by NIHR (Grant number 302607) for a doctoral research fellowship. The views expressed are those of the authors and not necessarily those of the NHS, the NIHR, the Department of Health, the InnoHK – ITC, or the University of Oxford.

Evaluating the combined effects of these interventions on the outcomes of interest is a complex open problem that urgently requires solutions with potentially significant impact on healthcare.

The primary challenge with composite treatments and outcomes is the scarcity of data for certain treatment combinations. For instance, with K binary treatments, there are 2^K possible treatment combinations, and in many real-world settings, it is impractical (or impossible) to obtain sufficient observations for all these combinations. This data deficiency hampers the reliable estimation of ITE for more complex treatment-outcome scenarios. Furthermore, analysing composite treatments and outcomes necessitates addressing confounding bias for each treatment component and outcome individually, compounding the challenge.

To address the above challenges in ITE estimation for complex real-world scenarios, we propose a novel and innovative approach based on a hypernetwork (a neural network that generates weights for another neural network) [9], referred to as *H-Learner*, to solve the problem of composite treatments and outcomes. In H-Learner, the hypernetwork is conditioned on the treatments and outcomes to generate a target learner for each specific treatment combination. Because H-Learner maps treatments to the corresponding target learners, it can tackle data scarcity by dynamically sharing information across treatments and outcomes. We provide an empirical study of H-Learner under varying treatments and outcomes, comparing its performance against existing methods.

Contributions: (i) We present an innovative and novel methodology, H-Learner, which leverages hypernetworks for ITE estimation under composite treatments and outcomes by sharing information across different treatment-outcome combinations; (ii) We empirically validate H-Learner against state-of-the-art approaches, showing superior or at par performance in scenarios involving varying treatments and outcomes with minimal assumptions.

II. RELATED WORK

In this section, we briefly review the literature on ITE estimation and hypernetworks.

A. Individualised Treatment Effects Estimation

After the pioneering work of [23], a wide variety of machine learning-based ITE learners have been proposed [2]. These methods can be broadly categorised as: (i) representation learning or deep learning-based learners, e.g., [13], [39], [18], [19], [6], [8], (ii) tree-based learners [1], and (iii) meta-learners, which are model-agnostic and can be subdivided into direct learners (S-Learner and T-Learner) [26], and indirect learners (RA-Learner, DR-Learner, and X-Learner) [24], [12], [26]. For a comprehensive review, please refer to [11]. While these frameworks have demonstrated success, they predominantly address settings with a single treatment and a single outcome.

The study of composite treatment effects has been constrained by data scarcity arising from the exponential number of treatment combinations (for K binary treatments,

2^K combinations) and the possibility that many combinations have insufficient or no data at all. In this context, [45] proposed an S-Learner-based approach, called deconfounder (DEC), that accommodates composite (binary and real) treatments for a single outcome. They leverage proxy variables and latent representations to capture interactions among multiple treatments and mitigate unmeasured confounding. Similarly, [50] developed the variational sample reweighting (VSR) approach—an extension of S-Learner—to handle high-dimensional binary treatments (referred to as bundle treatments), using learned latent representations to de-correlate treatments from confounders. To address data scarcity, [34] proposed a data-augmentation strategy for composite treatment and single outcome settings, whereby K ITE learners generate balanced datasets for each treatment before training a standard supervised deep learning model to predict potential outcomes. However, this method requires to train multiple models and is also limited to binary composite treatments.

B. Hypernetworks

Hypernetworks, or hypernets, are a class of neural networks that generate the weights of another network, known as the target (or primary) network [9]. Although the core idea of context-dependent weight generation originated earlier [38], the term “hypernetwork” was popularised by [16], who introduced an end-to-end training paradigm for both the hypernetwork and the target network. Hypernetworks thus provide an alternative way to train neural networks [9], which consist of a primary network for performing predictions and a hypernetwork for generating the primary network’s weights. Depending on the type of conditioning (data, task identifiers, or noise), hypernetworks are respectively categorised as data-conditioned, task-conditioned, or noise-conditioned hypernetworks. They can be classified using five key design criteria based on input-output variability and architectural choices [9].

When a hypernetwork is used to generate weights for multiple target networks (referred to as soft-weight sharing), it enables end-to-end information sharing across those networks. Soft-weight sharing was recently used in [8] to propose HyperITE that addresses the problem of information sharing between potential outcome functions for training ITE learners. Nevertheless, HyperITEs are limited to binary treatments and single outcomes, unlike our approach which can handle an arbitrary number of treatments and outcomes.

Hypernetworks have emerged as a powerful deep learning technique due to their flexibility, expressivity, data-adaptivity, and information sharing, and have been used across various problems in deep learning [9]. For example, hypernetworks have been successfully applied and have shown better results across different deep learning problems, such as uncertainty quantification [14], [5], hyperparameter optimisation [28], continual learning [32], federated learning [40], multitasking [42], embedding representations [47], ensemble learning [25], multi-objective optimisation [43], weight pruning [27], model-extraction attack [48], unlearning [36], image

processing [35], [49], quantum computing [4], knowledge distillation [46], neural architecture search [33], adversarial defence [41], and learning partial differential equations [3]. For an overview of hypernetworks, refer to [9].

III. BACKGROUND

Notations: Let $\mathbf{x}_i = (x_{i1}, \dots, x_{ip})^\top$ denote the p -dimensional vector of pre-treatment features for patient i ($i = 1, \dots, N$). Let $\mathbf{t}_i = (t_{i1}, \dots, t_{iK})^\top$ be the K -dimensional treatment vector for patient i , where t_{ik} represents the k -th component of the potentially composite treatment. Let $\mathbf{y}_i = (y_{i1}, \dots, y_{iM})^\top$ be the M -dimensional outcome vector for patient i , where y_{im} is the m -th outcome. $y_{im}(\mathbf{t}_i)$ denotes the potential outcome for patient i on outcome m if they were to receive treatment vector \mathbf{t} . The observed outcome is $y_{im} = y_{im}(\mathbf{t}_i)$. The observational dataset is $\mathcal{D} = \{(\mathbf{x}_i, \mathbf{t}_i, \mathbf{y}_i)\}_{i=1}^N$.

Potential Outcomes Framework: Following the potential outcomes framework [37], we define $y_{im}(\mathbf{t}_i)$ as the potential outcome for individual i on outcome m if they were to receive treatment vector $\mathbf{t}_i \in \mathcal{T}$. This represents the counterfactual outcome that would have been observed had individual i received treatment \mathbf{t}_i , even if they actually received a different treatment. We can then represent the vector of potential outcomes under treatment \mathbf{t}_i as $\mathbf{y}_i(\mathbf{t}_i) = (y_1(\mathbf{t}_i), y_2(\mathbf{t}_i), \dots, y_M(\mathbf{t}_i))^\top$. The fundamental problem of causal inference is that we can only observe one potential outcome vector for each individual, namely $\mathbf{y}_i = \mathbf{y}_i(\mathbf{t}_i)$, where \mathbf{t}_i is the treatment vector actually received by individual i . Specifically, the observed outcome for individual i on outcome m is $y_{im} = y_m(\mathbf{t}_i)$.

Assumptions: To identify and estimate ITEs for composite treatments and composite outcomes, we rely on the standard causal assumptions of (i) unconfoundedness (or conditional exchangeability), (ii) positivity (or overlap) and (iii) consistency for all individual treatments and outcomes.

IV. METHODS

In this section, we introduce *H-Learner*, a hypernetwork-based approach to solve ITE estimation problems with composite treatment and composite outcome.

Motivation: Complex real-world scenarios often entail multiple concurrent treatments (polypharmacy) and multiple outcomes of interest. Existing research on ITE estimation, however, typically focuses on single treatment and single outcome problems. In the composite treatment and composite outcome setting, the exponential number of possible treatment combinations (e.g., 2^K for K binary treatments) leads to data scarcity, where certain treatment combinations may have limited or no samples. Such data sparsity poses a significant challenge to reliably estimating ITE.

Broadly, there are two ways to address composite treatment and composite outcome problems: (i) *Train independent models for each treatment combination*, akin to a T-Learner [26]. While flexible, this approach can be infeasible when data are scarce for many treatment combinations. (ii) *Train a single joint model for all treatment combinations and outcomes*, such as an S-Learner [26]. This approach can

alleviate data scarcity through shared learning but may lack the flexibility needed even for simpler (binary) scenarios.

To overcome these limitations, we utilise hypernetworks for joint training of ITE learners. Our proposed *H-Learner* effectively combines the advantages of both independent and joint training: it dynamically shares information across treatments and outcomes yet learns distinct learners for each treatment-outcome combination, mitigating data scarcity.

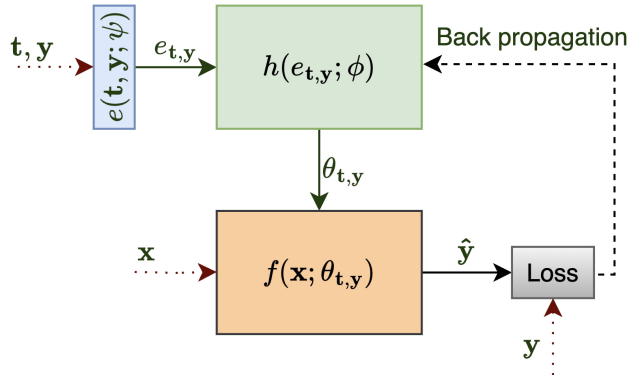


Fig. 2: Architecture of H-Learner. It comprises two networks: (1) a hypernetwork conditioned on treatments and outcomes, and (2) a target network (ITE learner). The hypernetwork generates the target network’s weights for each treatment-outcome combination, enabling dynamic information sharing.

Neural Architecture and Working: Figure 2 illustrates the key components of H-Learner, which include an embedding layer, a hypernetwork, and a target network (the ITE learner). The embedding layer learns representations for each of the unique combinations of treatments and outcomes and has been implemented using a single linear layer. The embedding layer maps given causes and an effect to a meaningful representation which is equivalent to learning embeddings for words in natural language processing [44].

The hypernetwork is a multi-layer perceptron that takes the treatment-outcome embeddings as input (i.e., *task-conditioned* inputs [9]) and outputs the weights of the target network. The target network, in turn, receives the covariate data and predicts the potential outcomes for the specified treatment-outcome combination. Unlike conventional learners where the target network’s weights are trained directly, here they are entirely generated by the hypernetwork and thus are not themselves learned via backpropagation.

Training proceeds by feeding the treatments and outcomes into the embedding layer, whose outputs are passed to the hypernetwork. The hypernetwork produces weights for the target network, which processes the observed covariates to predict potential outcomes. We compute the prediction loss on factual observations (the data points for which the treatments and outcomes are known) and backpropagate the error. Since only the embedding layer and the hypernetwork parameters are trainable, the backpropagated gradients update those components to learn better embeddings for

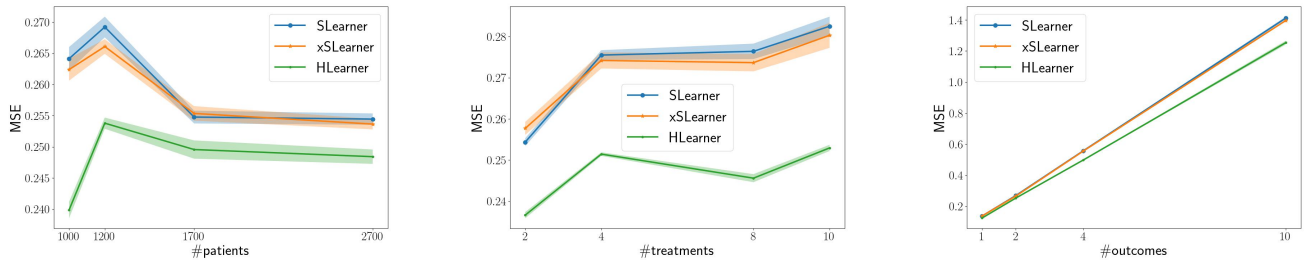


Fig. 3: Comparative study of ITE learners for arbitrary composite treatments and composite outcomes (shaded region represents one standard error over 10 repetitions).

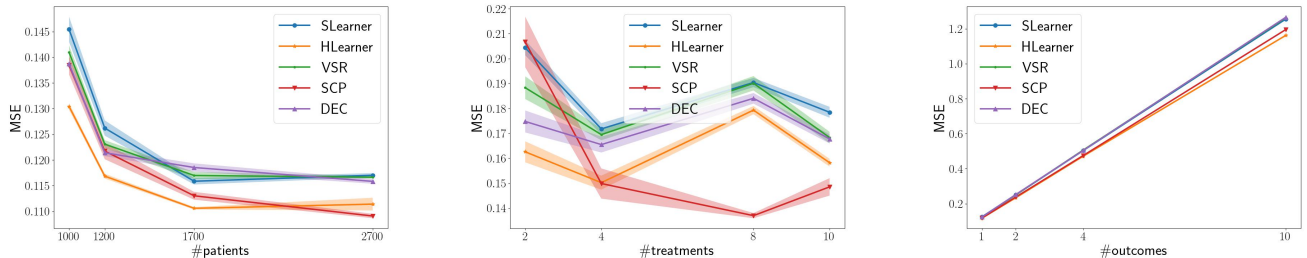


Fig. 4: Comparative study of ITE learners for binary composite treatments and composite outcomes (shaded region represents one standard error over 10 repetitions). H-Learner does not need any assumptions about the interaction among the treatments and can handle composite outcomes but SCP needs to know the causal structure among treatments and is limited to single outcomes.

treatments and outcomes and improve the hypernetwork’s mapping from embeddings to target-network weights. Each training epoch thus leads to dynamic information sharing across the various treatments and outcomes, benefiting low-data configurations through mechanisms similar to transfer learning and multitasking [29], [7].

Formally, we define the optimisation objective for H-Learner as:

$$\min_{\phi, \psi} f(\mathbf{x}; \theta_{\mathbf{t}, \mathbf{y}} = h(e_{\mathbf{t}, \mathbf{y}} = e(\mathbf{t}, \mathbf{y}; \psi); \phi)), \quad \forall \{\mathbf{x}, \mathbf{t}, \mathbf{y}\} \in \mathcal{D}, \quad (1)$$

where ϕ and ψ are the trainable parameters of the hypernetwork and the embedding layer, respectively, $e(\cdot, \cdot; \psi)$ denotes the embedding function, and $h(\cdot; \phi)$ represents the hypernetwork. The weights $\theta_{\mathbf{t}, \mathbf{y}}$ for each treatment-outcome pair (\mathbf{t}, \mathbf{y}) are generated by the hypernetwork, rather than learned directly. Consequently, H-Learner is a meta-model approach that naturally accommodates composite treatments and outcomes through dynamic weight-sharing across the treatment-outcome space.

V. EXPERIMENTS

Here, we present our experimental setup and the corresponding results.

A. Experimental Setup

Baselines: For composite treatments comprising binary treatments only, we compare against DEC, SCP, S-Learner, and VSR. For composite treatments that may be binary, continuous, or categorical, we use S-Learner and xS-Learner,

due to the lack of methods which could handle arbitrary treatments. With respect to composite outcomes, we apply these baselines independently for each outcome because none of them are explicitly designed to handle multiple outcomes simultaneously. Specifically, we use a multitasking version of S-Learner (still referred to as S-Learner) and repeat the learner for each outcome referred to as xS-Learner. Unless otherwise specified, our experiments involve five treatments (either all binary or one continuous and four binary) and two outcomes.

Metric: We employ an extension of the Precision in the Estimation of Heterogeneous Effects (PEHE) [21] suitable for composite treatments and outcomes. Concretely, this extension reduces to computing the mean squared error (MSE) of the estimated treatment effects overall treatment combinations and outcomes.

Dataset: Because of the “fundamental problem of causal inference” [22], not all potential outcomes are observable in real-world data, making direct validation of causal methods inherently difficult. As is common in the literature, we use synthetic datasets, where all potential outcomes are artificially generated, to evaluate our proposed methodology. Our data generation process follows [6] and is extended to accommodate multiple treatments and multiple outcomes.

Hyperparameters: We implemented SCP, VSR, and DEC using the publicly available code from [34], adopting their hyperparameter tuning protocols. For H-Learner, we set the learning rate to 0.005, the embedding size to 32, and used a hypernetwork with two hidden layers of 100 neurons

each. All other hyperparameters, including the optimiser and batch size, are the same as those used in the baseline implementations.

B. Results

In this subsection, we compare H-Learner under two scenarios: (1) arbitrary composite treatments and (2) binary composite treatments.

Arbitrary composite treatments: Since H-Learner shares information across all treatments and outcomes, we compare it against S-Learner [26], which employs a multitasking neural network, and xS-Learner, which considers only a single outcome at a time and therefore does not share information across outcomes. Figure 3 summarises performance as we vary the number of patients, treatments, and outcomes. H-Learner consistently performs better across different data sizes and different numbers of treatments and outcomes. Notably, its advantage over the baselines becomes more pronounced when the dataset size decreases or when the number of outcomes increases. This improvement arises from H-Learner’s dynamic end-to-end information sharing across treatments and outcomes, facilitated by hypernetworks [9].

Binary composite treatments: Here, we restrict treatments to binary treatments and compare H-Learner against S-Learner, VSR, SCP, and DEC. Figure 4 shows that H-Learner typically outperforms or is on par with the baselines. Its superior performance in smaller datasets, relative to SCP, can be attributed to the way H-Learner shares information across outcomes, which other methods do not. The same mechanism also enables H-Learner to outperform the baselines when the number of outcomes is increased. Although SCP shows stronger results for certain treatments and is overall the second-best estimator, it relies on knowing the underlying causal structure among treatments – information we provide in these experiments but which may be unavailable in practice. In contrast, H-Learner can accommodate an arbitrary number of treatments (and their interrelationships) by generating a distinct learner network for each treatment combination.

VI. CONCLUSION

In this paper, we proposed *H-Learner*, a novel hypernetwork-based framework for ITE estimation under composite treatments and composite outcomes – an important yet underexplored problem in real-world causal inference. By mapping each treatment-outcome combination to a distinct target learner, H-Learner combines the flexibility of independent models with the benefits of a joint learner capable of dynamic end-to-end information sharing. Our empirical results highlight that H-Learner not only manages data scarcity effectively but also consistently outperforms or competes with existing methods when dealing with both arbitrary and binary composite treatments, as well as multiple outcomes. Incorporating hypernetworks enables adaptive weight generation, facilitating transfer learning across complex treatment-outcome configurations and enhancing robustness in scenarios with limited data. We believe H-Learner

provides a strong foundation for addressing increasingly intricate real-world causal inference tasks involving multiple treatments and outcomes.

STATEMENTS AND DECLARATIONS

Competing Interests

The authors declare that they have no competing interests.

Code Availability

The finalised code, after acceptance, will be available at <https://github.com/jmdvinodjmd/HLearner>.

REFERENCES

- [1] Susan Athey and Stefan Wager. Estimating treatment effects with causal forests: An application. *Observational studies*, 5(2):37–51, 2019.
- [2] Ioana Bica, Ahmed M Alaa, Craig Lambert, and Mihaela Van Der Schaar. From real-world patient data to individualized treatment effects using machine learning: current and future methods to address underlying challenges. *Clinical Pharmacology & Therapeutics*, 109(1):87–100, 2021.
- [3] Nicolò Botteghi, Stefania Fresca, Mengwu Guo, and Andrea Manzoni. Hyperl: Parameter-informed reinforcement learning for parametric pdes. *arXiv preprint arXiv:2501.04538*, 2025.
- [4] Juan Carrasquilla, Mohamed Hibat-Allah, Estelle Inack, Alireza Makhzani, Kirill Neklyudov, Graham W Taylor, and Giacomo Torlai. Quantum hypernetworks: Training binary neural networks in quantum superposition. *arXiv preprint arXiv:2301.08292*, 2023.
- [5] Matthew Albert Chan, Maria J Molina, and Christopher Metzler. Estimating epistemic and aleatoric uncertainty with a single model. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [6] Vinod Kumar Chauhan, Soheila Molaei, Marzia Hoque Tania, Anshul Thakur, Tingting Zhu, and David A. Clifton. Adversarial deconfounding in individualised treatment effects estimation. In *Proceedings of The 26th International Conference on Artificial Intelligence and Statistics*, volume 206, pages 837–849. PMLR, 25–27 Apr 2023.
- [7] Vinod Kumar Chauhan, Sukhdeep Singh, and Anuj Sharma. HCR-Net: A deep learning based script independent handwritten character recognition network. *arXiv preprint arXiv:2108.06663*, 2023.
- [8] Vinod Kumar Chauhan, Jiandong Zhou, Ghadeer Ghosheh, Soheila Molaei, and David A Clifton. Dynamic inter-treatment information sharing for individualized treatment effects estimation. In *Proceedings of The 27th International Conference on Artificial Intelligence and Statistics*, volume 238 of *Proceedings of Machine Learning Research*, pages 3529–3537. PMLR, 02–04 May 2024.
- [9] Vinod Kumar Chauhan, Jiandong Zhou, Ping Lu, Soheila Molaei, and David A Clifton. A brief review of hypernetworks in deep learning. *Artificial Intelligence Review*, 57(9):250, 2024.
- [10] Vinod Kumar Chauhan, Jiandong Zhou, Soheila Molaei, Ghadeer Ghosheh, and David A Clifton. Dynamic inter-treatment information sharing for heterogeneous treatment effects estimation. *arXiv preprint arXiv:2305.15984*, 2023.
- [11] Alicia Curth, Richard W. Peck, Eoin McKinney, James Weatherall, and Mihaela van der Schaar. Using machine learning to individualize treatment effect estimation: Challenges and opportunities, 4 2024.
- [12] Alicia Curth and Mihaela van der Schaar. Nonparametric estimation of heterogeneous treatment effects: From theory to learning algorithms. In *International Conference on Artificial Intelligence and Statistics*, pages 1810–1818. PMLR, 2021.
- [13] Alicia Curth and Mihaela van der Schaar. On inductive biases for heterogeneous treatment effect estimation. *Advances in Neural Information Processing Systems*, 34:15883–15894, 2021.
- [14] Lior Deutsch, Erik Nijkamp, and Yu Yang. A generative model for sampling high-performance and diverse weights for neural networks. *arXiv preprint arXiv:1905.02898*, 2019.
- [15] Richard S D’Agostino, Jeffrey P Jacobs, Vinay Badhwar, Felix G Fernandez, Gaetano Paone, David W Wormuth, and David M Shahian. The society of thoracic surgeons adult cardiac surgery database: 2018 update on outcomes and quality. *The Annals of thoracic surgery*, 105(1):15–23, 2018.

- [16] David Ha, Andrew M. Dai, and Quoc V. Le. Hypernetworks. In *International Conference on Learning Representations*, 2017.
- [17] Emily R Hajjar, Angela C Cafiero, and Joseph T Hanlon. Polypharmacy in elderly patients. *The American journal of geriatric pharmacotherapy*, 5(4):345–351, 2007.
- [18] Negar Hassanpour and Russell Greiner. Counterfactual regression with importance sampling weights. In *IJCAI*, pages 5880–5887, 2019.
- [19] Negar Hassanpour and Russell Greiner. Learning disentangled representations for counterfactual regression. In *International Conference on Learning Representations*, 2019.
- [20] M.A. Hernan and J.M. Robins. *Causal Inference: What If*. Chapman & Hall/CRC monographs on statistics & applied probability. Taylor & Francis, 2023.
- [21] Jennifer L Hill. Bayesian nonparametric modeling for causal inference. *Journal of Computational and Graphical Statistics*, 20(1):217–240, 2011.
- [22] Paul W Holland. Statistics and causal inference. *Journal of the American statistical Association*, 81(396):945–960, 1986.
- [23] Fredrik Johansson, Uri Shalit, and David Sontag. Learning representations for counterfactual inference. In *International Conference on Machine Learning*, pages 3020–3029. PMLR, 2016.
- [24] Edward H Kennedy. Towards optimal doubly robust estimation of heterogeneous causal effects. *Electronic Journal of Statistics*, 17(2):3008–3049, 2023.
- [25] Agustinus Kristiadi, Sina Däubener, and Asja Fischer. Predictive uncertainty quantification with compound density networks. *arXiv preprint arXiv:1902.01080*, 2019.
- [26] Sören R Künzel, Jasjeet S Sekhon, Peter J Bickel, and Bin Yu. Metalearners for estimating heterogeneous treatment effects using machine learning. *Proceedings of the national academy of sciences*, 116(10):4156–4165, 2019.
- [27] Zechun Liu, Haoyuan Mu, Xiangyu Zhang, Zichao Guo, Xin Yang, Kwang-Ting Cheng, and Jian Sun. Metapruning: Meta learning for automatic neural network channel pruning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3296–3305, 2019.
- [28] Jonathan Lorraine and David Duvenaud. Stochastic hyperparameter optimization through hypernetworks, 2018.
- [29] Andreas Maurer, Massimiliano Pontil, and Bernardino Romera-Paredes. The benefit of multitask representation learning. *Journal of Machine Learning Research*, 17(81):1–32, 2016.
- [30] Valentyn Melnychuk, Dennis Frauen, Jonas Schweisthal, and Stefan Feuerriegel. Orthogonal representation learning for estimating causal quantities. *arXiv preprint arXiv:2502.04274*, 2025.
- [31] Thomas M. Munger, Li Qun Wu, and Win K. Shen. Atrial fibrillation. *Journal of Biomedical Research*, 28(1):1–17, 2014.
- [32] Johannes Von Oswald, Christian Henning, Benjamin F. Grewe, and João Sacramento. Continual learning with hypernetworks. In *International Conference on Learning Representations*, 2020.
- [33] Houwen Peng, Hao Du, Hongyuan Yu, Qi Li, Jing Liao, and Jianlong Fu. Cream of the crop: Distilling prioritized paths for one-shot neural architecture search. *Advances in Neural Information Processing Systems*, 33:17955–17964, 2020.
- [34] Zhaozhi Qian, Alicia Curth, and Mihaela van der Schaar. Estimating multi-cause treatment effects via single-cause perturbation. *Advances in Neural Information Processing Systems*, 34:23754–23767, 2021.
- [35] Sriprabha Ramanarayanan, Mohammad Al Fahim, Rahul G S, Amrit Kumar Jethi, Keerthi Ram, and Mohanasankar Sivaprakasam. Hypercoil-recon: A hypernetwork-based adaptive coil configuration task switching network for mri reconstruction. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV) Workshops*, pages 2392–2401, October 2023.
- [36] Jose Miguel Lara Rangel, Stefan Schoepf, Jack Foster, David Krueger, and Usman Anwar. Learning to forget using hypernetworks. *arXiv preprint arXiv:2412.00761*, 2024.
- [37] Donald B Rubin. Causal inference using potential outcomes: Design, modeling, decisions. *Journal of the American Statistical Association*, 100(469):322–331, 2005.
- [38] Jürgen Schmidhuber. Learning to control fast-weight memories: An alternative to dynamic recurrent networks. *Neural Computation*, 4(1):131–139, 1992.
- [39] Uri Shalit, Fredrik D Johansson, and David Sontag. Estimating individual treatment effect: generalization bounds and algorithms. In *International Conference on Machine Learning*, pages 3076–3085. PMLR, 2017.
- [40] Yujin Shin, Kichang Lee, Sungmin Lee, You Rim Choi, Hyung-Sin Kim, and JeongGil Ko. Effective heterogeneous federated learning via efficient hypernetwork-based weight generation. In *Proceedings of the 22nd ACM Conference on Embedded Networked Sensor Systems*, pages 112–125, 2024.
- [41] Zhun Sun, Mete Ozay, and Takayuki Okatani. Hypernetworks with statistical filtering for defending adversarial examples. *arXiv preprint arXiv:1711.01791*, 2017.
- [42] Yi Tay, Zhe Zhao, Dara Bahri, Donald Metzler, and Da-Cheng Juan. Hypergrid transformers: Towards a single model for multiple tasks. In *International Conference on Learning Representations*, 2021.
- [43] Tran Anh Tuan, Long P. Hoang, Dung D. Le, and Tran Ngoc Thang. A framework for controllable pareto front learning with completed scalarization functions and its applications. *Neural Networks*, 169:257–273, 2024.
- [44] Shirui Wang, Wenan Zhou, and Chao Jiang. A survey of word embeddings based on deep learning. *Computing*, 102(3):717–740, 2020.
- [45] Yixin Wang and David M Blei. The blessings of multiple causes. *Journal of the American Statistical Association*, 114(528):1574–1596, 2019.
- [46] Qi Wu, David Bauer, Yuyang Chen, and Kwan-Liu Ma. Hyperinr: A fast and predictive hypernetwork for implicit neural representations via knowledge distillation. *arXiv preprint arXiv:2304.04188*, 2023.
- [47] Young Hyun Yoo, Jii Cha, Changhyeon Kim, and Taek Kim. Hyper-cl: Conditioning sentence representations with hypernetworks. In *The 62nd Annual Meeting of the Association for Computational Linguistics (ACL 2024)*, 2024.
- [48] Yuanyuan Yuan, Zhibo Liu, Sen Deng, Yanzuo Chen, Shuai Wang, Yinqian Zhang, and Zhendong Su. Hypertheft: Thieving model weights from tee-shielded neural networks via ciphertext side channels. In *Proceedings of the 2024 on ACM SIGSAC Conference on Computer and Communications Security*, pages 4346–4360, 2024.
- [49] Mingliang Zhou, Heqiang Wang, Xuekai Wei, Yong Feng, Jun Luo, Huayan Pu, Jinglei Zhao, Liming Wang, Zhigang Chu, Xin Wang, Bin Fang, and Zhaowei Shang. Hdiqa: A hyper debiasing framework for full reference image quality assessment. *IEEE Transactions on Broadcasting*, 70(2):545–554, 2024.
- [50] Hao Zou, Peng Cui, Bo Li, Zheyang Shen, Jianxin Ma, Hongxia Yang, and Yue He. Counterfactual prediction for bundle treatment. *Advances in Neural Information Processing Systems*, 33:19705–19715, 2020.