# Long-Term TalkingFace Generation via Motion-Prior Conditional Diffusion Model

Fei Shen <sup>1</sup> Cong Wang <sup>2</sup> Junyao Gao <sup>3</sup> Qin Guo <sup>4</sup> Jisheng Dang <sup>5</sup> Jinhui Tang <sup>1</sup> Tat-Seng Chua <sup>6</sup>

# **Abstract**

Recent advances in conditional diffusion models have shown promise for generating realistic TalkingFace videos, yet challenges persist in achieving consistent head movement, synchronized facial expressions, and accurate lip synchronization over extended generations. To address these, we introduce the Motion-priors Conditional Diffusion Model (MCDM), which utilizes both archived and current clip motion priors to enhance motion prediction and ensure temporal consistency. The model consists of three key elements: (1) an archived-clip motion-prior that incorporates historical frames and a reference frame to preserve identity and context; (2) a present-clip motion-prior diffusion model that captures multimodal causality for accurate predictions of head movements, lip sync, and expressions; and (3) a memory-efficient temporal attention mechanism that mitigates error accumulation by dynamically storing and updating motion features. We also release the TalkingFace-Wild dataset, a multilingual collection of over 200 hours of footage across 10 languages. Experimental results demonstrate the effectiveness of MCDM in maintaining identity and motion continuity for long-term TalkingFace generation. Code, models, and datasets will be publicly available.

# 1. Introduction

TalkingFace generation (Tan et al., 2024; Peng et al., 2024; Zhou et al., 2021; Ye et al., 2024; Ji et al., 2021; Tan et al., 2023; Kim et al., 2018; Liang et al., 2022; Ye et al., 2023; Pumarola et al., 2018; Vougioukas et al., 2020) aims to create realistic and expressive videos from a reference face

and audio, with applications in virtual avatars, gaming, and filmmaking. However, the complexity of facial movements, including head, lip, and expression motions, presents challenges, along with the need to maintain identity consistency across extended sequences.

Early methods (Vougioukas et al., 2020; Wang et al., 2021b; Hong et al., 2022a; Chan et al., 2022; Guo et al., 2024) use GANs (Goodfellow et al., 2014; Mirza & Osindero, 2014) to synthesize facial motions onto a reference image through a two-step process: decoupling motion features from audio and mapping them onto intermediate representations like facial landmarks (Yang et al., 2023), 3DMM (Sun et al., 2023), or HeadNeRF (Hong et al., 2022b). Despite their promise, GAN-based methods suffer from training instability and inaccuracies in motion extraction, often leading to artifacts like blurriness and flickering that compromise video realism. Recent diffusion models (Wei et al., 2024; Stypułkowski et al., 2024; Tian et al., 2024; Guo et al., 2024; Zheng et al., 2024; Jiang et al., 2024) have improved TalkingFace generation by enhancing video realism through multi-step denoising that preserves conditional input information. These methods typically use a Reference UNet (Hu, 2024) to encode identity features and integrate audio via cross-attention. However, reliance on static audio features and weak correlations between audio and motion complicate the decoupling of identity and motion cues, often resulting in artifacts like motion distortion and flickering, especially in long-term generation.

While some methods (Wang et al., 2024; Ma et al., 2024; Yang et al., 2024) improve long-term stability by introducing motion constraints like facial landmarks and emotion tags, these constraints often overly bind poses to the reference image, limiting expression diversity. Models trained with driven landmark fail to learn natural audio-driven motion patterns, reducing audio-visual synergy. Additionally, static emotion tags cannot capture dynamic shifts, leading to rigid, inauthentic animations over extended sequences. Besides, some approaches (Xu et al., 2024; Chen et al., 2024) inject brief motion reference frames, usually fewer than five over 0.2 seconds, which is insufficient to establish coherent motion, resulting in random, less dynamic movements.

In this paper, we propose the Motion-priors Conditional

<sup>&</sup>lt;sup>1</sup>Nanjing University of Science and Technology <sup>2</sup>Nanjing University <sup>3</sup>Tongji University <sup>4</sup>Peking University <sup>5</sup>Sun Yat-sen University <sup>6</sup>National University of Singapore. Correspondence to: Jinhui Tang, Contact <feishen@njust.edu.cn>.

**D**iffusion Model (MCDM) to address the challenges in achieving long-term consistency in TalkingFace generation. The MCDM comprises three key modules: the archived-clip motion-prior, the present-clip motion-prior diffusion model, and a memory-efficient temporal attention mechanism. Unlike conventional reference UNet-based identity learning, the archived-clip motion-prior introduces historical frames along with a reference frame via frame-aligned attention, enhancing identity representation and creating a cohesive facial context over extended sequences. Then, the present-clip motion-prior diffusion model leverages multimodal causality and temporal interactions to effectively decouple and predict motion states, including head, lip, and expression movements, ensuring a clear separation between identity and motion features and promoting temporal consistency across frames. To support long-term stability, we devise a memory-efficient temporal attention that dynamically stores and updates historical motion features, integrating them with current motion cues via a memory update mechanism. This structure reduces error accumulation often observed in diffusion-based long-term TalkingFace generation, enabling more stable and consistent outputs. Additionally, we present the TalkingFace-Wild dataset, a high-quality, multilingual video dataset with over 200 hours of footage in 10 languages, offering a valuable resource for further research in TalkingFace generation. Our main contributions are summarized as follows:

- We propose MCDM to enhance robust identity consistency and support temporal consistency in long-term TalkingFace generation.
- We develop the archived-clip motion-prior module to enhance identity representation and construct a comprehensive facial context from historical frames.
- We devise the present-clip motion-prior diffusion model to decouple current identity and motion features via multimodal causality and temporal interactions.
- We present a memory-efficient temporal attention to dynamically update and integrate historical motion features with current ones, reducing error accumulation.
- We release the TalkingFace-Wild dataset, covering 10 languages and over 200 hours of video for advancing TalkingFace research.

# 2. Related Work

**GAN-Based Methods.** GAN-based approaches (Kim et al., 2018; Zhou et al., 2020; Pumarola et al., 2018; Vougioukas et al., 2020; Zhang et al., 2023; Wang et al., 2021b; Hong et al., 2022a; Chan et al., 2022; Guo et al., 2024) for

TalkingFace generation extract motion features from audio or visual inputs and map them to intermediate representations such as facial landmarks (Yang et al., 2023), 3DMM (Sun et al., 2023), or HeadNeRF (Hong et al., 2022b). MakeItTalk (Zhou et al., 2020) employs LSTMs to predict landmarks from audio, followed by a warp-based GAN for video synthesis. GANimation (Pumarola et al., 2018) models facial motion via continuous manifolds, enhancing expression dynamics. SadTalker (Zhang et al., 2023) integrates ExpNet and PoseVAE to refine motion representations within the FaceVid2Vid (Wang et al., 2021b) framework. DaGAN (Hong et al., 2022a) introduces selfsupervised geometric learning to capture dense 3D motion fields. While effective, GAN-based methods suffer from adversarial training instability and motion inaccuracies, often resulting in artifacts that degrade realism.

**Diffusion-Based Methods.** Diffusion models (Rombach et al., 2022) have gained traction in TalkingFace generation, producing high-quality, diverse outputs. AniPortrait (Wei et al., 2024) maps audio to 3D facial structures, generating temporally coherent videos with expressive detail. MegActor- $\Sigma$  (Wang et al., 2024) synchronizes lip movements, expressions, and head poses using a reference UNet (Hu, 2024) and facial loss functions to enhance fidelity. Hallo (Xu et al., 2024) and EchoMimic (Chen et al., 2024) leverage limited motion reference frames to improve expression diversity and pose alignment. However, reliance on short-term frame histories (2-4 frames) compromises long-term motion consistency, while increased frame dependencies escalate computational costs. Additionally, static audio features and restricted references fail to capture natural motion variations, leading to artifacts such as motion distortion and rigid expressions in extended sequences.

Unlike prior work, our approach introduces motion priors from both archived and present clips to enhance long-term motion prediction and identity consistency. By leveraging historical frames and memory-efficient temporal attention, MCDM improves motion continuity while maintaining realism in TalkingFace generation.

## 3. Method

**Task Definition.** Given a reference image, audio, and optional facial landmarks, TalkingFace generation aims to produce temporally coherent and realistic videos. The key challenges include maintaining consistent identity over time, achieving natural head movements, and ensuring expressive and precise lip alignment with audio cues. However, existing methods often encounter limitations such as error accumulation, inconsistent identity preservation, suboptimal audio-lip synchronization, and rigid expressions.

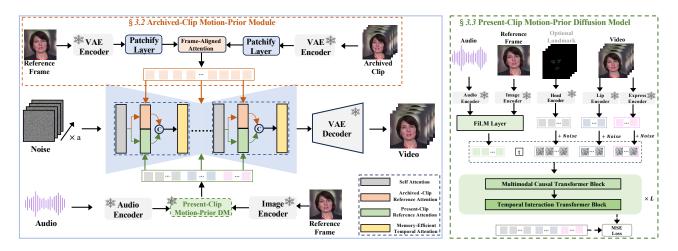


Figure 1. Our MCDM architecture. On the upper, the archived-clip motion-prior leverages frame-aligned attention with archived-clip, enhancing identity coherence over extended sequences. On the right, the present-clip motion-prior diffusion model uses multimodal causality and temporal interactions to decouple and predict motion states, covering head, lip, and expression movements while maintaining a clear separation of identity and motion features.

# 3.1. Overall Framework

To address the above challenges, we introduce MCDM, a framework centered on a denoising UNet resembling Stable Diffusion v1.5 (SD v1.5) 1, tailored to denoise multi-frame noisy latent inputs under conditional guidance. As illustrated in Figure 1, unlike standard UNet architectures, each Transformer block in MCDM incorporates four attention layers. The first layer, a self-attention, mirrors that in SD v1.5. The second and third layers are parallel cross attention (spatial-wise), designed for distinct interactions: the archived-clip reference attention layer, which integrates motion priors from archived clip encoded by the archived-clip motion-prior module (Section 3.2), and the present-clip reference attention, which engages with present clip priors from the present-clip motion-prior diffusion model (Section 3.3). The fourth layer, the memory-efficient temporal attention (Section 3.4), is a temporal-wise self attention that dynamically updates and merges archived motion features with current motion features, effectively mitigating error accumulation.

# 3.2. Archived-Clip Motion-Prior Module

**Motivation.** Existing methods typically use the past 2-4 frames to guide the denoising network for generating temporally consistent videos. However, this limited history frame is insufficient for maintaining long-term consistency, and incorporating more frames exponentially increases computational demand, making it impractical for real-world applications. To overcome these limitations, we propose an archived-clip motion prior that integrates long-term historical frames and a reference frame into the denoising UNet

via conditional frame-aligned attention, enhancing identity representation and establishing motion context.

Architecture. As illustrated in Figure 1, the archived-clip motion-prior consists of two frozen VAE encoders, two learnable patchify layers, and a frame-aligned attention mechanism. Given a reference frame  $X_{\text{ref}} \in \mathbb{R}^{b \times 1 \times c \times h \times w}$  and a archived clip  $X_{\text{arch}} \in \mathbb{R}^{b \times a \times c \times h \times w}$ , where b, c, h, w, and a represent the batch size, channels, height, width, and the number of archived frames, respectively. First, the frozen VAE encoder extracts latent features from both the reference and archived frames, resulting in  $f_x \in \mathbb{R}^{b \times 1 \times 4 \times \frac{h}{8} \times \frac{w}{8}}$  and  $f_a \in \mathbb{R}^{b \times a \times 4 \times \frac{h}{8} \times \frac{w}{8}}$ , respectively. Next, the learnable patchify layers, consisting of 2D convolutions followed by flattening operations, transform these latent features into tokens, yielding  $F_x \in \mathbb{R}^{b \times 1 \times m \times d}$  and  $F_a \in \mathbb{R}^{b \times a \times m \times d}$ , where m and d denote the token length and embedding dimension.

In the frame-aligned attention, we adopt a frame-wise computation approach to improve efficiency and adaptability for long temporal sequences. For each archived frame  $i \in [1, a]$ , the Key  $K_i$  is derived from the reference tokens  $F_x$ , while the Value  $V_i$  is derived from the tokens of the corresponding archived frame  $F_a^i$ :

$$K_i = F_x \mathbf{W}_K, \quad V_i = F_{a_i} \mathbf{W}_V, \tag{1}$$

where  $\mathbf{W}_K \in \mathbb{R}^{d \times d}$  and  $\mathbf{W}_V \in \mathbb{R}^{d \times d}$  are learnable projection matrices for the Key and Value. The attention for each frame i is then computed as:

$$Attention(Q, K_i, V_i) = Softmax\left(\frac{QK_i^{\top}}{\sqrt{d}}\right)V_i, \quad (2)$$

where  $Q \in \mathbb{R}^{n \times d}$  represents a learnable query tokens, with n denoting the number of queries. Aggregating the outputs

<sup>&</sup>lt;sup>1</sup>https://huggingface.co/runwayml/stable-diffusion-v1-5

across all frames yields the final output  $F_{ac} \in \mathbb{R}^{b \times a \times n \times d}$ , where each frame's attended tokens reflect both the static reference and dynamic temporal information.

# 3.3. Present-Clip Motion-Prior Diffusion Model

**Motivation.** Motion information is typically driven either by landmark signals from a driving video or directly by audio cues. The landmark-driven approach guides reference image movements but limits the natural diversity of head motions and expressions. In contrast, audio-driven methods rely solely on audio cues, often lacking sufficient guidance for realistic head movement. To address these limitations, we propose the present-clip motion-prior diffusion model, which first predicts motion states, including head, lip, and expressions motions, rather than directly generating TalkingFace videos.

**Architecture.** We aim to predict motion in head, lip, and expressions lip movements, conditioned on audio and image tokens. As shown in Figure 1 (right), we begin by extracting feature tokens from the audio encoder, image encoder, head encoder, lip encoder, and express encoder.

**Audio Encoder:** Audio sequence tokens are extracted from the input audio via a frozen Wav2Vec model (Baevski et al., 2020).

**Image Encoder:** Image tokens are extracted from the reference frame using a frozen CLIP (Radford et al., 2021) and are replicated along the temporal dimension to align with audio features.

**Head Encoder:** Head tokens are extracted from reference landmark video through a frozen Landmark Guider <sup>2</sup>; notably, these tokens are optional, allowing simulation of conditions with or without reference video guidance.

**Lip and Express Encoders:** Lip and expression tokens are extracted from the target video using a custom-trained encoder. Details of the lip and express encoders are provided in the supplementary material.

We then pass the audio and image tokens through a feature-wise linear modulation (FiLM) layer (Perez et al., 2018) to adaptively learn multimodal correlation tokens. These tokens, along with the timestep t, and noise-added tokens for head, lip, and expression movements, are prepended to the input sequence. This composite input is fed into an L-layer structure consisting of a multimodal causal transformer block (Peebles & Xie, 2023) and a temporal interaction transformer block (Hu, 2024), with added noise in facial motion tokens acting as the supervision. The training loss  $L_{\rm prior}$  for the present-clip motion-prior diffusion model  $\epsilon_{\theta}$  is




Figure 2. The overview of memory-efficient temporal attention. It can dynamically update and integrate historical motion features with current ones.

defined as:

$$L_{\text{prior}} = \mathbb{E}_{t, F_p, z_t, \epsilon} \left\| \epsilon - \epsilon_{\theta} \left( z_t, t, F_p \right) \right\|^2. \tag{3}$$

Without landmark guidance,  $F_p$  represent multimodal interaction tokens from audio and the reference frame.  $z_t$  represent noise-added tokens for head, lip, and expression movements at timestep t. With landmark guidance,  $F_p$  additionally include landmark tokens.  $z_t$  represent noise-added lip and expression tokens. This design allows flexible conditioning, incorporating landmark guidance when available, while effectively leveraging multimodal interactions for accurate motion state predictions.

## 3.4. Memory-Efficient Temporal Attention

**Motivation.** For long-term TalkingFace generation, current methods primarily adopt either fully or semi-autoregressive strategies: the former generates one frame per iteration, while the latter produces a fixed-length clip. However, due to GPU memory limitations, relying on a restricted frame history for extrapolation often results in error accumulation, as limited prior motion information undermines consistency over extended sequences. Therefore, we propose a memory-efficient temporal attention to dynamically update and integrate historical motion features with current ones, reducing error accumulation.

Architecture. AnimateDiff (Guo et al., 2023) demonstrates that the temporal layer in self-attention ensures smooth temporal continuity and consistency of appearance details across frames. We replace traditional self-attention with fast attention (Choromanski et al., 2020) in the temporal layer to enhance temporal continuity and manage memory efficiently, allowing the accumulation of extensive historical motion information for consistent long-sequence generation. As shown in Figure 2, let  $F_{ac}$  and  $F_{pc}$  denote the output features of the archived-clip and present-clip motion-prior modules, respectively, and let  $Z_t$  represent the noisy latent feature at time step t. These features undergo reference attention, yielding refined representations  $F_{ac}^{\rm ref}$  and  $F_{pc}^{\rm ref}$ , which capture spatial-domain motion characteristics.  $F_{ac}^{\rm ref}$  is then input into the motion memory update mechanism, which ag-

<sup>&</sup>lt;sup>2</sup>https://github.com/MooreThreads/Moore-AnimateAnyone

gregates motion across frames, producing the update feature  $M_f$ . The memory update mechanism is defined as follows,

(1) **Initialization**: At the first frame, the memory  $M_1$  is initialized with  $F_{ac}^{\text{ref}}$  since no prior motion information exists:

$$M_1 = F_{ac}^{\text{ref}}. (4)$$

(2) **Memory Update**: For each frame f, the memory  $M_f$  is updated by combining the current feature  $F_{ac}^{\text{ref}}$  with the previous memory  $M_{f-1}$  as:

$$M_f = \alpha M_{f-1} + (1 - \alpha) F_{ac}^{\text{ref}},\tag{5}$$

where  $\alpha \in [0,1]$  controls the balance between past and current frames. This fixed memory update mechanism avoids storage bottlenecks of historical information. We then concatenate  $F_{pc}^{\rm ref}$  with  $M_f$  along the temporal dimension, creating  $F_m^{\rm cat}$ , which integrates past and current motion.  $F_m^{\rm cat}$  is processed through Fast Attention along the temporal axis to capture dependencies across frames, with the lower half of the resulting feature map used as the output  $F_m$ .

#### 3.5. Training and Inference


**Training.** Our training process is divided into three stages, each with specific learning objectives. Each stage is supervised using standard MSE loss (Rombach et al., 2022).

**Stage1.** The archived-clip motion-prior is trained to enhance identity representation and establish a robust facial motion context across extended sequences. The present-clip reference attention and memory-efficient temporal attention modules remain frozen during this stage.

**Stage2.** The present-clip motion-prior diffusion model is trained to predict the motion states of facial expressions, lip, and head movements. To simulate scenarios without a driving video, we randomly drop the entire landmark clip.

**Stage3.** The full motion-priors conditional diffusion model is trained for generating stable and consistent long-term TalkingFace videos. Only the present-clip reference and memory-efficient temporal attentions are trained.

**Inference.** The present-clip motion-prior diffusion model first predicts distinct motion tokens based on the given conditions (either with or without landmark guidance). Landmarks are not used by default unless specified. Subsequently, MCDM utilizes these motion tokens, alongside a single reference image and audio input, to generate the video sequence. For the initial archived clip, we initialize it using the reference image and then progressively update the motion memory to ensure temporal consistency.



*Table 1.* **Statistics of our TalkingFace-Wild dataset.** We release a TalkingFace dataset that is well-balanced across 10 languages.

# 4. Experiments

# 4.1. Experimental Settings

**Datasets.** The HDTF dataset (Zhang et al., 2021) comprises 410 videos with over 10,000 unique speech sentences, varied head poses, and movement patterns. Following prior work (Chen et al., 2024; Tian et al., 2024; Xu et al., 2024), we split HDTF into training and testing sets with a 9:1 ratio. The CelebV-HQ dataset (Zhu et al., 2022) includes 35,666 clips (3–20 seconds each) across 15,653 identities, totaling roughly 65 hours. Both datasets present quality issues, such as audio-lip misalignment, facial occlusions, small facial regions, and low resolution. To mitigate these, we developed a custom data processing pipeline for high-quality TalkingFace data, detailed in the following subsection.

Additionally, mostly methods (Wang et al., 2024; Xu et al., 2024; Jiang et al., 2024) employ proprietary datasets for supplementary training and testing. Similarly, we sourced a variety of TalkingFace videos from YouTube using targeted keyword queries (e.g., "nationality," "interview," "dialogue") across different languages and contexts. From Table 1, we collect a new high-quality dataset, **TalkingFace-Wild**, covering 10 languages and totaling over 200 hours after processing through our data pipeline. To assess the generalization capability of models, we also constructed an open-set test collection of 20 diverse portrait images and 20 audio clips.

Data Processing. First, we detect scene transitions in raw videos using PySceneDetect<sup>3</sup> and trim each clip to a maximum duration of 30 seconds. Next, we apply face detection (Guo et al., 2021) to exclude videos lacking complete faces or containing multiple faces, using the bounding boxes to extract talking head regions. Third, an image quality assessment model (Su et al., 2020) filters out low-quality and low-resolution clips. Fourth, SyncNet (Prajwal et al., 2020) assesses audio-lip synchronization, discarding clips with misaligned audio. Finally, we manually inspect a subset to verify audio-lip synchronization and overall video quality, ensuring precise filtering. In addition, to ensure a fair comparison, we report results trained independently on each of the previously mentioned datasets.

<sup>&</sup>lt;sup>3</sup>https://github.com/Breakthrough/PySceneDetect

Method	HDTF				CelebV-HQ							
	FID↓	FVD↓	Sync-C↑	Sync-D↓	SSIM↑	E-FID↓	FID↓	FVD↓	Sync-C↑	Sync-D↓	SSIM↑	<b>E-FID</b> ↓
Audio2Head	76.08	1417.65	3.16	17.62	0.572	3.81	127.30	1882.64	1.96	17.36	0.391	8.42
V-Express	57.14	1152.29	5.05	11.68	0.706	1.83	98.07	1465.26	3.71	13.41	0.514	5.18
AniPortrait	54.81	1072.63	5.40	11.39	0.727	1.95	94.25	1260.74	3.98	12.88	0.536	4.91
SadTalker	52.77	956.24	5.73	10.65	0.736	1.87	88.22	1055.49	4.05	11.20	0.565	4.66
Hallo	37.29	616.04	6.33	8.64	0.774	1.67	72.46	907.60	6.48	8.61	0.620	2.93
EchoMimic	31.44	595.17	6.96	8.59	0.782	1.64	71.47	893.28	6.70	8.45	0.637	2.81
MegActor- $\Sigma$	31.37	586.10	6.87	8.55	0.778	1.62	70.82	875.21	6.77	8.32	0.634	2.74
MCDM (Ours)	26.45	543.28	7.49	8.04	0.824	1.51	67.29	784.53	7.25	7.84	0.662	2.31

Table 2. Quantitative comparisons on HDTF and CelebV-HQ. MCDM achieves the top results across all metrics, with best in bold.

**Metrics.** We utilize a comprehensive set of metrics to assess the quality of generated videos and audio-lip synchronization. Fréchet Inception Distance (FID) (Heusel et al., 2017) evaluates individual frame quality by comparing feature distributions from a pre-trained model. Fréchet Video Distance (FVD) (Unterthiner et al., 2019) quantifies the distributional distance between real and generated videos, providing an overall assessment of video fidelity. Sync-C and Sync-D (Chung & Zisserman, 2017) evaluate lip synchronization from content and dynamic perspectives, with higher Sync-C and lower Sync-D scores indicating superior alignment with audio. Structural Similarity Index (SSIM) (Wang et al., 2004) measures structural consistency between ground truth and generated videos, while E-FID (Deng et al., 2019) provides a refined image fidelity evaluation based on Inception network features.

Implementations. The experiments are conducted on a computing platform equipped with 8 NVIDIA V100 GPUs. Training is performed in three stages, with each stage consisting of 30,000 iterations and a batch size of 4. Video data is processed at a resolution of  $512 \times 512$ . The learning rate is fixed at  $1 \times 10^{-5}$  across all stages, and the AdamW optimizer is employed to stabilize training. Each training clip comprised 16 video frames. In the archived-clip motion-prior module, we set  $\alpha=16$ , m=256, and n=16. In the present-clip motion-prior diffusion model, the number of layers L is set to 8, and the weighting factor  $\alpha$  in Eq. 5 is configured to 0.1 to balance the influence of prior motion information. This setup is chosen to optimize long-term identity preservation and enhance motion consistency within generated TalkingFace videos.

## 4.2. Main Results

We compare our method with several SOTA methods, including Audio2Head (Wang et al., 2021a), V-Express (Wang et al., 2024), AniPortrait (Wei et al., 2024), SadTalker (Zhang et al., 2023), Hallo (Xu et al., 2024), EchoMimic (Chen et al., 2024), and MegActor- $\Sigma$  (Yang et al., 2024), from quantitative, qualitative, and user study. Unless otherwise specified, all methods do not use landmarks to ensure a fair comparison.

Method	FID↓	$\text{FVD}\!\!\downarrow$	Sync-C↑	Sync-D↓	SSIM↑	<b>E-FID</b> ↓
Audio2Head	87.21	1836.25	2.32	13.92	0.613	3.12
V-Express	62.18	1324.57	5.45	9.04	0.674	2.81
AniPortrait	56.11	954.91	6.37	8.29	0.706	2.60
SadTalker	52.77	847.20	6.94	7.92	0.724	2.49
Hallo	51.35	792.38	6.85	7.65	0.728	2.35
EchoMimic	49.20	751.44	7.06	7.18	0.737	2.31
MegActor- $\Sigma$	48.57	724.40	7.22	7.14	0.745	2.29
MCDM (Ours)	42.08	656.71	7.84	6.69	0.779	1.97

Table 3. Quantitative comparisons on TalkingFace-Wild. MCDM achieves a significant advantage over other methods.

Quantitative Evaluation. Table 2 presents a quantitative comparison on the HDTF (Zhang et al., 2021) and CelebV-HQ (Zhu et al., 2022), illustrating the overall superior performance of diffusion-based methods compared to GAN-based methods. Our proposed MCDM achieves the best scores across all metrics, outperforming existing diffusion-based approaches. Specifically, MCDM achieves superior lipsync accuracy, reflected in higher Sync-C and lower Sync-D scores, outperforming methods like EchoMimic (Chen et al., 2024) and MegActor- $\Sigma$  (Yang et al., 2024), which show notable declines in synchronization quality. MCDM's outstanding SSIM and E-FID scores also highlight its ability to generate visually appealing, temporally consistent content with precise lip synchronization.

Table 3 summarizes the quantitative performance on the proposed TalkingFace-Wild dataset. Consistent with results on HDTF (Zhang et al., 2021) and CelebV-HQ (Zhu et al., 2022), MCDM surpasses all competing SOTA methods across evaluation metrics, demonstrating marked improvements in visual quality and temporal consistency. Achieving the best FID, FVD, and an E-FID of 1.97, MCDM shows strong capability in generating high-fidelity TalkingFace videos under diverse conditions, effectively maintaining temporal coherence across audio, expressions, and lip synchronization.

**Qualitative Evaluation.** Figure 3 provides a qualitative comparison of our method against other SOTA approaches. Compared to V-Express (Wang et al., 2024) and EchoMimic (Chen et al., 2024), our approach shows superior head and lip synchronization, benefiting from the audiovisual consistency introduced by motion priors. Addition-

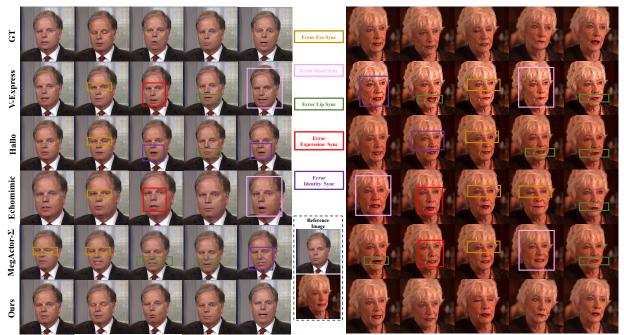


Figure 3. Qualitative comparison on HDTF and CelebV-HQ. Our method achieves the best generation results, particularly in identity consistency and motion detail.

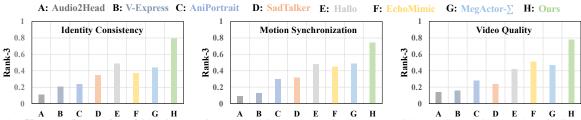


Figure 4. User study results of identity consistency, motion synchronization, and video quality. Higher values indicate better performance.

ally, unlike Hallo (Xu et al., 2024) and MegActor- $\Sigma$  (Yang et al., 2024), Our method accurately captures subtle facial actions, including blinks and expression nuances through the archived-clip, while better preserving identity consistency. Overall, our approach demonstrates the best visual results.

**User Study.** The quantitative and qualitative comparisons underscore the substantial advantages of our proposed MCDM in generating consistent TalkingFace videos. To further evaluate video quality, we conducte a user study, focusing on identity consistency, motion synchronization, and overall video quality. We randomly selected 10 cases, shuffled the generated videos from each method, and recruited 20 participants (10 male, 10 female) to provide rank-3 preferences. From Figure 4, our method consistently achieved the highest scores across all metrics in the user preference evaluation. This user study highlights the significant advantage of our approach in user-centric TalkingFace generation.

Method	FID↓	FVD↓	Sync-C↑	Sync-D↓	SSIM↑	<b>E-FID</b> ↓
w/o F <sub>a</sub>	46.25	708.93	7.37	7.05	0.749	2.25
w/o $F_{pc}$	45.63	684.20	7.49	6.97	0.758	2.13
w/o $MTA$	44.27	671.05	7.62	6.84	0.771	2.04
Ours	42.08	656.71	7.84	6.69	0.779	1.97

Table 4. Ablation results on the TalkingFace-Wild dataset.

# 4.3. Ablation Results

We conduct an ablation study to assess the impact of each component in our method. Table 4 shows the results: w/o  $F_a$  omits historical frame information, w/o  $F_{pc}$  adds an audio attention module for audio feature input, and w/o MTA applies a standard temporal attention module.

**Archived-Clip Motion-Prior.** The results in Table 4 show that removing historical frame information ( $w/o F_a$ ) significantly degrades performance across all metrics, underscoring the importance of the archived-clip motion-prior. To further assess the effect of  $F_a$  on long-term generation, we visualized frames 30, 300, 1800, 3600, and 7200 with corresponding SSIM scores, as shown in Figure 5. Fig-




Figure 5. Visualization results and SSIM scores during long-term generation. We find that  $w/F_a$  offers a distinct advantage in maintaining both identity and contextual consistency.




Figure 6. Lip heatmap and expression cluster. We find that w/ $F_p$  effectively tracks the lip region and conveys expressions.

ure 5(a) indicates that without the archived-clip (w/o  $F_a$ ), identity consistency worsens with frame progression, resulting in visible artifacts and inconsistencies in head, mouth, and expression. In Figure 5(b), the SSIM scores highlight error accumulation increases with frame count, showing a rapid decline in (w/o  $F_a$ ), while (w/  $F_a$ ) remains stable at a higher value. These findings validate the effectiveness of the archived-clip motion-prior in preserving both identity and temporal coherence over extended sequences.

**Present-Clip Motion-Prior.** Similarly, excluding the present-clip motion-prior and injecting audio information directly via audio attention ( $\text{w/o}\ F_{pc}$ ) leads to a drop in performance across all metrics. This decline highlights the effectiveness of the present-clip motion-prior in leveraging multimodal causality and temporal interactions to decouple and predict motion states, including expressions, lip movement, and head motion (see Table 4). To further validate this decoupling capability, we visualize heatmaps of the predicted lip tokens, as shown in Figure 6(a), where the present-clip motion-prior accurately localizes and tracks lip motion. For expression decoupling, t-SNE (Van der Maaten & Hinton, 2008) visualization of expression tokens reveals




Figure 7. SSIM results for different  $\alpha$  values. Our method performs comparably well when the  $\alpha$  value is smaller than 0.9.

Method	FID↓ FVD↓ S	Sync-C↑	Sync-D	. SSIM↑	E-FID↓
B1	42.49 668.24	7.69	6.78	0.771	2.02
B2	47.12 721.17	7.30	6.84	0.732	2.29
Ours	42.08 656.71	7.84	6.69	0.779	1.97

Table 5. More results of variant MCDM.

tighter clustering within each of the eight distinct emotion categories when using the present-clip motion-prior, indicating improved separation of emotional content from audio input.

Memory-Efficient Temporal Attention. Following the standard approach (Hu, 2024), we replace the proposed memory-efficient temporal attention with conventional temporal attention by directly summing  $F_{ac}^{ref}$  and  $F_{pc}^{ref}$ . As shown in Table 4, this modification significantly degrades performance across all metrics. This drop in quality is primarily due to the absence of an update mechanism, which introduces gaps between the archived clip and the present clip, compromising video smoothness. Next, we analyzed the effect of different  $\alpha$  values in Eq. 5, which control the update rate, on the model's SSIM performance, as shown in Figure 7. We observed that as  $\alpha$  increases, SSIM gradually declines. When  $\alpha$  is below 0.9, our approach significantly outperforms the w/o WTA configuration. However, at  $\alpha = 0.9$ , the performance is weaker than w/o WTA, due to the excessive accumulation of historical frame information and a reduced proportion of the present clip. Consequently, we set  $\alpha = 0.1$  as the default value in this paper.

More Results. Table 5 evaluates different design variants. In B1, Q-Former (Li et al., 2023) replaces frame-aligned attention, while in B2, Reference UNet (Hu, 2024) substitutes VAE with Reference UNet, omitting archived-clip information. Results show that frame-aligned attention outperforms Q-Former by effectively capturing temporal context and integrating long-term dependencies. Additionally, using a frozen VAE with a trainable patchify layer proves to be an efficient alternative to the conventional Reference UNet.

## 5. Conclusion

We presented the Motion-priors Conditional Diffusion Model (MCDM) to address the challenges of long-term TalkingFace generation by achieving robust identity consistency and motion continuity. MCDM integrates three

key innovations: an archived-clip motion-prior to enhance identity representation, a present-clip motion-prior diffusion model for accurate motion prediction, and a memory-efficient temporal attention to mitigate error accumulation over extended sequences. Additionally, we introduced the **TalkingFace-Wild** dataset, offering over 200 hours of multilingual video data across diverse scenarios. Experimental results demonstrate the effectiveness of MCDM, setting new benchmarks in long-term TalkingFace generation.

# **Impact Statement**

This paper presents the MCDM model, designed to enhance identity and temporal consistency in long-term TalkingFace generation. While MCDM contributes to the advancement of generative modeling, we recognize the potential ethical concerns, including the risks of misuse for creating deceptive content or spreading misinformation. We emphasize the importance of transparency in AI development and support the integration of detection frameworks to mitigate these risks. In alignment with ongoing efforts in responsible AI, we aim to ensure that the benefits of our work are balanced with its ethical implications, promoting safe and constructive applications in society.

## References

- Baevski, A., Zhou, Y., Mohamed, A., and Auli, M. wav2vec 2.0: A framework for self-supervised learning of speech representations. *Advances in neural information process*ing systems, 33:12449–12460, 2020.
- Chan, E. R., Lin, C. Z., Chan, M. A., Nagano, K., Pan, B., De Mello, S., Gallo, O., Guibas, L. J., Tremblay, J., Khamis, S., et al. Efficient geometry-aware 3d generative adversarial networks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 16123–16133, 2022.
- Chen, Z., Cao, J., Chen, Z., Li, Y., and Ma, C. Echomimic: Lifelike audio-driven portrait animations through editable landmark conditions. *arXiv preprint arXiv:2407.08136*, 2024.
- Choromanski, K., Likhosherstov, V., Dohan, D., Song, X., Gane, A., Sarlos, T., Hawkins, P., Davis, J., Mohiuddin, A., Kaiser, L., et al. Rethinking attention with performers. arXiv preprint arXiv:2009.14794, 2020.
- Chung, J. S. and Zisserman, A. Out of time: automated lip sync in the wild. In *Computer Vision–ACCV 2016 Workshops: ACCV 2016 International Workshops, Taipei, Taiwan, November 20-24, 2016, Revised Selected Papers, Part II 13*, pp. 251–263. Springer, 2017.
- Deng, Y., Yang, J., Xu, S., Chen, D., Jia, Y., and Tong, X.

- Accurate 3d face reconstruction with weakly-supervised learning: From single image to image set. In *Proceedings* of the IEEE/CVF conference on computer vision and pattern recognition workshops, pp. 0–0, 2019.
- Goodfellow, I., Pouget-Abadie, J., Mirza, M., Xu, B., Warde-Farley, D., Ozair, S., Courville, A., and Bengio, Y. Generative adversarial nets. Advances in neural information processing systems, 27, 2014.
- Guo, J., Deng, J., Lattas, A., and Zafeiriou, S. Sample and computation redistribution for efficient face detection. *arXiv* preprint arXiv:2105.04714, 2021.
- Guo, J., Zhang, D., Liu, X., Zhong, Z., Zhang, Y., Wan, P., and Zhang, D. Liveportrait: Efficient portrait animation with stitching and retargeting control. *arXiv preprint arXiv:2407.03168*, 2024.
- Guo, Y., Yang, C., Rao, A., Liang, Z., Wang, Y., Qiao, Y., Agrawala, M., Lin, D., and Dai, B. Animatediff: Animate your personalized text-to-image diffusion models without specific tuning. arXiv preprint arXiv:2307.04725, 2023.
- Heusel, M., Ramsauer, H., Unterthiner, T., Nessler, B., and Hochreiter, S. Gans trained by a two time-scale update rule converge to a local nash equilibrium. *Advances in neural information processing systems*, 30, 2017.
- Hong, F.-T., Zhang, L., Shen, L., and Xu, D. Depth-aware generative adversarial network for talking head video generation. In *Proceedings of the IEEE/CVF conference* on computer vision and pattern recognition, pp. 3397– 3406, 2022a.
- Hong, Y., Peng, B., Xiao, H., Liu, L., and Zhang, J. Headnerf: A real-time nerf-based parametric head model. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 20374–20384, 2022b.
- Hu, L. Animate anyone: Consistent and controllable imageto-video synthesis for character animation. In *Proceed*ings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 8153–8163, 2024.
- Ji, X., Zhou, H., Wang, K., Wu, W., Loy, C. C., Cao, X., and Xu, F. Audio-driven emotional video portraits. In Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp. 14080–14089, 2021.
- Jiang, J., Liang, C., Yang, J., Lin, G., Zhong, T., and Zheng, Y. Loopy: Taming audio-driven portrait avatar with long-term motion dependency. arXiv preprint arXiv:2409.02634, 2024.
- Kim, H., Garrido, P., Tewari, A., Xu, W., Thies, J., Niessner, M., Pérez, P., Richardt, C., Zollhöfer, M., and Theobalt, C. Deep video portraits. *ACM transactions on graphics* (*TOG*), 37(4):1–14, 2018.

- Langley, P. Crafting papers on machine learning. In Langley, P. (ed.), Proceedings of the 17th International Conference on Machine Learning (ICML 2000), pp. 1207–1216, Stanford, CA, 2000. Morgan Kaufmann.
- Li, J., Li, D., Savarese, S., and Hoi, S. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, pp. 19730–19742. PMLR, 2023.
- Liang, B., Pan, Y., Guo, Z., Zhou, H., Hong, Z., Han, X., Han, J., Liu, J., Ding, E., and Wang, J. Expressive talking head generation with granular audio-visual control. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 3387–3396, 2022.
- Ma, Y., Liu, H., Wang, H., Pan, H., He, Y., Yuan, J., Zeng, A., Cai, C., Shum, H.-Y., Liu, W., et al. Follow-your-emoji: Fine-controllable and expressive freestyle portrait animation. *arXiv preprint arXiv:2406.01900*, 2024.
- Mirza, M. and Osindero, S. Conditional generative adversarial nets. *arXiv preprint arXiv:1411.1784*, 2014.
- Peebles, W. and Xie, S. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 4195–4205, 2023.
- Peng, Z., Hu, W., Shi, Y., Zhu, X., Zhang, X., Zhao, H., He, J., Liu, H., and Fan, Z. Synctalk: The devil is in the synchronization for talking head synthesis. In *Proceedings* of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 666–676, 2024.
- Perez, E., Strub, F., De Vries, H., Dumoulin, V., and Courville, A. Film: Visual reasoning with a general conditioning layer. In *Proceedings of the AAAI conference on artificial intelligence*, volume 32, 2018.
- Prajwal, K., Mukhopadhyay, R., Namboodiri, V. P., and Jawahar, C. A lip sync expert is all you need for speech to lip generation in the wild. In *Proceedings of the 28th ACM international conference on multimedia*, pp. 484–492, 2020.
- Pumarola, A., Agudo, A., Martinez, A. M., Sanfeliu, A., and Moreno-Noguer, F. Ganimation: Anatomically-aware facial animation from a single image. In *Proceedings of the European conference on computer vision (ECCV)*, pp. 818–833, 2018.
- Radford, A., Kim, J. W., Hallacy, C., Ramesh, A., Goh, G., Agarwal, S., Sastry, G., Askell, A., Mishkin, P., Clark, J., et al. Learning transferable visual models from natural language supervision. In *International conference on* machine learning, pp. 8748–8763. PMLR, 2021.

- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., and Ommer, B. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 10684–10695, 2022.
- Stypułkowski, M., Vougioukas, K., He, S., Zikeba, M., Petridis, S., and Pantic, M. Diffused heads: Diffusion models beat gans on talking-face generation. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pp. 5091–5100, 2024.
- Su, S., Yan, Q., Zhu, Y., Zhang, C., Ge, X., Sun, J., and Zhang, Y. Blindly assess image quality in the wild guided by a self-adaptive hyper network. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 3667–3676, 2020.
- Sun, X., Zhang, L., Zhu, H., Zhang, P., Zhang, B., Ji, X., Zhou, K., Gao, D., Bo, L., and Cao, X. Vividtalk: One-shot audio-driven talking head generation based on 3d hybrid prior. *arXiv* preprint arXiv:2312.01841, 2023.
- Tan, S., Ji, B., and Pan, Y. Emmn: Emotional motion memory network for audio-driven emotional talking face generation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 22146–22156, 2023.
- Tan, S., Ji, B., and Pan, Y. Flowvqtalker: High-quality emotional talking face generation through normalizing flow and quantization. In *Proceedings of the IEEE/CVF* Conference on Computer Vision and Pattern Recognition, pp. 26317–26327, 2024.
- Tian, L., Wang, Q., Zhang, B., and Bo, L. Emo: Emote portrait alive-generating expressive portrait videos with audio2video diffusion model under weak conditions. *arXiv* preprint arXiv:2402.17485, 2024.
- Unterthiner, T., van Steenkiste, S., Kurach, K., Marinier, R., Michalski, M., and Gelly, S. Fvd: A new metric for video generation. 2019.
- Van der Maaten, L. and Hinton, G. Visualizing data using t-sne. *Journal of machine learning research*, 9(11), 2008.
- Vougioukas, K., Petridis, S., and Pantic, M. Realistic speechdriven facial animation with gans. *International Journal* of Computer Vision, 128(5):1398–1413, 2020.
- Wang, C., Tian, K., Zhang, J., Guan, Y., Luo, F., Shen, F., Jiang, Z., Gu, Q., Han, X., and Yang, W. V-express: Conditional dropout for progressive training of portrait video generation. *arXiv preprint arXiv:2406.02511*, 2024.

- Wang, S., Li, L., Ding, Y., Fan, C., and Yu, X. Audio2head: Audio-driven one-shot talking-head generation with natural head motion. *arXiv preprint arXiv:2107.09293*, 2021a.
- Wang, T.-C., Mallya, A., and Liu, M.-Y. One-shot free-view neural talking-head synthesis for video conferencing. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 10039–10049, 2021b.
- Wang, Z., Bovik, A. C., Sheikh, H. R., and Simoncelli, E. P. Image quality assessment: from error visibility to structural similarity. *IEEE transactions on image processing*, 13(4):600–612, 2004.
- Wei, H., Yang, Z., and Wang, Z. Aniportrait: Audio-driven synthesis of photorealistic portrait animation. *arXiv* preprint arXiv:2403.17694, 2024.
- Xu, M., Li, H., Su, Q., Shang, H., Zhang, L., Liu, C., Wang, J., Van Gool, L., Yao, Y., and Zhu, S. Hallo: Hierarchical audio-driven visual synthesis for portrait image animation. *arXiv* preprint arXiv:2406.08801, 2024.
- Yang, S., Li, H., Wu, J., Jing, M., Li, L., Ji, R., Liang, J., Fan, H., and Wang, J. Megactor-sigma: Unlocking flexible mixed-modal control in portrait animation with diffusion transformer. *arXiv preprint arXiv:2408.14975*, 2024.
- Yang, Z., Zeng, A., Yuan, C., and Li, Y. Effective whole-body pose estimation with two-stages distillation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 4210–4220, 2023.
- Ye, Z., Jiang, Z., Ren, Y., Liu, J., He, J., and Zhao, Z. Geneface: Generalized and high-fidelity audio-driven 3d talking face synthesis. *arXiv preprint arXiv:2301.13430*, 2023.
- Ye, Z., Zhong, T., Ren, Y., Yang, J., Li, W., Huang, J., Jiang, Z., He, J., Huang, R., Liu, J., et al. Real3d-portrait: Oneshot realistic 3d talking portrait synthesis. arXiv preprint arXiv:2401.08503, 2024.
- Zhang, W., Cun, X., Wang, X., Zhang, Y., Shen, X., Guo, Y., Shan, Y., and Wang, F. Sadtalker: Learning realistic 3d motion coefficients for stylized audio-driven single image talking face animation. In *Proceedings of the IEEE/CVF* Conference on Computer Vision and Pattern Recognition, pp. 8652–8661, 2023.
- Zhang, Z., Li, L., Ding, Y., and Fan, C. Flow-guided one-shot talking face generation with a high-resolution audio-visual dataset. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 3661–3670, 2021.

- Zheng, L., Zhang, Y., Guo, H. A., Pan, J., Tan, Z., Lu, J., Tang, C., An, B., and YAN, S. MEMO: Memory-guided and emotion-aware talking video generation, 2024. URL https://openreview.net/forum?id=CpgWRFqxhD.
- Zhou, H., Sun, Y., Wu, W., Loy, C. C., Wang, X., and Liu, Z. Pose-controllable talking face generation by implicitly modularized audio-visual representation. In *Proceedings* of the *IEEE/CVF* conference on computer vision and pattern recognition, pp. 4176–4186, 2021.
- Zhou, Y., Han, X., Shechtman, E., Echevarria, J., Kalogerakis, E., and Li, D. Makelttalk: speaker-aware talkinghead animation. *ACM Transactions On Graphics (TOG)*, 39(6):1–15, 2020.
- Zhu, H., Wu, W., Zhu, W., Jiang, L., Tang, S., Zhang, L., Liu, Z., and Loy, C. C. Celebv-hq: A large-scale video facial attributes dataset. In *European conference on computer vision*, pp. 650–667. Springer, 2022.