Efficient Multitask Learning in Small Language Models Through Upside-Down Reinforcement Learning

Yu-Chen Lin^{*1,2}, Sanat Sharma^{†1,3}, Hari Manikandan¹, Jayant Kumar¹, Tracy Holloway King¹, and Jing Zheng¹

¹Adobe ²Carnegie Mellon University ³Meta

Abstract

In this work, we demonstrate that small language models (SLMs), specifically a 100M parameter GPT-2 model (Radford et al., 2019), can achieve competitive performance in multitask prompt generation tasks while requiring only a fraction of the computational resources needed by large language models (LLMs). Through a novel combination of upside-down reinforcement learning and synthetic data distillation from a powerful LLM, Llama-3 (Dubey et al., 2024), we train an SLM that achieves relevance scores within 5% of state-of-the-art models, including Llama-3, Qwen2, and Mistral, despite being up to 80 times smaller, making it highly suitable for resource-constrained and real-time applications. This study highlights the potential of SLMs as efficient multitask learners in multimodal settings, providing a promising alternative to LLMs for scalable, low-latency deployments.

1 Introduction

Large language models have revolutionized various applications of natural language processing, yet they come with substantial computational and memory costs, especially at inference time. These limitations hinder their deployment in highfrequency, real-time applications where efficiency is critical. We propose a small language model (SLM) framework that can serve as an efficient and effective multitask learner for multimodal prompt generation tasks, utilizing upside-down reinforcement learning to control the generation.

In Figure 1, we demonstrate our overall pipeline. We start by generating synthetic data from a large language model (LLM) using prompt engineering and few-shot examples. This synthetic data undergoes upside-down reinforcement learning (UDRL) (Schmidhuber, 2020; Srivastava et al., 2021), enabling the training of a specialized SLM that is optimized for low latency, memory efficiency, targeted multitasking, and real-time multimodal generation tasks.

Our approach is built on three core contributions:

- SLMs as Multitask Learners: We demonstrate that SLMs, trained with targeted synthetic data, can achieve multi-task capabilities often associated with larger models.
- Upside-down reinforcement learning for SLM Training: By using upside-down reinforcement learning, we optimize our SLM for various prompt generation tasks, achieving competitive relevance and diversity.
- Synthetic Dataset Distillation: Leveraging a large language model (Llama-3), we curate a high-quality training dataset for the SLM, enabling it to learn effectively from minimal resources.

Our experimental results show that the SLM can achieve comparable performance to an LLM with an 80-fold reduction in model size. This makes the SLM framework ideal for use in real-world, resource-constrained settings where both performance and efficiency are critical.

We highlight that this framework can be integrated with any commercial text-to-image generation system (e.g., Adobe Firefly) to provide multimodal prompt generation, making the SLM framework highly adaptable and efficient for real-world applications.

2 Related Work

2.1 LLM Knowledge Distillation

LLM knowledge distillation has been widely explored, particularly for real-time, high frequency applications. Proprietary models might not meet

^{*}Work done during an internship at Adobe.

[†]Work done as a full-time employee at Adobe.

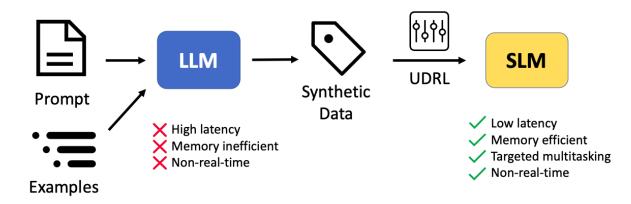


Figure 1: Our framework for developing a small language model (SLM) as an efficient multitask learner.

with time constraints and often lack flexibility in adapting to specific tasks. Supervised fine-tuning (SFT) is a common approach to distill knowledge from a large model to a smaller one. For example, Taori et al. (2023); Chiang et al. (2023) distill knowledge from GPT-3.5 to Llama, achieving competitive performance to the teacher model. In our work, we apply SFT to a smaller GPT-2 model, targeting high-frequency, low latency real-world applications.

Researchers have also explored distilling LLM knowledge for specific NLP tasks. Similar to our focus on natural language generation, Xu et al. (2023b,a); Ramnath et al. (2024); Agarwal et al. (2024) apply knowledge distillation across various tasks, such as summarization, question-answering, and machine translation. In this work, we concentrate on prompt generation tasks, a critical application that is highly relevant to industry challenges.

2.2 Reinforcement Learning

A key challenge in applying LLMs to real-world scenarios is aligning them with practical use cases, which often involve human preferences and satisfaction. This alignment is commonly addressed through reinforcement learning (RL), where models are optimized to maximize a desired reward. For example, Bai et al. (2022); Cui et al. (2024); Lee et al. (2024); Kim et al. (2023) train reward models using human or AI feedback and apply RL algorithms like PPO (Schulman et al., 2017) for reward alignment. In addition, Rafailov et al. (2024) directly optimizes the reward through ranking-based optimization, which does not need to train a separate reward model. In our work, we control the generation process using upside-down reinforcement learning (UDRL) (Schmidhuber, 2020; Srivastava et al., 2021), a technique that, to the best of our knowledge, has not been widely explored in language model training. We are one of the few applying this method to real-world controlled generation tasks.

3 Methodology

Our task involves generating prompts for generative models based on multimodal inputs. The process begins with detecting user intents using an in-house model. Once the intents are identified, we aim to generate prompts accordingly. Rather than relying solely on a large language model (LLM) or a multimodal LLM, we adopt a more efficient approach.

Specifically, our methodology focuses on training a small language model (SLM) for prompt generation with intents that emphasizes high efficiency and multitask capabilities. We achieve this by leveraging synthetic data distillation from a large language model (LLM) combined with upside-down reinforcement learning.

3.1 Synthetic Dataset Distillation

To enable the SLM to capture complex task knowledge from a larger model, we first create a synthetic dataset using Llama-3. This involves generating high-quality, task-specific data that allows the SLM to learn from the representations of LLM effectively. We utilize vLLM (Kwon et al., 2023) to parallelize our dataset generation process.

3.1.1 Dataset Curation Process

1. **Intent and Prompt Pair Generation:** We curated a dataset of 52 million intent-prompt pairs by prompting the LLM with various intent descriptions and collecting its responses.

Intents / Task	Generated Prompt	Training Data Format				
Topic: birthday	Whimsical birthday cele-	< 19 > < intent > Topic: birthday,				
Scene object: balloon	bration featuring giant bal-	Scene object: balloon < IP > whimsical				
Task: prompt for text-	loons in fun shapes and	birthday celebration featuring giant				
to-image generation	sizes, tied to a birthday	balloons in fun shapes and sizes, tied				
	child's arm or wrist.	to a birthday child's arm or wrist.				
Topic: birthday party	Create a whimsical birth-	< 14 > < intent > Topic: birthday party,				
Design type: invitation	day party invitation tem-	Design Type: invitation < TP > create				
Task: prompt for text-	plate with balloons, con-	a whimsical birthday party invitation				
to-template generation	fetti, and a playful theme.	template with balloons, confetti, and a				
		playful theme.				

Table 1: Examples of intents and generated prompts for image and template generation, including format specifications. Having task, length, and intent tags helps guide the generations.

Each sample consists of an intent description paired with a generated prompt, tailored to a range of real-world tasks. For example, intents such as "birthday celebration," "holiday sale," or "product launch" were used to generate prompts that align with these contexts.

- 2. Structured Prompting for Targeted Tasks: To ensure diversity and relevance in generated prompts, we used structured prompting with few-shot examples and task specifications. Each prompt to Llama-3 included highlevel task descriptions and few-shot examples to encourage contextually appropriate and diverse outputs. Different prompting strategies are used to address the specific requirements of different tasks. By specifying factors like tone, style, and context, we created a dataset that is comprehensive and task-aligned.
- 3. Labeling and Intent Selection: The intent descriptions were sourced from in-house creative knowledge graph and augmented with diverse asset metadata from internal images and templates. This process provided a broad set of intents that accurately represent realworld use cases. Each intent was paired with multiple generated prompts, thus ensuring a rich dataset of prompt variations for each concept.

This curated dataset of intent-prompt pairs serves as a distilled form of knowledge from Llama-3, allowing the SLM to learn diverse language patterns and contextual nuances without directly training on a massive language model. Examples of intents to generated prompts are shown in Table 1.

3.2 Upside-Down Reinforcement Learning for SLM Optimization

To optimize the SLM's generation quality and control specific attributes like length and relevance, we utilize upside-down reinforcement learning (UDRL) (Schmidhuber, 2020; Srivastava et al., 2021). This approach allows the model to learn specific objectives based on desired outcomes rather than traditional reward structures.

3.2.1 Reward-Based Prompt Generation

Upside-down reinforcement learning frames the prompt generation task as an optimization problem where the SLM aims to achieve target specifications for each generated output. This process is as follows:

- **Controlled-Length Generation:** The SLM is trained to produce prompts within a desired length range (e.g., 10 to 35 words). Tokens indicating target lengths are incorporated into the input, guiding the model towards generating responses that match the specified length with a mean squared error consistently under two words. More evaluations are in Section 4.
- Modality-Agnostic Prompting: We trained the SLM to handle both text-to-image (T2I) and text-to-template (T2T) prompts within the same framework. This was achieved by adding modality tokens to each training instance, allowing the model to distinguish between generation tasks and tailor its output accordingly.
- **Contextual Relevance and Specificity:** By assigning relevance scores to generated prompts based on a predefined metric (e.g.,

alignment with target intent or clarity), the model learns to prioritize contextually relevant and specific responses. During training, prompts that meet these objectives are positively reinforced, improving the SLM's ability to generate accurate and contextually appropriate prompts. While we do not implement this aspect in our current pipeline, it could be valuable for other applications.

3.3 Model Architecture and Key Capabilities

Our SLM is based on nanoGPT¹, a compact variant of GPT-2, with 104 million parameters, configured with 12 layers, 12 attention heads, and an embedding dimension of 768. The model architecture and training setup are designed to maximize efficiency and multitask performance.

3.3.1 Model Specifications

- **Parameter Efficiency:** The SLM contains approximately 1/80th the parameters of Llama-3 8b and similar state-of-the-art LLMs, making it computationally efficient and suitable for deployment on standard hardware.
- Inference Speed: Our SLM achieves a processing speed of up to 338 tokens per second on a single A10G GPU (non-batched, non-quantized, or accelerated), making it suitable for real-time applications. This performance is especially advantageous in resourceconstrained environments where inference latency is a critical factor.
- Multitask Learning Capabilities: The SLM is trained to handle both T2I and T2T prompts, making it a versatile tool for multimodal applications. Through the integration of taskspecific tokens, the model can generate contextually accurate prompts tailored to the input task, whether it's for text-to-image generation or template-based design.

3.3.2 Training with UDRL

The training data are formatted as <|# words of the prompt|> <|intent|> INTENT <|prompt for T2I (IP) or T2T (TP)|> PROMPT. As outlined in Section 3.2, we combine the word count and modality tokens to create a single training instance; refer to Table 1 for examples.

We utilize a vocabulary set with legal approval, ensuring it excludes any offensive, discriminatory, or biased language. We then train a BPE tokenizer with 25,600 tokens from scratch using our curated dataset. Subsequently, we train the nanoGPT model using next-token prediction, employing four A10G GPUs over 10 days, completing approximately 300,000 iterations with a batch size of 128 and a learning rate of 6e-4.

By combining this training approach with upsidedown reinforcement learning, we ensure that our SLM can effectively manage length control and multitasking. During inference, we can easily control output length by specifying a length token and define the desired task using the modality token. Please refer to Section 4 for more evaluations of these abilities.

4 Experiments and Evaluations

We focus on both qualitative and quantitative evaluations to judge the quality of our model.

4.1 Quantitative Evaluation

The quantitative evaluation is divided into two primary areas: relevance evaluation, which assesses how well the generated prompts align with the specified intents and modality requirements, and task adherence evaluation, which measures the SLM's accuracy in meeting specific prompt length requirements.

4.1.1 Relevance Evaluation

To evaluate relevance, we conducted experiments to measure how accurately the SLM-generated prompts aligned with the specified intents and task requirements. Relevance was assessed using an automatic method with LLM-as-a-judge, where GPT-40 (OpenAI et al., 2024) served as the evaluator. Each generated prompt was rated on a scale from 1 to 10, where higher scores indicate stronger alignment with the target intent. We provided several examples and criterion to the LLM judge prior to the evaluation. Some of these include

- Correctness does the prompt contain grammatical or semantic errors.
- Clarity is the prompt clear to understand, is the grammar structure sound.
- Completeness does the prompt utilize all of the context (intent) provided.
- Usefulness is the prompt generated useful for the task provided.

¹https://github.com/karpathy/nanoGPT

Model	Few-Shot		Zero-Shot		# Params
WIOUCI	T2I	T2T	T2I	T2T	π 1 at at π
SLM (Ours)	N/A	N/A	7.94	7.79	104M
Llama-3 8B (Dubey et al., 2024)		8.01	7.93	7.79	8.0B
Mistral 7B (Jiang et al., 2023)		8.31	7.04	7.55	7.3B
Gemma-1.1 7B (Team et al., 2024)		8.13	7.57	7.96	8.5B
Hermes-3 8B (Teknium et al., 2024)		8.33	7.12	7.63	8.0B
Llama-3.2 1B (Dubey et al., 2024)		7.49	5.99	6.48	1.2B
Phi-3-Mini (Abdin et al., 2024)		8.13	7.33	7.76	3.8B
Qwen2 7B (Yang et al., 2024)		8.35	7.14	7.75	7.6B

Table 2: Relevance scores for prompt generation tasks, evaluated on text-to-image (T2I) and text-to-template (T2T) prompts under both few-shot and zero-shot prompting. Our SLM model, which operates in a zero-shot setting, demonstrates competitive performance with much larger models. With the UDRL training paradigm, SLM achieves efficiency suitable for enterprise use, outperforming or matching models with significantly higher parameter counts.

For comparison, we evaluated our SLM with state-of-the-art LLMs ranging in size from 1B to 8B. Table 2 displays the relevance scores for both text-to-image (T2I) and text-to-template (T2T) prompt generation tasks. We investigated the performance of these LLMs under both few-shot and zero-shot prompting. For our trained SLM, there is no need for demonstration, which places it in the zero-shot setting. We observe the following.

- Effective Distillation: In the few-shot setting, our SLM achieves relevance scores nearly on par with the teacher model, Llama-3 8B, with only a minor performance gap of approximately 3%. In the zero-shot setting, the performance of our SLM matches Llama-3 8B, and it even outperforms Llama-3 8B in T2I prompt generation. This illustrates the success of our distillation process, effectively transferring high-performance prompt generation capabilities to a more efficient model, without the need for task-specific demonstrations.
- 2. **Competitive Performance:** Despite having fewer parameters, our SLM performs competitively against the best LLMs tested. In the few-shot setting, it scores 7.94 on T2I tasks, closely trailing the top performer (8.29), and achieves 7.79 on T2T tasks, staying within reach of the best result (8.35). In the zero-shot setting, our SLM matches the performance of larger models, ranking first on T2I tasks and second on T2T tasks. This highlights the capability of our SLM to deliver strong performance across various prompt generation tasks, making it a robust solution for real-world applications.

3. **Real-World Efficiency and Performance:** Considering the number of parameters, our SLM is the most efficient model in the comparison. Even when compared to the secondsmallest model, Llama-3.2 1B, our SLM outperforms it significantly in both few-shot and zero-shot settings. Additionally, as detailed in Section 3.3.1, our SLM can operate with just a single GPU for real-time inference, while other models typically require multiple GPUs and may suffer from higher latency. This makes the SLM well-suited for practical deployment in resource-constrained environments.

In summary, our SLM is highly effective in generating contextually accurate prompts that align closely with specified intents and task requirements. It combines efficiency, scalability, and competitive performance, positioning it as a compelling solution for real-world applications.

4.1.2 Task Adherence Evaluation (Length)

In addition to relevance, we evaluated the SLM's ability to meet target length requirements for generated prompts. The model was trained to produce prompts within specified lengths, typically in the range of 10 to 35 words. Length adherence was measured by calculating the mean squared error (MSE) between the generated prompt length and the target length, and by recording the percentage of prompts that fell within an acceptable range (± 2 words from the target length). The evaluation results are in Table 3.

The SLM achieves precise control over prompt length, with MSE consistently around 1. These

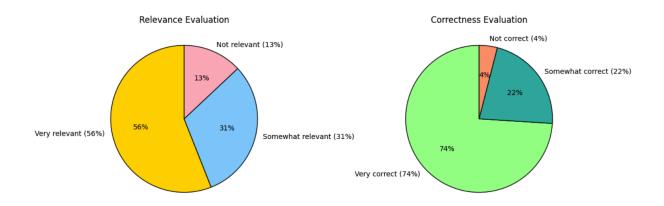


Figure 2: Qualitative Results: Based on over 200 human evaluations, we found 87% of all prompts to be very or somewhat relevant, with 96% being somewhat or very correct.

Target Len. (words)	10	20	30	35
Mean Len. (words)	10.3	19.2	31.1	33.8
Mean Square Err.	0.365	0.881	1.131	1.179
% Prompts Within ±2 Words	98%	96%	93%	95%

Table 3: Task adherence results for specified prompt lengths. MSE measures the deviation from the target length, and the final row shows the percentage of prompts within ± 2 words of the target length.

results indicate that the model can reliably generate prompts of desired lengths, which is essential for applications requiring specific or concise outputs.

4.2 Qualitative Evaluation

To complement the quantitative results, we conducted a qualitative evaluation with human reviewers and chose 18 human reviewers with experience in writing prompts for image and template generative models. The reviewers assessed the SLMgenerated prompts on two criteria:

- 1. Relevance how closely does the prompt align with the intent.
- 2. Correctness is the prompt clear and easy to understand, with correct grammar and sound structure.

Each criterion was rated on a scale from 1 to 3 (corresponding to not, somewhat, very, e.g., not relevant, somewhat relevant and very relevant re-

spectively), and reviewers provided additional qualitative feedback on the prompts.

The human reviewers scored the prompts with an average relevance rating of **87%**, highlighting the model's ability to generate prompts that align well with the provided intents and the task specification. For accuracy and correctness, the SLM received a score of **96%** somewhat or very correct, indicating that the prompts were contextually accurate, grammatically correct and generally maintained coherence to the topic.

Overall, the qualitative feedback supports our quantitative findings, demonstrating that the SLM not only achieves high relevance and length adherence but also produces contextually rich prompts. This qualitative analysis underscores the practical applicability of SLMs in prompt generation tasks, particularly in scenarios where low-latency and computational efficiency are critical.

5 Conclusion

This work highlights the capabilities of small language models (SLMs) as efficient and effective multitask learners. By combining upside-down reinforcement learning with supervised training, we demonstrate that an SLM can achieve competitive performance against much larger models, such as Llama-3, with an 80-fold reduction in size on specific tasks. Our evaluations reveal that SLMs can maintain high contextual relevance, precision, and adherence to tasks, even in resource-constrained settings.

The significant improvements in efficiency and low latency underscore its suitability for deployment in enterprise scenarios where computational resources and speed are critical.

References

- Marah Abdin, Jyoti Aneja, Hany Awadalla, Ahmed Awadallah, Ammar Ahmad Awan, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Jianmin Bao, Harkirat Behl, Alon Benhaim, Misha Bilenko, Johan Bjorck, Sébastien Bubeck, Martin Cai, Qin Cai, Vishrav Chaudhary, Dong Chen, Dongdong Chen, Weizhu Chen, Yen-Chun Chen, Yi-Ling Chen, Hao Cheng, Parul Chopra, Xiyang Dai, Matthew Dixon, Ronen Eldan, Victor Fragoso, Jianfeng Gao, Mei Gao, Min Gao, Amit Garg, Allie Del Giorno, Abhishek Goswami, Suriya Gunasekar, Emman Haider, Junheng Hao, Russell J. Hewett, Wenxiang Hu, Jamie Huynh, Dan Iter, Sam Ade Jacobs, Mojan Javaheripi, Xin Jin, Nikos Karampatziakis, Piero Kauffmann, Mahoud Khademi, Dongwoo Kim, Young Jin Kim, Lev Kurilenko, James R. Lee, Yin Tat Lee, Yuanzhi Li, Yunsheng Li, Chen Liang, Lars Liden, Xihui Lin, Zeqi Lin, Ce Liu, Liyuan Liu, Mengchen Liu, Weishung Liu, Xiaodong Liu, Chong Luo, Piyush Madan, Ali Mahmoudzadeh, David Majercak, Matt Mazzola, Caio César Teodoro Mendes, Arindam Mitra, Hardik Modi, Anh Nguyen, Brandon Norick, Barun Patra, Daniel Perez-Becker, Thomas Portet, Reid Pryzant, Heyang Oin, Marko Radmilac, Liliang Ren, Gustavo de Rosa, Corby Rosset, Sambudha Roy, Olatunji Ruwase, Olli Saarikivi, Amin Saied, Adil Salim, Michael Santacroce, Shital Shah, Ning Shang, Hiteshi Sharma, Yelong Shen, Swadheen Shukla, Xia Song, Masahiro Tanaka, Andrea Tupini, Praneetha Vaddamanu, Chunyu Wang, Guanhua Wang, Lijuan Wang, Shuohang Wang, Xin Wang, Yu Wang, Rachel Ward, Wen Wen, Philipp Witte, Haiping Wu, Xiaoxia Wu, Michael Wyatt, Bin Xiao, Can Xu, Jiahang Xu, Weijian Xu, Jilong Xue, Sonali Yadav, Fan Yang, Jianwei Yang, Yifan Yang, Ziyi Yang, Donghan Yu, Lu Yuan, Chenruidong Zhang, Cyril Zhang, Jianwen Zhang, Li Lyna Zhang, Yi Zhang, Yue Zhang, Yunan Zhang, and Xiren Zhou. 2024. Phi-3 technical report: A highly capable language model locally on your phone. Preprint, arXiv:2404.14219.
- Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos, Matthieu Geist, and Olivier Bachem. 2024. On-policy distillation of language models: Learning from self-generated mistakes. *Preprint*, arXiv:2306.13649.
- Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, Carol Chen, Catherine Olsson, Christopher Olah, Danny Hernandez, Dawn Drain, Deep Ganguli, Dustin Li, Eli Tran-Johnson, Ethan Perez, Jamie Kerr, Jared Mueller, Jeffrey Ladish, Joshua Landau, Kamal Ndousse, Kamile Lukosuite, Liane Lovitt, Michael Sellitto, Nelson Elhage, Nicholas Schiefer, Noemi Mercado, Nova DasSarma, Robert Lasenby, Robin Larson, Sam Ringer, Scott Johnston, Shauna Kravec, Sheer El Showk, Stanislav Fort, Tamera Lanham, Timothy Telleen-Lawton, Tom Conerly, Tom Henighan, Tristan Hume, Samuel R. Bowman, Zac Hatfield-Dodds, Ben Mann, Dario Amodei, Nicholas Joseph, Sam McCandlish, Tom Brown, and

Jared Kaplan. 2022. Constitutional ai: Harmlessness from ai feedback. *Preprint*, arXiv:2212.08073.

- Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. 2023. Vicuna: An opensource chatbot impressing gpt-4 with 90%* chatgpt quality.
- Ganqu Cui, Lifan Yuan, Ning Ding, Guanming Yao, Bingxiang He, Wei Zhu, Yuan Ni, Guotong Xie, Ruobing Xie, Yankai Lin, Zhiyuan Liu, and Maosong Sun. 2024. Ultrafeedback: Boosting language models with scaled ai feedback. *Preprint*, arXiv:2310.01377.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Graeme Nail, Gregoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan Misra, Ivan Evtimov, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Lauren Rantala-Yeary, Laurens van der Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo, Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar Paluri, Marcin Kardas, Mathew Oldham, Mathieu Rita, Maya Pavlova, Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal, Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Olivier Duchenne, Onur Çelebi, Patrick Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajjwal Bhargava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj Ganapathy, Ramon

Calderer, Ricardo Silveira Cabral, Robert Stojnic, Roberta Raileanu, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa, Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang, Sharath Raparthy, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende, Soumya Batra, Spencer Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney Borodinsky, Tamar Herman, Tara Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom, Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh Ramanathan, Viktor Kerkez, Vincent Gonguet, Virginie Do, Vish Vogeti, Vladan Petrovic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang, Xiaoqing Ellen Tan, Xinfeng Xie, Xuchao Jia, Xuewei Wang, Yaelle Goldschlag, Yashesh Gaur, Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre Coudert, Zheng Yan, Zhengxing Chen, Zoe Papakipos, Aaditya Singh, Aaron Grattafiori, Abha Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay Menon, Ajay Sharma, Alex Boesenberg, Alex Vaughan, Alexei Baevski, Allie Feinstein, Amanda Kallet, Amit Sangani, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Franco, Aparajita Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh Yazdan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Brandon Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina Mejia, Changhan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai, Chris Tindal, Christoph Feichtenhofer, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li, Danny Wyatt, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana Liskovich, Didem Foss, Dingkang Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil, Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Erik Brinkman, Esteban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Firat Ozgenel, Francesco Caggioni, Francisco Guzmán, Frank Kanayet, Frank Seide, Gabriela Medina Florez, Gabriella Schwarz, Gada Badeer, Georgia Swee, Gil Halpern, Govind Thattai, Grant Herman, Grigory Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hamid Shojanazeri, Han Zou, Hannah Wang, Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Goldman, Ibrahim Damlaj, Igor Molybog, Igor Tufanov, Irina-Elena Veliche, Itai Gat, Jake Weissman, James Geboski, James Kohli, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie Wang, Kai Wu, Kam Hou U, Karan Saxena, Karthik Prasad, Kartikay Khandelwal, Katayoun Zand, Kathy Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kun Huang, Kunal Chawla, Kushal Lakhotia, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva, Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian Khabsa, Manav Avalani, Manish Bhatt, Maria Tsimpoukelli, Martynas Mankus, Matan Hasson, Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim Naumov, Maya Lathi, Meghan Keneally, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mohammad Rastegari, Munish Bansal, Nandhini Santhanam, Natascha Parks, Natasha White, Navyata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikolay Pavlovich Laptev, Ning Dong, Ning Zhang, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux, Piotr Dollar, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Raymond Li, Rebekkah Hogan, Robin Battey, Rocky Wang, Rohan Maheswari, Russ Howes, Ruty Rinott, Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Satadru Pan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Shaun Lindsay, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shiva Shankar, Shuqiang Zhang, Shuqiang Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Sungmin Cho, Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser, Tamara Best, Thilo Kohler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Timothy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan, Vinay Satish Kumar, Vishal Mangla, Vítor Albiero, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu Mihailescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Constable, Xiaocheng Tang, Xiaofang Wang, Xiaojian Wu, Xiaolan Wang, Xide Xia, Xilun Wu, Xinbo Gao, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi, Youngjin Nam, Yu, Wang, Yuchen Hao, Yundi Qian, Yuzi He, Zach Rait, Zachary DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang, and Zhiwei Zhao. 2024. The llama 3 herd of models. Preprint, arXiv:2407.21783.

Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, Lélio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2023. Mistral 7b. *Preprint*, arXiv:2310.06825.

- Sungdong Kim, Sanghwan Bae, Jamin Shin, Soyoung Kang, Donghyun Kwak, Kang Yoo, and Minjoon Seo. 2023. Aligning large language models through synthetic feedback. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 13677–13700, Singapore. Association for Computational Linguistics.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. 2023. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles.*
- Harrison Lee, Samrat Phatale, Hassan Mansoor, Thomas Mesnard, Johan Ferret, Kellie Lu, Colton Bishop, Ethan Hall, Victor Carbune, Abhinav Rastogi, and Sushant Prakash. 2024. Rlaif vs. rlhf: Scaling reinforcement learning from human feedback with ai feedback. *Preprint*, arXiv:2309.00267.
- OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li,

Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O'Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. 2024. Gpt-4 technical report. Preprint, arXiv:2303.08774.

- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. Language models are unsupervised multitask learners.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. 2024. Direct preference optimization: Your language model is secretly a reward model. *Preprint*, arXiv:2305.18290.
- Sahana Ramnath, Brihi Joshi, Skyler Hallinan, Ximing Lu, Liunian Harold Li, Aaron Chan, Jack Hessel, Yejin Choi, and Xiang Ren. 2024. Tailoring selfrationalizers with multi-reward distillation. *Preprint*, arXiv:2311.02805.

Juergen Schmidhuber. 2020. Reinforcement learning

upside down: Don't predict rewards – just map them to actions. *Preprint*, arXiv:1912.02875.

- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. Proximal policy optimization algorithms. *Preprint*, arXiv:1707.06347.
- Rupesh Kumar Srivastava, Pranav Shyam, Filipe Mutz, Wojciech Jaśkowski, and Jürgen Schmidhuber. 2021. Training agents using upside-down reinforcement learning. *Preprint*, arXiv:1912.02877.
- Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. 2023. Stanford alpaca: An instruction-following llama model. https:// github.com/tatsu-lab/stanford_alpaca.
- Gemma Team, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, Pouya Tafti, Léonard Hussenot, Pier Giuseppe Sessa, Aakanksha Chowdhery, Adam Roberts, Aditya Barua, Alex Botev, Alex Castro-Ros, Ambrose Slone, Amélie Héliou, Andrea Tacchetti, Anna Bulanova, Antonia Paterson, Beth Tsai, Bobak Shahriari, Charline Le Lan, Christopher A. Choquette-Choo, Clément Crepy, Daniel Cer, Daphne Ippolito, David Reid, Elena Buchatskaya, Eric Ni, Eric Noland, Geng Yan, George Tucker, George-Christian Muraru, Grigory Rozhdestvenskiy, Henryk Michalewski, Ian Tenney, Ivan Grishchenko, Jacob Austin, James Keeling, Jane Labanowski, Jean-Baptiste Lespiau, Jeff Stanway, Jenny Brennan, Jeremy Chen, Johan Ferret, Justin Chiu, Justin Mao-Jones, Katherine Lee, Kathy Yu, Katie Millican. Lars Lowe Sjoesund, Lisa Lee, Lucas Dixon, Machel Reid, Maciej Mikuła, Mateo Wirth, Michael Sharman, Nikolai Chinaev, Nithum Thain, Olivier Bachem, Oscar Chang, Oscar Wahltinez, Paige Bailey, Paul Michel, Petko Yotov, Rahma Chaabouni, Ramona Comanescu, Reena Jana, Rohan Anil, Ross McIlroy, Ruibo Liu, Ryan Mullins, Samuel L Smith, Sebastian Borgeaud, Sertan Girgin, Sholto Douglas, Shree Pandya, Siamak Shakeri, Soham De, Ted Klimenko, Tom Hennigan, Vlad Feinberg, Wojciech Stokowiec, Yu hui Chen, Zafarali Ahmed, Zhitao Gong, Tris Warkentin, Ludovic Peran, Minh Giang, Clément Farabet, Oriol Vinyals, Jeff Dean, Koray Kavukcuoglu, Demis Hassabis, Zoubin Ghahramani, Douglas Eck, Joelle Barral, Fernando Pereira, Eli Collins, Armand Joulin, Noah Fiedel, Evan Senter, Alek Andreev, and Kathleen Kenealy. 2024. Gemma: Open models based on gemini research and technology. Preprint, arXiv:2403.08295.
- Ryan Teknium, Jeffrey Quesnelle, and Chen Guang. 2024. Hermes 3 technical report. *Preprint*, arXiv:2408.11857.
- Fangyuan Xu, Weijia Shi, and Eunsol Choi. 2023a. Recomp: Improving retrieval-augmented lms with compression and selective augmentation. *Preprint*, arXiv:2310.04408.

- Yichong Xu, Ruochen Xu, Dan Iter, Yang Liu, Shuohang Wang, Chenguang Zhu, and Michael Zeng. 2023b. InheritSumm: A general, versatile and compact summarizer by distilling from GPT. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 13879–13892, Singapore. Association for Computational Linguistics.
- An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang, Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jianxin Yang, Jin Xu, Jingren Zhou, Jinze Bai, Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Keqin Chen, Kexin Yang, Mei Li, Mingfeng Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Xuejing Liu, Yang Fan, Yang Yao, Yichang Zhang, Yu Wan, Yunfei Chu, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, Zhifang Guo, and Zhihao Fan. 2024. Qwen2 technical report. Preprint, arXiv:2407.10671.