OWLS: Scaling Laws for Multilingual Speech Recognition and Translation Models

William Chen¹ Jinchuan Tian¹ Yifan Peng¹ Brian Yan¹ Chao-Han Huck Yang² Shinji Watanabe¹

Abstract

Neural scaling laws offer valuable insights for designing robust sequence processing architectures. While these laws have been extensively characterized in other modalities, their behavior in speech remains comparatively underexplored. In this work, we introduce OWLS, an open-access, reproducible suite of multilingual speech recognition and translation models spanning 0.25B to 18B parameters, with the 18B version being the largest speech model, to the best of our knowledge. OWLS leverages up to 360K hours of public speech data across 150 languages, enabling a systematic investigation into how data, model, and compute scaling each influence performance in multilingual speech tasks. We use OWLS to derive neural scaling laws, showing how final performance can be reliably predicted when scaling. One of our key findings is that scaling enhances performance on low-resource languages/dialects, helping to mitigate bias and improve the accessibility of speech technologies. Finally, we show how OWLS can be used to power new research directions by discovering emergent abilities in large-scale speech models. Model checkpoints will be released on huggingface for future studies.

1. Introduction

Neural acoustic models have shown robust performance in processing human speech information and have demonstrated remarkable capabilities in spoken language tasks (Radford et al., 2023; Peng et al., 2023b; Barrault et al., 2023a). Powered by large-scale training (Baevski et al., 2020; Zhang et al., 2023; Chen et al., 2024; 2022; Li et al., 2021), Transformer-based (Vaswani et al., 2017) models have dominated the fields of Automatic Speech Recognition




Figure 1. Comparison of previous open models and our OWLS models (blue) by parameter count and training dataset size. Whisper (Radford et al., 2023) and Canary (Puvvada et al., 2024) are trained on *undisclosed* data, while OWSM (Peng et al., 2023b) and the presented OWLS use public data.

(ASR) and Speech Translation (ST).

The state-of-the-art (SOTA) in ASR/ST has now progressed to not only scaling in terms of model and *data size*, but also tasks and *languages*. In recent years, there has been significant interest in developing massively multilingual models that can perform ASR/ST for hundreds, if not thousands, of diverse spoken languages (Chen et al., 2023); Pratap et al., 2023; Babu et al., 2022; Yu et al., 2023; Chen et al., 2024; Zhang et al., 2023), with the goal of having a single model that can universally convert multilingual speech into text.

However, the architecture of these massively multilingual models is complex, and their scaling properties pose significant challenges for both experimental designs in advancing speech science. This challenge is further exacerbated by the multi-modal nature of spoken language systems, which must handle the complexities of both multilingual text and speech. Prior art on the scaling laws of neural models deviates significantly from the goal of SOTA universal systems. The majority study single-task and single-modality systems (Biderman et al., 2023; Ghorbani et al., 2022; Zheng et al., 2022), while multilingual work concentrates only on settings where a few languages are supported (Fernandes et al., 2023; Yang et al., 2023; Li et al., 2021).

To address this, we present OWLS, a **O**pen Whisper-style Large-scale neural model **S**uite for Speech Recognition and

¹Carnegie Mellon University ²NVIDIA. Correspondence to: William Chen <williamchen@cmu.edu>, Chao-Han Huck Yang <hucky@nvidia.com>, Shinji Watanabe <shinjiw@ieee.org>.

Preprint. Copyright 2025 by the author(s).

Translation. OWLS contains 13 fully transparent¹ speech foundation models for ASR/ST, pre-trained on up to 360K hours of multilingual data across 150 languages, with each model ranging from 0.25B to 18B parameters (Figure 1). We experiment with scaling in terms of both model and data size, and analyze the change in downstream ASR/ST performance. Through these investigations, we derive a neural scaling law to predict the change in model performance for each task and language. We also evaluate *test-time* capabilities of large-scale ASR/ST models, studying how new abilities emerge at scale and showing how speech model scaling can be benefits to new languages with in-context learning. Our contributions are summarized as follows:

- We open-source OWLS, a collection of 13 Whisperstyle ASR/ST models trained on up to 360K hours of publicly available data and 150 languages. We will also release all model training code, training logs, and intermediate checkpoints.
- We train and release an OWLS model with 18B total parameters, which makes it the largest of all publicly known ASR/ST models and nearly double that of prior work (Zheng et al., 2022).
- We systemically evaluate the effects of model and data scaling on ASR and ST, developing the first set of neural scaling laws for these tasks. We not only measure the usefulness of model scaling, but also identify failure cases that it is not able to overcome.
- We evaluate the test-time capabilities of frozen largescale speech foundation models via in-context learning, and discover several new emergent abilities present in large models that are absent in smaller ones.

2. Background and Related Work

2.1. Neural Scaling Laws

Previous research has shown that the performance of Transformer-based (Vaswani et al., 2017) models at scale can be empirically predicted with three fundamental variables: the model size N, the training data size T, and the compute budget B (Hestness et al., 2017; Rosenfeld et al., 2020; Kaplan et al., 2020; Hernandez et al., 2021; Ghorbani et al., 2022; Fernandes et al., 2023). This can be summarized by modeling the change in the cross-entropy loss L when varying each variable independently:

$$L(x) = L_{\infty} + \beta_x x^{\alpha_x}, \tag{1}$$

where $x \in (N, T, B)$, L(x) is the reducible loss that obeys the power-scaling law, and L_{∞} is irreducible loss. β and α are thus the empirically learned variables of the power law. Varying the value of x allows a practitioner to estimate the scaling behavior in different settings. When $x = N^2$, for example, the power law models the data-rich $(T \to \infty)$ and compute-rich $(B \to \infty)$ setting. Previous work (Gu et al., 2023) in language model re-scoring has shown that the Word Error Rate (WER) can also be modeled as a power law function of x. We can thus modify Equation 1 as follows:

$$WER(x) = \beta_x x^{\alpha_x}.$$
 (2)

We empirically show that this power law can also generalize to the multi-modal task of ASR (Figures 3 and 9), allowing true downstream performance to be easily predicted when x = N, B. Furthermore, we also observe that it can be applied to ST (via BLEU(x) = $\beta_x x^{\alpha_x}$) and thus extends our findings to more tasks (Figures 6 and 7).

2.2. Scaling Laws for text and vision

The impact of scaling neural models has been thoroughly studied in the domains of text and vision. Early studies in scaling text models focused on supervised tasks such as machine translation (MT) (Gordon et al., 2021; Ghorbani et al., 2022). The most relevant work to ours is from Fernandes et al. (2023), who devised scaling laws for multilingual MT models. However, these are only trained on two translation tasks/languages. In comparison, our work evaluates on over 100 languages and tasks.

Later studies focused instead on scaling self-supervised LLMs (Biderman et al., 2023; Tay et al., 2023; Kaplan et al., 2020). Kaplan et al. (2020) empirically showed that language modeling obeys a power law w.r.t x = N, T, and B. Biderman et al. (2023) released a suite of open-access LLMs, and showed how they can be used to understand scaling behaviors on downstream tasks. Our research can be viewed as a combination of these works, albeit applied to speech: we introduce a suite of open-access large ASR/ST models and also derive scaling laws for downstream tasks.

In vision, there is existing literature on the scalability of vision encoders on image classification tasks (Zhai et al., 2022). However, these tasks do not require multi-modal understanding. Our work is thus most similar to those on text-to-image/image-to-text tasks (Henighan et al., 2020). However, we focus on the speech modality while also considering multi-tasking and zero-shot behaviors.

2.3. Multilingual Processing and Scaling in Speech

Multilingual ASR is the concept of having a single model that can recognize speech in many languages (Watanabe et al., 2017a). While initial investigations focused on only

¹We follow the definition of "transparency" (Dabbish et al., 2012) on open-source, open-data, and open transcripts.

²We assume that the model parameters are equally distributed between the encoder and decoder for encoder-decoder architectures. Otherwise, the law can also be formulated as a bivariate function w.r.t. to the encoder parameters N_e and decoder parameters N_d (Fernandes et al., 2023; Ghorbani et al., 2022)

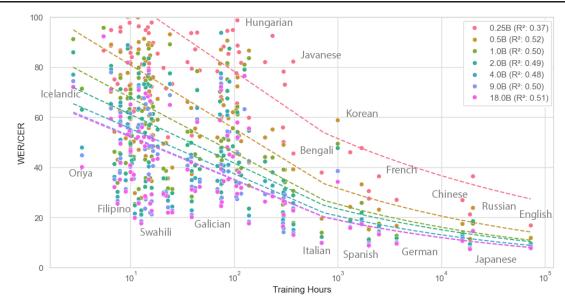


Figure 2. The effect of scaling model size on the 102 FLEURS languages, plotted as WER (or CER) versus available training data. Although WER/CER generally decreases with more training data, the relationship is only moderately correlated, as indicated by the R^2 values in the legend. Model performance is also influenced by domain alignment and orthographic transparency: for instance, more transparent languages (e.g., Spanish, Italian) often achieve lower error rates with less data than opaque languages (e.g., English, French).

combining a few languages together (Conneau et al., 2021), modern multilingual ASR models are capable of handling hundreds, if not thousands, of languages (Zhang et al., 2023; Pratap et al., 2023; Chen et al., 2024; Radford et al., 2023; Li et al., 2022). Recent SOTA multilingual speech models have begun supporting tasks in addition to ASR. Joint language prediction and speech recognition is now a common method of developing multilingual ASR models (Chen et al., 2023b; Radford et al., 2023). Whisper-style models (Radford et al., 2023; Peng et al., 2023b) use a system of language and task prompts to also perform language identification, speech translation, and timestamp prediction. On the other hand, the Seamless family (Barrault et al., 2023a;b) leverages task decomposition to perform ASR within a speech-to-speech translation framework. Our work focuses on Whisper-style models, as their use of task prompts allow us to easily evaluate the effects of scale on zero/few-shot performance.

There have been few studies on neural scaling laws for speech. Droppo & Elibol (2021) and Cuervo & Marxer (2024) devised neural scaling laws for self-supervised acoustics models and speech language models, respectively. However, their evaluations are limited to simple probes due to the text-less nature of these models, and cannot be easily applied to typical speech tasks. Zheng et al. (2022) and Li et al. (2021) experimented with scaling monolingual and multilingual models respectively to 10B parameters, but the models are trained only on internal data and remain unreleased. Neither works attempt to devise empirical scaling laws nor study the enhanced capabilities of larger models.

3. The OWL Suite

3.1. Dataset

We largely rely on the OWSM v3.2 (Tian et al., 2024) dataset for our experiments. It consists of 180K hours of ASR/ST data gathered across 25 public corpora, covering 150 unique languages. For our experiments on scaling up the training data size beyond 180K hours, we also include an additional 180K hours of audio from YODAS (Li et al., 2023) for a total of 360K hours. More details about the dataset can be found in Section A in the Appendix.

3.2. Training Details

All OWLS models follow a Transformer (Vaswani et al., 2017) encoder-decoder architecture trained using a hybrid CTC/attention (Graves et al., 2006; Watanabe et al., 2017b) loss. The inputs to the Transformer are 80-dimension log-Mel filterbanks extracted with a frame shift of 10ms, which are then down-sampled 4 times by a stack of convolution layers. The prediction targets are text tokens with a 50K sub-word vocabulary (Kudo, 2018). We also use Whisper-style training (Radford et al., 2023): all utterances are padded to 30 seconds, and the model is jointly trained to perform language identification, ASR, ST, and timestamp prediction.

We conduct our experiments with the ESPNet (Watanabe et al., 2018) toolkit. Since our goal is a systematic study of large-scale speech models, we take an experimental approach similar to Biderman et al. (2023): we design our experiments to prioritize training stability and controllability over squeezing out the best possible performance. We therefore use *the exact same hyper-parameters* for all mod-

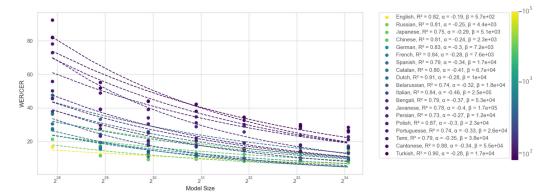


Figure 3. **The effect of model scaling on WER/CER on FLEURS.** Languages are color-coded by the amount of training data. For readability, we only show the top-20 languages (by data amount) in our training corpus. We find that model scaling is consistently predictive of downstream WER/CER across languages. Scaling curves for other languages can be found in Figure 12 in the Appendix.

els, varying only the data or model size to fit the appropriate scaling experiment. More details on training can be found in Appendix B.

4. Pre-Training Experiments

4.1. Scaling Model Size

We experiment with scaling the model parameters of the OWLS models from 0.25B to 18B parameters, roughly doubling the total model parameters with each iteration. This leads to a total of 7 model sizes (0.25B, 0.50B, 1B, 2B, 4B, 9B, 18B). For each model size we scale the depth and width of the encoder and decoder in tandem, while allocating the model parameters equally between both. More details about each model can be found in Appendix B.

Multilingual ASR: To evaluate the multilingual performance of the OWLS models, we use the 102-language FLEURS test set (Conneau et al., 2022). Figures 2 and 3 show WER for different languages as a function of perlanguage training data size and model size respectively, and measure their correlation with WER using the co-efficient of determination, R^2 . We find that model scaling consistently improves WER/CER of each language across all data levels (Figure 2). However, the amount of data used for any given language is only somewhat predictive of its WER/CER $(R^2 \simeq 0.5, \text{Figure 2})$. In other words, we cannot easily fit a language-agnostic data scaling law. On the other hand, language-specific model size scaling laws are highly predictive of WER/CER ($R^2 \simeq 0.95$, Figure 3). Finally, we want to highlight the significant improvement on WER in low-resource languages when scaling to larger model sizes. The average WER on the 50 lowest-resource languages (less than 35 hours of training data) in our dataset decreases from 59 to 45 when model size increases from an already large size of 1B to 9B. Larger models can mitigate bias and improve the fairness of speech technologies.

Multi-domain ASR (English): We test robustness of OWLS models to different data domains by evaluating on




Figure 4. WERs on multi-domain English ASR by model size.

6 standard ASR benchmarks: AMI (Carletta, 2007), LibriSpeech (Panayotov et al., 2015), SPGISpeech (O'Neill et al., 2021), Tedlium (Hernandez et al., 2018), VoxPopuli (Wang et al., 2021b), and GigaSpeech (Chen et al., 2021). Figure 4 shows the results of these experiments. *ASR improves significantly with scale across all domains*, with the average WER almost halving from 12.1 to 6.3 when scaling from 0.25B to 9B parameters. *The effects of scale are apparent even when going beyond the typical maximum ASR model size of 2B parameters*, with a relative reduction in WER of 11.3% when scaling from 2B to 9B.

Translation: We study the effects of parameter scaling on English to X and X to English translation. The results are shown in Figures 6 and 7 respectively. We observe that scaling the model parameters leads to significant improvements in BLEU scores for all languages. This observation holds true even for high-resource language pairs. For highresource English to German, *scaling from an already large 1B model to a 9B variant nearly doubles the BLEU score from 16.6 to 28.9* (Figure 6). Figure 6 also shows that *some models are too small to functionally perform ST:* the 0.25B OWLS model is unable to produce intelligible output (BLEU < 5) for 9 of the 15 English to X translation pairs. In comparison, the 9B OWLS model functions reasonably

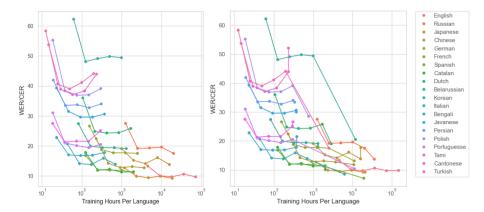


Figure 5. The evolution of FLEURS WER/CER for the top 20 languages by data size, as more training data is added for each language and given a fixed model capacity. *Left*: impact on WER/CER when scaling from 11K to 180K total hours, when all data is from the same distribution. *Right*: impact on WER/CER from adding in data from a new domain/distribution (YODAS), when further scaling from 180K to 360K total hours. Plots for more languages can be found in Figure 13 in the Appendix.




Figure 6. BLEU scores on English to X speech translation.

well (BLEU > 15) on 12 of the 15 pairs.

However, there are also limitations of model scaling. Figure 7 shows the effects of scaling on X to English ST. While 4 out of the 5 language pairs show improvement trends similar to Figure 6, the BLEU scores for Japanese do not increase significantly. Importantly, there is only 1 hour total of Japanese to English ST to English data in the OWLS training corpus. We can thus conclude the following: *while parameter scaling can significantly improve ST performance, it cannot overcome cases where there is inherently insufficient amounts of data to learn the task.*

4.2. Scaling Data Size

We evaluate how varying the amount of data used to train an OWLS model can affect downstream performance. To do so, we first create smaller training splits by uniformly downsampling the 180K hour base training set by 50%, 25%, 12.5%, and 6.25%. We also experiment with using a larger amount of data by collecting an additional 180K




Figure 7. BLEU scores on X to English speech translation.

hours from YODAS (Section 3.1). For these experiments, we fix the model size at 1B parameters. This leads to a total of 6 different models trained on 360K, 180K, 90K, 45K, 22.5K, and 11.25K hours of speech respectively. We use an evaluation protocol similar to the one in Section 4.1, benchmarking the model on Multilingual ASR and ST.

Multilingual ASR: Figure 5 (left) shows the effect of data scaling on the WER of each language from 11.25K to 180K hours, given a fixed model capacity. While a training set generally leads to better performance for most languages, we also observe degradations in WER/CER for some, likely due to interference from similar languages (e.g. Chinese interference for Cantonese). Figure 5 (right) shows the impact of adding in data from a new domain/distribution (YODAS) when scaling from 180K hours to 360K hours. With the addition of 180K hours of high quality data from YODAS, many languages with saturated performance when scaling from 22K to 180K hours (Korean, Polish, Dutch) experience large improvements in WER/CER. Our findings can thus be summarized as the following: *data scaling without additional diversity leads to quickly saturated performance.*

Translation: Similar to our findings in Figure 2, we find that ST data quantity is only loosely correlated with down-




Figure 8. BLEU scores on EN to X (top) and X to EN (bottom) ST with different dataset sizes.

stream performance ($R^2 \simeq 0.55$). The top and bottom portions of Figure 8 show the change in BLEU score as the training data size increases for English to X and X to English, respectively. While BLEU score is positively correlated with a larger dataset size for most translation pairs, we also observe significant degradations in English to German (Figure 8). We hypothesize that this may be due to the 1B model's limited capacity as data size increases, but leave more concrete analyses to future work. Finally, we note that we exclude results from the 360K model in this analysis, since the additional 180K hours from YODAS did not contain any ST data.

4.3. Scaling Compute

Another method of evaluating the effects of scaling is by predicting the test WER as a function of the FLOPS used for training. This allows models to be evaluated in the compute-equivalent setting and considers the fact that larger models will take longer to train. To model this relationship, we test OWLS models of various sizes on FLEURS. We only evaluate on English and two other randomly chosen languages (Spanish and Turkish) to reduce computing costs. Figure 9 shows the evolution of average WER from the 3 languages for each model size as training progresses. We find that for a fixed parameter size, the WER of the final checkpoint can be reliably predicted as a function of the training compute ($R^2 \simeq 0.82$). This means that one can reasonably predict the final WER of the model given the WERs of initial checkpoints. As expected, smaller models are more compute efficient, being able to reach a much lower WER with lower FLOPS spent.

4.4. Further Scaling

We combine our findings in model and data scaling to make a preliminary exploration in further scaling OWLS models. We scale an 18B parameter OWLS model to 360K hours of data, which we designate as OWLS 18B v2. We compare

Table 1. WER/CER of OWLS models vs Whisper Large V3 and Canary on ASR benchmarks: AISHELL (zh-CN), LibriSpeech test-clean (eng), ReazonSpeech (jpn), and Ksponspeech (kor). Canary is only trained on 4 European languages.

Model	AISHELL	LS clean	Reazon	Kspon
Canary	N/A	1.5	N/A	N/A
Whisper	5.1	2.0	15.1	13.4
OWLS 1B	6.2	2.3	7.8	17.5
OWLS 9B	4.8	1.9	7.3	15.8
OWLS 18B	4.8	2.0	7.5	15.2
OWLS 18B v2	4.8	2.0	7.2	15.0




Figure 9. Average multilingual WER for each model size throughout different stages of training.

this model with other OWLS models and SOTA ASR models (Radford et al., 2023; Puvvada et al., 2024) in Table 1. OWLS 18B v2 outperforms or equals Whisper Large V3 on 3 of the 4 test sets, while further improving performance on Japanese and Korean over the other OWLS models.

5. Test-Time Experiments

5.1. Beam Search

One advantage of smaller models is the ability to leverage more complex decoding algorithms during inference. For larger models, using these techniques would be unfeasible within GPU memory constraints. To make the performance

Table 2. WER on Librispeech test-other when balancing testtime compute budget. We exclude 0.5B and 1B OWLS models since there is no beam size that consumes \sim 40-50 TFLOPS.

Params.	Beam Size	TFLOPS	WER
0.25B	10	48.7	8.33
2B	4	36.2	4.69
4B	2	42.3	4.52
9B	1	47.7	4.52

more fair at the compute-level, we conduct analyses where all models have the same fixed test-time compute budget. Smaller models may leverage beam search with larger beam sizes, while larger ones may be constrained to only greedy decoding. Table 2 shows the WER on LibriSpeech test-other when test-time compute is balanced at ~40-50 TFLOPS across the 0.25B, 2B, 4B, and 9B OWLS models. We note that the 0.5B, 1B, and 18B OWLS models are excluded since there is no beam size that consumes a similar number of TFLOPS. Even when using equivalent compute, larger models clearly perform better than smaller models at test-time (4.5 WER for 9B vs 8.3 WER for 0.25B). This shows the viability of large-scale ASR models in production settings.

5.2. Emergent Ability

LLMs are shown to exhibit drastically improved performance on certain tasks as the model size increases, even if the training data remains unchanged (Wei et al., 2022). In this section, we study if large-scale ASR models can also exhibit these "emergent abilities³". We focus on three abilities that we newly discover: orthographic understanding, code-switching, and mondegreens. Results for contextual biasing, the first known example of emergent abilities in ASR models (to our knowledge), are found in Appendix F.

Orthographic Understanding: Orthographic transparency describes the relationship between the phonetics (sounds) of a language and its written form. Opaque languages (e.g. Chinese and Japanese) have complex many-to-one or oneto-many relationships from sound to symbol, making ASR particularly difficult (Taguchi & Chiang, 2024). Examples of this phenomena are shown in Table 3. We hypothesized that larger OWLS models will exhibit enhanced robustness to orthographic opacity. To measure this, we calculate the normalized CER (N-CER) by normalizing all symbols to a single orthography. This can then be compared to the unnormalized CER. A model with a good N-CER but poor CER has strong phonetic capabilities but poor orthographic understanding. Models are tested on Taiwanese Chinese Mandarin (zh-TW) and Japanese (Figure 10). The N-CER curve shows that scaling does not have a large impact on learning phonetics: small models already exhibit strong performance in phonetically mapping speech to text. On the other hand, the steeper CER curve calculated from the raw model outputs indicate that larger models exhibit significantly stronger orthographic capabilities. Another key finding in this experiment was the overall robustness of larger models to zh-TW, which is a minority dialect rela*Table 3.* Orthographic opacity examples of Japanese and Chinese. The same phone sequence can be written in different ways.

Orthography	Example	
Romanization (zh)	shì shī shì	
Simp. Chinese	室诗 士	
Trad. Chinese	室詩 士	
Romanization (jp)	hashi	
Hiragana	はし	
Katakana	ハシ	
Kanji	橋	




Figure 10. Effects of model scaling on orthographic understanding on Chinese (left) and Japanese (right). The quick saturation in PN-CER shows that scaling does not have a large effect on the *phonetic* understanding in ASR models. However, the raw CER trend shows that large-scale models exhibit significantly stronger *orthographic* capabilities.

tive to Mainland Chinese (zh-CN). Larger models are much more capable of providing fair performance across both dialects (see Table 1 for zh-CN scores), which aligns with the findings in Section 4.1 on low-resource languages.

Code-switching: In multilingual societies, it is common for more than one language to be spoken within a single utterance. However, despite multilingual training, most existing ASR models are incapable of accurately recognizing code-switched speech in a zero-shot manner (Peng et al., 2023a). We collect an evaluation set of bilingually codeswitched English for 12 languages from Yan et al. (2024) and test OWLS models of different sizes. Figure 11 shows the results on each code-switched language. *We find that scaling can lead to significant reductions in code-switched CER, but the benefits are unevenly distributed*. Many of the improvements lie in languages that also use the Latin alphabet, like Portuguese, while languages with very different orthographies (such as Chinese) see no improvement. More details about the data are in Appendix C.

³In our work, we define "emergent abilities" as those exhibited by larger models and not by smaller models. Wei et al. (2022) originally used a stricter definition where emergent abilities as those that can not be extrapolated from scaling curves. However, Schaeffer et al. (2023) later showed that the emergence can in fact be predicted with finer-grained evaluation metrics.




Figure 11. CER on zero-shot English-X code-switching.

Table 4. Evaluation of mondegreen capabilities.

Params.	PPL	MOS
0.25B	1338	1.9
0.50B	728	4.1
1B	559	3.5
2B	491	3.6
4B	436	3.8
9B	372	4.8
18B	429	4.4

Mondegreen: Humans are capable of constructing semantically meaningful sentences from mis-recognized speech (such as mishearing "José, can you see" from "O say can you see"). This phenomena is known as a mondegreen. We hypothesize that large ASR models learn more semantic mappings than smaller ones, enhancing their ability of constructing mondegreens. We evaluate this technique by purposefully providing the model an English ASR task token along with speech from 3 non-English languages from FLEURS. The generated text is then evaluated by using the perplexity of a pre-trained OPT 2.7B LLM (Zhang et al., 2022b), such that a lower perplexity corresponds to a semantically plausible English sentence for humans. To ground these numbers, we also perform a qualitative analysis with 13 human volunteers, who provided a mean opinion score (MOS) on the semantic coherence for each generation on a scale from 1 to 5 (higher is better). The results of the mondegreen evaluations are shown in Table 4. We observe that larger models obtain consistently better perplexity scores across all model sizes. Similarly, we also find that higher MOS scores trend well with model size. This suggests that larger ASR models are indeed more capable of "mishearing" in a semantically sound manner. Experimental details and sample inputs/outputs are in Appendix E.

5.3. In-Context Learning of OWLS

LLMs are capable of few-shot task performance via incontext learning (ICL) (Brown et al., 2020). Large-scale

Table 5. Quechua CER on ICL with 0/1/2/3 examples. The overall best result is **bolded** while the best result for each model size is underlined.

Params.	k = 0	k = 1	k = 2	k = 3
0.25B	36.9	35.1	33.7	34.5
0.50B	53.3	39.2	<u>33.8</u>	33.9
1 B	41.8	35.0	<u>31.6</u>	31.8
2B	47.3	35.1	<u>31.9</u>	33.2
4B	40.4	32.4	<u>31.2</u>	31.8
9B	38.3	31.3	28.1	<u>27.4</u>
18B	41.3	32.7	31.3	<u>28.1</u>

ASR models like Whisper have shown potential in performing ICL, albeit with very limited capabilities. In this section, we evaluate if the ICL ability of OWLS models improve as the model size scales. To do so, we evaluate the model on ASR for a language unseen during training. We provide the model with 0 to 4 in-context examples to benchmark its ability to learn at test-time. We use Quechua as the unseen language, with data sourced from the Siminchik (Cardenas et al., 2018) corpus. We perform ICL using the same k-NN approach as Wang et al. (2024a), where k utterances with the lowest Euclidean distance (when embedded by the encoder) from the target speech are selected from the training set as in-context examples. The audio from the in-context examples are concatenated with the target speech, while the concatenated text examples are fed as an input prompt. Further details can be found in Appendix G. We find that while all model sizes are capable of using in-context examples in some capacity, only the largest models (9B and 18B) can take advantage of all three in-context examples (Table 5). For the 4B and smaller models, performance degrades when using more than two in-context examples.

6. Conclusion and Future Work

This paper introduces OWLS, a suite of 13 joint ASR/ST models designed to help researchers understand the scaling behaviors of multi-modal, multi-language, multi-task models. OWLS models range from 250M to 18B parameters, trained on 11K to 360K hours of speech. In fact, the 18B OWLS model is the largest speech model in known literature. With OWLS, we show that the affects of scaling parameter, training data, and compute can lead to reasonable direct predictions of downstream ASR/ST performance. We also study the emergent capabilities of large-scale ASR/ST models, showing for the first time how larger speech models exhibit stronger in-context abilities and understanding of human language. In the future, we plan to (i) scale model training to even larger datasets and more diverse tasks, and (ii) investigate more scaling effects for adaptation, while also developing new benchmarks to better understand the emergent capabilities of spoken language models with open and diverse research communities together.

Acknowledgments

Parts of this work used the Bridges2 at PSC and Delta/DeltaAI NCSA computing systems through allocation CIS210014 from the Advanced Cyberinfrastructure Coordination Ecosystem: Services & Support (ACCESS) program, supported by National Science Foundation grants 2138259, 2138286, 2138307, 2137603, and 2138296.

Impact Statement

This paper presents OWLS, a suite of open-access, reproducible, large-scale joint ASR and ST models. Unlike most other ASR foundation models at this scale, all of the models in this work are trained on publicly accessible datasets and open-source codebases. To facilitate reproducibility, we will also release all intermediate checkpoints, optimizer states, and the final model checkpoint. Our goal is to provide researchers with additional resources and artifacts to better understand the scaling properties of large-scale speech models. We also offer detailed breakdowns of computational resources and costs in the Appendix.

Societal Consequences

There are many potential societal consequences of machine learning, most of which we will not highlight here because they are common across the entire field. Instead, we will discuss the aspect of our work that is most unique: the impact on society resulting from model scaling. Training the OWLS models required many GPUs, which can consume large amounts of electricity. Although our computing costs are insignificant compared to those incurred in LLM training (*i.e.*, we use at most 48 GPUs at once), they remain large relative to most other work.

Ethical Aspects

Our models, like all machine learning models, are prone to bias due to uneven distributions in the training data. Although we show that model scaling can lead to more fair performance across different languages, it can still be prone to hallucinations and generate incorrect output.

A portion of the training data that we use was accessed under non-commercial licenses. To follow the spirit of these datasets' access conditions, all of our models are also released under non-commercial licenses. We emphasize that the models are released for research purposes and discourage use outside of this original use-case.

References

Ahmad, I. S., Anastasopoulos, A., Bojar, O., Borg, C., Carpuat, M., Cattoni, R., Cettolo, M., Chen, W., Dong, Q., Federico, M., Haddow, B., Javorský, D., Krubiński, M., Lam, T. K., Ma, X., Mathur, P., Matusov, E., Maurya, C., McCrae, J., Murray, K., Nakamura, S., Negri, M., Niehues, J., Niu, X., Ojha, A. K., Ortega, J., Papi, S., Polák, P., Pospíšil, A., Pecina, P., Salesky, E., Sethiya, N., Sarkar, B., Shi, J., Sikasote, C., Sperber, M., Stüker, S., Sudoh, K., Thompson, B., Waibel, A., Watanabe, S., Wilken, P., Zemánek, P., and Zevallos, R. FINDINGS OF THE IWSLT 2024 EVALUATION CAMPAIGN. In Salesky, E., Federico, M., and Carpuat, M. (eds.), *Proc. IWSLT*, pp. 1–11, Bangkok, Thailand (in-person and online), August 2024.

- Ardila, R., Branson, M., Davis, K., Kohler, M., Meyer, J., Henretty, M., Morais, R., Saunders, L., Tyers, F., and Weber, G. Common voice: A massively-multilingual speech corpus. In *LREC 2020*, pp. 4218–4222, 2020.
- Babu, A., Wang, C., Tjandra, A., Lakhotia, K., Xu, Q., Goyal, N., Singh, K., von Platen, P., Saraf, Y., Pino, J., Baevski, A., Conneau, A., and Auli, M. XLS-R: Selfsupervised Cross-lingual Speech Representation Learning at Scale. In *Interspeech 2022*, pp. 2278–2282, 2022. doi: 10.21437/Interspeech.2022-143.
- Baevski, A., Zhou, Y., Mohamed, A., and Auli, M. wav2vec 2.0: A framework for self-supervised learning of speech representations. In *NeurIPS 2020*, volume 33, 2020.
- Bang, J.-U. et al. KsponSpeech: Korean spontaneous speech corpus for automatic speech recognition. *Applied Sci*ences, 2020.
- Barrault, L., Chung, Y.-A., Meglioli, M. C., Dale, D., Dong, N., Duppenthaler, M., Duquenne, P.-A., Ellis, B., Elsahar, H., Haaheim, J., et al. Seamless: Multilingual expressive and streaming speech translation. *arxiv*:2312.05187, 2023a.
- Barrault, L., Chung, Y.-A., Meglioli, M. C., Dale, D., Dong, N., Duquenne, P.-A., Elsahar, H., Gong, H., Heffernan, K., Hoffman, J., et al. SeamlessM4Tmassively multilingual & multimodal machine translation. *arxiv:2308.11596*, 2023b.
- Beijing DataTang Technology Co., L. aidatatang_200zh, a free Chinese Mandarin speech corpus.
- Biderman, S., Schoelkopf, H., Anthony, Q., Bradley, H., O'Brien, K., Hallahan, E., Khan, M. A., Purohit, S., Prashanth, U. S., Raff, E., Skowron, A., Sutawika, L., and Van Der Wal, O. Pythia: a suite for analyzing large language models across training and scaling. In *Proc. ICML*, ICML'23, 2023.
- Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J. D., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., Agarwal, S., Herbert-Voss, A., Krueger, G.,

Henighan, T., Child, R., Ramesh, A., Ziegler, D., Wu, J., Winter, C., Hesse, C., Chen, M., Sigler, E., Litwin, M., Gray, S., Chess, B., Clark, J., Berner, C., McCandlish, S., Radford, A., Sutskever, I., and Amodei, D. Language models are few-shot learners. In *Proc. NeurIPS*, volume 33, pp. 1877–1901, 2020.

- Bu, H. et al. AISHELL-1: An open-source Mandarin speech corpus and a speech recognition baseline. In O-COCOSDA, 2017.
- Cardenas, R., Zevallos, R., Baquerizo, R., and Camacho, L. Siminchik: A speech corpus for preservation of southern Quechua. *ISI-NLP*, 2018.
- Carletta, J. Unleashing the killer corpus: experiences in creating the multi-everything AMI meeting corpus. Springer, 2007.
- Cattoni, R. et al. MuST-C: A multilingual corpus for endto-end speech translation. *Computer speech & language*, 66, 2021.
- Chen, G. et al. GigaSpeech: An evolving, multi-domain ASR corpus with 10,000 hours of transcribed audio. In *Interspeech 2021*, 2021.
- Chen, S., Wang, C., Chen, Z., Wu, Y., Liu, S., Chen, Z., Li, J., Kanda, N., Yoshioka, T., Xiao, X., Wu, J., Zhou, L., Ren, S., Qian, Y., Qian, Y., Wu, J., Zeng, M., Yu, X., and Wei, F. WavLM: Large-scale self-supervised pre-training for full stack speech processing. *IEEE JSTSP*, 2022. doi: 10.1109/JSTSP.2022.3188113.
- Chen, W., Shi, J., Yan, B., Berrebbi, D., Zhang, W., Peng, Y., Chang, X., Maiti, S., and Watanabe, S. Joint prediction and denoising for large-scale multilingual self-supervised learning. In ASRU 2023, 2023a.
- Chen, W., Yan, B., Shi, J., Peng, Y., Maiti, S., and Watanabe, S. Improving massively multilingual ASR with auxiliary CTC objectives. In *ICASSP 2023*, 2023b.
- Chen, W., Zhang, W., Peng, Y., Li, X., Tian, J., Shi, J., Chang, X., Maiti, S., Livescu, K., and Watanabe, S. Towards robust speech representation learning for thousands of languages. In Al-Onaizan, Y., Bansal, M., and Chen, Y.-N. (eds.), *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pp. 10205–10224, Miami, Florida, USA, November 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.emnlp-main. 570. URL https://aclanthology.org/2024. emnlp-main.570/.
- Conneau, A., Baevski, A., Collobert, R., Mohamed, A., and Auli, M. Unsupervised Cross-Lingual Representation Learning for Speech Recognition. In *Interspeech*

2021, pp. 2426–2430, 2021. doi: 10.21437/Interspeech. 2021-329.

- Conneau, A. et al. FLEURS: Few-shot learning evaluation of universal representations of speech. In SLT 2022, 2022.
- Cuervo, S. and Marxer, R. Scaling properties of speech language models. In Al-Onaizan, Y., Bansal, M., and Chen, Y.-N. (eds.), *Proc. EMNLP*, pp. 351–361, Miami, Florida, USA, November 2024. Association for Computational Linguistics.
- Dabbish, L., Stuart, C., Tsay, J., and Herbsleb, J. Leveraging transparency. *IEEE software*, 30(1):37–43, 2012.
- Dao, T. Flashattention-2: Faster attention with better parallelism and work partitioning. In *The Twelfth International Conference on Learning Representations*, 2024.
- Droppo, J. and Elibol, O. Scaling laws for acoustic models. In *Proc. Interspeech*, pp. 2576–2580, 2021. doi: 10. 21437/Interspeech.2021-1644.
- Fernandes, P., Ghorbani, B., Garcia, X., Freitag, M., and Firat, O. Scaling laws for multilingual neural machine translation. In *Proc. ICML*, ICML'23, 2023.
- Ghorbani, B., Firat, O., Freitag, M., Bapna, A., Krikun, M., Garcia, X., Chelba, C., and Cherry, C. Scaling laws for neural machine translation. In *Proc. ICLR*, 2022. URL https://openreview.net/forum? id=hR_SMu8cxCV.
- Gordon, M. A., Duh, K., and Kaplan, J. Data and parameter scaling laws for neural machine translation. In *Proc. EMNLP*, pp. 5915–5922, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main. 478. URL https://aclanthology.org/2021.emnlp-main.478/.
- Graves, A., Fernández, S., Gomez, F., and Schmidhuber, J. Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks. In *ICML 2006*, pp. 369–376, 2006.
- Gu, Y., Gurunath Shivakumar, P., Kolehmainen, J., Gandhe, A., Rastrow, A., and Bulyko, I. Scaling laws for discriminative speech recognition rescoring models. In *Proc. Interspeech*, pp. 471–475, 2023.
- Henighan, T., Kaplan, J., Katz, M., Chen, M., Hesse, C., Jackson, J., Jun, H., Brown, T. B., Dhariwal, P., Gray, S., et al. Scaling laws for autoregressive generative modeling. *arXiv preprint arXiv:2010.14701*, 2020.
- Hernandez, D., Kaplan, J., Henighan, T., and McCandlish, S. Scaling laws for transfer. *arXiv preprint arXiv:2102.01293*, 2021.

- Hernandez, F., Nguyen, V., Ghannay, S., Tomashenko, N., and Esteve, Y. TED-LIUM 3: Twice as much data and corpus repartition for experiments on speaker adaptation. In Speech and Computer: 20th International Conference, SPECOM 2018. Springer, 2018.
- Hestness, J., Narang, S., Ardalani, N., Diamos, G., Jun, H., Kianinejad, H., Patwary, M. M. A., Yang, Y., and Zhou, Y. Deep learning scaling is predictable, empirically. *arXiv* preprint arXiv:1712.00409, 2017.
- IARPA. The Babel Program. URL www.iarpa.gov/ index.php/research-programs/babel.
- Kaplan, J., McCandlish, S., Henighan, T., Brown, T. B., Chess, B., Child, R., Gray, S., Radford, A., Wu, J., and Amodei, D. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- Kingma, D. P. and Ba, J. Adam: A method for stochastic optimization. *ICLR* 2015, 2015.
- Kudo, T. Subword regularization: Improving neural network translation models with multiple subword candidates. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 66–75, Melbourne, Australia, July 2018.
- Le, D., Jain, M., Keren, G., Kim, S., Shi, Y., Mahadeokar, J., Chan, J., Shangguan, Y., Fuegen, C., Kalinli, O., Saraf, Y., and Seltzer, M. L. Contextualized streaming end-toend speech recognition with trie-based deep biasing and shallow fusion. In *Proc. Interspeech*, pp. 1772–1776, 2021.
- Li, B., Pang, R., Sainath, T. N., Gulati, A., Zhang, Y., Qin, J., Haghani, P., Huang, W. R., Ma, M., and Bai, J. Scaling end-to-end models for large-scale multilingual asr. In *Proc. ASRU*, pp. 1011–1018, 2021.
- Li, X., Metze, F., Mortensen, D. R., Black, A. W., and Watanabe, S. ASR2K: Speech Recognition for Around 2000 Languages without Audio. In *Interspeech 2022*, 2022. doi: 10.21437/Interspeech.2022-10712.
- Li, X., Takamichi, S., Saeki, T., Chen, W., Shiota, S., and Watanabe, S. YODAS: Youtube-oriented dataset for audio and speech. In ASRU 2023, 2023.
- O'Neill, P. K., Lavrukhin, V., Majumdar, S., Noroozi, V., Zhang, Y., Kuchaiev, O., Balam, J., Dovzhenko, Y., Freyberg, K., Shulman, M. D., Ginsburg, B., Watanabe, S., and Kucsko, G. SPGISpeech: 5,000 hours of transcribed financial audio for fully formatted end-to-end speech recognition. In *Interspeech 2021*, 2021.
- Panayotov, V. et al. Librispeech: An ASR corpus based on public domain audio books. In *ICASSP 2015*, 2015.

- Peng, P., Yan, B., Watanabe, S., and Harwath, D. Prompting the hidden talent of web-scale speech models for zeroshot task generalization. In *Proc. Interspeech*, 2023a.
- Peng, Y., Tian, J., Yan, B., Berrebbi, D., Chang, X., Li, X., Shi, J., Arora, S., Chen, W., Sharma, R., Zhang, W., Sudo, Y., Shakeel, M., weon Jung, J., Maiti, S., and Watanabe, S. Reproducing Whisper-style training using an open-source toolkit and publicly available data. In ASRU 2023, 2023b.
- Peng, Y., Tian, J., Chen, W., Arora, S., Yan, B., Sudo, Y., Shakeel, M., Choi, K., Shi, J., Chang, X., et al. OWSM v3. 1: Better and Faster Open Whisper-Style Speech Models based on E-Branchformer. *arXiv preprint arXiv:2401.16658*, 2024.
- Post, M. et al. Improved speech-to-text translation with the fisher and callhome Spanish-English speech translation corpus. In *IWSLT 2013*, 2013.
- Pratap, V., Xu, Q., Sriram, A., Synnaeve, G., and Collobert, R. MLS: A large-scale multilingual dataset for speech research. In *Interspeech 2020*, pp. 2757–2761.
- Pratap, V., Tjandra, A., Shi, B., Tomasello, P., Babu, A., Kundu, S., Elkahky, A., Ni, Z., Vyas, A., Fazel-Zarandi, M., et al. Scaling speech technology to 1,000+ languages. *arxiv*:2305.13516, 2023.
- Puvvada, K. C., Żelasko, P., Huang, H., Hrinchuk, O., Koluguri, N. R., Dhawan, K., Majumdar, S., Rastorgueva, E., Chen, Z., Lavrukhin, V., et al. Less is more: Accurate speech recognition & translation without web-scale data. *arXiv preprint arXiv:2406.19674*, 2024.
- Radford, A., Kim, J. W., Xu, T., Brockman, G., Mcleavey, C., and Sutskever, I. Robust speech recognition via largescale weak supervision. In *ICML 2023*, 2023.
- Rajbhandari, S., Rasley, J., Ruwase, O., and He, Y. Zero: Memory optimizations toward training trillion parameter models. In SC20: International Conference for High Performance Computing, Networking, Storage and Analysis, pp. 1–16, 2020.
- Rasley, J., Rajbhandari, S., Ruwase, O., and He, Y. Deepspeed: System optimizations enable training deep learning models with over 100 billion parameters. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, KDD '20, pp. 3505–3506, New York, NY, USA, 2020. Association for Computing Machinery. ISBN 9781450379984.
- Rosenfeld, J. S., Rosenfeld, A., Belinkov, Y., and Shavit, N. A constructive prediction of the generalization error across scales. In *International Conference on Learning Representations*, 2020. URL https://openreview. net/forum?id=ryenvpEKDr.

- Schaeffer, R., Miranda, B., and Koyejo, S. Are emergent abilities of large language models a mirage? In Oh, A., Naumann, T., Globerson, A., Saenko, K., Hardt, M., and Levine, S. (eds.), *Proc. NeurIPS*, volume 36, pp. 55565– 55581. Curran Associates, Inc., 2023.
- Slizhikova, A. et al. Russian Open Speech To Text
 (STT/ASR) Dataset, 2020. URL https://github.
 com/snakers4/open_stt.
- Taguchi, C. and Chiang, D. Language complexity and speech recognition accuracy: Orthographic complexity hurts, phonological complexity doesn't. arXiv preprint arXiv:2406.09202, 2024.
- Tay, Y., Dehghani, M., Abnar, S., Chung, H., Fedus, W., Rao, J., Narang, S., Tran, V., Yogatama, D., and Metzler, D. Scaling laws vs model architectures: How does inductive bias influence scaling? In Bouamor, H., Pino, J., and Bali, K. (eds.), *Findings of EMNLP*, pp. 12342–12364, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-emnlp. 825. URL https://aclanthology.org/2023. findings-emnlp.825/.
- Tian, J., Peng, Y., Chen, W., Choi, K., Livescu, K., and Watanabe, S. On the effects of heterogeneous data sources on speech-to-text foundation models. In *Interspeech* 2024, pp. 3959–3963, 2024. doi: 10.21437/Interspeech. 2024-1938.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, L., and Polosukhin, I. Attention is all you need. In *NeurIPS 2017*, 2017.
- VoxForge. VoxForge. URL http://www.voxforge. org/.
- Wang, C. et al. CoVoST 2 and Massively Multilingual Speech Translation. In *Interspeech*, 2021a.
- Wang, C. et al. VoxPopuli: A Large-Scale Multilingual Speech Corpus for Representation Learning, Semi-Supervised Learning and Interpretation. In ACL 2021, 2021b.
- Wang, S., Yang, C.-H., Wu, J., and Zhang, C. Can whisper perform speech-based in-context learning? In *Proc. ICASSP*, pp. 13421–13425, 2024a.
- Wang, S., Yang, C.-H. H., Wu, J., and Zhang, C. Bayesian example selection improves in-context learning for speech, text and visual modalities. In *Proceedings* of the 2024 Conference on Empirical Methods in Natural Language Processing, pp. 20812–20828, Miami, Florida, USA, November 2024b. Association for Computational Linguistics. doi: 10.18653/v1/2024.emnlp-main.

1158. URL https://aclanthology.org/2024. emnlp-main.1158/.

- Watanabe, S., Hori, T., and Hershey, J. R. Language independent end-to-end architecture for joint language identification and speech recognition. In 2017 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), pp. 265–271, 2017a. doi: 10.1109/ASRU.2017. 8268945.
- Watanabe, S., Hori, T., Kim, S., Hershey, J. R., and Hayashi, T. Hybrid CTC/attention architecture for end-to-end speech recognition. *IEEE Journal of Selected Topics in Signal Processing*, 2017b.
- Watanabe, S., Hori, T., Karita, S., Hayashi, T., Nishitoba, J., Unno, Y., Enrique Yalta Soplin, N., Heymann, J., Wiesner, M., Chen, N., Renduchintala, A., and Ochiai, T. ESPnet: End-to-end speech processing toolkit. In *Interspeech* 2018, 2018.
- Wei, J., Tay, Y., Bommasani, R., Raffel, C., Zoph, B., Borgeaud, S., Yogatama, D., Bosma, M., Zhou, D., Metzler, D., Chi, E. H., Hashimoto, T., Vinyals, O., Liang, P., Dean, J., and Fedus, W. Emergent abilities of large language models. *Transactions on Machine Learning Research*, 2022. ISSN 2835-8856.
- Yamagishi, J. et al. CSTR VCTK Corpus: English Multispeaker Corpus for CSTR Voice Cloning Toolkit, 2019.
- Yan, B., Shimizu, S., and Watanabe, S. Code-switching Evaluation Set, 2024. URL https://github.com/ brianyan918/sentence-recorder/tree/ codeswitching/.
- Yang, C.-H. H., Li, B., Zhang, Y., Chen, N., Prabhavalkar, R., Sainath, T. N., and Strohman, T. From english to more languages: Parameter-efficient model reprogramming for cross-lingual speech recognition. In *ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 1–5. IEEE, 2023.
- Yang, Z., Chen, Y., Luo, L., Yang, R., Ye, L., Cheng, G., Xu, J., Jin, Y., Zhang, Q., Zhang, P., Xie, L., and Yan, Y. Open source MagicData-RAMC: A rich annotated mandarin conversational (RAMC) speech dataset. In *Interspeech* 2022, pp. 1736–1740, 2022.
- Ye, R. et al. GigaST: A 10,000-hour pseudo speech translation corpus. In *Interspeech 2023*, 2023.
- Yin, Y., Mori, D., et al. ReazonSpeech: A Free and Massive Corpus for Japanese ASR, 2023.
- Yu, Y., Yang, C.-H. H., Kolehmainen, J., Shivakumar, P. G., Gu, Y., Ren, S. R. R., Luo, Q., Gourav, A., Chen, I.-F., Liu, Y.-C., et al. Low-rank adaptation of large language

model rescoring for parameter-efficient speech recognition. In 2023 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), pp. 1–8. IEEE, 2023.

- Zhai, X., Kolesnikov, A., Houlsby, N., and Beyer, L. Scaling vision transformers. In *Proceedings of the IEEE/CVF* conference on computer vision and pattern recognition, pp. 12104–12113, 2022.
- Zhang, B. et al. WenetSpeech: A 10000+ hours multidomain mandarin corpus for speech recognition. In *ICASSP 2022*, 2022a.
- Zhang, S., Roller, S., Goyal, N., Artetxe, M., Chen, M., Chen, S., Dewan, C., Diab, M., Li, X., Lin, X. V., et al. OPT: Open pre-trained transformer language models. *arxiv:2205.01068*, 2022b.
- Zhang, Y., Han, W., Qin, J., Wang, Y., Bapna, A., Chen, Z., Chen, N., Li, B., Axelrod, V., Wang, G., et al. Google USM: Scaling automatic speech recognition beyond 100 languages. *arxiv*:2303.01037, 2023.
- Zheng, W., Xiao, A., Keren, G., Le, D., Zhang, F., Fuegen, C., Kalinli, O., Saraf, Y., and Mohamed, A. Scaling asr improves zero and few shot learning. In *Proc. Interspeech*, pp. 5135–5139, 2022.

Dataset	License	Language(s)	Domain	Hours
MLS (Pratap et al.)	CC BY 4.0	8	Audiobook	44K
WeNetSpeech (Zhang et al., 2022a)	CC BY 4.0/SA	Mandarin	Variety	22K
Russian Open STT (Slizhikova et al., 2020)	CC-BY-NC	Russian	Variety	20K
Reazonspeech (Yin et al., 2023)	Apache 2.0	Japanese	Television	15K
Common Voice 13 (Ardila et al., 2020)	CC0-1.0	92	Read	13K
GigaSpeech (Chen et al., 2021)	Apache 2.0	English	Variety	10K
GigaST (Ye et al., 2023)	CC BY NC 4.0	2	Variety	24K
MuST-C (Cattoni et al., 2021)	CC BY NC ND 4.0	16	Talk	10K
CoVoST2 (Wang et al., 2021a)	CC BY NC 4.0	22	Read	8550
SPGI (O'Neill et al., 2021)	CC BY-NC-ND 4.0	English	Finance	5000
Fisher (Post et al., 2013)	LDC	English	Conversation	2000
VoxPopuli (Wang et al., 2021b)	CC BY-NC 4.0	23	Legal	1800
Googlei18n (Chen et al., 2023a)	Varies	34	Variety	1328
BABEL (IARPA)	IARPA Babel License	17	Conversation	1000
FLEURS (Conneau et al., 2022)	CC BY 4.0	102	News	1000
KSponSpeech (Bang et al., 2020)	MIT	Korean	Conversation	970
LibriSpeech (Panayotov et al., 2015)	CC BY 4.0	English	Audiobook	960
MagicData (Yang et al., 2022)	CC BY-NC-ND 4.0	Mandarin	Conversation	755
TEDLIUM3 (Hernandez et al., 2018)	CC BY-NC-ND 3.0	English	Talk	500
Fisher Callhome Spanish (Post et al., 2013)	CC BY-SA 3.0	2	Conversation	241
VoxForge (VoxForge)	GPL	8	Read	235
AISHELL (Bu et al., 2017)	Apache 2.0	Mandarin	Read	200
AIDATATANG (Beijing DataTang Technology Co.)	CC BY-NC-ND 4.0	Mandarin	Read	140
AMI (Carletta, 2007)	CC BY 4.0	English	Meetings	100
VCTK (Yamagishi et al., 2019)	CC BY 4.0	English	Read	25

Table 6. Overview of datasets used in the 180K OWSM v3.2 dataset. The language column indicates the language used in monolingual datasets and the number of languages in multilingual datasets.

A. Dataset

For the base 180K hours experiments, we use the exact same corpora as those in OWSM v3.2 (Tian et al., 2024). We emphasize that all of these corpora are *publicly accessible* (although not necessarily purely *open-source* due to some licensing restrictions). In total, this leads to 25 corpora across 151 languages. Following Tian et al. (2024), the target text data is normalized by restoring punctuation and casing. In total, there are 150K hours of data for ASR and 30K hours of data for ST. Details on the license, languages, domain, and size of each corpora are shown in Table 6. A per-language distribution of the 150K hours of ASR data is shown in the third column of Table 11.

To scale to 360K hours, we collect more data from YODAS (Li et al., 2023), which contains 500K hours of speech. However, since the data is crawled from YouTube, the transcripts are very noisy. We therefore obtained and used a clean 180K hour subset of YODAS from the authors, which they will make publicly available in the near future. A breakdown of the amount of additional data per language is available in the last column in Table 11.

B. Training Details

All models use a total effective batch size of 256 utterances and are trained for 675K steps. We use the Adam optimizer (Kingma & Ba, 2015) with a piecewise scheduler (Peng et al., 2024) that linearly warms up the learning rate from 0 to 5.0e-5 in the first 30K steps, 5.0e-5 to 2.0e-4 in the next 30K steps, and finally exponentially decays for the remaining training steps. For the hybrid CTC/attention (Watanabe et al., 2017b) training, we use a CTC weight of 0.3. We use bfloat 16, Flash Attention 2 (Dao, 2024), and DeepSpeed Zero Stage-2 (Rasley et al., 2020; Rajbhandari et al., 2020) to improve training efficiency.

As mentioned in Section 3.2, all OWLS models follow a Transformer (Vaswani et al., 2017) encoder-decoder architecture trained using a hybrid CTC/attention (Graves et al., 2006; Watanabe et al., 2017b) loss. Both the encoder and decoder use

sinusoidal absolute positional embeddings (Vaswani et al., 2017). The inputs to the Transformer encoder are 80-dimension log-Mel filterbanks extracted with a frame shift of 10ms, which are then down-sampled 4 times by a stack of convolution layers. The Transformer decoder auto-regressively predicts text tokens, which are pre-segmented with a unigram language model (Kudo, 2018) into a 50K subword vocabulary. We also use Whisper-style training (Radford et al., 2023): all utterances are padded to 30 seconds, and the model is jointly trained to perform language identification, ASR, ST, and timestamp prediction. The exact configurations for each model size are shown in Table 7. We use a mix of A100, H100, and GH200 GPUs for supervised training.

	71	1		
Params.	Enc./Dec. Layers	Hidden Size	FFN Size	Attn. Heads
0.25B	8	768	3072	16
0.50B	16	1024	4096	16
1B	32	1024	4096	16
2B	16	2048	8192	64
4B	36	2048	8192	64
9B	39	2816	11264	64
18B	64	3072	12288	64

Table 7. Architecture hyper-parameter details for each model size.

C. Code-Switching

The code-switching evaluation data is collected from Yan et al. (2024). The authors create synthetic code-switching text by taking sentences from 12 non-English languages in FLEURS (Conneau et al., 2022) and randomly swapping in English translations via dictionary mapping. The swapping is done at the word-level. Bilingual volunteers are then tasked to read the code-switched speech. All volunteers are native speakers in the non-English language and at least fluent in English. The languages to create the code-switched text are Arabic, Czech, Chinese, German, French, Hindi, Japanese, Korean, Portuguese, Russian, Spanish, and Telugu.

D. Japanese and Taiwanese Chinese Mandarin ASR

This section expands the orthographic analyses results and compares the performance of OWLS on ReazonSpeech Japanese (Yin et al., 2023) and Common Voice Taiwanese Chinese Mandarin (Ardila et al., 2020) against Whisper Large v3 (Radford et al., 2023). The results are shown in Table 8. All OWLS models beyond 4B parameters outperform Whisper Large v3. OWLS 9B achieves the best performance on Reazonspeech with 7.3 CER, less than half of that of Whisper (15.1 CER). OWLS 18B achieves the best performance on Taiwanese Mandarin with a CER of 18.7, while Whisper has a CER of 26.9.

Model	Japanese (ja-jp)	Taiwanese Chinese Mandarin (zh-tw)
Whisper Large v3	15.1	26.9
OWLS 0.25B	14.7	50.2
OWLS 0.5B	9.3	39.7
OWLS 1B	7.8	31.0
OWLS 2B	7.6	29.7
OWLS 4B	7.7	24.6
OWLS 9B	7.3	19.1
OWLS 18B	7.5	18.7

Table 8. ASR performance against SOTA models on Japanese (Reazonspeech) and Taiwan Chinese Mandarin (Common Voice).

E. Mondegreens

As discussed in Section 5.2, mondegreens are cases where a human mishears a phrase in a somewhat semantically coherent manner. For Chinese and Japanese speakers, these are known as 空耳 (kōng'ěr / soramimi). These can either occur within a

Source	Text
Original	Vir daardie rede, als wat jy op die TV sien, het die kante gesny, bo, onder en kante.
0.25B	Dore the rear of the ozvatioctiya fissic.
0.5B	For Dore the Rieda also got the optic fissure.
1B	The order did read as Vatican's affiliate for the first time.
2B	The Daily Director also wrote the optics for his work.
4B	For the order read, also what the optieth is.
9B	The door of the red house was fatty, and the squad was very tired.
18B	For the ordinary, the oasis varies between the oasis and the oasis.
Original	Alle burgers van die Vatikaan Stad is Rooms Katoliek.
0.25B	Alabarkers fan diva
0.5B	Alabama cares for the development of the reservation.
1B	allebergers van the valley
2B	Alabama kerrs fan the game.
4B	Alabama, Cars, Fan, Diva.
9B	All the birds catch the worm.
18B	All the workers found the vat.

Table 9. Example mondegreen generations and their corresponding original text.

language ("José, can you see" vs "O say can you see") or across languages ("Bon Appétit" vs "Bone Apple Tea"). We focus on the cross-lingual mondegreen setting, since generating monolingual mondegreens are challenging due to the strength of modern ASR systems. To do this, we first randomly select three low-resource languages (Thai, Afrikaans, and Vietnamese) from FLEURS. We have each model perform ASR inference on these languages, but purposefully input an incorrect English language task tag⁴.

For the human evaluation, we have 13 volunteers rate the semantic coherence of the text corresponding to each utterance on a scale from 1 to 5. Scores of 1 indicate completely non-English text or random strings, while scores of 5 correspond to coherent and realistic English words. We filter out all utterances with an average score across all models below 3.0, removing all utterances that are naturally unsuited for creating English mondegreens. Finally, we obtain the average human score for each individual model output, and report the score averaged across all utterances for each model in Table 4. Sample outputs are shown in Table 9.

F. Contextual Biasing

Previous studies (Peng et al., 2024) have shown that zero-shot contextual biasing is an ability emergent in larger (1B+) ASR models. In this section, we scale the evaluation to the 18B setting. We use the same Librispeech contextual biasing data as Peng et al. (2024); Le et al. (2021), where the model is prompted with a list of true target rare words and distracters. The goal of this task is to reduce the biased WER (B-WER) without degrading the unbiased WER (U-WER). Similar to the results in ST (Section 4.1), we find that small models may encounter catastrophic failures in contextual biasing: the 0.25B model yields a WER of near 97% by frequently outputting blank predictions (Table 10). The 0.5B model also encounters performance degradations upon using contextual biasing prompts, albeit at a less severe magnitude. 1B+ parameter models are able to better take advantage of the context words, while maintaining U-WER. In fact, only the 9B model is capable of sufficiently maintaining the U-WER while sufficiently lowering the B-WER to get an overall lower WER.

G. In-Context Learning

Text-based LLMs are capable of few-shot task performance via in-context learning (ICL) from text prompts at inference time. This is generally done by concatenating consecutive examples together, where each example is an input and expected output pair, and feeding the concatenated text as input into a decoder-only causal language model.

We perform ICL for encoder-decoder ASR models in a similar manner, using the same popular formulation introduced

⁴We initially attempted this evaluation with high-resource non-English languages, but found that models would ignore the incorrect task tag and always transcribe in the original language. We leave further studies of this phenomena to future work.

Table 10. WER on zero-shot contextual biasing.						
Params.	test-clean		test-other			
	WER	U-WER	B-WER	WER	U-WER	B-WER
0.25B	4.05	2.76	15.08	9.62	7.33	30.82
+ biasing	97.73	98.41	91.84	98.88	99.47	93.49
0.50B	2.65	1.77	10.22	6.61	4.85	22.97
+ biasing	2.40	1.83	7.24	6.09	4.94	16.83
1B	2.30	1.50	9.14	5.59	4.02	20.25
+ biasing	2.04	1.54	6.31	5.19	4.19	14.50
2B	2.18	1.44	8.44	5.18	3.73	18.7
+ biasing	1.98	1.50	5.98	4.63	3.70	13.23
4B	2.03	1.37	7.60	4.65	3.33	16.90
+ biasing	2.02	1.68	4.89	5.13	4.47	11.32
9B	1.89	1.25	7.39	4.52	2.97	18.93
+ biasing	1.72	1.29	5.32	4.47	3.67	11.93

Table 10. WER on zero-shot contextual biasing

by Wang et al. (2024a;b). The encoder is first used to extract embeddings of each speech example in the ICL *training* set, which are averaged across the sequence dimension and cached. During inference time, we also extract a time-averaged embedding for the input speech and retrieve the k training samples from the cache with the smallest Euclidean distance from the embedding of the test sample. The audio of the retrieved training samples are then concatenated together, with a half-second pause inserted between each sample. Finally, the speech of the input test utterance is appended at the end. This will be used as the encoder input. The decoder input is therefore the concatenation of the retrieved training examples, with a comma inserted between each sample.

G.1. Quechua Evaluation

Quechua is a low-resource language indigenous to Peru and does not appear in any of the training data that we use. To perform the Quechua ICL evaluation, we use the IWSLT 2024 (Ahmad et al., 2024) version of the Siminchik corpus (Cardenas et al., 2018). We filter out all utterances longer than 7 seconds and split the corpus such that a speaker can only appear in the training or test set. We then further subsample the training set to 150 utterances to reduce compute costs.


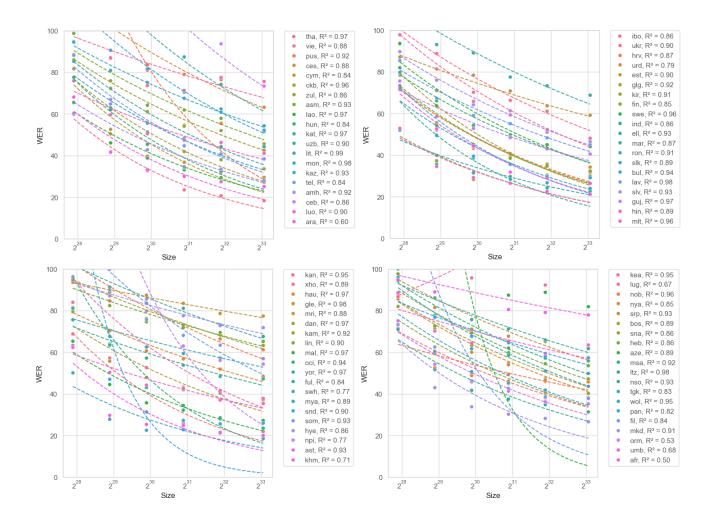


Figure 12. Model scaling laws for all languages in FLEURS. For almost all languages, WER/CER strongly correlated with the power law w.r.t. model parameter size.

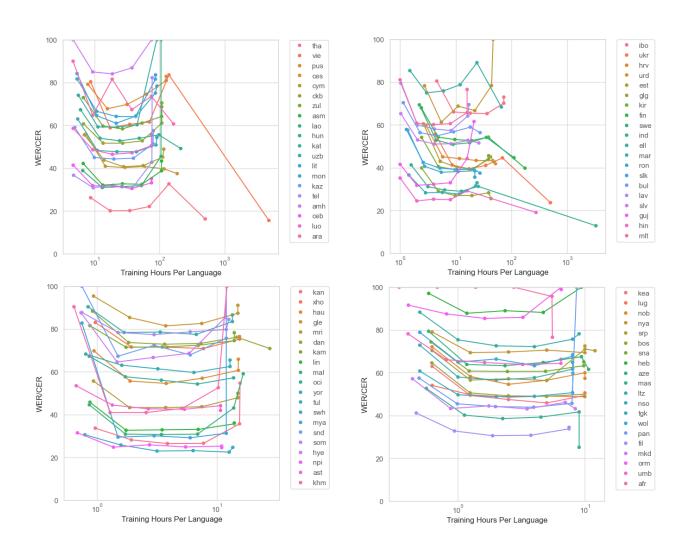

OWLs: Scaling Laws for Multilingual Speech Recognition and Translation Models

Figure 13. Change in WER/CER when adding more data per language. For most languages, we observe the same trend as Figure 5: more data with no increase in diversity does not lead to meaningful changes in WER/CER.

Language	ISO3 Code	OWSM v3.2 Hours	YODAS Hours
English	eng	73000	75000
Russian	rus	20183	15692
Japanese	jpn	18900	1934
Chinese	cmn	16000	176
German	deu	3700	7129
French	fra	2500	8560
Spanish	spa	2000	17344
Catalan	cat	1996.7	37
Dutch	nld	1700	1193
Belarussian	bel	1319.31	0.15
Korean	kor	1000	10890
Italian	ita	700	5553
Bengali	ben	373.6	9.2
Javanese	jav	372	0
Persian	fas	309	30
Polish	pol	300	465
Portuguesse	por	300	10815
Tami	tam	296	10
Cantonese	yue	235	0
Turkish	fur	199	2322
Thai	tha	139	363
Vietnamese	vie	139	4644
Pastho	pus	126	0.141
Czech	ces	117	69
Welsh	cym	111.6	4.2
Kurdish	ckb	108	0
Zulu	zul	107.5	0
Assamese	asm	107.5	0.06
Lao	lao	100.070	0.007
Hungarian	hun	97.3	114
Georgian	kat	90.05	114
Uzbek	uzb	88	2.7
Lithuanian	lit	88 86	2.7
Mongolian	mon	86	0.42
Kazakh	kaz	79.18	0.42
Telugu	tel	79.18	0.7
Amharic	amh	70	0.33
Cebuano	ceb	75	0.55
Luo		75	0
Arabic	luo	74.6	89
	ara	73.017	
Igno Ukranian	ibo ukr	69	0 433
Croatian	hrv	46.6	5.1
Urdu	urd	44	3
Estonian	est	42.1	7
Galician	glg	39	4
Kyrgyz	kir	39	0
Finnish	fin	38.5	137
Swedish	swe	35.5	76
Indonesian	ind	25.3	3270

 Table 11. Amount of ASR training data per language in the OWSM v3.2 180K and YODAS 180K corpora for the top 50 languages in FLEURS.

Language	ISO3 Code	OWSM v3.2 Hours	YODAS Hour
Greek	ell	24	4
Marathi	mar	23	1.
Romanian	ron	22	
Slovakian	slk	20.8	6.
Bulgarian	bul	18.27	9.
Latvian	lav	16.5	0.704
Slovenian	slv	16.5	9.
Gujarati	guj	16	5.3
Hindi	hin	16	26
Maltese	mlt	16	
Kannada	kan	15.5	0.1
Xhosa	xho	15.5	
Hausa	hau	15.13	
Irish	gle	15	
Maori	mri	15	
Danish	dan	14.7	1
Kamba	kam	14	
Lingala	lin	14	
Malayalam	mal	13.84	2.
Occitan	oci	13.8	0.01
Yoruba	yor	13.5	
Fulah	ful	12.9	
Swahili	swh	12.7	0.
Malaysian	mya	12	
Sindhi	snd	12	0.00
Somali	som	12	0.
Armenian	hye	11.8	0.2
Nepali	npi	11	0
Asturian	ast	10.75	
Cambodian	khm	10.3	1.8
Kabuverdianu	kea	10	110
Luganda	lug	10	
Norwegian	nob	10	
Nyanja	nya	10	
Serbian	srp	10	
Bosnian	bos	9.96	
Shona	sna	9.8	
Hebrew	heb	9.4	
Azerbaijani	aze	9.39	1.
Masai	mas	9.39	1.
Luxembourgish	ltz	8	
Northern Sotho		8	
	nso tak	8	0.03
Tajik Wolo	tgk	8	0.03
Wolo Ponjobi	wol		0.
Panjabi Filinina	pan 61	7.9	
Filipino	fil	7.5	1
Macedonian	mkd	7	1.
Oromo	orm	6.5	
Umbundu	umb	6.47	0.04
Afrikaans	afr	5.5	0.04

Table 12. Amount of ASR training data per language in the OWSM v3.2 180K and YODAS 180K corpora for the bottom 50 languages in FLEURS.

Languages0.25B0.50B1B2B4B9B18BEnglish16.811.89.79.58.58.57.7Russian36.423.817.518.514.714.814.5Japanese21.211.49.29.38.17.77.3Chinese26.917.413.813.112.311.610.6German27.016.612.711.710.210.09.5French36.423.117.516.614.413.713.2Spanish27.515.811.110.69.09.79.0Catalan30.515.211.411.18.88.68.8Dutch47.733.225.821.919.317.917.3Belarussian46.024.219.118.515.816.218.2Korean25.925.849.447.738.638.534.2Italian37.919.513.912.2 9.8 10.0 9.8 Bengali45.523.117.817.21513.813.0Javanese82.239.230.628.825.723.622.7Persian73.039.034.730.027.726.5Portuguesse50.129.620.515.714.121.1Tami55.927.525.122.019.017.716.4<	ble 13. WER/CE	R for the	top 50 lar	iguages i	n FLEUR	S by O	WLS tra	aining da
Russian 36.4 23.8 17.5 18.5 14.7 14.8 14.5 Japanese 21.2 11.4 9.2 9.3 8.1 7.7 7.3 Chinese 26.9 17.4 13.8 13.1 12.3 11.6 10.0 9.5 French 36.4 23.1 17.5 16.6 14.4 13.7 13.2 Spanish 27.5 15.8 11.1 10.6 9.0 9.7 9.0 Catalan 30.5 15.2 11.4 11.1 8.8 8.6 8.8 Dutch 47.7 33.2 25.8 21.9 19.3 17.9 17.3 Belarussian 46.0 24.2 19.1 18.5 15.8 13.1 12.2 9.8 10.0 9.8 Bengali 45.5 23.1 17.8 17.2 15 13.8 13.0 12.7 23.6 22.7 Persian 73.0 39.0 34.0 31.1	Languages	0.25B	0.50B	1 B	2B	4B	9B	18B
Japanese 21.2 11.4 9.2 9.3 8.1 7.7 7.3 Chinese 26.9 17.4 13.8 13.1 12.3 11.6 10.6 German 27.0 16.6 12.7 11.7 10.2 10.0 9.5 French 36.4 23.1 17.5 16.6 14.4 13.7 13.2 Spanish 27.5 15.8 11.1 10.6 9.0 9.7 9.0 Catalan 30.5 15.2 11.4 11.1 8.8 8.6 8.8 Dutch 47.7 33.2 25.8 21.9 19.3 17.9 17.3 Belarussian 46.0 24.2 19.1 18.5 15.8 16.2 18.2 Korean 259.2 58.8 49.4 47.7 38.6 38.5 34.2 Italian 37.9 19.5 13.9 12.2 9.8 10.0 9.8 Javanese 82.2 39.2 30.6 28.8 25.7 23.6 20.7 16.1 Persi	English	16.8	11.8	9.7	9.5	8.5	8.5	7.7
Chinese 26.9 17.4 13.8 13.1 12.3 11.6 10.6 German 27.0 16.6 12.7 11.7 10.2 10.0 9.5 French 36.4 23.1 17.5 16.6 14.4 13.7 13.2 Spanish 27.5 15.8 11.1 10.6 9.0 9.7 9.0 Catalan 30.5 15.2 11.4 11.1 8.8 8.6 8.8 Dutch 47.7 33.2 25.8 21.9 19.3 17.9 17.3 Belarussian 46.0 24.2 19.1 18.5 15.8 16.2 18.2 Korean 259.2 58.8 49.4 47.7 38.6 38.5 34.2 Italian 37.0 39.0 34.0 31.1 29.3 28.9 25.6 Portuguesse 50.1 29.6 20.5 15.5 14.1 21.1 Tami 55.9 27.5 25	Russian	36.4	23.8	17.5	18.5	14.7	14.8	14.5
German 27.0 16.6 12.7 11.7 10.2 10.0 9.5 French 36.4 23.1 17.5 16.6 14.4 13.7 13.2 Spanish 27.5 15.8 11.1 10.6 9.0 9.7 9.0 Catalan 30.5 15.2 11.4 11.1 8.8 8.6 8.8 Dutch 47.7 33.2 25.8 21.9 19.3 17.9 17.3 Belarussian 46.0 24.2 19.1 18.5 15.8 16.2 18.2 Korean 259.2 58.8 49.4 47.7 38.6 38.5 34.2 Italian 37.9 19.5 13.9 12.2 9.8 10.0 9.8 Javanese 82.2 39.2 30.6 31.1 29.3 28.9 25.6 Portuguesse 50.1 29.6 20.5 15.7 14.1 21.1 Tami 59.8 41.9 32.	Japanese	21.2	11.4	9.2	9.3	8.1	7.7	7.3
French 36.4 23.1 17.5 16.6 14.4 13.7 13.2 Spanish 27.5 15.8 11.1 10.6 9.0 9.7 9.0 Catalan 30.5 15.2 11.4 11.1 8.8 8.6 8.8 Dutch 47.7 33.2 25.8 21.9 19.3 17.9 17.3 Belarussian 46.0 24.2 19.1 18.5 15.8 16.2 18.2 Korean 259.2 58.8 49.4 47.7 38.6 38.5 34.2 Italian 37.9 19.5 13.9 12.2 9.8 10.0 9.8 Bengali 45.5 23.1 17.8 17.2 15 13.8 13.0 Javanese 82.2 39.2 30.6 28.8 25.7 23.6 22.7 Persian 73.0 39.0 34.0 31.1 29.3 28.5 29.2 26.3 Portuguesse 50.1 29.6 20.5 14.3 42.3 34.5 29.2 26.3 </td <td>Chinese</td> <td>26.9</td> <td>17.4</td> <td>13.8</td> <td>13.1</td> <td>12.3</td> <td>11.6</td> <td>10.6</td>	Chinese	26.9	17.4	13.8	13.1	12.3	11.6	10.6
Spanish 27.5 15.8 11.1 10.6 9.0 9.7 9.0 Catalan 30.5 15.2 11.4 11.1 8.8 8.6 8.8 Dutch 47.7 33.2 25.8 21.9 19.3 17.9 17.3 Belarussian 46.0 24.2 19.1 18.5 15.8 16.2 18.2 Korean 259.2 58.8 49.4 47.7 38.6 38.5 34.2 Italian 37.9 19.5 13.9 12.2 9.8 10.0 9.8 Bengali 45.5 23.1 17.8 17.2 15 13.8 13.0 Javanese 82.2 39.2 30.6 28.8 25.7 23.6 22.7 Persian 73.0 39.0 34.0 31.1 29.3 28.6 Portuguesse 50.1 29.6 20.5 20.5 15.7 14.1 21.1 Tami 55.9 27.5 <t< td=""><td>German</td><td>27.0</td><td>16.6</td><td>12.7</td><td>11.7</td><td>10.2</td><td>10.0</td><td>9.5</td></t<>	German	27.0	16.6	12.7	11.7	10.2	10.0	9.5
Catalan 30.5 15.2 11.4 11.1 8.8 8.6 8.8 Dutch 47.7 33.2 25.8 21.9 19.3 17.9 17.3 Belarussian 46.0 24.2 19.1 18.5 15.8 16.2 18.2 Korean 259.2 58.8 49.4 47.7 38.6 38.5 34.2 Italian 37.9 19.5 13.9 12.2 9.8 10.0 9.8 Bengali 45.5 23.1 17.8 17.2 15 13.8 13.0 Javanese 82.2 39.2 30.6 28.8 25.7 23.6 22.7 Persian 73.0 39.0 34.0 31.1 29.3 28.9 25.6 Polish 78.2 49.0 39.1 34.7 30.0 27.7 26.5 Portuguesse 50.1 29.6 20.5 20.5 15.7 14.1 21.1 Tami 55.9 27.5 25.1 22.0 19.0 17.7 16.4 Cantonese 92.5 55.1 43.9 38.0 32.7 30.0 28.4 Turkish 82.0 51.9 44.1 42.3 34.5 29.2 26.3 Thai 59.8 41.9 32.7 23.5 20.7 18.3 17.6 Vietnamese 18.2 86.6 35.6 45.6 47.9 Pastho 114.2 108.3 81.0 79.0 76.5 63.2 $64.$	French	36.4	23.1	17.5	16.6	14.4	13.7	13.2
Dutch47.733.225.821.919.317.917.3Belarussian46.024.219.118.515.816.218.2Korean259.258.849.447.738.638.534.2Italian37.919.513.912.29.810.09.8Bengali45.523.117.817.21513.813.0Javanese82.239.230.628.825.723.622.7Persian73.039.034.031.129.328.925.6Polish78.249.039.134.730.027.726.5Portuguesse50.129.620.515.714.121.1Tami55.927.525.143.938.032.730.028.4Turkish82.051.944.142.334.529.226.3Thai59.841.932.723.520.718.317.6Vietnamese181.286.683.654.655.542.547.9Pastho114.2108.381.079.076.563.264.2Czech81.750.439.736.831.829.551.9Austhi88.675.961.154.152.045.649.1Zulu98.772.364.261.957.951.551.9Assamese65.546.138.833.1 </td <td>Spanish</td> <td>27.5</td> <td>15.8</td> <td>11.1</td> <td>10.6</td> <td>9.0</td> <td>9.7</td> <td>9.0</td>	Spanish	27.5	15.8	11.1	10.6	9.0	9.7	9.0
Belarussian 46.0 24.2 19.1 18.5 15.8 16.2 18.2 Korean 259.2 58.8 49.4 47.7 38.6 38.5 34.2 Italian 37.9 19.5 13.9 12.2 9.8 10.0 9.8 Bengali 45.5 23.1 17.8 17.2 15 13.8 13.0 Javanese 82.2 39.2 30.6 28.8 25.7 23.6 22.7 Persian 73.0 39.0 34.0 31.1 29.3 29.2 26.6 Polish 78.2 49.0 39.1 34.7 30.0 27.7 26.5 Portuguesse 50.1 29.6 20.5 25.1 14.1 21.1 Tami 59.8 41.9 32.7 23.5 20.7 18.3 17.6 Vietnamese 181.2 86.6 83.6 54.6 55.5 42.5 47.9 Pastho 114.2 108.3 81.0	Catalan	30.5	15.2	11.4	11.1	8.8	8.6	8.8
Korean259.258.849.447.738.638.534.2Italian37.919.513.912.2 9.8 10.0 9.8 Bengali45.523.117.817.21513.813.0Javanese82.239.230.628.825.723.622.7Persian73.039.034.031.129.328.925.6Polish78.249.039.134.730.027.7 26.5 Portuguesse50.129.620.520.515.7 14.1 21.1Tami55.927.525.122.019.017.7 16.4 Cantonese92.555.143.938.032.730.0 28.4 Turkish82.051.944.142.334.529.2 26.3 Thai59.841.932.723.520.718.3 17.6 Vietnamese181.286.683.654.655.5 42.2 Czech81.750.439.736.831.8 29.5 36.1Welsh86.052.645.241.938.0 33.6 38.9Kurdish88.675.961.154.152.0 45.6 49.1Zulu98.772.364.261.957.9 51.5 51.9Assamese65.546.138.833.129.4 27.3 29.4Lao77.662.945.5 <t< td=""><td>Dutch</td><td>47.7</td><td>33.2</td><td>25.8</td><td>21.9</td><td>19.3</td><td>17.9</td><td>17.3</td></t<>	Dutch	47.7	33.2	25.8	21.9	19.3	17.9	17.3
Italian 37.9 19.5 13.9 12.2 9.8 10.0 9.8 Bengali 45.5 23.1 17.8 17.2 15 13.8 13.0 Javanese 82.2 39.2 30.6 28.8 25.7 23.6 22.7 Persian 73.0 39.0 34.0 31.1 29.3 28.9 25.6 Polish 78.2 49.0 39.1 34.7 30.0 27.7 26.5 Portuguesse 50.1 29.6 20.5 15.7 14.1 21.1 Tami 55.9 27.5 25.1 22.0 19.0 17.7 16.4 Cantonese 92.5 55.1 43.9 38.0 32.7 30.0 28.4 Turkish 82.0 51.9 44.1 42.3 34.5 29.2 26.3 Thai 59.8 41.9 32.7 23.5 20.7 18.3 17.6 Vietnamese 181.2 86.6 83.6 54.6 55.5 42.5 47.9 Pastho 114.2	Belarussian	46.0	24.2	19.1	18.5	15.8	16.2	18.2
Bengali 45.5 23.1 17.8 17.2 15 13.8 13.0 Javanese 82.2 39.2 30.6 28.8 25.7 23.6 22.7 Persian 73.0 39.0 34.0 31.1 29.3 28.9 25.6 Polish 78.2 49.0 39.1 34.7 30.0 27.7 26.5 Portuguesse 50.1 29.6 20.5 20.5 15.7 14.1 21.1 Tami 55.9 27.5 25.1 22.0 19.0 17.7 16.4 Cantonese 92.5 55.1 43.9 38.0 32.7 30.0 28.4 Turkish 82.0 51.9 44.1 42.3 34.5 29.2 26.3 Thai 59.8 41.9 32.7 23.5 20.7 18.3 17.6 Vietnamese 181.2 86.6 83.6 54.6 55.5 42.5 47.9 Pastho 114.2	Korean	259.2	58.8	49.4	47.7	38.6	38.5	34.2
Javanese82.239.230.628.825.723.622.7Persian73.039.034.031.129.328.925.6Polish78.249.039.134.730.027.726.5Portuguesse50.129.620.520.515.714.121.1Tami55.927.525.122.019.017.716.4Cantonese92.555.143.938.032.730.028.4Turkish82.051.944.142.334.529.226.3Thai59.841.932.723.520.718.317.6Vietnamese181.286.683.654.655.542.547.9Pastho114.2108.381.079.076.563.264.2Czech81.750.439.736.831.829.536.1Welsh86.052.645.241.938.033.638.9Kurdish88.675.961.154.152.045.649.1Zulu98.772.364.261.957.951.551.9Assamese65.546.138.833.129.427.329.4Lao77.662.945.534.132.528.332.5Hungarian94.862.055.648.444.344.7Georgian130.9117.1106.387.474	Italian	37.9	19.5	13.9	12.2	9.8	10.0	9.8
Persian73.039.034.031.129.328.925.6Polish78.249.039.134.730.027.726.5Portuguesse50.129.620.520.515.714.121.1Tami55.927.525.122.019.017.716.4Cantonese92.555.143.938.032.730.028.4Turkish82.051.944.142.334.529.226.3Thai59.841.932.723.520.718.317.6Vietnamese181.286.683.654.655.542.547.9Pastho114.2108.381.079.076.563.264.2Czech81.750.439.736.831.829.536.1Welsh86.052.645.241.938.033.638.9Kurdish88.675.961.154.152.045.649.1Zulu98.772.364.261.957.951.551.9Assamese65.546.138.833.129.427.329.4Lao77.662.945.534.132.528.332.5Hungarian94.862.055.648.444.344.7Georgian130.9117.1106.387.474.254.245.1Uzbek85.359.650.947.341.0<	Bengali	45.5	23.1	17.8	17.2	15	13.8	13.0
Polish78.249.039.134.730.027.726.5Portuguesse50.129.620.520.515.714.121.1Tami55.927.525.122.019.017.716.4Cantonese92.555.143.938.032.730.028.4Turkish82.051.944.142.334.529.226.3Thai59.841.932.723.520.718.317.6Vietnamese181.286.683.654.655.542.547.9Pastho114.2108.381.079.076.563.264.2Czech81.750.439.736.831.829.536.1Welsh86.052.645.241.938.033.638.9Kurdish88.675.961.154.152.045.649.1Zulu98.772.364.261.957.951.551.9Assamese65.546.138.833.129.427.329.4Lao77.662.945.534.132.528.332.5Hungarian94.862.055.648.444.344.344.7Georgian130.9117.1106.387.474.254.245.1Uzbek85.359.650.947.341.038.435.2Lithuanian94.580.975.167	Javanese	82.2	39.2	30.6	28.8	25.7	23.6	22.7
Portuguesse 50.1 29.6 20.5 20.5 15.7 14.1 21.1 Tami 55.9 27.5 25.1 22.0 19.0 17.7 16.4 Cantonese 92.5 55.1 43.9 38.0 32.7 30.0 28.4 Turkish 82.0 51.9 44.1 42.3 34.5 29.2 26.3 Thai 59.8 41.9 32.7 23.5 20.7 18.3 17.6 Vietnamese 181.2 86.6 83.6 54.6 55.5 42.5 47.9 Pastho 114.2 108.3 81.0 79.0 76.5 63.2 64.2 Czech 81.7 50.4 39.7 36.8 31.8 29.5 36.1 Welsh 86.0 52.6 45.2 41.9 38.0 33.6 38.9 Kurdish 88.6 75.9 61.1 54.1 52.0 45.6 49.1 Zulu 98.7 72.3 64.2 61.9 57.9 51.5 51.9 Assamese 65.5 46.1 38.8 33.1 29.4 27.3 29.4 Lao 77.6 62.9 45.5 34.1 32.5 28.3 32.5 Hungarian 94.8 62.0 55.6 48.4 44.3 44.7 Georgian 130.9 117.1 106.3 87.4 74.2 54.2 45.1 Uzbek 85.3 59.6 50.9 47.3 41.0 $38.$	Persian	73.0	39.0	34.0	31.1	29.3	28.9	25.6
Tami 55.9 27.5 25.1 22.0 19.0 17.7 16.4 Cantonese 92.5 55.1 43.9 38.0 32.7 30.0 28.4 Turkish 82.0 51.9 44.1 42.3 34.5 29.2 26.3 Thai 59.8 41.9 32.7 23.5 20.7 18.3 17.6 Vietnamese 181.2 86.6 83.6 54.6 55.5 42.5 47.9 Pastho 114.2 108.3 81.0 79.0 76.5 63.2 64.2 Czech 81.7 50.4 39.7 36.8 31.8 29.5 36.1 Welsh 86.0 52.6 45.2 41.9 38.0 33.6 38.9 Kurdish 88.6 75.9 61.1 54.1 52.0 45.6 49.1 Zulu 98.7 72.3 64.2 61.9 57.9 51.5 51.9 Assamese 65.5 46.1 38.8 33.1 29.4 27.3 29.4 Lao 77.6 62.9 45.5 34.1 32.5 28.3 32.5 Hungarian 94.8 62.0 55.6 48.4 44.3 44.7 Georgian 130.9 117.1 106.3 87.4 74.2 54.2 45.1 Uzbek 85.3 59.6 50.9 47.3 41.0 38.4 35.2 Lithuanian 94.5 80.9 75.1 67.5 60.8 54.3	Polish	78.2	49.0	39.1	34.7	30.0	27.7	26.5
Tami 55.9 27.5 25.1 22.0 19.0 17.7 16.4 Cantonese 92.5 55.1 43.9 38.0 32.7 30.0 28.4 Turkish 82.0 51.9 44.1 42.3 34.5 29.2 26.3 Thai 59.8 41.9 32.7 23.5 20.7 18.3 17.6 Vietnamese 181.2 86.6 83.6 54.6 55.5 42.5 47.9 Pastho 114.2 108.3 81.0 79.0 76.5 63.2 64.2 Czech 81.7 50.4 39.7 36.8 31.8 29.5 36.1 Welsh 86.0 52.6 45.2 41.9 38.0 33.6 38.9 Kurdish 88.6 75.9 61.1 54.1 52.0 45.6 49.1 Zulu 98.7 72.3 64.2 61.9 57.9 51.5 51.9 Assamese 65.5 46.1 38.8 33.1 29.4 27.3 29.4 Lao 77.6 62.9 45.5 34.1 32.5 28.3 32.5 Hungarian 94.8 62.0 55.6 48.4 44.3 44.7 Georgian 130.9 117.1 106.3 87.4 74.2 54.2 45.1 Uzbek 85.3 59.6 50.9 47.3 41.0 38.4 35.2 Lithuanian 94.5 80.9 75.1 67.5 60.8 54.3	Portuguesse	50.1	29.6	20.5	20.5	15.7	14.1	21.1
Turkish 82.0 51.9 44.1 42.3 34.5 29.2 26.3 Thai 59.8 41.9 32.7 23.5 20.7 18.3 17.6 Vietnamese 181.2 86.6 83.6 54.6 55.5 42.5 47.9 Pastho 114.2 108.3 81.0 79.0 76.5 63.2 64.2 Czech 81.7 50.4 39.7 36.8 31.8 29.5 36.1 Welsh 86.0 52.6 45.2 41.9 38.0 33.6 38.9 Kurdish 88.6 75.9 61.1 54.1 52.0 45.6 49.1 Zulu 98.7 72.3 64.2 61.9 57.9 51.5 51.9 Assamese 65.5 46.1 38.8 33.1 29.4 27.3 29.4 Lao 77.6 62.9 45.5 34.1 32.5 28.3 32.5 Hungarian 94.8 62.0 55.6 48.4 44.3 44.3 44.7 Georgian 130.9 117.1 106.3 87.4 74.2 54.2 45.1 Uzbek 85.3 59.6 50.9 47.3 41.0 38.4 35.2 Lithuanian 94.5 80.9 75.1 67.5 60.8 54.3 52.7 Mongolian 117.0 90.6 81.6 70.5 62.4 52.2 48.0 Kazakh 88.2 64.8 51.4 44.7 4	-	55.9	27.5	25.1	22.0	19.0	17.7	16.4
Thai 59.8 41.9 32.7 23.5 20.7 18.3 17.6 Vietnamese 181.2 86.6 83.6 54.6 55.5 42.5 47.9 Pastho 114.2 108.3 81.0 79.0 76.5 63.2 64.2 Czech 81.7 50.4 39.7 36.8 31.8 29.5 36.1 Welsh 86.0 52.6 45.2 41.9 38.0 33.6 38.9 Kurdish 88.6 75.9 61.1 54.1 52.0 45.6 49.1 Zulu 98.7 72.3 64.2 61.9 57.9 51.5 51.9 Assamese 65.5 46.1 38.8 33.1 29.4 27.3 29.4 Lao 77.6 62.9 45.5 34.1 32.5 28.3 32.5 Hungarian 94.8 62.0 55.6 48.4 44.3 44.3 44.7 Georgian 130.9 117.1 106.3 87.4 74.2 54.2 45.1 Uzbek 85.3 59.6 50.9 47.3 41.0 38.4 35.2 Lithuanian 94.5 80.9 75.1 67.5 60.8 54.3 52.7 Mongolian 117.0 90.6 81.6 70.5 62.4 52.2 48.0 Kazakh 88.2 64.8 51.4 44.7 40.7 38.4 44.4 Telugu 60.3 67.0 42.8 34.6 31	Cantonese	92.5	55.1	43.9	38.0	32.7	30.0	28.4
Vietnamese181.286.683.654.655.542.547.9Pastho114.2108.381.079.076.563.264.2Czech81.750.439.736.831.829.536.1Welsh86.052.645.241.938.033.638.9Kurdish88.675.961.154.152.045.649.1Zulu98.772.364.261.957.951.551.9Assamese65.546.138.833.129.427.329.4Lao77.662.945.534.132.528.332.5Hungarian94.862.055.648.444.344.7Georgian130.9117.1106.387.474.254.245.1Uzbek85.359.650.947.341.038.435.2Lithuanian94.580.975.167.560.854.352.7Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.7	Turkish	82.0	51.9	44.1	42.3	34.5	29.2	26.3
Pastho114.2108.381.079.076.5 63.2 64.2Czech81.750.439.736.831.8 29.5 36.1Welsh86.052.645.241.938.0 33.6 38.9Kurdish88.675.961.154.152.0 45.6 49.1Zulu98.772.364.261.957.9 51.5 51.9Assamese65.546.138.833.129.4 27.3 29.4Lao77.662.945.534.132.5 28.3 32.5Hungarian94.862.055.648.4 44.3 44.7Georgian130.9117.1106.387.474.254.2 45.1 Uzbek85.359.650.947.341.038.4 35.2 Lithuanian94.580.975.167.560.854.3 52.7 Mongolian117.090.681.670.562.452.2 48.0 Kazakh88.264.851.444.740.738.4 34.4 Telugu60.367.042.834.633.527.9 26.1 Amharic174.9122.4117.1104.993.773.4 70.9 Cebuano68.141.633.230.027.425.1 24.5 Luo75.959.650.547.746.341.1 39.3 Arabic107.587.0	Thai	59.8	41.9	32.7	23.5	20.7	18.3	17.6
Pastho114.2108.381.079.076.563.264.2Czech81.750.439.736.831.829.536.1Welsh86.052.645.241.938.033.638.9Kurdish88.675.961.154.152.045.649.1Zulu98.772.364.261.957.951.551.9Assamese65.546.138.833.129.427.329.4Lao77.662.945.534.132.528.332.5Hungarian94.862.055.648.444.344.7Georgian130.9117.1106.387.474.254.245.1Uzbek85.359.650.947.341.038.435.2Lithuanian94.580.975.167.560.854.352.7Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.5	Vietnamese	181.2	86.6	83.6	54.6	55.5	42.5	47.9
Welsh86.052.645.241.938.033.638.9Kurdish88.675.961.154.152.045.649.1Zulu98.772.364.261.957.951.551.9Assamese65.546.138.833.129.427.329.4Lao77.662.945.534.132.528.332.5Hungarian94.862.055.648.444.344.344.7Georgian130.9117.1106.387.474.254.245.1Uzbek85.359.650.947.341.038.435.2Lithuanian94.580.975.167.560.854.352.7Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.5		114.2	108.3	81.0	79.0	76.5	63.2	64.2
Kurdish88.675.961.154.152.0 45.6 49.1Zulu98.772.364.261.957.9 51.5 51.9Assamese65.546.138.833.129.4 27.3 29.4Lao77.662.945.534.132.5 28.3 32.5Hungarian94.862.055.648.4 44.344.3 44.7Georgian130.9117.1106.387.474.254.2 45.1 Uzbek85.359.650.947.341.038.4 35.2 Lithuanian94.580.975.167.560.854.3 52.7 Mongolian117.090.681.670.562.452.2 48.0 Kazakh88.264.851.444.740.738.4 34.4 Telugu60.367.042.834.633.527.9 26.1 Amharic174.9122.4117.1104.993.773.4 70.9 Cebuano68.141.633.230.027.425.1 24.5 Luo75.959.650.547.746.341.1 39.3 Arabic107.587.073.671.377.575.6 72.1 Igno109.481.470.266.361.159.1 58.8 Ukranian78.752.343.339.335.134.232.2Urdu93.8<	Czech	81.7	50.4	39.7	36.8	31.8	29.5	36.1
Zulu98.772.3 64.2 61.9 57.9 51.5 51.9 Assamese 65.5 46.1 38.8 33.1 29.4 27.3 29.4 Lao 77.6 62.9 45.5 34.1 32.5 28.3 32.5 Hungarian 94.8 62.0 55.6 48.4 44.3 44.3 44.7 Georgian 130.9 117.1 106.3 87.4 74.2 54.2 45.1 Uzbek 85.3 59.6 50.9 47.3 41.0 38.4 35.2 Lithuanian 94.5 80.9 75.1 67.5 60.8 54.3 52.7 Mongolian 117.0 90.6 81.6 70.5 62.4 52.2 48.0 Kazakh 88.2 64.8 51.4 44.7 40.7 38.4 34.4 Telugu 60.3 67.0 42.8 34.6 33.5 27.9 26.1 Amharic 174.9 122.4 117.1 104.9 93.7 73.4 70.9 Cebuano 68.1 41.6 33.2 30.0 27.4 25.1 24.5 Luo 75.9 59.6 50.5 47.7 46.3 41.1 39.3 Arabic 107.5 87.0 73.6 71.3 77.5 75.6 72.1 Igno 109.4 81.4 70.2 66.3 61.1 59.1 58.8 Ukranian 78.3 51.9 44.6 40.5 34.6	Welsh	86.0	52.6	45.2	41.9	38.0	33.6	38.9
Assamese65.546.138.833.129.427.329.4Lao77.662.945.534.132.528.332.5Hungarian94.862.055.648.444.344.344.7Georgian130.9117.1106.387.474.254.245.1Uzbek85.359.650.947.341.038.435.2Lithuanian94.580.975.167.560.854.352.7Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.2	Kurdish	88.6	75.9	61.1	54.1	52.0	45.6	49.1
Lao77.662.945.534.132.528.332.5Hungarian94.862.055.648.444.344.344.7Georgian130.9117.1106.387.474.254.245.1Uzbek85.359.650.947.341.038.435.2Lithuanian94.580.975.167.560.854.352.7Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.3	Zulu	98.7	72.3	64.2	61.9	57.9	51.5	51.9
Hungarian94.862.055.648.444.344.344.7Georgian130.9117.1106.387.474.254.245.1Uzbek85.359.650.947.341.038.435.2Lithuanian94.580.975.167.560.854.352.7Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.0<	Assamese	65.5	46.1	38.8	33.1	29.4	27.3	29.4
Georgian130.9117.1106.387.474.254.245.1Uzbek85.359.650.947.341.038.435.2Lithuanian94.580.975.167.560.854.352.7Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.3 <td< td=""><td>Lao</td><td>77.6</td><td>62.9</td><td>45.5</td><td>34.1</td><td>32.5</td><td>28.3</td><td>32.5</td></td<>	Lao	77.6	62.9	45.5	34.1	32.5	28.3	32.5
Uzbek85.359.650.947.341.038.435.2Lithuanian94.580.975.167.560.854.352.7Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.	Hungarian	94.8	62.0	55.6	48.4	44.3	44.3	44.7
Lithuanian94.580.975.167.560.854.352.7Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Georgian	130.9	117.1	106.3	87.4	74.2	54.2	45.1
Mongolian117.090.681.670.562.452.248.0Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Uzbek	85.3	59.6	50.9	47.3	41.0	38.4	35.2
Kazakh88.264.851.444.740.738.434.4Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Lithuanian	94.5	80.9	75.1	67.5	60.8	54.3	52.7
Telugu60.367.042.834.633.527.926.1Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Mongolian	117.0	90.6	81.6	70.5	62.4	52.2	48.0
Amharic174.9122.4117.1104.993.773.470.9Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Kazakh	88.2	64.8	51.4	44.7	40.7	38.4	34.4
Cebuano68.141.633.230.027.425.124.5Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Telugu	60.3	67.0	42.8	34.6	33.5	27.9	26.1
Luo75.959.650.547.746.341.139.3Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Amharic	174.9	122.4	117.1	104.9	93.7	73.4	70.9
Arabic107.587.073.671.377.575.672.1Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Cebuano	68.1	41.6	33.2	30.0	27.4	25.1	24.5
Igno109.481.470.266.361.159.158.8Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Luo	75.9	59.6	50.5	47.7	46.3	41.1	39.3
Ukranian78.351.944.640.534.631.330.2Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Arabic	107.5	87.0	73.6	71.3	77.5	75.6	72.1
Croatian78.752.343.339.335.134.232.2Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Igno	109.4	81.4	70.2	66.3	61.1	59.1	58.8
Urdu93.871.078.470.863.759.258.1Estonian87.155.545.240.735.731.830.5Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Ukranian	78.3	51.9	44.6	40.5	34.6	31.3	30.2
Estonian87.155.545.240.735.731.8 30.5 Galician52.737.328.326.422.821.0 20.1 Kyrgyz79.454.244.038.534.932.3 31.1 Finnish93.663.754.349.845.044.1 42.1 Swedish82.066.154.248.943.140.7 39.1		78.7						
Galician52.737.328.326.422.821.020.1Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1								
Kyrgyz79.454.244.038.534.932.331.1Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1								
Finnish93.663.754.349.845.044.142.1Swedish82.066.154.248.943.140.739.1	Galician	52.7	37.3	28.3	26.4	22.8	21.0	20.1
Swedish 82.0 66.1 54.2 48.9 43.1 40.7 39.1	Kyrgyz	79.4	54.2		38.5	34.9	32.3	31.1
	Finnish	93.6	63.7	54.3	49.8	45.0	44.1	42.1
Indonesian 73.3 39.9 31.3 29.7 24.3 22.7 22.0		82.0	66.1	54.2	48.9	43.1	40.7	39.1
	Indonesian	73.3	39.9	31.3	29.7	24.3	22.7	22.0

Table 13. WER/CER for the top 50 languages in FLEURS by OWLS training data.

Table 14. WER/CER	Cable 14. WER/CER for the bottom 52 languages in FLEURS by OWLS training data.										
Languages	0.25B	0.50B	1 B	2B	4B	9B	18B				
Greek	116.6	93.1	89.1	77.5	73.3	68.8	64.9				
Marathi	52.0	35.6	31.6	28.4	26.7	24.0	21.9				
Romanian	71.5	49.7	38.6	35.5	30.3	29.7	28.7				
Slovakian	79.7	49.4	39.5	35.6	29.9	29.1	29.4				
Bulgarian	85.4	67.3	59.0	55.1	48.3	45.2	43.4				
Latvian	89.7	76.0	64.2	61.3	51.0	46.5	46.0				
Slovenian	75.6	58.6	52.8	48.4	43.0	40.5	42.8				
Gujarati	72.2	52.6	44.3	31.8	29.2	26.4	33.1				
Hindi	52.9	34.5	29.2	26.5	22.6	21.2	22.7				
Maltese	97.8	88.8	65.8	59.3	52.3	48.1	51.7				
Kannada	68.8	57.2	35.7	25.9	25.5	21.9	23.3				
Xhosa	110.5	84.7	75.3	72.5	66.4	61.2	61.2				
Hausa	81.5	70.3	60.7	56.8	51.9	48.4	33.0				
Irish	93.6	89.6	87.4	83.5	78.6	77.4	33.3				
Maori	79.5	55.7	47.9	42.0	40.3	37.2	35.1				
Danish	95.9	88.9	76.2	73.2	68.3	63.3	69.8				
Kamba	94.8	82.4	74.6	71.9	69.5	65.2	64.9				
Lingala	65.3	44.5	35.7	34.4	28.0	27.2	28.8				
Malayalam	100.6	63.9	43.1	32.2	28.5	23.5	26.6				
Occitan	75.6	63.4	57.2	53.8	48.4	47.2	47.8				
Yoruba	104.8	91.3	83.5	81.1	73.2	67.6	52.1				
Fulah	81.1	67.6	62.5	59.4	57.2	56.9	56.0				
Swahili	50.1	27.8	22.5	22.8	21.1	18.5	17.6				
Malaysian	162.8	47.0	31.3	27.3	25.6	26.0	25.6				
Sindhi	126.5	90.0	75.7	68.1	63.4	56.9	54.4				
Somali	96.3	87.1	79.8	77.5	72.8	71.8	70.9				
Armenian	231.7	99.9	85.5	63.0	56.1	54.3	52.1				
Nepali	63.3	29.7	25.3	24.8	21.5	20.0	19.8				
Asturian	62.3	50.3	44.2	43.2	37.0	35.4	37.0				
Cambodian	84.0	105.0	52.6	42.7	41.5	37.8	35.2				
Kabuverdianu	73.1	59.3	49.4	44.9	38.1	38.2	40.6				
Luganda	71.5	52.6	48.8	49.4	46.0	46.7	44.1				
Norwegian	87.8	71.5	60.0	54.7	47.2	45.8	45.3				
Nyanja	102.5	81.5	69.4	67.7	65.1	61.6	60.0				
Serbian	85.7	71.5	71.1	54.0	46.5	47.2	47.1				
Bosnian	82.0	59.3	50.0	46.1	40.8	40.2	40.7				
Shona	97.7	72.6	63.3	59.8	54.5	53.5	51.7				
Hebrew	508.6	132.5	100.4	87.4	88.8	81.9	76.9				
Azerbaijani	100.0	77.7	67.5	62.0	57.2	55.9	53.1				
Masai	71.0	51.6	41.7	37.5	34.8	31.3	30.3				
Luxembourgish	94.2	86.1	75.7	71.2	65.9	61.8	60.2				
Northern Sotho	95.9	77.0	61.7	58.5	51.0	49.8	49.4				
Tajik	86.6	60.4	50.7	45.3	41.8	43.6	41.8				
Wolo	86.7	76.8	67.7	64.6	58.1	57.3	56.7				
Panjabi	172.0	62.5	45.7	42.6	38.5	37.8	35.1				
Filipino	73.3	43.0	33.8	30.2	28.2	26.6	25.5				
Macedonian	75.1	54.2	46.2	41.3	36.2	35.2	32.1				
Oromo	94.8	89.0	102.4	80.5	79.1	77.9	71.1				
Umbundu	88.5	70.2	64.4	65.3	59.4	63.5	59.1				
Afrikaans	86.6	102.3	95.7	133.7	92.3	152.2	92.3				
Oriya	240.4	167.8	71.4	63.0	47.9	44.8	40.1				
Icelandic	108.0	102.1	91.2	85.9	77.0	74.4	72.1				

Table 14. WER/CER for the bottom 52 languages in FLEURS by OWLS training data.