CSP: A Simulator For Multi-Agent Ranking Competitions

Tommy Mordo Technion Haifa, Israel tommymordo@technion.ac.il Tomer Kordonsky Technion Haifa, Israel tkordonsky@campus.technion.ac.il Haya Nachimovsky Technion Haifa, Israel haya.nac@campus.technion.ac.il

Moshe Tennenholtz Technion Haifa, Israel moshet@technion.ac.il Oren Kurland Technion Haifa, Israel kurland@technion.ac.il

ABSTRACT

In ranking competitions, document authors compete for the highest rankings by modifying their content in response to past rankings. Previous studies focused on human participants, primarily students, in controlled settings. The rise of generative AI, particularly Large Language Models (LLMs), introduces a new paradigm: using LLMs as document authors. This approach addresses scalability constraints in human-based competitions and reflects the growing role of LLM-generated content on the web—a prime example of ranking competition. We introduce a highly configurable ranking competition simulator that leverages LLMs as document authors. It includes analytical tools to examine the resulting datasets. We demonstrate its capabilities by generating multiple datasets and conducting an extensive analysis. Our code and datasets are publicly available for research.

1 INTRODUCTION

Ranking incentives can drive corpus dynamics in competitive search settings [28]: document authors (publishers) might respond to rankings induced for queries of interest by modifying their documents. The goal of the modification is to improve future ranking. A case in point, in Web search, the documents most highly ranked often attract most clicks [27]. Hence, for queries of commercial intent, high ranks are of utmost importance.

This practice of modifying documents to improve their future ranking is often referred to as search engine optimization (SEO) [22]. Competitive search [28], which is our focus in this paper, refers to white hat SEO: legitimate modifications that do not hurt content quality and/or the search ecosystem.

There are a few recent studies of competitive search. Ben Basat et al. [9] showed using game theoretic analysis that the probability ranking principle (PRP) [45] is not optimal in competitive search: it leads to reduced topical diversity in the long run. The implication is that the static view of a corpus in most work on ad hoc retrieval falls short given the dynamics driven by ranking incentives. Raifer et al. [42] showed using theoretical and empirical analysis that a prevalent strategy of publishers which leads to an equilibrium is to mimic content in the documents most highly ranked in the past. Indeed, previous rankings are the only signal about the undisclosed ranking function. Goren et al. [21] empirically showed that this strategy leads to a publisher herding effect with potentially unwarranted implications; e.g., reducing the volume of content relevant to a query in the corpus. Performing empirical studies of competitive search is an extremely difficult challenge [28]. For example, in the Web setting, multiple factors can affect the changes of Web pages, many of which may not be due to ranking incentives. Hence, while there are observational studies of Web dynamics (e.g., [41]), analyzing rankingincentivized publisher strategies and corpus effects remains an open question. This challenge drove forward a new type of empirical analysis in recent work on competitive search: controlled ranking competitions were held between students [20, 21, 35, 42]. The students modified documents to have them highly ranked for queries they were assigned to. They competed over a few rounds, in each of which they were shown the last ranking induced by the undisclosed ranking function. The resultant datasets were used for various analyses [20, 21, 35, 42, 52].

Ranking competitions with humans acting as publishers are valuable for offline analysis of the *specific* competitions that took place. However, studying new retrieval methods and/or publishers' document modification strategies, which significantly affect the competition, is practically impossible: each new design choice calls for re-running the competition. Kurland and Tennenholtz [28] mentioned this challenge as a potential barrier to empirical study of competitive search and suggested to run ranking competitions using automated agents. Their call of arms, together with the increasing proliferation over the Web of generated AI content, is the motivation for the work we report here.

We present a platform dubbed *CSP*: a multi-agent platform that uses large language models (LLMs) as publishers (agents) in ranking competitions. The platform allows the execution of large-scale and highly varied ranking competitions where various factors can be controlled: the query for which the competition is held, the ranking function, the LLM and its prompt. The platform also provides a competition Analyzer module that analyzes a single competition using various measures. In addition, the platform includes a Compare module that allows to compare different competitions; e.g., competitions run with different LLMs or different rankers. The *CSP* platform will be made publicly available upon acceptance of this paper, and is currently available for reviewing purposes at https://github.com/csp-platform/Simulator.

To demonstrate the merits of *CSP*, we used it to run many ranking competitions for sets of queries where we varied the LLM and its prompt and the ranking function. We present analysis of the resultant competition datasets using the Analyzer and Compare modules. For example, we compare the corpus dynamics with that reported in past human-based ranking competitions and reveal that LLM-based agents reduce content diversity in the corpus to a larger extent than humans. Furthermore, the analysis of the competitions shows that the ranking function has less effect on the dynamics than the choice of the LLM which serves as a publisher.

2 RELATED WORK

Previous studies addressed theoretical and empirical results. Kurland and Tennenholtz [28] highlight several perspectives in the competitive search ecosystem. From *the ranker perspective*, the focus is on designing mechanisms that can enhance social welfare (i.e., mitigate herding of publishers and promote fairness among publishers [28]). *The publisher perspective* includes benefits to document authors who strategically manipulate their documents to improve the future rankings. *The user perspective* includes benefit of the user, who interacts with the search engine to satisfy an information need expressed using a query. To empirically explore these perspectives, ranking competitions in various settings have been conducted and analyzed.

Ranking competitions. Game theory [5, 18] provides a foundational framework for modeling repeated ranking competitions where document authors do not cooperate.

Several studies have used controlled ranking competitions as a tool to study dynamics in competitive settings. Raifer et al. [42] conducted the earliest controlled ranking competitions among students, revealing a key strategy employed by publishers: mimicking the documents most highly ranked in previous rounds. Goren et al. [21] demonstrated how search engines could drive predefined and targeted content effects, leading to the herding phenomenon [6]. Nachimovsky et al. [35] extended this line of research by conducting ranking competitions where authors competed to improve their ranks with respect to multiple queries.

In addition to these studies, another line of research focuses on developing algorithmic adversarial attacks designed to manipulate rankings and promote specific documents. Examples include Castillo et al.'s work on adversarial strategies [11], Raval and Schwing's exploration of one-shot adversarial attacks [43] and Mordo et al.'s study on strategic document manipulation in competitive search setting with diversity-based ranking [34].

LLMs in competitive search. The use of large language models (LLMs) in competitive search setups has several aspects. First, a growing number of document authors leverage LLMs to modify and even generate content for search engine optimization (SEO) purposes [3, 33, 35, 53]. LLMs can generate high-quality content [35], sometimes indistinguishable from content generated by humans [53], and aimed at improving rankings. Second, various tasks require data annotation are not scalable, and can benefit from LLM assistance [13, 49]. Organizing ranking competitions among human participants, similar to conducting annotation tasks, has traditionally posed significant challenges of scalability. LLMs provide new opportunities for studying ranking competitions by simulating document authors, enabling researchers to simulate competitive search scenarios efficiently.

Third, the emergence of LLMs has introduced novel dynamics in human-LLM interactions, particularly within competitive search settings [7, 35]. For example, researchers can study how document authors react to LLM-generated content [35], or explore how LLMs perform when competing against human players in ranking games [7]. Finally, LLMs themselves are the basis for the potential shift from search engines to (conversational) question answering (QA) systems (e.g., [36]). Additionally, these systems can be used for zero-shot or few-shot ranking tasks [7, 24, 39].

Agents in decision-making tasks. Recent research has increasingly highlighted the capabilities of large language models (LLMs) in decision-making tasks, demonstrating their potential to function as autonomous agents in complex economic environments that often require advanced strategic reasoning [1, 23, 29, 48, 50, 56]. In other work, LLMs were used to simulate users in information retrieval and recommendation systems [10, 51, 55], and we use them to simulate authors.

LLM-based multi-agent simulation. Various tools and frameworks have been developed to create agents powered by LLMs¹ [14, 31, 37]. However, these tools are not easily customizable to simulate ranking competitions. They lack specific modules designed to facilitate the analysis and exploration of unique aspects of ranking competitions, such as dynamic interactions between agents and ranking strategies.

3 CSP FRAMEWORK

3.1 Competitive search background

The *CSP* SIMULATOR supports the simulation of ranking competitions. We now turn to describe the structure of ranking competitions, and more generally, competitive search [28].

A ranking game between publishers (document authors) is driven by their ranking incentives. That is, we assume that some publishers are motivated to have their documents highly ranked for a query. In response to a ranking induced for the query, the publishers (players) might modify their documents so as to improve their future ranking. In the general setup [42], every player begins with an *initial document* pre-determined by the system designer. During each round of the game, every player: (1) modifies her document, and (2) receives information about the ranking induced for the query; the player can observe the content of other documents in the ranking. Players may then modify their documents in subsequent rounds with the goal of promoting their rankings with respect to the query of the game. We refer to a collection of games, each associated with a different query, as a *competition*.

3.2 CSP SIMULATOR

The core component of *CSP* is the *CSP* SIMULATOR, a highly configurable simulator designed to simulate ranking competitions. It allows fine-grained control over key parameters, including the ranking function, the query for which every game is performed, initial documents, and the type of the players: a specific type of a player is referred to as an *agent*. Specifically, *CSP* is highly supports players based on LLMs. Additionally, it supports the configuration of the number of simulated games, the number of players per game and the number of rounds per game, providing flexibility for diverse

 $^{^1{\}rm For}$ example, https://www.letta.com and https://github.com/Thytu/Agentarium/tree/main

experimental setups. The simulation output includes a dataset containing all documents generated by players across rounds, along with their rankings, forming the basis for competition analysis.

The simulation parameters can be configured via a *json* file or customized directly within the *CSP* SIMULATOR code-base, offering significant flexibility for tailoring the platform to various experimental scenarios. The code-base is publicly available².

3.2.1 Competition properties. A ranking competition is structured as a collection of games. Each game is composed of a set of players competing over a few rounds for a predefined query. A competition is highly configurable, allowing customization of parameters such as the assigned query for every game, and the corresponding initial document, the number of rounds and more. Additional, our *CSP* SIMULATOR offers the capability to simulate a competition from a predefined state (e.g., after several rounds of each game). This functionality aids in exploring various scenarios that begin from different starting points. Moreover, it allows for breaking lengthy simulations into smaller batches.

3.2.2 Player properties. We assume that the same set of players is assigned to each game within a competition. Consequently, the only difference between games in a competition is the query being played and the corresponding initial document. Players are exposed to documents from previous rounds along with their corresponding rankings. Note that the rankings are the only signals available to players regarding the undisclosed ranking function. Accordingly, players modify their documents so as to be ranked higher in subsequent rounds. Different players may interpret and utilize these signals in various ways to guide their document modifications. In this paper, we focus on scenarios where different LLMs compete against each other.

3.2.3 Ranking function properties. The ranking function determines the rankings of players' documents in every round of a game. The *CSP* SIMULATOR is designed to be highly flexible, allowing the integration of any type of ranking function such as feature-based or neural-based ranking functions. Additionally, the *CSP* SIMULATOR supports implementing penalty mechanisms to enhance the dynamics of players in the competition. Inspired by ranking competitions among human participants [34, 35, 42], these mechanisms can penalize players—by demoting their rankings—for copying documents from others or for refrain from modifying their documents across multiple rounds.

3.3 CSP ANALYZER and CSP COMPARE

We introduce two additional components in the *CSP* framework designed to facilitate the analysis of competitions.

The *CSP* ANALYZER is a module designed to enable in-depth analysis of an individual competition. The analysis is focused on different measures related to different aspects of the competition dynamics. For example, we measure how the diversity of documents of ranked lists evolves over rounds [34]. For cases where comparisons between datasets generated under different competitive scenarios are of interest, we developed *CSP* COMPARE, an interactive tool (dashboard) for comparing competitions with different configurations.

The functionalities of *CSP* ANALYZER and *CSP* COMPARE are demonstrated using several research questions. (See Section 5.1.) The code-bases are available on GitHub³. Note that *CSP* ANALYZER and *CSP* COMPARE were also designed to analyze and compare ranking competitions, even if they were not generated by the *CSP* SIMULATOR; e.g., competitions conducted between human players [21, 35, 42].

4 CREATING DATASETS USING CSP

We created 22 datasets using the CSP SIMULATOR, each produced through a simulation representing a distinct configuration of a ranking competition among LLMs. We analyzed the datasets using the CSP ANALYZER and the CSP COMPARE modules to demonstrate an analysis of a single competition and comparison of multiple competitions. (The analysis is presented in Section 5.) Additional objective of collecting data from LLM-based competitions is to compare the properties of ranking competitions conducted among LLMs with those involving human players. To this end, we utilized the dataset of a ranking competition conducted between students, organized by Mordo et al. [34]. The competition included 15 games, each for a different query selected from TREC09-TREC12. Every game included four students and lasted for seven rounds. The ranking function was the cosine between a query and document embedding induced using E5 [50]. The competition was approved by ethics committees [34].

4.1 The resultant datasets of LLM-based competitions

The parametrization of the *CSP* SIMULATOR enables a diverse and flexible range of options for simulating ranking competitions and generating their corresponding datasets. Our goal in this paper is to demonstrate *CSP*' capabilities and not to find the best performing agents. We adopt a specific class of prompt-based agents developed by Bardas et al. [7]. Note that other types of LLMs (for instance, fine-tuned LLMs) can be integrated in the *CSP* SIMULATOR. The proposed agents are LLMs that operate based on instructions provided through prompts. Each agent is defined by a specific LLM model and a prompt given each round, that guides its behavior in the ranking game. Each prompt has two parts: a general shared part which describes the task (denoted *Instructional Part*) and a context-specific part, specific to a prompt, which provides information about past rankings (denoted *Contextualized Part*).

The Instructional Part includes the general background for the game, which outlines the game's rules and restrictions, the player's current document, and the assigned query. Additionally, the Instructional Part instructs players to maintain similarity to their original document as a guideline to ensure faithfulness to the original content. To mitigate the potential behavior of *mimicking-the-winner* (mimicking content from the top-ranked documents) as observed in competitions between students [42], we introduced a modified Instructional Part. It is building upon the version presented by Bardas et al. [7], with an additional instruction explicitly designed to

²https://github.com/csp-platform/Simulator.

 $^{^3}$ CSP Analyzer: https://github.com/csp-platform/Analyzer and CSP Compare: https://github.com/csp-platform/Compare

discourage general copying of content during the game. This mitigation is crucial, as the long-term effect of *mimicking-the-winner* can lead to a herding effect, ultimately reducing topical diversity in the corpus and limiting the competitive dynamics of the game [21].

The Contextualized Part of the prompt includes information about past rankings, to serve as a signal about the ranking function. (Recall that the ranking function is not disclosed.) It guides the LLM's actions in subsequent rounds to try to achieve the highest ranking. Bardas et al. [7] conducted a series of experiments aimed to find the optimal parametrization of the Contextualized Parts which maximizes ranking promotion. We use the two best performing Contextualized Parts reported by Bardas et al. [7]. These prompts led to the highest ranking promotion for the modified documents: Pairwise prompt and Listwise prompt. The Pairwise prompt contains pairs of randomly selected documents and their rank preference by the ranking function, from the last three rounds. The Listwise prompt contains ranked lists from the two last rounds.

We demonstrate the platform's capabilities using a competition among LLMs. Each competition consisted of 30 games, with each game held for a query with a commercial intent, selected from the TREC09–TREC12 datasets⁴. The initial documents, those provided to the players at the beginning of Mordo et al.'s dataset [34].

Each game was played for 30 rounds. We used different lightweight instruct-tuned (<10B parameters) language models as agents: Llama 3.1 [12], Gemma2 [19], Qwen2.5 [40] and Ministral⁵ [26]. For demonstration purposes, we use Llama3.1 and Gemma2 in the analysis presented in Section 5, and prompt them with the Listwise and Pairwise prompts. Due to computational limitations, each competition utilized only a single language model and Contextualized Part, with the same commonly used hyper-parameters [30]: a top_{p}^{6} value of 0.9 and a temperature⁷ of 0.5, enabling LLMs to generate diverse content while prioritizing the most probable tokens. To introduce variation among competing players, each player was assigned a persona [46, 47]. This approach aimed to induce diverse behavioral patterns among the players in the same game. The personas were generated as follows: we selected the Educational environment from Samuel et al. [46] to align with the topic interests of students, given that previous ranking competitions were conducted between student. Then, we used GPT-40 to generate five personas using the prompt provided by Samuel et al. [46] with an additional general description of ranking competitions. The resulting personas included a BSc student, a professional writer, a professional editor, an English teacher, and a Data Science professor.

Four or five players competed against each other in each game. Three distinct unsupervised ranking functions were applied. Two dense retrieval methods and one sparse method: E5 [50], Contriever⁸ [25] and Okapi BM25 [32]. To compute the score in dense retrieval methods for a given document-query pair, we first generated the embedding vectors for both the document and the query using the embedder model, then computed the cosine similarity between these vectors. For extracting IDF (inverse document frequency) based features in Okapi, we used the English Wikipedia dataset with 59k pages, from a 2020 dump (Krovetz stemmed) [16, 17].

The LLMs sometimes generate text that exceeds the word limit allowed in the Instructional Part or includes unnecessary headers and prefixes⁹. To prevent exceeding token limits, we truncated the generated documents to the first 256 tokens¹⁰. To address the presence of unwarranted tokens, we incorporated a post-edit step in which players utilize their own LLM with a targeted cleaning prompt. This prompt directs the LLM to remove any headers or prefixes from the generated document.

The competitions with five players per game resulted in 4500 documents, and those with four players per game yielded 3600 documents.

5 ANALYSIS OF COMPETITION DATASETS

In this section, we present an extensive analysis of seven datasets (out of the 22 created datasets) generated using the *CSP* SIMULA-TOR, selected due to space constraints. All the datasets and their corresponding analyses, conducted using the *CSP* framework, are available in our GitHub repository¹¹. In Section 5.1 we present three research questions used to compare the seven datasets. Then, in Section 5.2 we discuss the measures used to analyze the datasets and to compare them. The analysis addressing the three research questions is detailed in Sections 5.3, 5.4, and 5.5. In this section, we define a "winner" as the author of the top-ranked document in a given round, or the document itself. Conversely, "losers" refer to authors (or documents thereof) whose documents did not achieve the highest rank in that round.

5.1 Research questions

We address three main research questions:

- (RQ1) What are the differences between competitions with LLMs as players and competitions with humans as players in terms of player's strategies, resulting documents, and more? To address this question, we utilized Mordo et al.'s dataset [34] described in Section 4.
- (RQ2) How do the characteristics of LLM-based agents (specifically, the language model and prompt type) affect the dynamic of the competition? For this analysis, we fixed the ranking function to the (unsupervised) E5 [50].
- (RQ3) How does the choice of ranking function affects the competition dynamics? For this comparison, we fixed the LLM to Llama3.1 [12].

A summary of the datasets used for addressing these research questions is presented in Table 1. Additionally, for every research question, we focused on a subset of measures, prioritizing those that provided the most insightful findings. We emphasize that overall our findings are consistent among all measures.

 ⁴We used the following queries: 9,17,21,29,34,45,48,55,59,61,64,69,74,75,78,83,96,98,124,144, 161,164,166,167,170,180,182,193,194,195 from https://trec.nist.gov/data/webmain.html.
⁵meta-llama/Meta-Llama-3.1-8B-Instruct, google/gemma-2-9b-it, Qwen/Qwen2.5-7B-Instruct and mlx-community/Ministral-8B-Instruct-2410-bf16 from Hugging face repository.

⁶Controls the probability mass from which the model samples its next token, ensuring that only the most probable tokens, comprising 90% of the cumulative distribution, are considered.

⁷Controls the randomness of language model output.

⁸ intfloat/e5-large-unsupervised and facebook/contriever from Hugging face repository.

⁹For instance: "The modified document is:" or "Here is the document text:".

¹⁰To align with competitions conducted between students [34, 35, 42].

¹¹https://github.com/csp-platform/Datasets.

Conference'17, July 2017, Washington, DC, USA

Table 1: Research questions (RQs) and the corresponding competition datasets used to address them. Each competition includes the following components: either Llama or Gemma-LLM; a ranking function (E5, Contriever, or Okapi); Listwise or Pairwise Contextualized Part of the prompts; and four or five players per game (unless specified otherwise, the competition includes five players). One of the competitions in RQ2 includes a modified Instructional Part that instructs the LLM not to copy other players' documents (denoted as 'no-copy'). We annotated all the listed datasets, excluding datasets with a Contriever ranking function. κ_q , κ_r are the inter-annotator agreement rates (free-marginal multi-rater Kappa) of the quality and relevance judgements, respectively.

RQ	Dataset	Annotation (κ_q , κ_r)
RQ1	Llama-E5-Listwise-4-players	(58.5%, 65.3%)
	Llama-E5-Pairwise-4-players	(51.4%, 53.8%)
	Mordo et al. [34]	(32.0%, 62.3%)
RQ2	Llama-E5-Listwise	(66.8%, 66.0%)
	Llama-E5-Pairwise	(47.3%, 48.4%)
	Llama-E5-Listwise-no-copy	(53.8%, 57.3%)
	Gemma-E5-Listwise	(71.8%, 61.2%)
RQ3	Llama-E5-Listwise	(66.8%, 66.0%)
	Llama-E5-Pairwise	(47.3%, 48.4%)
	Llama-Contriever-Listwise	-
	Llama-Contriever-Pairwise	-
	Llama-Okapi-Listwise	(60.9%, 60.3%)
	Llama-Okapi-Pairwise	(45.2%, 46.4%)

Quality and relevance judgements. We annotated the datasets used for addressing the three research questions. (See Table 1.) Each document was judged for binary relevance to a query by three crowd workers (English speakers) on the Connect platform via CloudResearch [2]. Three workers annotated the quality of each document with the categories: valid, keyword-stuffed¹², and spam. We used the same instructions to annotators as presented in past work [34, 35]. For each document, the final quality grade was defined as the number of annotators who judged the document as valid. Accordingly, the final relevance grade was the number of annotators who marked the document as relevant. Due to budget limitations, annotations were not performed on datasets where the Contriever [25] ranking function was used. Additionally, we annotated only the top-ranked document from every two rounds. The inter-annotator agreement rates (free-marginal multi-rater Kappa [15]) ranged between 45.2% and 66.8% for quality judgments. For relevance judgments, the agreement rates ranged from 46.5% to 66.0%. Since in Mordo et al. [34], every document was annotated by five workers, we calibrated the relevance and quality grades to 3 by multiplying the relevance and quality grades of Mordo et al. [34] by $\frac{3}{5}$. In addition, we selected from Mordo et al. [34] only the top-ranked documents to align with the comparison with the LLM-based competitions here.

5.2 Measures

We propose a broad set of measures applied to the competitions datasets. These measures were designed to facilitate the analysis of competitions and to gain multifaceted insights into the dynamics and outcomes of competitive search scenarios. To quantify similarity between documents we employ the TF.IDF¹³ text representation with cosine similarity. Note that additional text representations can be easily integrated into *CSP* and may, in some cases, provide different insights [34]. The measures are averaged over queries (games) unless stated otherwise.

We categorized the measures to five classes of competition properties:

- Mimicking-the-winner (mimicking content from top-ranked documents) has been identified, both theoretically and empirically, as a strategy employed by players who loose in a round to improve their chance of winning in subsequent rounds [42]. Following prior work, we analyzed the document modification strategies by analyzing the changes in the documents' feature values¹⁴ over rounds [34, 35, 38, 42]. The background dataset used to compute IDF based features was Clueweb09¹⁵. We analyzed changes in feature values of winner documents between consecutive rounds; Wi and W_{i+1} are the winner documents in rounds *i* and *i* + 1, respectively. We focus on cases where W_i and W_{i+1} are produced by different players as it was observed in past work [34, 42] that players who win a round are unlikely to substantially modify their document for the subsequent round. Additional approach to studying the phenomenon of mimickingthe-winner is to analyze the similarity of winners' documents between consecutive rounds [34]. As in the feature values analysis, we focus on cases where W_i and W_{i+1} are produced by different players. Note that high similarity values indicate that a player has made modifications that make her document similar to the previously winning document. We also analyze the similarity between the top two ranked documents as an additional indicator of the herding effect¹⁶ [21]. If the second-ranked player is mimicking-the-winner, we expect an increased similarity between the top two ranked documents.
- *Diversity* of documents. We measure diversity at two levels: the ranked-list-level and the player level. Diversity at the ranked-list-level is computed by the minimum of interdocument similarity (averaged over queries) across rounds [34]. Diversity at the player level is computed by the similarity of documents produced by the same player between consecutive rounds. It is averaged over players and queries across rounds.
- *Convergence* of a competition. Informally, this class includes measures that assess whether documents continue to be

¹²Adding query terms to documents in an excessive manner.

¹³The results obtained using alternative text representations, including E5 [50] with cosine similarity and SBERT [44] with cosine similarity, were consistent with those attained for TF-IDF. Thus, they are omitted for brevity.

¹⁴The features are selected from http://www.research.microsoft.com/en-us/projects/ mslr or from past work on ranking competitions [34, 35, 42].

¹⁵https://lemurproject.org/clueweb09/.

¹⁶The tendency of players' documents to converge towards similar content, leading to a reduction in topical diversity in the ranked list.

modified as the game progresses. As in the *Diversity* class of measures, we measure convergence at the ranked-listlevel and at the player level. As for the ranked-list-level, we compute the minimum of the inter-document similarity in a ranked list, enabling us to observe how inter-document similarities in a ranked list evolve over rounds. We also examined the number of unique documents over rounds to detect potential convergence to unique documents. At the player level, convergence was estimated by measuring the similarity between documents of the same player between consecutive rounds, as computed in the *Diversity* class of measures. The resulting player level analysis will indicate how players modify their documents in comparison to their documents from the previous round.

- *Quality and relevance* of documents in a competition. We analyzed the quality and relevance grades of top-ranked documents in each competition across rounds. The annotation process and the methodology for computing the quality and relevance grades are detailed in Section 5.1.
- Top-ranked players' statistics. We analyzed two statistics of the top-ranked players in a competition. The first is the proportion of the wins, computed by the ratio of the number of wins by the best-performing player in a game to the average number of expected wins¹⁷ assuming every player has a random chance to win a round of a game (averaged over games). For instance, in our competitions with five players and 30 rounds, one extreme case occurs when each player wins randomly, resulting in a ratio of 1. In the opposite extreme, if a single player wins all 30 rounds in all games, the ratio would be $\frac{30}{6} = 5$. The second statistic is about winning players. We identify the overall best-performing player across all games in a competition (i.e., the player with the highest number of wins, aggregated over rounds and games).

5.3 Results (RQ1): human vs. LLM-based agents

We now turn to the comparison between competitions with LLMbased agents and those conducted with human players. For the LLM-based competitions, we used the same ranking function and the same number of players per game as used in Mordo et al. [34]. We employed Llama-based models, utilizing both Pairwise and Listwise prompts, along with the Instructional Part as described in Bardas et al. [7]. Each player was assigned a distinct persona as described in Section 4 excluding the persona of a Data Science professor, which was randomly selected to be omitted.

We now turn to study the *mimicking-the-winner* phenomenon. Specifically, we analyze changes in feature values of winner documents as described in Section 5.2 [34, 35, 42]. The features are divided into two main categories: query-independent and querydependent features. The query-independent features are (i) **Length**: document length, (ii) **StopwordRatio**: the ratio of stopwords to non stopwords in the document; the INQUERY stopword list was used [4], and (iii) **Entropy**: the entropy of the unsmoothed unigram maximum likelihood estimate induced from the document. The query-dependent features are (iv) **LM.DIR**: the query likelihood score of a document where document language models are Dirichlet smoothed with smoothing parameter set to 1000 [54], (v) **TF**: the sum of query term frequencies in the document, and (vi) **BM25**: the Okapi similarity between the query and the document.

The results are presented in Figure 1. A general decreasing trend in the feature values was observed across rounds in almost all cases, except for Entropy in the human competition and Length in the LLM-based competitions. Notably, the query-dependent feature values exhibited greater differences and a steeper decrease in the human competition compared to the LLM-based competitions. This observation suggests that, similar to human participants [42], LLMbased agents may adopt a *mimicking-the-winner* strategy to align with winning features.

Further exploration of the *mimicking-the-winner* phenomenon is presented in Figure 2a, where we analyze the similarity of winners' documents between consecutive rounds. For all three competitions, winners become increasingly similar across rounds. In the human competition, similarity levels are initially lower than the LLMbased competitions; however, they exhibit a steeper increase across rounds. These results are consistent with those presented in Figure 1, where a decreasing trend in feature value differences was observed. This decrease aligns with an increase in the similarity of winning documents across consecutive rounds.

In Figure 2b we present the similarity between the top two ranked players' documents. The results indicate that in all three competitions, the top two ranked players become more similar as the competition progresses. Nevertheless, similarity levels remain slightly lower in the human competition. This observation may be attributed to the lower number of rounds in the human competition. Another possible explanation could be that LLM players have a similar configuration in competitions, leading them to generate highly similar documents. Recall that the only difference between LLM players in a competition was their persona.

We now turn to analyze the Diversity class of measures. Figure 2c presents the minimum inter-document similarity in a ranked list over rounds. For all three competitions, as the game progresses, the documents in ranked lists become increasingly similar, leading to a decrease in ranked list diversity. Notably, the level of similarity in the two LLM-based competitions is higher than that observed in Mordo et al. [34]. Further analysis of the average number of unique documents (Figure 2d) reveals a general decreasing trend in LLM-based competitions, in contrast to a more stable trend in the human competition. Recall that non-unique documents means the players essentially copied other players' documents. By the end of seven rounds, the Mordo et al.'s dataset [34] contained an average of 3.8 unique documents per round. In comparison, a slightly lower number of unique documents was observed in the LLM-based competitions, with averages of 3.75 and 3.6 in the competitions involving Pairwise and Listwise agents, respectively.

The findings just presented, along with the observed *mimicking-the-winner* phenomenon (Figures 1 and 2a), attest that LLM-based agents tend to generate less diverse documents than human participants. This reduction in content diversity may lead to a sub-optimal user welfare [8] and an increased herding effect, negatively impacting the topical diversity of the resulting corpus [21]. These effects

¹⁷The average number of expected wins in a game is computed as the total number of rounds divided by the number of players in a game.

appear to be more pronounced in LLM-based competitions compared to those involving human players.

Figure 2e illustrates the similarity of players' documents across consecutive rounds. At the beginning of all three competitions, players tended to make more substantial modifications to their documents. In Mordo et al. [34], only seven rounds are available, limiting conclusions about longer-term trend of convergence and diversity. In both LLM-based competitions, the similarity of players' documents between consecutive rounds saturates and converges over time, providing empirical evidence that players modify their documents less as the rounds progress.

Figure 2f shows that the quality and relevance grades are quite different between the LLMs and the human competitions. The quality grades in the human competition were lower than those in the LLM-based competitions, showing an increasing trend over the seven rounds, ranging from 2.05 to 2.15. In contrast, the quality grades in the LLM-based competitions ranged between 2.3 and 2.7, without a clear trend over the rounds. This finding aligns with previous reports indicating that LLMs consistently generate high-quality content in ranking competitions [35, 53]. Unlike the quality grades, relevance grades in the LLM competition were slightly lower compared to the human competition. In all three competitions, no clear trend in relevance grades over the rounds was observed.

We now turn to the analysis of the proportion of the wins. Recall from Section 5.2 that it is computed as the ratio between the actual number of wins by the best-performing players and the expected number of wins, assuming that each player has an equal probability of winning a round (averaged over the games). In Mordo et al.'s dataset [34], the resultant proportion of the wins was 2.62, compared to 1.4 observed in both LLM-based competitions. This suggests that in Mordo et al. [34], there is often a dominant player, whereas in LLM-based competitions, wins are more evenly shared among players. One possible explanation for this difference is the varying levels of motivation among human players, as individual participants may have different incentives that influence their engagement and performance. Another explanation for the reduced proportion of the wins in the LLM-based competitions is that the LLM-based players have similar characteristics, which leads them to exhibit more uniform behavior.

5.4 Results (RQ2): comparing LLM-based agents

We proceed to compare different LLM-based competitions while keeping the ranking function fixed as the cosine of document and query E5 embeddings, henceforth referred to as the E5 ranking function. To potentially increase the competition dynamics with respect to the four-players competitions that were addressed in RQ1, we increased the number of players in each game to five. We explored variations of the competition with the Listwise prompt¹⁸ (Llama-E5-Listwise): (1) changing the Contextualized Part to Pairwise (Llama-E5-Pairwise), (2) modifying the Instructional Part to instruct the LLM not to copying other players' documents (Llama-E5-Listwise-no-copy), and (3) replacing Llama with Gemma as the LLM (Gemma-E5-Listwise).




Figure 1: Average absolute difference of feature values of winner documents in rounds i (W_i) and i + 1 (W_{i+1}).

In the *Mimicking-the-winner* class of measures, both the similarity of winners' documents between consecutive rounds (Figure 3a) and the similarity between the top two players (Figure 3b) generally increased over round across all competitions. Notably, the similarity levels for Gemma were consistently higher than those for the other competitions and also leveled off way more quickly. Overall, the Gemma-LLM exhibits a stronger tendency to mimic documents compared to the Llama LLM competitions.

The minimum inter-document similarity over rounds (Figure 3c) is higher in the competition with Gemma-LLM compared to all other three competitions with Llama-based agents. It attests to a lower ranked list diversity in the Gemma-based competition compared to the Llama-based competitions. The analysis of unique documents (Figure 3d) reveals a decline in the number of unique documents across rounds in all competitions. Notably, the competition involving Gemma players exhibits the steepest decrease, with the proportion of unique documents converging to approximately 50%. This results in an average of 2.5 unique documents out of a total of 5 in the ranked list. In the competition with the Pairwise prompts, the copying behavior was observed to a smaller extent. Between the two Listwise competitions, the Llama-E5-Listwise-nocopy competition included more unique documents on average, consistent with the instructions in the Instructional Part to avoid copying documents of other players.

As for the *Convergence* class, examination of the similarity of players' documents between consecutive rounds (Figure 3e) reveals that the competition with Gemma-LLM (Gemma-E5-Listwise) exhibits an increasing and higher levels of similarity over rounds, in comparison to the Llama-LLM competitions (Llama-E5-Listwise,

 $^{^{18} \}rm Recall$ that Bardas et al. [7] identified it as one of the two best-performing Contextualized Part of the prompt.

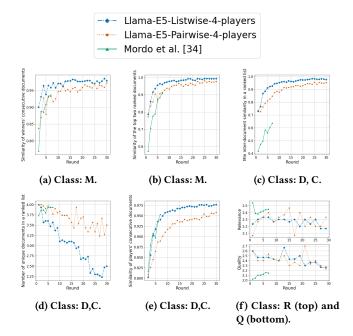


Figure 2: Comparing LLM-based competitions with a competition with human players [34] (RQ1): Llama-E5-Listwise-4players, Llama-E5-Pairwise-4-players and Mordo et al. [34]. (a) average (over queries) similarity of winners between consecutive rounds (i, i + 1); (b) the average (over queries) similarity between the two highest ranked documents; (c) the average (over queries) min inter-document similarity in a ranked list over rounds; (d) the number of unique documents over rounds; (e) the average (over queries and players) similarity of players' documents between consecutive rounds (i, i+1); (f) the average relevance (top) and quality (bottom) grades over rounds. Mordo et al. [34] consists of 15 games with seven rounds; The LLM-based competitions consist of 30 games with 30 rounds. We refer to the classes of measures Mimicking-the-winner, Diversity, Convergence and Relevance and Quality as M, D, C, R and Q, respectively.

Llama-E5-Pairwise and Llama-E5-Listwise-no-copy). We conclude that the competition with Gemma-LLM converges more rapidly comparing to the other competitions. Overall, our findings suggest that the most influential factor that affects the dynamics of the competitions, as reflected by the measures, is the language model of the agents rather than the provided prompts. As for the Llama competitions, a slightly higher levels of *mimicking-the-winner* were observed, with respect to the corresponding measures, when the Listwise prompt was used compared to the Pairwise prompt. This observation may be attributed to structural differences between the prompts: the Pairwise prompt provides a limited context regarding other rankings, whereas the Listwise prompt contains a broader view of competing players. Consequently, this broader context facilitates the adoption of the strategy proven to be optimal [42], which involves mimicking winning documents.

The quality grades (Figure 3f) in the LLM competitions show a marginal tendency to decrease over rounds. This suggests that the competition dynamics may contribute to a gradual decline in overall corpus quality. Moreover, competitions with the Listwise prompts, specifically Llama-E5-Listwise and Gemma-E5-Listwise, included documents with slightly higher quality compared to Llama-E5-Pairwise and Llama-E5-Listwise-no-copy. As for the relevance grades (Figure 3f), the Llama-E5-Listwise competition exhibits marginally higher relevance grades across most rounds compared to other competitions. Specifically, the competition using prompts that explicitly instruct players to avoid copying (Llama-E5-Listwise-no-copy) appears to yield lower quality and relevance grades across most rounds compared to the competition without such an instruction (Llama-E5-Listwise). A possible explanation is that restricting copying may hinder players from adopting the *mimicking-the-winner* strategy [42], which is associated with achieving higher rankings. Since top-ranked documents are generally more relevant, this restriction could negatively impact overall document quality and relevance.

5.5 Results (RQ3): Llama agents with different rankers

We next turn to study the effect of the ranking function on the competition. To this end, we fix the LLM to Llama3.1, and study the ranking functions: the cosine of document and query E5 [50] embeddings (refer to as E5 ranking function), the cosine of document and query Contriever embeddings [25] (refer to as Contriever ranking function), and Okapi [32]. We used agents with both Pairwise and Listwise prompts.

The average similarity between winners (Figure 4a) was similar across the ranking functions. At the end of the competition with the Okapi ranking function and players with the Listwise prompt, an higher similarity with respect to consecutive winners was observed, compared to other competitions. Additionally, the average similarity between the top two players (Figure 4b) increased over rounds. For all ranking functions, the choice of ranking function did not substantially affect both measures of the *Mimicking-the-winner* class. As discussed in Section 5.4 and illustrated in Figure 4b, the type of prompt (Listwise vs. Pairwise) has a significantly greater impact than the ranking function.

As for the diversity at the ranked-list-level, measured by both the minimum inter-document similarity in the ranked list and the number of unique documents, we observe the same trend of being unaffected by the ranking function (Figures 4c and 4d). We can see two distinct "clusters" for both the Listwise and Pairwise LLM-based competitions, with minimal impact with respect to the choice of the ranking function. The convergence and diversity at the player level measured by the similarity of players' documents between consecutive rounds (Figure 4e), demonstrated an increasing trend (over rounds) across all the competitions. Once again, the differences observed across ranking functions remain minimal. However, in the competition with the Okapi ranking function and agents with the Listwise prompt, slightly elevated similarity levels were observed in the final rounds compared to all other competitions.

The quality and relevance grades were similar across all the competitions. (See Figure 4f.) The quality grades across all competitions (excluding those with Contriever ranking functions, which were not

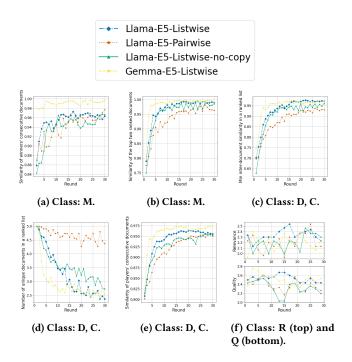


Figure 3: Comparison of LLM-based agents (RQ2): Llama-E5-Listwise, Llama-E5-Pairwise, Llama-E5-Listwise-no-copy and Gemma-E5-Listwise. (a) average (over queries) similarity of winners between consecutive rounds (i, i + 1); (b) the average (over queries) similarity between the two highest ranked documents; (c) the average (over queries) min inter-document similarity in a ranked list over rounds; (d) the number of unique documents over rounds; (e) the average (over queries and players) similarity of players' documents between consecutive rounds (i, i + 1); (f) the average relevance (top) and quality (bottom) grades over rounds. Each competition consists of 30 games with 30 rounds. We refer to the classes of measures <u>Mimicking-the-winner</u>, <u>Diversity</u>, <u>Convergence</u> and <u>Relevance and Quality</u> as M, D, C, R and Q, respectively.

annotated) exhibit a general tendency to decline over the rounds. Interestingly, the quality grades of Llama-E5-Listwise were slightly higher compared to all other competitions. For relevance grades, the values consistently exceed 1.9 (out of possible 3) in most rounds, with no significant influence observed by the choice of ranking function.

Overall, the ranking function appears to have minimal to no significant impact on the competition dynamics with respect to the analyzed measures. We showed above that the type of LLM and the prompt have a much larger effect.

6 CONCLUSIONS AND FUTURE WORK

We introduced a novel simulation platform, the *CSP* SIMULATOR, designed to simulate ranking competitions with LLMs as document authors. Along with the platform, we presented the *CSP* ANALYZER and *CSP* COMPARE tools, which facilitate the analysis of individual competitions and the comparison of multiple competitions.

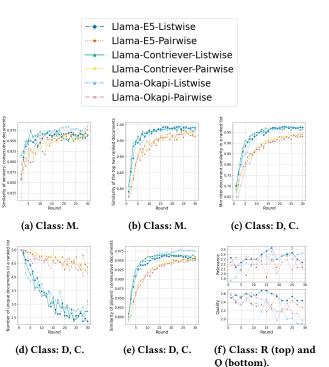


Figure 4: Comparison of ranking functions in LLMbased competitions (RQ3): Llama-E5-Listwise, Llama-E5-Pairwise, Llama-Contriever-Listwise, Llama-Contriever-Pairwise, Llama-Okapi-Listwise, and Llama-Okapi-Pairwise. (a) average (over queries) similarity of winners between consecutive rounds (i, i + 1); (b) the average (over queries) similarity between the two highest ranked documents; (c) the average (over queries) min inter-document similarity in a ranked list over rounds; (d) number of unique documents over rounds; (e) the average (over queries and players) similarity of players' documents between consecutive rounds (i, i+1); (f) the average relevance (top) and quality (bottom) grades over rounds. Each competition consists of 30 games with 30 rounds. We refer to the classes of measures Mimicking-thewinner, Diversity, Convergence and Relevance and Quality as M, D, C, R and Q, respectively.

We demonstrated the capabilities of *CSP* by generating multiple datasets with LLM-based agents and comparing the results across different datasets. Additionally, we compared LLM-based competitions with a human-based competition to study the behavioral dynamics of the two types of agents (LLM and human).

We found that LLMs exhibit strategic behavior similar to that of human players [8, 42], with an even greater tendency to adopt the *mimicking-the-winner* strategy. This strategy results in herding behavior towards the top-ranked players [21], leading to a reduced diversity in the corpus [34]. Further exploration revealed that the most influential factor affecting the behavior of LLMs is the language model they use, followed by the prompt provided. In contrast, the choice of ranking function had minimal to no effect on the dynamics of the competition. For future work, we plan to use *CSP* so as to study competitions that include different types of LLMs competing against each other, as well as humans competing against LLM agents.

REFERENCES

- [1] [n.d.]. Letta. https://www.letta.com/
- [2] 2024. Introducing Connect by CloudResearch: Advancing Online Participant Recruitment in the Digital Age | Request PDF. https://doi.org/10.31234/osf.io/ ksgyr
- [3] Pranjal Aggarwal, Vishvak Murahari, Tanmay Rajpurohit, Ashwin Kalyan, Karthik Narasimhan, and Ameet Deshpande. 2023. GEO: Generative Engine Optimization. (Nov. 2023). arXiv:2311.09735 [cs.LG]
- [4] James Allan, Margaret E. Connell, W. Bruce Croft, Fang-Fang Feng, David Fisher, and Xiaoyan Li. 2000. INQUERY and TREC-9. In Proceedings of TREC. 551–562.
- [5] Robert J Aumann, Michael Maschler, and Richard E Stearns. 1995. Repeated games with incomplete information. MIT press.
- [6] A. V. Banerjee. 1992. A Simple Model of Herd Behavior. The Quarterly Journal of Economics 107, 3 (Aug. 1992), 797–817. https://doi.org/10.2307/2118364
- [7] Niv Bardas, Tommy Mordo, Oren Kurland, Moshe Tennenholtz, and Gal Zur. 2025. Prompt-Based Document Modifications In Ranking Competitions. https: //doi.org/10.48550/arXiv.2502.07315 arXiv:2502.07315 [cs].
- [8] Ran Ben Basat, Moshe Tennenholtz, and Oren Kurland. 2017. A Game Theoretic Analysis of the Adversarial Retrieval Setting. *Journal of Artificial Intelligence Research* 60 (Dec. 2017), 1127–1164. https://doi.org/10.1613/jair.5547
- [9] Ran Ben-Basat, Moshe Tennenholtz, and Oren Kurland. 2017. A Game Theoretic Analysis of the Adversarial Retrieval Setting. J. Artif. Intell. Res. 60 (2017), 1127– 1164.
- [10] Timo Breuer, Christin Katharina Kreutz, Norbert Fuhr, Krisztian Balog, Philipp Schaer, Nolwenn Bernard, Ingo Frommholz, Marcel Gohsen, Kaixin Ji, Gareth J. F. Jones, Jüri Keller, Jiqun Liu, Martin Mladenov, Gabriella Pasi, Johanne Trippas, Xi Wang, Saber Zerhoudi, and ChengXiang Zhai. 2024. Report on the Workshop on Simulations for Information Access (Sim4IA 2024) at SIGIR 2024. https: //doi.org/10.48550/arXiv.2409.18024 arXiv:2409.18024 [cs].
- [11] Carlos Castillo and Brian Davison. 2010. Adversarial Web Search. Foundations and Trends in Information Retrieval 4 (01 2010), 377–486. https://doi.org/10.1561/ 1500000021
- [12] Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Al-Dahle, et al. 2024. The Llama 3 Herd of Models. http://arxiv.org/abs/2407.21783 arXiv:2407.21783 [cs].
- [13] Guglielmo Faggioli, Laura Dietz, Charles Clarke, Gianluca Demartini, Matthias Hagen, Claudia Hauff, Noriko Kando, Evangelos Kanoulas, Martin Potthast, Benno Stein, and Henning Wachsmuth. 2023. Perspectives on Large Language Models for Relevance Judgment. In Proceedings of the 2023 ACM SI-GIR International Conference on Theory of Information Retrieval. 39–50. https: //doi.org/10.1145/3578337.3605136 arXiv:2304.09161 [cs].
- [14] Peiyuan Feng, Yichen He, Guanhua Huang, Yuan Lin, Hanchong Zhang, Yuchen Zhang, and Hang Li. 2024. AGILE: A Novel Reinforcement Learning Framework of LLM Agents. https://doi.org/10.48550/arXiv.2405.14751 arXiv:2405.14751 [cs].
- [15] Joseph L. Fleiss. 1971. Measuring nominal scale agreement among many raters. *Psychological Bulletin* 76, 5 (Nov. 1971), 378–382. https://doi.org/10. 1037/h0031619
- [16] Jibril Frej, Didier Schwab, and Jean-Pierre Chevallet. 2020. MLWIKIR: A Python Toolkit for Building Large-scale Wikipedia-based Information Retrieval Datasets in Chinese, English, French, Italian, Japanese, Spanish and More. In CIRCLE.
- [17] Jibril Frej, Didier Schwab, and Jean-Pierre Chevallet. 2020. WIKIR: A Python toolkit for building a large-scale Wikipedia-based English Information Retrieval Dataset. In LREC.
- [18] Drew Fudenberg and Jean Tirole. 1991. Game theory. MIT Press, Cambridge, Mass.
- [19] Gemma Team, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, et al. [n. d.]. Gemma. https://doi.org/10.34740/KAGGLE/M/3301
- [20] Gregory Goren, Oren Kurland, Moshe Tennenholtz, and Fiana Raiber. 2020. Ranking-Incentivized Quality Preserving Content Modification. In Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval. ACM, Virtual Event China, 259–268. https: //doi.org/10.1145/3397271.3401058
- [21] Gregory Goren, Oren Kurland, Moshe Tennenholtz, and Fiana Raiber. 2021. Driving the Herd: Search Engines as Content Influencers. In Proceedings of the 30th ACM International Conference on Information & Knowledge Management. ACM, Virtual Event Queensland Australia, 586–595. https://doi.org/10.1145/3459637. 3482334
- [22] Zoltán Gyöngyi and Hector Garcia-Molina. 2005. Web Spam Taxonomy. In Proceedings of AIRWeb 2005. 39–47.
- [23] John J. Horton. 2023. Large Language Models as Simulated Economic Agents: What Can We Learn from Homo Silicus? http://arxiv.org/abs/2301.07543

arXiv:2301.07543 [econ].

- [24] Yupeng Hou, Junjie Zhang, Zihan Lin, Hongyu Lu, Ruobing Xie, Julian McAuley, and Wayne Xin Zhao. 2024. Large language models are zero-shot rankers for recommender systems. In *Lecture Notes in Computer Science*. Springer Nature Switzerland, Cham, 364–381.
- [25] Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand Joulin, and Edouard Grave. 2022. Unsupervised Dense Information Retrieval with Contrastive Learning. http://arxiv.org/abs/2112.09118 arXiv:2112.09118 [cs].
- [26] Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, Lélio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2023. Mistral 7B. https://doi.org/10.48550/arXiv.2310.06825 arXiv:2310.06825 [cs].
- [27] Thorsten Joachims, Laura Granka, Bing Pan, Helene Hembrooke, and Geri Gay. 2005. Accurately interpreting clickthrough data as implicit feedback. In Proceedings of the 28th annual international ACM SIGIR conference on Research and development in information retrieval. ACM, Salvador Brazil, 154–161. https://doi.org/10.1145/1076034.1076063
- [28] Oren Kurland and Moshe Tennenholtz. 2022. Competitive Search. In Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval. ACM, Madrid Spain, 2838–2849. https://doi.org/10.1145/ 3477495.3532771
- [29] Chuanhao Li, Runhan Yang, Tiankai Li, Milad Bafarassat, Kourosh Sharifi, Dirk Bergemann, and Zhuoran Yang. 2024. STRIDE: A Tool-Assisted LLM Agent Framework for Strategic and Interactive Decision-Making. http://arxiv.org/abs/ 2405.16376 arXiv:2405.16376 [cs].
- [30] Chen-An Li and Hung-Yi Lee. 2024. Examining Forgetting in Continual Pretraining of Aligned Large Language Models. https://doi.org/10.48550/arXiv.2401. 03129 arXiv:2401.03129 [cs].
- [31] Zhiwei Liu, Weiran Yao, Jianguo Zhang, Liangwei Yang, Zuxin Liu, Juntao Tan, Prafulla K. Choubey, Tian Lan, Jason Wu, Huan Wang, Shelby Heinecke, Caiming Xiong, and Silvio Savarese. 2024. AgentLite: A Lightweight Library for Building and Advancing Task-Oriented LLM Agent System. https://doi.org/10.48550/ arXiv.2402.15538 arXiv:2402.15538 [cs].
- [32] M. E. Maron and J. L. Kuhns. 1960. On Relevance, Probabilistic Indexing and Information Retrieval. J. ACM 7, 3 (July 1960), 216–244. https://doi.org/10.1145/ 321033.321035
- [33] Shahan Ali Memon and Jevin D West. 2024. Search engines post-ChatGPT: How generative artificial intelligence could make search less reliable. (Feb. 2024). arXiv:2402.11707 [cs.IR]
- [34] Tommy Mordo, Itamar Reinman, Moshe Tennenholtz, and Oren Kurland. 2025. Search results diversification in competitive search. https://doi.org/10.48550/ arXiv.2501.14922 arXiv:2501.14922 [cs].
- [35] Haya Nachimovsky, Moshe Tennenholtz, Fiana Raiber, and Oren Kurland. 2024. Ranking-Incentivized Document Manipulations for Multiple Queries. In Proceedings of the 2024 ACM SIGIR International Conference on Theory of Information Retrieval. ACM, Washington DC USA, 61–70. https://doi.org/10.1145/3664190. 3672516
- [36] perplexity [n.d.]. http://perplexity.ai.
- [37] Bo Qiao, Liqun Li, Xu Zhang, Shilin He, Yu Kang, Chaoyun Zhang, Fangkai Yang, Hang Dong, Jue Zhang, Lu Wang, Minghua Ma, Pu Zhao, Si Qin, Xiaoting Qin, Chao Du, Yong Xu, Qingwei Lin, Saravan Rajmohan, and Dongmei Zhang. 2024. TaskWeaver: A Code-First Agent Framework. https://doi.org/10.48550/arXiv. 2311.17541 arXiv:2311.17541 [cs].
- [38] Tao Qin and Tie-Yan Liu. 2013. Introducing LETOR 4.0 Datasets. https://doi. org/10.48550/arXiv.1306.2597 arXiv:1306.2597 [cs].
- [39] Zhen Qin, Rolf Jagerman, Kai Hui, Honglei Zhuang, Junru Wu, Le Yan, Jiaming Shen, Tianqi Liu, Jialu Liu, Donald Metzler, Xuanhui Wang, and Michael Bendersky. 2023. Large Language Models are effective text rankers with Pairwise Ranking Prompting. (June 2023). arXiv:2306.17563 [cs.IR]
- [40] Qwen, An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jingren Zhou, Junyang Lin, Kai Dang, Keming Lu, Keqin Bao, Kexin Yang, Le Yu, Mei Li, Mingfeng Xue, Pei Zhang, Qin Zhu, Rui Men, Runji Lin, Tianhao Li, Tingyu Xia, Xingzhang Ren, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yu Wan, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, and Zihan Qiu. 2024. Qwen2.5 Technical Report. https://doi.org/10.48550/arXiv.2412.15115 arXiv:2412.15115 [cs].
- [41] Kira Radinsky, Fernando Diaz, Susan T. Dumais, Milad Shokouhi, Anlei Dong, and Yi Chang. 2013. Temporal web dynamics and its application to information retrieval. In *Proceedings of WSDM*. 781–782.
- [42] Nimrod Raifer, Fiana Raiber, Moshe Tennenholtz, and Oren Kurland. 2017. Information Retrieval Meets Game Theory: The Ranking Competition Between Documents' Authors. In Proceedings of the 40th International ACM SIGIR Conference on Research and Development in Information Retrieval. ACM, Shinjuku Tokyo Japan, 465–474. https://doi.org/10.1145/3077136.3080785

CSP: A Simulator For Multi-Agent Ranking Competitions

Conference'17, July 2017, Washington, DC, USA

- [43] Nisarg Raval and Manisha Verma. 2020. One word at a time: adversarial attacks on retrieval models. https://doi.org/10.48550/arXiv.2008.02197 arXiv:2008.02197 [cs].
- [44] Nils Reimers and Iryna Gurevych. 2019. Sentence-BERT: Sentence Embeddings using Siamese BERT-Networks. http://arxiv.org/abs/1908.10084 arXiv:1908.10084 [cs].
- [45] Stephen E. Robertson. 1977. The Probability Ranking Principle in IR. Journal of Documentation (1977), 294–304. Reprinted in K. Sparck Jones and P. Willett (eds), Readings in Information Retrieval, pp. 281–286, 1997.
- [46] Vinay Samuel, Henry Peng Zou, Yue Zhou, Shreyas Chaudhari, Ashwin Kalyan, Tanmay Rajpurohit, Ameet Deshpande, Karthik Narasimhan, and Vishvak Murahari. 2024. PersonaGym: Evaluating Persona Agents and LLMs. https: //doi.org/10.48550/arXiv.2407.18416 arXiv:2407.18416 [cs].
- [47] Eilam Shapira, Omer Madmon, Roi Reichart, and Moshe Tennenholtz. 2024. Can LLMs Replace Economic Choice Prediction Labs? The Case of Language-based Persuasion Games. http://arxiv.org/abs/2401.17435 arXiv:2401.17435 [cs].
- [48] Eilam Shapira, Omer Madmon, Itamar Reinman, Samuel Joseph Amouyal, Roi Reichart, and Moshe Tennenholtz. 2024. GLEE: A Unified Framework and Benchmark for Language-based Economic Environments. http://arxiv.org/abs/2410. 05254 arXiv:2410.05254 [cs].
- [49] Zhen Tan, Dawei Li, Song Wang, Alimohammad Beigi, Bohan Jiang, Amrita Bhattacharjee, Mansooreh Karami, Jundong Li, Lu Cheng, and Huan Liu. 2024. Large Language Models for Data Annotation and Synthesis: A Survey. https: //doi.org/10.48550/arXiv.2402.13446 arXiv:2402.13446 [cs].

- [50] Liang Wang, Nan Yang, Xiaolong Huang, Binxing Jiao, Linjun Yang, Daxin Jiang, Rangan Majumder, and Furu Wei. 2024. Text Embeddings by Weakly-Supervised Contrastive Pre-training. http://arxiv.org/abs/2212.03533 arXiv:2212.03533 [cs].
- [51] Lei Wang, Jingsen Zhang, Hao Yang, Zhiyuan Chen, Jiakai Tang, Zeyu Zhang, Xu Chen, Yankai Lin, Ruihua Song, Wayne Xin Zhao, Jun Xu, Zhicheng Dou, Jun Wang, and Ji-Rong Wen. 2024. User Behavior Simulation with Large Language Model based Agents. http://arxiv.org/abs/2306.02552 arXiv:2306.02552 [cs].
- [52] Chen Wu, Ruqing Zhang, Jiafeng Guo, Yixing Fan, and Xueqi Cheng. 2023. Are Neural Ranking Models Robust? ACM Trans. Inf. Syst. 41, 2 (2023), 29:1–29:36. https://doi.org/10.1145/3534928
- [53] Junchao Wu, Shu Yang, Runzhe Zhan, Yulin Yuan, Derek F. Wong, and Lidia S. Chao. 2024. A Survey on LLM-Generated Text Detection: Necessity, Methods, and Future Directions. https://doi.org/10.48550/arXiv.2310.14724 arXiv:2310.14724 [cs].
- [54] Chengxiang Zhai and John Lafferty. 2001. A study of smoothing methods for language models applied to Ad Hoc information retrieval. In Proceedings of the 24th annual international ACM SIGIR conference on Research and development in information retrieval (SIGIR '01). Association for Computing Machinery, New York, NY, USA, 334–342. https://doi.org/10.1145/383952.384019
- [55] An Zhang, Yuxin Chen, Leheng Sheng, Xiang Wang, and Tat-Seng Chua. 2024. On Generative Agents in Recommendation. http://arxiv.org/abs/2310.10108 arXiv:2310.10108 [cs].
- [56] Jian-Qiao Zhu, Joshua C. Peterson, Benjamin Enke, and Thomas L. Griffiths. 2024. Capturing the Complexity of Human Strategic Decision-Making with Machine Learning. http://arxiv.org/abs/2408.07865 arXiv:2408.07865 [econ].