
ANCHOLIK-NER: A BENCHMARK DATASET FOR BANGLA REGIONAL NAMED ENTITY RECOGNITION

Bidyarthi Paul

Department of Computer Science and Engineering
Ahsanullah University of Science and Technology
Dhaka, Bangladesh
bidyarthipaul01@gmail.com

Faika Fairuj Preotee

Department of Computer Science and Engineering
Ahsanullah University of Science and Technology
Dhaka, Bangladesh
faikafairuj2001@gmail.com

Shuvashis Sarker

Department of Computer Science and Engineering
Ahsanullah University of Science and Technology
Dhaka, Bangladesh
shuvashisofficial@gmail.com

Shamim Rahim Refat

Department of Computer Science and Engineering
Ahsanullah University of Science and Technology
Dhaka, Bangladesh
n.a.refat2000@gmail.com

Shifat Islam

Department of Computer Science and Engineering
Bangladesh University of Engineering and Technology
Dhaka, Bangladesh
shifat.islam.buet@gmail.com

Tashreef Muhammad

Department of Computer Science and Engineering
Southeast University
Dhaka, Bangladesh
tashreef.muhammad@seu.edu.bd

Mohammad Ashraful Hoque

Department of Computer Science and Engineering
Southeast University
Dhaka, Bangladesh
ashraful@seu.edu.bd

Shahriar Manzoor

Department of Computer Science and Engineering
Southeast University
Dhaka, Bangladesh
smanzoor@seu.edu.bd

February 18, 2025

ABSTRACT

ANCHOLIK-NER is a linguistically diverse dataset for Named Entity Recognition (NER) in Bangla regional dialects, capturing variations across Sylhet, Chittagong, and Barishal. The dataset has around 10,443 sentences, 3,481 sentences per region. The data was collected from two publicly available datasets and through web scraping from various online newspapers, articles. To ensure high-quality annotations, the BIO tagging scheme was employed, and professional annotators with expertise in regional dialects carried out the labeling process. The dataset is structured into separate subsets for each region and is available both in CSV format. Each entry contains textual data along with identified named entities and their corresponding annotations. Named entities are categorized into ten distinct classes: Person, Location, Organization, Food, Animal, Colour, Role, Relation, Object, and Miscellaneous. This dataset serves as a valuable resource for developing and evaluating NER models for Bangla dialectal variations, contributing to regional language processing and low-resource NLP applications. It can be utilized to enhance NER systems in Bangla dialects, improve regional language understanding, and support applications in machine translation, information retrieval, and conversational AI.

Keywords Named Entity Recognition · Low Resource Language · Bangla Language · Regional Dialects · Natural Language Processing

Specification Table

Subject	Computer Science Applications
Specific subject area	Named Entity Recognition for identifying regional dialect-specific entities in Bangla text data.
Type of data	Table (CSV)
Data collection	ANCHOLIK-NER comprises of 3,481 sentences per region. The first 3,000 sentences from each region were from two publicly available datasets and the rest collected through web scraping from newspapers and articles.
Data source location	Vashantor, ONUBAD, Bangla Newspapers and Articles
Data accessibility	Repository Name: Mendeley Data (10.17632/gbkszkt8z3.1)
Related research article	None

1 Value of the data

- ANCHOLIK-NER is a corpus for Named Entity Recognition (NER) in Bangla regional dialects, covering diverse linguistic variations across Bangladesh. It provides a valuable resource for developing NER models tailored to low-resource dialects.
- The dataset is thoroughly annotated using the BIO scheme by expert linguists specializing in regional Bangla dialects, ensuring high-quality entity recognition.
- It includes text from multiple sources, with dialects such as Sylhet, Chittagong, and Barishal, enhancing its usability for dialect-aware NLP applications.
- The dataset can serve as a tool for extracting structured information from the Bangla Regional Dialects into knowledge bases.
- Provided both in format, it includes textual data and named entity annotations, making it adaptable to different NER frameworks and machine learning models.

2 Background

Named Entity Recognition (NER) is a fundamental task in Natural Language Processing (NLP) that aims to identify and classify named entities such as people, locations, organizations, and other predefined categories in a given text. While high-resource languages have seen significant advancements in NER[1] due to large annotated datasets and linguistic tools, low-resource languages, including Bangla, continue to face substantial challenges. The lack of dedicated datasets, linguistic resources, and orthographic consistency makes entity recognition in these languages difficult. Additionally, research in Bangla has primarily focused on Standard Bangla[2][3][4], leaving regional dialects underrepresented despite their linguistic diversity.

Several studies have contributed to NER research for low-resource languages by developing datasets and improving model performance. A study[5] introduced two annotated datasets for Chinese, including a Chinese Internet novel corpus and a financial report dataset. They applied a semi-supervised entity-enhanced BERT pre-training approach, integrating lexicon-based knowledge with deep contextual embeddings, demonstrating improved NER performance across multiple domains. On the other hand, NER challenges in African languages were addressed[6] through the creation of NaijaNER, a dataset covering five Nigerian languages: Nigerian English, Nigerian Pidgin English, Igbo, Yoruba, and Hausa. Their findings indicated that multilingual NER models performed better than language-specific models, highlighting the effectiveness of cross-lingual learning in low-resource settings. For Indo-Aryan languages, an annotated dataset for Assamese was developed[7], containing 99,000 tokens from speeches and plays. Their study evaluated multiple NER models, including FastText, BERT, XLM-R, FLAIR, and MuRIL, using a BiLSTM-CRF sequence tagging approach. The best performance was achieved using MuRIL embeddings, with an F1-score of 80.69

Similarly a study[8] worked on Bhojpuri, Maithili and Magahi – three low resource Indo-Aryan languages known as Purvanchal languages. They created a large NER dataset with 228,373 tokens for Bhojpuri, 157,468 tokens for Maithili and 56,190 tokens for Magahi with 22 entity labels same as Hindi NER dataset. This alignment facilitates cross-lingual knowledge transfer among related languages. Furthermore, for West Slavic, Upper Sorbian and Kashubian language, NER datasets were created with Czech and Polish corpora so that they can do cross-lingual learning[9]. The Uzbek

NER problem was addressed by creating an annotated dataset of 2,000 sentences and 25,865 words primarily from legal documents and manually crafted texts[10]. They used the BIOES annotation scheme to improve entity boundary identification and tagging.

In domain of Medical Named Entity Recognition (MNER), a study [11] published an annotated dataset with over 117,000 tokens in IOB2 format, covering Chemicals and Drugs, Disease and Symptom, and Anatomy entities. Additionally another work[12] addressed the challenge of medical NER in informal settings by creating a dataset for recognizing named entities in Consumer Health Questions (CHQs). The dataset consists of 31,783 samples from an online public health platform and captured diverse linguistic styles and dialectal variations. Experiments showed the complexity of the dataset and BanglishBERT got the highest F1-score of 56.13%.

The ANCHOLIK-NER dataset is unique as there are currently no similar datasets specifically focused on Bangla regional dialects. While NER research has made significant progress in high-resource languages and even Standard Bangla, regional variations such as Sylhet, Chittagong, and Barishal remain largely unexplored. Existing NER datasets primarily cover formal Bangla text. Therefore, leaves a significant gap in recognizing named entities in dialectal and spoken language contexts. Our dataset is the first to address this gap and provides annotated data for regional Bangla varieties.

3 Data Description

We have developed the ANCHOLIK-NER, Bangla Regional Named Entity Recognition dataset, which focuses on the regional dialects of **Sylhet**, **Chittagong**, and **Barishal**. This dataset is specifically designed to enhance the recognition and classification of named entities within the context of these dialects, which are underrepresented in existing NER datasets. By capturing the linguistic nuances specific to these regions, the dataset provides a valuable resource for developing more accurate and regionally aware NER models for Bangla.

Our Bangla Regional Named Entity Recognition (NER) dataset comprises a total of 10,443 sentences, with 3,481 sentences collected for each of the three major regional dialects: Sylhet, Chittagong, and Barishal. Named entities in this dataset are systematically categorized into ten distinct types: Person, Location, Organization, Food, Animal, Colour, Role, Relationship, Object, and Miscellaneous. 71.81% of the dataset (sentences 1 to 2,500) of each region was sourced from two publicly available datasets (Vashantor[13] and ONUBAD[14]) and the rest 29.11% through web scraping from online newspapers and articles, covering structured and editorially curated texts. This incorporates informal, conversational, and spoken language characteristics unique to these regional dialects. This diverse data collection approach helps in capturing real-world linguistic variations and dialectal expressions, making the dataset more representative of actual language usage across different mediums. The number of instances of each type of named entities in the dataset for each three regions is given in Table 2.

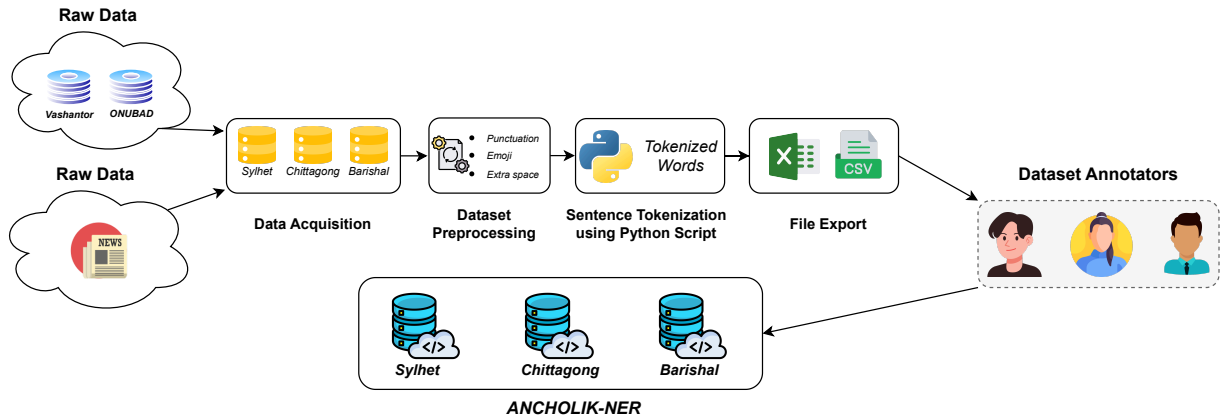


Figure 1: Development of ANCHOLIK-NER

Dataset Development

As mentioned earlier, the dataset was constructed using a diverse range of sources, ensuring comprehensive coverage of Bangla regional dialects. The collection and processing steps are outlined below along with a flow chart in Figure 1:

1. All text data were initially stored in excel format.
2. A Python script was used to process the raw sentences, converting them into a structured tabular format. The script assigned a unique serial number to each sentence and extracted individual words into separate columns. This was done to convert the sentences into tokenized words for efficient annotation. The processed output was saved in both CSV format.
3. The annotation process followed the BIO scheme and was conducted by professional annotators specializing in Bangla regional dialects. Each word was manually labeled with its respective named entity category. To ensure high-quality annotation, three annotators independently labeled the data, and discrepancies were resolved through a consensus-based approach.

The dataset is structured into separate sub-datasets for each region, enabling analysis of dialectal variations. The entire corpus is saved as CSV file, which is structured quite conveniently. A sample of the data structure is given in Table 1. Each entry in the dataset consists of:

1. Sentence Number – The sentence number in the ANCHOLIK-NER dataset for each regions.
2. Tokenized Words – Each word is treated as a separate token.
3. Named Entity Annotations – Assigned entity tags following the BIO scheme.

Table 1: Dataset consists of 3 columns, while the first two columns are fulfilled by Python script (During the conversion of raw text to table format), the third column was filled and checked by Bangla Regional Language experts.

Sentence Number	Word (Sylhet Region)	BIO Tags
1	ফুয়াটায়	O
1	সিলেট	B-LOC
1	থাকি	O
1	ঢাকাত	B-LOC
1	আইছে	O

The BIO scheme is used to indicate the position of the token within the named entity:

- B (Beginning): Beginning of a multi-word entity.
- I (Inside): Inside a multi-word entity.
- O (Outside): Outside any entity.

Table 2: Total instances of Named Entity Types in three Regions

Named Entity Type	Barishal	Sylhet	Chittagonj	Total Instances
Person (PER)	39	38	39	116
Location (LOC)	540	544	538	1622
Organization (ORG)	143	146	144	433
Food (FOOD)	310	308	308	926
Animal (ANI)	56	55	56	167
Colour (COL)	161	167	160	488
Role (ROLE)	117	110	112	339
Relation (REL)	664	660	662	1986
Object (OBJ)	348	345	345	1038
Miscellaneous (O)	17773	18590	18025	54388

The BIO scheme was chosen to ensure precise and detailed annotation of named entity boundaries in the ANCHOLIK-NER dataset. This is very useful for Bangla regional dialects where named entities can span multiple tokens due to the language’s morphological complexity. BIO scheme allows the model to differentiate between Start Entity, and intermediate tokens and hence improve training accuracy and prediction quality. The entity categories were selected based on their relevance and frequency in Bangla regional contexts. This ensures comprehensive coverage of commonly occurring named entities while maintaining a balanced dataset for effective model training.

The dataset includes the following named entity categories, each annotated using the BIO scheme:

- Location (LOC): B-LOC, I-LOC
- Person (PER): B-PER, I-PER
- Organization (ORG): B-ORG, I-ORG
- FOOD (FOOD): B-FOOD, I-FOOD
- Animal (ANI): B-ANI, I-ANI
- Colour (COL): B-COL, I-COL
- ROLE (ROLE): B-ROLE, I-ROLE
- Relationship (REL): B-REL, I-REL
- Object (OBJ): B-OBJ, I-OBJ
- Miscellaneous: O

4 Limitations

The dataset focuses on three regional dialects: Sylhet, Chittagong, and Barishal, potentially excluding linguistic variations present in other Bangla-speaking regions.

5 Ethics Statement

The data used to construct the ANCHOLIK-NER dataset does not raise any ethical concerns, as it was collected from two publicly available datasets and through web scraping from publicly accessible online newspapers, articles. The dataset contains no sensitive or private information, ensuring compliance with ethical standards. Additionally, no data was sourced from personal communications or restricted sources. This dataset is intended solely for NLP research and development, and no human or animal subjects were involved in its creation.

6 Data Availability

Dataset of Named Entity Recognition for Regional Bangla Language (Original data) (Mendeley Data)

7 CRediT Author Statement

Bidyarthi Paul: Methodology, Data curation, Writing – original draft, Visualization, Validation; **Faika Fairuj Preotee:** Data curation, Investigation, Writing – original draft; **Shuvashis Sarker:** Methodology, Validation, Software, Conceptualization; **Shamim Rahim Refat:** Resources, Data curation, Project administration; **Shifat Islam:** Supervision, Project administration; **Tashreef Muhammad:** Supervision, Writing – review & editing; **Mohammad Ashraful Hoque:** Project administration; **Shahriar Manzoor:** Supervision.

8 Acknowledgments

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

9 Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References

- [1] Jing Li, Aixin Sun, Jianglei Han, and Chenliang Li. A survey on deep learning for named entity recognition. *IEEE transactions on knowledge and data engineering*, 34(1):50–70, 2020.
- [2] Md Zahidul Haque, Sakib Zaman, Jillur Rahman Saurav, Summit Haque, Md Saiful Islam, and Mohammad Ruhul Amin. B-ner: A novel bangla named entity recognition dataset with largest entities and its baseline evaluation. *IEEE Access*, 11:45194–45205, 2023.
- [3] HAZ Sameen Shahgir, Ramisa Alam, and Md Zarif Ul Alam. Banglaconer: Towards robust bangla complex named entity recognition. *arXiv e-prints*, pages arXiv–2303, 2023.
- [4] Niloy Farhan, Saman Sarker Joy, Tafseer Binte Mannan, and Farig Sadeque. Gazetteer-enhanced bangla named entity recognition with banglabert semantic embeddings k-means-infused crf model. *arXiv preprint arXiv:2401.17206*, 2024.
- [5] Chen Jia, Yuefeng Shi, Qinrong Yang, and Yue Zhang. Entity enhanced bert pre-training for chinese ner. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6384–6396, 2020.
- [6] Wuraola Fisayo Oyewusi, Olubayo Adekanmbi, Ifeoma Okoh, Vitus Onuigwe, Mary Idera Salami, Opeyemi Osakuade, Sharon Ibejih, and Usman Abdullahi Musa. Naijaner: Comprehensive named entity recognition for 5 nigerian languages. *arXiv preprint arXiv:2105.00810*, 2021.
- [7] Dhrubajyoti Pathak, Sukumar Nandi, and Priyankoo Sarmah. Asner–annotated dataset and baseline for assamese named entity recognition. *arXiv preprint arXiv:2207.03422*, 2022.
- [8] Rajesh Mundotiya, Shantanu Kumar, Ajeet Kumar, Umesh Chaudhary, Supriya Chauhan, Swasti Mishra, Praveen Gatla, and Anil Kumar Singh. Development of a dataset and a deep learning baseline named entity recognizer for three low resource languages: Bhojpuri, maithili, and magahi. *ACM Transactions on Asian and Low-Resource Language Information Processing*, 22(1):1–20, 2023.
- [9] Sunna Torge, Andrei Politov, Christoph Lehmann, Bochra Saffar, and Ziyang Tao. Named entity recognition for low-resource languages–profiting from language families. In *Proceedings of the 9th Workshop on Slavic Natural Language Processing 2023 (SlavicNLP 2023)*, pages 1–10, 2023.
- [10] Davlatyor Mengliev, Vladimir Barakhnin, Mukhriddin Eshkulov, Bahodir Ibragimov, and Shohrux Madirimov. A comprehensive dataset and neural network approach for named entity recognition in the uzbek language. *Data in Brief*, 58:111249, 2025.
- [11] Abdul Muntakim, Farhan Sadaf, and KM Azharul Hasan. Banglamedner: A gold standard medical named entity recognition corpus for bangla text. In *2023 6th International Conference on Electrical Information and Communication Technology (EICT)*, pages 1–6. IEEE, 2023.
- [12] Alvi Khan, Fida Kamal, Nuzhat Nower, Tasnim Ahmed, Sabbir Ahmed, and Tareque Chowdhury. Nervous about my health: Constructing a bengali medical named entity recognition dataset. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 5768–5774, 2023.
- [13] Fatema Tuj Johora Faria, Mukaffi Bin Moin, Ahmed Al Wase, Mehidi Ahmmed, Md Rabius Sani, and Tashreef Muhammad. Vashantor: a large-scale multilingual benchmark dataset for automated translation of bangla regional dialects to bangla language. *arXiv preprint arXiv:2311.11142*, 2023.
- [14] Nusrat Sultana, Rumana Yasmin, Bijon Mallik, and Mohammad Shorif Uddin. Onubad: A comprehensive dataset for automated conversion of bangla regional dialects into standard bengali dialect. *Data in Brief*, 58:111276, 2025.