

Steering the LoCoMotif: Using Domain Knowledge in Time Series Motif Discovery

Aras Yurtman ^{1,2*}, Daan Van Wesenbeeck ^{1,2},
Wannes Meert ^{1,2}, Hendrik Blockeel ^{1,2}

¹Dept. of Computer Science, KU Leuven, Leuven, B-3000, Belgium.

²Leuven.AI - KU Leuven Institute for AI, Leuven, B-3000, Belgium.

*Corresponding author(s). E-mail(s): aras.yurtman@kuleuven.be;

Abstract

Time Series Motif Discovery (TSMD) identifies repeating patterns in time series data, but its unsupervised nature might result in motifs that are not interesting to the user. To address this, we propose a framework that allows the user to impose constraints on the motifs to be discovered, where constraints can easily be defined according to the properties of the desired motifs in the application domain. We also propose an efficient implementation of the framework, the LoCoMotif-DoK algorithm. We demonstrate that LoCoMotif-DoK can effectively leverage domain knowledge in real and synthetic data, outperforming other TSMD techniques which only support a limited form of domain knowledge.

Keywords: pattern mining, time series, motif discovery, domain knowledge, constrained optimization

1 Introduction

Time series data often contain repeating patterns, some of which might be interesting because they reveal important aspects of the underlying process. Such patterns can be manually extracted by experts, but this is a time-consuming and costly approach. An alternative is to use **Time Series Motif Discovery (TSMD)**, which automatically identifies (approximately) repeating patterns in a time series in an unsupervised manner. In the context of TSMD, a time segment that contains a single occurrence of a pattern is called a **motif**, and the set of all occurrences of the same pattern is called a **motif set**.

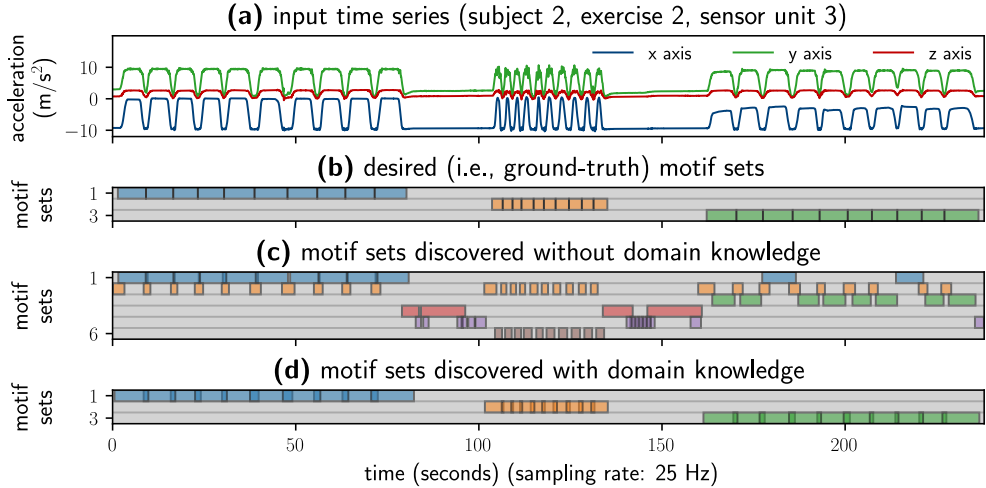


Fig. 1: (a) From the time series that captures the acceleration of the lower arm, (b) executions of a physical therapy exercise are (d) successfully discovered by using domain knowledge, (c) but not without using domain knowledge. We use the existing TSMD technique LoCoMotif (Van Wesenbeeck et al. 2024) in (c) and the proposed one, LoCoMotif-DoK, in (d).

Due to the unsupervised nature of TSMD, the identified motif sets might not be aligned with the user’s intentions. To demonstrate this, consider a physiotherapy use case where a subject performs certain exercises repeatedly and their body motions are captured by wearable sensors as time series data. In such a time series, the desired motifs are individual exercise executions grouped into motif sets according to their execution type. Figure 1a depicts an example time series that contains an exercise performed in three different execution types, each type repeated ten times. In this time series, an unsupervised TSMD technique fails to discover the desired motif sets (Figure 1b); instead, it mostly finds motif sets that consist of parts of exercise executions and idle time periods between them (Figure 1c). We call such motif sets, which are not interesting to the user, **off-target** motif sets. Off-target motif sets are also discovered in the rest of the physiotherapy dataset (Section 6.1) as well as in other application domains such as electrocardiogram, seismology, and epileptic seizure monitoring (Section 6 and Dau and Keogh (2017)).

To discover desired motif sets in TSMD, we leverage **domain knowledge**, which is the available information about the desired motifs and can be defined by an expert without much effort in many applications. Domain knowledge includes properties of motifs or motif sets to be discovered, such as restrictions on and preferences for certain patterns, and does *not* require manually annotating occurrences of any patterns. In our physiotherapy example, we have three pieces of domain knowledge: (1) The subject was advised to perform the exercises ten times, (2) every exercise execution starts and ends when the subject is at resting position, and (3) each execution type has a specific

range of duration. Leveraging these three pieces of domain knowledge enables us to exclusively discover the desired motif sets in the example time series (Figure 1d).

Although incorporating domain knowledge into TSMD is valuable, only a few existing TSMD techniques support it, and their support is quite limited. To represent domain knowledge, these techniques merely consider an auxiliary time series that specifies for every time index whether a motif can start (or end) there or how preferable such a motif is (Dau and Keogh 2017; Mohammad and Nishida 2009; Van Wesenbeeck et al. 2024). This approach is not expressive enough to represent a wide variety of domain knowledge; for example, to define the knowledge in our running example. Some TSMD techniques have hyperparameters (such as motif length) that can be selected based on domain knowledge, but they are also not expressive enough. For example, a hyperparameter that specifies the motif length range usually applies to all discovered motifs, whereas the domain knowledge in our running example includes different ranges for different motif sets to be discovered. Therefore, most forms of domain knowledge cannot be leveraged by existing TSMD techniques.

This paper first proposes a framework for incorporating domain knowledge into TSMD in a generic and highly expressive manner. The framework supports domain knowledge expressed by hard and soft constraints that respectively represent the restrictions on and preferences for the patterns to be discovered. Constraints can be defined differently for individual motif sets and for specific pairs of motif sets. Defining constraints does not require any knowledge about the TSMD technique being used. Although constraints can easily be defined by the user, for convenience, we provide a catalogue of constraints that might be useful in multiple applications.

Secondly, this paper proposes an implementation of the proposed framework based on an existing TSMD technique, LoCoMotif (Van Wesenbeeck et al. 2024), leading to **LoCoMotif-DoK** (LoCoMotif with Domain Knowledge). We evaluate LoCoMotif-DoK based on three different experiments with different types of domain knowledge: a physiotherapy use case, a benchmark for TSMD, and time series from other applications. In general, LoCoMotif-DoK successfully leverages domain knowledge, outperforming existing TSMD techniques that support domain knowledge.

The remainder of this paper is organized as follows: After providing the notation (Section 2), we describe our proposed framework for TSMD with domain knowledge (Section 3) and its implementation LoCoMotif-DoK (Section 4). We then provide an overview of the related work (Section 5). We evaluate LoCoMotif-DoK in a physiotherapy use case, on a TSMD benchmark, and in other applications (Section 6). Lastly, we draw conclusions (Section 7).

2 Notation

A **time series** \mathbf{x} of length n is a sequence of n samples (i.e., measurements): $\mathbf{x} = [x_1, \dots, x_n]$ where $x_i \in \mathbb{R}$ for univariate time series and $x_i \in \mathbb{R}^D$ for D -dimensional multivariate time series for $i = 1, \dots, n$.

A **(time) segment** $\beta = [b : e] = [b, b + 1, \dots, e]$ is an interval of time indices with length $|\beta| = e - b + 1$ for $1 \leq b \leq e \leq n$. The **subsequence** of \mathbf{x} that corresponds to β is $\mathbf{x}_\beta = [x_b, x_{b+1}, \dots, x_e]$. To check whether a segment β overlaps with another segment

β' excessively or not, we define that β is ν -**coincident** to β' if $|\beta \cap \beta'| > \nu \cdot |\beta'|$ where ν is the **overlap** parameter.

A **motif** in \mathbf{x} is a subsequence \mathbf{x}_β (which corresponds to the segment β) that contains a pattern that occurs multiple times in \mathbf{x} . Occurrences of the same pattern constitute a **motif set**: $\mathcal{M} = \{\beta_1, \dots, \beta_k\}$, where $|\mathcal{M}| = k$ is the **cardinality** of \mathcal{M} . The **time coverage** of \mathcal{M} is defined as the overall time duration covered by the motifs: $\text{cov}(\mathcal{M}) = \left| \bigcup_{\beta \in \mathcal{M}} \beta \right|$.

3 Proposed Framework for Motif Discovery with Domain Knowledge

We introduce a TSMD framework that allows the user to specify domain knowledge as constraints on the motif sets to be discovered. By only finding motif sets that comply to the specified constraints, we are more likely to discover the desired patterns. We formulate this task as a constrained optimization problem, which is explained next.

3.1 Constrained Optimization Problem

The constrained optimization problem has the decision variables $\mathcal{M}_1, \dots, \mathcal{M}_\kappa$ that represent the κ motif sets to be discovered. Constraints are defined separately for every motif set \mathcal{M}_i and for every pair of distinct motif sets $(\mathcal{M}_i, \mathcal{M}_j)$ where $i, j \in [1 : \kappa]$ with $i \neq j$.

Constraints can be of two types: hard constraints (requirements) and soft constraints (preferences). Hard constraints must be satisfied by the discovered motif sets, and are represented by predicates that evaluate to True when satisfied and False otherwise. Figure 2 shows a taxonomy of the supported constraints. We support two types of hard constraints: **hard motif set constraints** $H_i^{\text{mset}}(\mathcal{M}_i)$ ($i \in [1 : \kappa]$) that are defined for individual motif sets, and **hard pairwise motif set constraints** $H_{i,j}^{\text{msets}}(\mathcal{M}_i, \mathcal{M}_j)$ (where $i, j \in [1 : \kappa]$ with $i \neq j$) that are defined for pairs of distinct motif sets. A soft constraint is implemented through a **desirability function** $D_i(\mathcal{M}_i)$ ($i \in [1 : \kappa]$) that determines a motif set's desirability by a scalar ranging from 0 (completely undesirable) to 1 (most desirable).¹

To discover the *best* motif sets, we consider a nonnegative **quality measure** $\varphi(\mathcal{M})$ that evaluates a motif set \mathcal{M} in an unsupervised manner, e.g., based on the similarities between motifs as existing TSMD techniques do (Schäfer and Leser 2023; Van Wesenbeeck et al. 2024).

These concepts lead us to the constrained optimization problem

$$\begin{aligned} \max_{\mathcal{M}_1, \mathcal{M}_2, \dots, \mathcal{M}_\kappa} \quad & \sum_{i=1}^{\kappa} D_i(\mathcal{M}_i) \cdot \varphi(\mathcal{M}_i) \\ \text{s.t.} \quad & H_i^{\text{mset}}(\mathcal{M}_i) \quad \forall i \in [1 : \kappa] \\ & H_{i,j}^{\text{msets}}(\mathcal{M}_i, \mathcal{M}_j) \quad \forall i, j \in [1 : \kappa], i \neq j \end{aligned} \tag{1}$$

¹We do *not* consider desirability functions defined on pairs of motif sets because it would not be straightforward to take them into account in the objective function of the optimization problem.

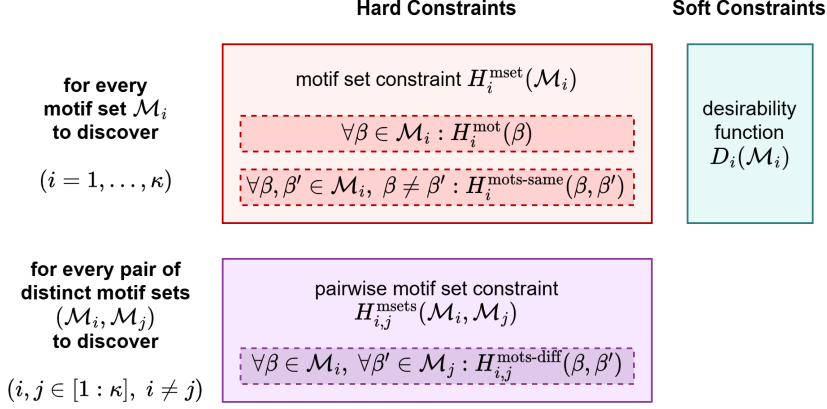


Fig. 2: Taxonomy of constraints. Dashed rectangles indicate special cases of constraints.

whose solution $\mathcal{M}_1^*, \dots, \mathcal{M}_\kappa^*$ consists of the discovered motif sets.

The objective function is the sum of the qualities $\varphi(\mathcal{M}_i)$ of the motif sets weighted by the desirability functions $D_i(\mathcal{M}_i)$ for $i = 1, \dots, \kappa$. Therefore, the constrained optimization problem discovers the κ motif sets that satisfy the hard constraints and that lead to the highest total quality weighted by the soft constraints.

The size of the search space of the optimization problem is astronomical: Without any constraints, it is² is $O(2^{\kappa n^2})$ and becomes a 6021-digit number when searching for merely $\kappa = 2$ motif sets in a relatively short time series of length $n = 100$. Hence, it is not possible to solve this problem using a brute force approach that evaluates every possible κ motif sets in terms of their admissibility, desirability, and quality. Therefore, we provide the LoCoMotif-DoK algorithm that solves this problem efficiently using a greedy strategy in Section 4.

Before describing LoCoMotif-DoK, we provide special cases of the aforementioned constraints and a catalogue of constraints that might be useful in different applications.

3.2 Special Cases of Constraints

While all the constraints in the optimization problem are defined on (pairs of) motif sets, we consider certain special cases of hard constraints where constraints are defined on (pairs of) motifs. These special cases are easier to define in certain scenarios and can be converted to soft constraints.

We consider two special cases of a motif set constraint $H^{\text{mset}}(\mathcal{M})$, as shown in the dashed red rectangles in Figure 2: The first one requires all motifs β in the motif set to satisfy a predicate $H^{\text{mot}}(\beta)$. The second requires all pairs of distinct motifs

²There are $n_{\text{segments}} \triangleq n + (n-1) + (n-2) + \dots + 2 + 1 = \frac{n^2+n}{2}$ distinct time segments. Any set of distinct segments with a minimum cardinality of two constitute a motif set; hence, there are $n_{\text{motif sets}} \triangleq 2^{n_{\text{segments}}} - n_{\text{segments}} - 1$ distinct motif sets. The search space contains any ordered list of κ motif sets; hence, its size is $(n_{\text{motif sets}})^\kappa = \left(2^{(n^2+n)/2} - \frac{n^2+n}{2} - 1\right)^\kappa \in O(2^{\kappa n^2})$.

(β, β') in the motif set to satisfy a predicate $H^{\text{mots-same}}(\beta, \beta')$. For a pairwise motif set constraint $H^{\text{msets}}(\mathcal{M}, \mathcal{M}')$, we consider one special case (the dashed purple rectangle) where every pair of motifs, with one motif from each of the two motif sets, must satisfy a predicate $H^{\text{mots-diff}}(\beta, \beta')$. When applicable, the predicates in these special cases are easier to define than $H^{\text{mset}}(\mathcal{M})$. For example, one can simply define $H^{\text{mot}}(\beta) : 50 \leq |\beta| \leq 100$ to restrict the motif length.

In principle, every hard constraint that is represented by the predicate $H^{\text{mot}}(\beta)$ or $H^{\text{mots-same}}(\beta, \beta')$ can be converted into a desirability function on the corresponding motif set \mathcal{M} by considering the proportion of the motifs or the pairs of distinct motifs that satisfy these constraints, as follows (where $\llbracket \cdot \rrbracket$ denote the Iverson brackets):

$$D(\mathcal{M}) = \frac{1}{|\mathcal{M}|} \sum_{\beta \in \mathcal{M}} \llbracket H^{\text{mot}}(\beta) \rrbracket \quad (2)$$

$$D(\mathcal{M}) = \frac{1}{|\mathcal{M}|^2 - |\mathcal{M}|} \sum_{\substack{\beta, \beta' \in \mathcal{M} \\ \beta \neq \beta'}} \llbracket H^{\text{mots-same}}(\beta, \beta') \rrbracket \quad (3)$$

3.3 Catalogue of Constraints

The user can represent domain knowledge by defining any function in the form of H^{mset} , H^{mot} , $H^{\text{mots-same}}$, $H^{\text{mots-diff}}$, or D . However, for convenience, we provide a catalogue of readily-implemented constraints (in Table 1) that are leveraged in existing TSMD techniques or in the remainder of this paper. It is important to note that desirability functions (D) can be defined differently from what we provide.

Types 1–4 of domain knowledge restrict two characteristics of a motif set: cardinality and time coverage. The corresponding hard constraints set lower- or upper-bounds on these characteristics. In the soft implementation, desirability is set to 1 when the characteristic is within the bounds, and is gradually decreased beyond the bounds. The decrease is linear beyond the lower bound (where it reaches 0 when the characteristic becomes 0) and exponential beyond the upper bound with a decay constant $\varrho \in (0, 1)$ provided by the user.³ For example, for a given cardinality range of $(k_{\min}, k_{\max}) = (5, 7)$, motif sets of cardinalities 2 and 7 have desirabilities $2/5$ and ϱ^2 , respectively.

Types 5–8 of domain knowledge impose constraints on individual motifs according to their length, standard deviation of the measurements in them, and whether their beginning and end time points are allowed or not (determined by the *masks*). Their hard implementations simply require defining H^{mot} according to these properties. Their soft implementations, on the other hand, deserve some explanation: For types 5–6, we set a desirability $r(\beta)$ for every motif β in the motif set (similarly to the desirability in types 1–4), and multiply these desirabilities to obtain the overall desirability D of the motif set. For types 7–8, we rely on user-provided *soft masks* that represent the preference (between 0 and 1) for a motif starting or ending at every time index. We then compute the desirability of a motif set by multiplying the preferences for all motifs.

³For the lower bound, we use a linear penalization strategy to avoid requiring a parameter for penalization.

Type of Domain Knowledge	Hard Constraint	Soft Constraint (Desirability Function) ($\varrho \in (0, 1)$ is specified by the user.)
1 Min. cardinality k_{\min}	$H^{\text{mset}}(\mathcal{M}) : \mathcal{M} \geq k_{\min}$	$D(\mathcal{M}) = \begin{cases} \frac{ \mathcal{M} }{k_{\min}} & \text{if } \mathcal{M} < k_{\min} \\ 1 & \text{otherwise} \end{cases}$
2 Max. cardinality k_{\max}	$H^{\text{mset}}(\mathcal{M}) : \mathcal{M} \leq k_{\max}$	$D(\mathcal{M}) = \begin{cases} \varrho^{ \mathcal{M} - k_{\max}} & \text{if } \mathcal{M} > k_{\max} \\ 1 & \text{otherwise} \end{cases}$
3 Min. time coverage c_{\min}	$H^{\text{mset}}(\mathcal{M}) : \text{cov}(\mathcal{M}) \geq c_{\min}$	$D(\mathcal{M}) = \begin{cases} \frac{\text{cov}(\mathcal{M})}{c_{\min}} & \text{if } \text{cov}(\mathcal{M}) < c_{\min} \\ 1 & \text{otherwise} \end{cases}$
4 Max. time coverage c_{\max}	$H^{\text{mset}}(\mathcal{M}) : \text{cov}(\mathcal{M}) \leq c_{\max}$	$D(\mathcal{M}) = \begin{cases} \varrho^{\text{cov}(\mathcal{M}) - c_{\max}} & \text{if } \text{cov}(\mathcal{M}) > c_{\max} \\ 1 & \text{otherwise} \end{cases}$
5 Length range (l_{\min}, l_{\max})	$H^{\text{mot}}(\beta) : l_{\min} \leq \beta \leq l_{\max}$	$D(\mathcal{M}) = \prod_{\beta \in \mathcal{M}} r(\beta)$ where $r(\beta) = \begin{cases} \frac{ \beta }{l_{\min}} & \text{if } \beta < l_{\min} \\ \varrho^{ \beta /l_{\max} - 1} & \text{if } \beta > l_{\max} \\ 1 & \text{otherwise} \end{cases}$
6 Min. standard deviation σ_{\min}	$H^{\text{mot}}(\beta) : \text{std}(\mathbf{x}_{\beta}) \geq \sigma_{\min}$ where $\text{std}(\mathbf{x}_{\beta})$ is the standard deviation of the subsequence \mathbf{x}_{β}	$D(\mathcal{M}) = \prod_{\beta \in \mathcal{M}} r'(\beta)$ where $r'(\beta) = \begin{cases} \frac{\text{std}(\mathbf{x}_{\beta})}{\sigma_{\min}} & \text{if } \text{std}(\mathbf{x}_{\beta}) < \sigma_{\min} \\ 1 & \text{otherwise} \end{cases}$
7 Beginning mask $\mathbf{m}^{\text{start}}$	$H^{\text{mot}}([b : e]) : m_b^{\text{start}}$ where $\mathbf{m}^{\text{start}} \in \{0, 1\}^n$	$D(\mathcal{M}) = \prod_{[b:e] \in \mathcal{M}} m_b^{\text{start}}$ where $\mathbf{m}^{\text{start}} \in [0, 1]^n$
8 End mask \mathbf{m}^{end}	$H^{\text{mot}}([b : e]) : m_e^{\text{end}}$ where $\mathbf{m}^{\text{end}} \in \{0, 1\}^n$	$D(\mathcal{M}) = \prod_{[b:e] \in \mathcal{M}} m_e^{\text{end}}$ where $\mathbf{m}^{\text{end}} \in [0, 1]^n$
9 Overlap within a motif set	$H^{\text{mots-same}}(\beta, \beta') :$ β is not ν -coincident to β'	Eq. (3)
10 Overlap between motif sets	$H^{\text{mots-diff}}(\beta, \beta') :$ β is not ν -coincident to β'	N/A

Table 1: Catalogue of constraints.

Lastly, types 9 and 10 involve preventing overlaps between motifs that are in the same motif set (type 9) or in different motif sets (type 10), where the extent of overlap is controlled by the parameter $\nu \in [0, 1]$. While $\nu = 0$ strictly prevents overlaps, $\nu = 1$ completely removes the overlap constraint so that any overlaps are allowed.

Our physiotherapy example (Figure 1(d)) uses $\kappa = 3$, soft constraints of types 1, 2 and hard constraints of types 5, 7, 8, 9, 10. Among them, the constraints of types 1 and 2 are applied with different parameters on the three motif sets to be discovered.

4 Implementation of the Proposed Framework: LoCoMotif-DoK

As an implementation of the proposed framework, we present the LoCoMotif-DoK algorithm. We first provide an overview of LoCoMotif-DoK and then explain individual mechanisms of it.

4.1 Overview and Motivation

LoCoMotif-DoK is a TSMD technique that discovers motif sets that satisfy hard constraints by taking into account soft constraints. LoCoMotif-DoK performs this by solving the constrained optimization problem in Equation 1 in a tractable manner. Hence, LoCoMotif-DoK supports all types of constraints and desirability functions that are considered in the framework. In our implementation⁴, those constraints and desirability functions can simply be selected from the catalogue (Table 1) or defined by the user as Python functions.

We base LoCoMotif-DoK on the existing TSMD technique LoCoMotif (Van Wesenbeeck et al. 2024) for two reasons. First, LoCoMotif has useful capabilities: It can discover multiple motif sets of different cardinalities where motif length can differ within and among motif sets; it supports multivariate time series; and it can optionally apply time warping to compensate for nonlinear variations in time. Second, the LoCoMotif algorithm efficiently obtains a diverse set of so-called candidate motif sets, evaluates them, and selects the highest-quality ones as the discovered motif sets. This process is well-suited for integrating domain knowledge by filtering out inadmissible motif sets and scaling the quality of the remaining ones by their desirability.

We provide the pseudocode of LoCoMotif-DoK in Algorithm 1 and its flowchart in Figure 3. LoCoMotif-DoK first extracts time segments of \mathbf{x} that are similar to each other using the Local Concurrences (LoCo) method of LoCoMotif (line 1) so that candidate motif sets can later be generated efficiently. Then, LoCoMotif-DoK discovers κ motif sets greedily (lines 4–14), where κ is specified by the user: For each motif set i to discover ($i = 1, \dots, \kappa$), the best admissible motif set \mathcal{C}_i is found by the procedure `FINDBESTADMISSIBLEMOTIFSET` by taking into account the domain knowledge provided for the i -th motif set. Among these κ motif sets, the best one (\mathcal{C}_{i^*}) is saved as the i^* -th discovered motif set \mathcal{M}_{i^*} . This process is repeated for the undiscovered motif sets until all κ are discovered or no more admissible motif sets can be found.

In the next subsections, we explain the mechanisms of generating a candidate motif set, finding the single best admissible motif set, and discovering multiple motif sets.

4.2 Generating A Candidate Motif Set

LoCoMotif-DoK inherits LoCoMotif’s LoCo step (Van Wesenbeeck et al. 2024) that enables obtaining candidate motif sets efficiently. LoCo obtains a set \mathcal{P} of local warping paths, each of which relates two similar time segments of \mathbf{x} with each other with time warping, as shown in Figure 4 (left). The strictness of assessing the similarity

⁴The source code is available at https://github.com/ML-KULeuven/locomotif_dok.

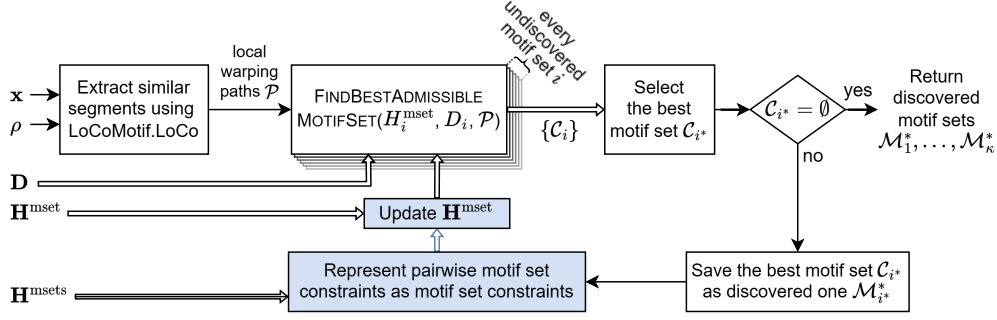


Fig. 3: Flowchart of LoCoMotif-DoK.

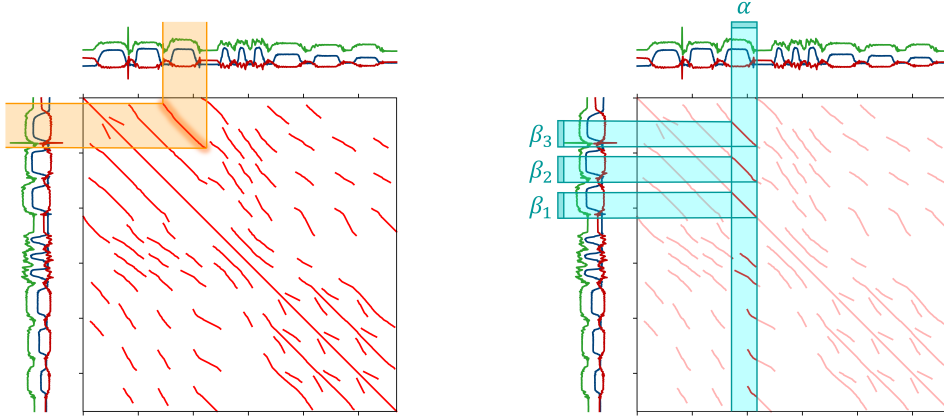


Fig. 4: *Left*: LoCo relates similar time segments of \mathbf{x} with each other by local warping paths \mathcal{P} , where one of the paths is highlighted. *Right*: From a given representative segment α , a candidate motif set $\mathcal{C} = \{\beta_1, \beta_2, \beta_3\}$ is obtained efficiently by identifying segments that are similar to α according to \mathcal{P} .

between segments is controlled by the hyperparameter $\rho \in [0, 1]$: A larger ρ requires the segments to be more similar to each other to be related by a local warping path.

To generate a candidate motif set, we use the function `LoCoMotif.generateCandidateMotifSet`, which efficiently obtains all the segments β_1, \dots, β_k that contain a similar pattern to a given segment α by processing \mathcal{P} as shown in Figure 4 (right). Here, α is called a **representative segment** and $\mathcal{C} = \{\beta_1, \dots, \beta_k\}$ the corresponding **candidate motif set**. The segments in \mathcal{C} are sorted from the most similar to α to the least similar⁵; hence, $\beta_1 = \alpha$.

⁵We measure the similarity between every motif $\beta \in \mathcal{C}$ and α by summing up the similarities on the subpath \mathbf{q} of the partial warping path $\mathbf{p} \in \mathcal{P}$ that relates β to α : $\sum_{(i,j) \in \mathbf{q}} s(x_i, x_j)$ where $s(x_i, x_j) \triangleq$

Algorithm 1: LoCoMotif-DoK

Input : \mathbf{x} : time series, ρ : strictness, κ : max. number of motif sets to discover,
 $\mathbf{H}^{\text{mset}} = [H_i^{\text{mset}}]_{i=1}^{\kappa}$: motif set constraints,
 $\mathbf{H}^{\text{msets}} = [H_{i,j}^{\text{msets}}]_{i,j \in [1:\kappa], i \neq j}$: pairwise motif set constraints,
 $\mathbf{D} = [D_i]_{i=1}^{\kappa}$: desirability functions.
Output: $\{\mathcal{M}_1^*, \dots, \mathcal{M}_\kappa^*\}$: discovered motif sets.

- 1 $\mathcal{P} \leftarrow \text{LoCoMotif.LoCo}(\mathbf{x}, \rho)$ \triangleright Obtain the set \mathcal{P} of local warping paths.
- 2 $\mathcal{I} \leftarrow [1 : \kappa]$ \triangleright indices of motif sets to be discovered
- 3 $\mathcal{M}_i \leftarrow \emptyset$ for $i = 1, \dots, \kappa$ \triangleright initialize every motif set to be discovered
- 4 **while** $\mathcal{I} \neq \emptyset$ **do**
- 5 $\mathcal{C}_i \leftarrow \emptyset, \phi_i \leftarrow 0$ for $i = 1, \dots, \kappa$
- 6 **for** $i \in \mathcal{I}$ **do**
- 7 $\mathcal{C}_i, \phi_i \leftarrow \text{FINDBESTADMISSIBLEMOTIFSET}(H_i^{\text{mset}}, D_i, \mathcal{P})$
- 8 $i^* \leftarrow \arg \max[\phi_1, \dots, \phi_\kappa]$ \triangleright index of the best discovered motif set
- 9 **if** $\mathcal{C}_{i^*} = \emptyset$ **then**
- 10 Exit the loop. \triangleright no admissible motif sets found
- 11 $\mathcal{M}_{i^*}^* \leftarrow \mathcal{C}_{i^*}$ \triangleright Save \mathcal{C}_{i^*} as the i^* th discovered motif set.
- 12 $\mathcal{I} \leftarrow \mathcal{I} \setminus \{i^*\}$ \triangleright Remove the index of the discovered motif set.
- 13 **for** $j \in \mathcal{I}$ **do** \triangleright every undiscovered motif set j
- 14 $H_j^{\text{mset}}(\mathcal{C}) \leftarrow H_j^{\text{mset}}(\mathcal{C}) \wedge H_{j,i^*}^{\text{msets}}(\mathcal{C}, \mathcal{M}_{i^*}^*) \wedge H_{i^*,j}^{\text{msets}}(\mathcal{M}_{i^*}^*, \mathcal{C})$ \triangleright Represent pairwise motif set constraints as motif set constraints.
- 15 **return** $\{\mathcal{M}_1^*, \dots, \mathcal{M}_\kappa^*\}$

16 **procedure** $\text{FINDBESTADMISSIBLEMOTIFSET}(H^{\text{mset}}, D, \mathcal{P})$
17 $\{H^{\text{mot}}, H^{\text{mot-repr}}, H^{\text{mots-same}}, k_{\text{max}}^{\text{discard}}, H^{\text{mset-others}}\} \leftarrow H^{\text{mset}}$ \triangleright Categorize H^{mset} .
18 $(\mathcal{C}^*, \phi^*) \leftarrow (\emptyset, 0)$ \triangleright initialize the best motif set with its quality
19 **for** b in $[1 : n]$ **do**
20 **for** e in $[b : n]$ **do**
21 $\alpha \leftarrow [b : e]$ \triangleright representative segment
22 **if** $H^{\text{mot}}(\alpha) \wedge H^{\text{mot-repr}}(\alpha)$ **then**
23 $\mathcal{C} \leftarrow \text{LoCoMotif.generateCandidateMotifSet}(\alpha, \mathcal{P})$
24 $\mathcal{C} \leftarrow \text{FILTERCANDIDATEMOTIFSET}(\mathcal{C}, H^{\text{mot}}, H^{\text{mots-same}}, k_{\text{max}}^{\text{discard}})$
25 **if** $|\mathcal{C}| \geq 2 \wedge H^{\text{mset-others}}(\mathcal{C})$ **then**
26 $\phi \leftarrow \varphi(\mathcal{C}) \cdot D(\mathcal{C})$ \triangleright quality of \mathcal{C} weighted by its desirability
27 **if** $\phi > \phi^*$ **then** $(\mathcal{C}^*, \phi^*) \leftarrow (\mathcal{C}, \phi)$
28 **return** \mathcal{C}^*, ϕ^*

29 **procedure** $\text{FILTERCANDIDATEMOTIFSET}(\mathcal{C}, H^{\text{mot}}, H^{\text{mots-same}}, k_{\text{max}}^{\text{discard}})$
30 $\mathcal{C}_{\text{new}} \leftarrow \emptyset$
31 **for** β in \mathcal{C} **do**
32 **if** $|\mathcal{C}_{\text{new}}| < k_{\text{max},i}^{\text{discard}} \wedge H^{\text{mot}}(\beta) \wedge H^{\text{mots-same}}(\beta, \beta') \forall \beta' \in \mathcal{C}_{\text{new}}$ **then**
33 $\mathcal{C}_{\text{new}} \leftarrow \mathcal{C}_{\text{new}} \cup \{\beta\}$
34 **return** \mathcal{C}_{new}

4.3 Finding the Best Admissible Motif Set

Given a hard motif set constraint H^{mset} and desirability function D , the procedure $\text{FINDBESTADMISSIBLEMOTIFSET}$ (lines 16–28 in Algorithm 1) finds the best admissible motif set in three steps by (1) generating candidate motif sets, (2) filtering them

$\exp(-\|x_i - x_j\|^2)$ is the similarity between \mathbf{x}_i and \mathbf{x}_j . This is consistent with the way the similarity between subsequences is calculated to evaluate the quality of a candidate motif set in LoCoMotif(-DoK).

(or individual motifs in them) according to the constraints, and (3) evaluating the quality of the remaining candidate motif sets by taking D into account to eventually select the best candidate motif set.

To be able to check the constraints at the correct stages in the algorithm, we first separate the provided hard constraints H^{mset} into five categories (line 17): H^{mot} for constraints that are applied on every motif, the newly-introduced $H^{\text{mot-repr}}$ for constraints that are applied on every representative motif, $H^{\text{mots-same}}$ for constraints that are applied on every pair of distinct motifs within the motif set, $k_{\text{max}}^{\text{discard}}$ for the cardinality limit of a motif set (beyond which motifs will be removed).⁶ We introduce $H^{\text{mot-repr}}$ (which is not present in the framework) here for two reasons: First, the user should be able to apply certain constraints only to representative motifs instead of all motifs because every motif in a motif set is already similar to the representative. Second, we would like to support the functionality in the existing TSMD techniques (which are discussed in Section 5) where certain constraints are applied only on the representatives.

Then, we generate candidate motif sets only from the *admissible* representative segments using `LoCoMotif.generateCandidateMotifSet` function. We check the admissibility of a representative segment α not only according to $H^{\text{mot-repr}}$ but also H^{mot} (line 22) because the representative itself is one of the motifs in the candidate motif set and all motifs must satisfy H^{mot} . This process results in a search space of at most $O(n^2)$ candidate motif sets, which is much smaller than that of the framework ($O(2^{n^2})$ for a single motif set). Despite its manageable size, the reduced search space is sufficiently diverse for discovering motif sets because it includes (approximate) occurrences (if any) of every subsequence \mathbf{x}_α as a candidate motif set.

Next, we process every candidate motif set \mathcal{C} according to the constraints (lines 24–27). First, we filter out individual motifs in \mathcal{C} to satisfy the constraints H^{mot} , $H^{\text{mots-same}}$, and $k_{\text{max}}^{\text{discard}}$, if possible.⁷ The filtering operation is implemented greedily by the procedure `FILTERCANDIDATEMOTIFSET`, which starts with a new, empty candidate motif set and adds motifs to it one by one as long as the constraints are satisfied. This operation adheres to the order of motifs in \mathcal{C} because they are already sorted from the most relevant to the least relevant. Subsequently, if the (possibly filtered) candidate motif set \mathcal{C} contains at least two motifs and is admissible according to $H^{\text{mset-others}}$, we evaluate its quality using the **fitness** metric $\varphi(\mathcal{C}) \in [0, 1]$, which considers the similarities of the motifs to the representative as well as the fraction of the time range the motifs cover, as in `LoCoMotif`. To take into account soft constraints, we scale the fitness by the desirability $D(\mathcal{C})$.

As a result of this process, the procedure `FINDBESTADMISSIBLEMOTIFSET` returns the admissible candidate motif set that has the highest fitness times desirability. If there are no admissible motif sets found, \emptyset is returned.

⁶The constraint $k_{\text{max}}^{\text{discard}}$ is different from the maximum cardinality constraint k_{max} (given in Table 1), which discards the entire candidate motif set if it contains more than k_{max} motifs instead of removing excessive motifs in it.

⁷We need this filtering operation because a subset of an inadmissible candidate motif set might be admissible; however, such a subset is not included in the search space because every candidate motif set contains *all* occurrences of a pattern.

4.4 Discovering Multiple Admissible Motif Sets

LoCoMotif-DoK discovers multiple motif sets greedily: Instead of finding κ globally optimal motif sets, it identifies the best admissible motif set at a time by the procedure `FINDBESTADMISSIBLEMOTIFSET` and repeats this process until κ motif sets are discovered or no more can be found (lines 4–14 in Algorithm 1). While this iterative approach is analogous to LoCoMotif, LoCoMotif-DoK needs to ensure that the discovered motif sets satisfy constraints, which is not trivial because constraints might be defined differently for every (pair of) motif set(s) to be discovered.

Since the constraints might differ across the motif sets $\mathcal{M}_1, \dots, \mathcal{M}_\kappa$, in every iteration of LoCoMotif-DoK, the `FINDBESTADMISSIBLEMOTIFSET` procedure is called separately for every motif set that hasn’t been discovered yet. Among these ‘best’ motif sets, the one with the highest fitness scaled by desirability is selected as the discovered motif set ($\mathcal{M}_{i^*}^*$).⁸ If there are no motif sets found or all motif sets have been discovered, then the iterative process is terminated. Hence, the LoCoMotif-DoK algorithm can discover less than κ motif sets (in which case some \mathcal{M}_i^* are \emptyset).

The `FINDBESTADMISSIBLEMOTIFSET` procedure checks the constraints of types H^{mset} and D (which are defined for individual motif sets) and not H^{msets} (which are defined for pairs of motif sets). This is because every constraint defined for a pair of motif sets can be represented as a constraint defined for a single motif set if one of the two motif sets is known (i.e., discovered). Given this fact, once LoCoMotif-DoK discovers a motif set ($\mathcal{M}_{i^*}^*$), for every undiscovered motif set j , it changes the representation of the constraints H_{j,i^*}^{msets} and $H_{i^*,j}^{\text{msets}}$ (which involve $\mathcal{M}_{i^*}^*$) into H_j^{mset} by substituting the corresponding free variables by $\mathcal{M}_{i^*}^*$. LoCoMotif-DoK then combines the constraints whose representations have changed, with the existing constraints H_j^{mset} using the ‘and’ operation in line 14, where \mathcal{C} is an independent variable that represents any motif set. This process is represented by the parts highlighted in blue in Figure 3.

5 Related Work

Most existing TSMD techniques do not support domain knowledge. Although they have hyperparameters, some of which can be determined using domain knowledge, they are never sufficient to represent domain knowledge in general. This is because hyperparameters are limited in expressiveness, as they only capture predetermined properties such as motif length or the cardinality of motif sets (Schäfer and Leser 2023; Van Wesenbeeck et al. 2024).

To our knowledge, there are only three existing TSMD techniques that support domain knowledge, but they are all quite limited in expressiveness. They merely utilize a mask \mathbf{m} , which is an auxiliary time series that specifies the desirability (between 0 and 1) or permissibility (either 0 or 1) of motifs at each time index.⁹ The mask \mathbf{m} can be provided by a domain expert or computed from the input time series \mathbf{x} (or from an auxiliary one) using a simple method that leverages domain knowledge. We explain these existing techniques below.

⁸If the same constraints are defined for every (pair of) motif set(s), then there is no need to call the `FINDBESTADMISSIBLEMOTIFSET` procedure multiple times because their result would be the same.

⁹The mask \mathbf{m} is referred to as an annotation vector in Dau and Keogh (2017) and a constraint in Mohammad and Nishida (2009).

Dau and Keogh (2017) proposed the technique Matrix Profile V (MPV) that applies \mathbf{m} to the starting time index of the *representative* motif only (which is called the query). We can implement this in LoCoMotif-DoK by defining the hard constraint $H^{\text{mot-repr}}([b : e]) : m_b$ for a binary \mathbf{m} or the desirability function $D(\{[b_1 : e_1], \dots, [b_k : e_k]\}) = m_{b_1}$ for a real-valued \mathbf{m} where b_1 is the starting time index of the representative (i.e., the first) motif. We note that MPV discovers only a single motif set with cardinality two, which can be achieved in LoCoMotif-DoK by setting $\kappa = 1$ and $k_{\text{max}}^{\text{discard}} = 2$.

The TSMD algorithms proposed by Mohammad and Nishida (2009) probabilistically sample the representative segments instead of processing all of them, where m_i specifies the probability of sampling (i.e., the probability of occurrence of) a motif that ends at time point i for $i = 1, \dots, n$. If we consider the probability of occurrence as desirability, we can implement this in LoCoMotif-DoK by setting $D(\{[b_1 : e_1], \dots, [b_k : e_k]\}) = m_{e_1}$ where e_1 is the end time index of the representative (i.e., the first) segment.

LoCoMotif (Van Wesenbeeck et al. 2024) supports two different binary masks, $\mathbf{m}^{\text{begin-repr}}$ and $\mathbf{m}^{\text{end-repr}}$, that are applied to the beginning and end time indices of *representative* motifs only. This functionality can be implemented in LoCoMotif-DoK by defining the constraint $H^{\text{mot-repr}}([b : e]) : m_b^{\text{begin-repr}} \wedge m_e^{\text{end-repr}}$.

Yeh et al. (2017) employs a mask for a different purpose than TSMD: Given a Boolean mask $\mathbf{m} \in \{0, 1\}^n$ that annotates a time series \mathbf{x} by specifying the time intervals containing interesting patterns, a model is learned to predict, for an unseen time series, a Boolean mask that specifies interesting time intervals in it. This is considered as a semi- (or weekly) supervised approach because a model is learned from an annotated time series to make predictions for unseen time series. As such, this method falls outside the scope of this paper.

6 Experimental Evaluation

To evaluate the impact of domain knowledge on the motifs discovered by LoCoMotif-DoK, we perform three sets of experiments: detecting exercise executions in a physiotherapy use case, discovering the motifs inserted into time series in a TSMD benchmark, and identifying meaningful repeating patterns in several other applications.

6.1 Physiotherapy Use Case

Here, we detail the physiotherapy use case, from which we have already provided an example time series in Figure 1. In this use case, we apply TSMD on wearable motion sensor data acquired during physiotherapy sessions to identify each exercise execution and group them by their execution type to aid a physiotherapist (Yurtman and Barshan 2014). By using LoCoMotif-DoK, we can leverage much more comprehensive domain knowledge than LoCoMotif, which leads to the following Research Question (RQ):

RQ1: By leveraging more comprehensive domain knowledge, can LoCoMotif-DoK outperform LoCoMotif in identifying and grouping physiotherapy exercise executions using wearable sensor data?

6.1.1 Dataset

We use all the 40 time series that represent exercise sessions available in a publicly available dataset (Yurtman and Barshan 2022). In every session, a subject performs a certain exercise in three different types: ten times in a correct manner, ten times too quickly, and ten times with a low range of motion, as shown in Figure 1. Time segments of all the executions are available as ground-truth (GT) information that we use for evaluation. The subjects’ body movements are captured as time series data by wearable sensors (at 25 Hz) placed at five different positions on the body. We use the data acquired by the tri-axial accelerometer that moves the most in each exercise (position 4 for exercise 2 and position 2 for the remaining exercises), as done by Van Wesenbeeck et al. (2024).

6.1.2 Experimental Setup

We consider three levels of domain knowledge:

- *LoCoMotif-0*: We do not leverage any domain knowledge.
- *LoCoMotif* (limited domain knowledge): All exercises need to start and end when the subject is at the resting position, which is determined simply by thresholding the standard deviation over a sliding window (Van Wesenbeeck et al. 2024). We represent this domain knowledge through the masks $\mathbf{m}^{\text{begin-repr}}$ and $\mathbf{m}^{\text{end-repr}}$ that constraint the beginning and end points of the representative motifs (as explained in Section 5). This is the only type of domain knowledge LoCoMotif supports.
- *LoCoMotif-DoK* (comprehensive domain knowledge): In addition to the masks in the previous setting, we represent two more pieces of domain knowledge: (1) The subject is *expected* to perform 10 executions of each type in every exercise session. We represent this by soft constraints on the cardinality for every motif set to be discovered by setting $k_{\min} = k_{\max} = 10$ and $\varrho = 0.5$ (rows 1–2 in Table 1). (2) The three execution types present in every time series have different duration characteristics; for example, the second type is expected to be shorter than the other types (Figure 1a). To represent this information, we constrain the lengths of the representatives of the three motif sets to be discovered using three different length ranges (using hard constraint 5 in Table 1). While a physiotherapist can define these ranges according to the expected durations in practice, we obtain them from the dataset according to the shortest and longest executions of the three execution types in the entire dataset.

We use the same hyperparameter values for all three levels of domain knowledge: We set $(l_{\min}, l_{\max}) = (2.0, 10.5)$ seconds according to the shortest and longest exercise executions in the dataset. We repeat the experiments with different values for the strictness: $\rho \in \{0, 0.05, \dots, 1\}$. We use the default values for the remaining hyperparameters: $\nu = 0.25$ and time warping enabled.

For each level of domain knowledge, we run the experiments in two settings: In the first setting, we assume that a physiotherapist is available. Since they can easily

discard motif sets that do not correspond to an exercise type, we allow three additional motif sets to be discovered by setting $\kappa = 6$, as in Van Wesenbeeck et al. (2024). In this setting, LoCoMotif-DoK uses specialized length ranges for motif sets 1–3 and no additional length constraint for motif sets 4–6 (other than l_{\min} and l_{\max}). In the second setting, we assume that discovered motif sets are automatically processed by a downstream algorithm, where falsely discovered ones may pose a problem. Hence, we set $\kappa = 3$.

We evaluate the discovered motifs with respect to the GT ones by using the evaluation method PROM (Wesenbeeck et al. 2024) that computes three metrics: precision, recall, and F1-score. High precision means fewer false positive motifs, whereas high recall means fewer missed motifs. F1-score is the harmonic mean of precision and recall, providing an overview evaluation of the discovered motifs. We set PROM to ignore falsely discovered motif sets, which is preferred in the first setting and has no effect in the second setting.


We note that other existing TSMD techniques that can leverage domain knowledge *cannot* be applied to this use case due to the requirement of discovering multiple motif sets of cardinality greater than two.

6.1.3 Results


Figure 5 provides experimental results for each setting, level of domain knowledge, and strictness (ρ). In both settings, LoCoMotif-DoK substantially outperforms LoCoMotif for most ρ values. As expected, LoCoMotif-0, which doesn’t leverage any domain knowledge, yields substantially worse results in all experiments, especially for $\kappa = 3$. The main reason is the quasi-periodicity of successive exercise executions where the phase-shifted versions of the executions can be discovered as motifs, which are uninteresting repeating patterns. This problem is eliminated in LoCoMotif and LoCoMotif-DoK by requiring motifs to start and end when the subject is at resting position.

In terms of the peak performance (for the optimal ρ), LoCoMotif-DoK is dramatically better than LoCoMotif in precision, recall, and F1-score in the first setting (Figure 5a). For the second setting (Figure 5b), the peak performance of LoCoMotif-DoK is slightly better than LoCoMotif with a very similar precision and slightly higher recall and F1-score. This is despite the fact that LoCoMotif-DoK is configured to discover up to 6 motif sets while the domain knowledge includes the presence of 3 motif sets. We observe that the peak performance corresponds to a smaller strictness (ρ) when more domain knowledge is leveraged, which is expected because domain knowledge makes the algorithm stricter in a different way (through constraints) than ρ (through similarities between motifs in a motif set).

To conclude, in the physiotherapy use case, leveraging domain knowledge is essential to discover desired motifs, and additional domain knowledge can further improve the results. Hence, our answer to RQ1 is yes.

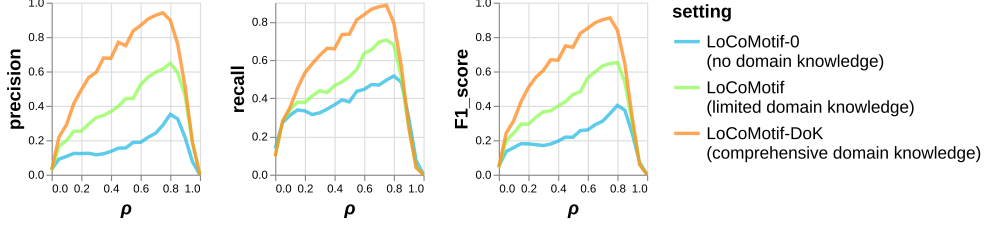

(a) First setting: discovering up to $\kappa = 3$ motif sets.

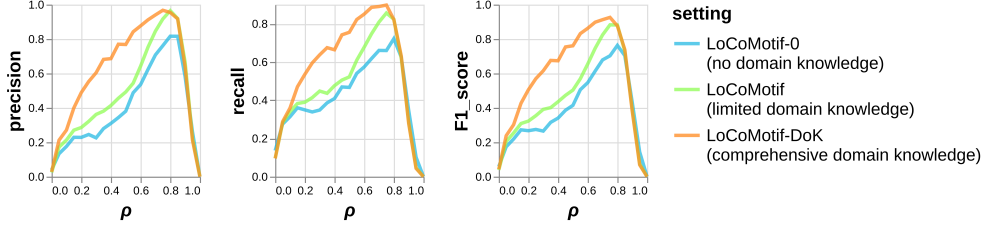

(b) Second setting: discovering up to $\kappa = 6$ motif sets.

Fig. 5: In the physiotherapy use case, LoCoMotif-DoK can leverage comprehensive domain knowledge and outperforms LoCoMotif that supports a much more limited form of domain knowledge in terms of different evaluation metrics for most strictness (ρ) values.

6.2 TSMD Benchmark

We investigate the impact of domain knowledge on the quality of the discovered motif sets using a TSMD benchmark, that consists of a diverse set of time series for which GT motif sets are available for evaluation (Wesenbeeck et al. 2024). This leads to:

RQ2: Does incorporating additional information about the GT motif sets help in discovering motif sets that are more similar to the GT ones?

6.2.1 Experimental Setup

Every time series in the benchmark consists of concatenation of time series instances from a classification dataset, where repeating classes are considered as GT motif sets. To emulate domain knowledge in such a time series, we extract some information from each GT motif set and represent it by different hard and soft constraints. Parameters of constraints are determined specifically for every motif set in every generated time series, since the characteristics of these motif sets might differ.

To observe the impact of constraints on the quality of the discovered motif sets, we apply LoCoMotif without domain knowledge as well as LoCoMotif-DoK with every constraint separately. We set the hyperparameters as κ being the number of GT motif sets; $\nu = 0.5$; l_{\min} and l_{\max} being the 0.1- and 0.9-quantiles of the lengths of the instances in the validation set (of the classification dataset), as in Van Wesenbeeck

et al. (2024). We tune the strictness (ρ) and time warping hyperparameters based on a validation set (Van Wesenbeeck et al. 2024; Wesenbeeck et al. 2024) separately for LoCoMotif and LoCoMotif-DoK with every constraint.

We evaluate the quality of the discovered motif sets using F1-score (Wesenbeeck et al. 2024). We compare the F1-scores of each constraint with the base case through 2-D histograms as well as the number of wins, ties, and losses. We separate the results into two groups: hard and soft constraints. We further group the results according to GT motifs being fixed- or variable-length because fixed-length motifs prevent length-related constraints from being specialized for every motif set.

6.2.2 Results

Hard constraints are provided in Table 2 and the corresponding results in Figure 6a. The constraint Start- and End-points yields the greatest improvement, pushing the F1-scores to 1 in most cases, which is expected because the constraint defines the time segments of possible motifs with some flexibility, making the TSMD task much easier. The constraints Max. Cardinality, Non-consecutive Motifs, and Positive Region also bring an improvement. The Exact Cardinality constraint, on the other hand, does not help in most cases, partially because of its strictness: it discards candidate motif sets with incorrect cardinalities and may cause no motif sets to be discovered. For example, if there are five motifs in a GT motif set and one of them is too noisy, then all candidate motif sets might contain four motif sets and hence be inadmissible. The Length constraint also has an adverse effect on the result.

Soft constraints are listed in Table 3 with their results presented in Figure 6b. The constraints Cardinality, Soft Mask, and Positive Region improve the F1-score. In particular, the soft Cardinality constraint performs much better than its hard implementation because the former does not suffer from being too strict, as it introduces a preference for certain motif sets without discarding others. Lastly, the Length constraint does not improve the results.

A possible reason for the adverse effect of the Length-related constraints is LoCoMotif-DoK’s time warping capability, which causes candidate motif sets to consist of possibly variable-length motifs, some of which may not be admissible or desired according to constraints. This problem could be solved if LoCoMotif-DoK could compute time warping by considering the constraints; however, this is not straightforward to achieve in a computationally tractable manner, especially while supporting generic constraints.

Overall, domain knowledge is more helpful for variable-length datasets than fixed-length ones. This is because motif (set)s with more diverse properties enable the domain knowledge to be more specialized for individual motif sets, which can be successfully leveraged by LoCoMotif-DoK.

To conclude, the majority of the constraints we consider lead to higher-quality motif sets; hence, our response to RQ2 is ‘most of the time’.

Constraint Type	Description	Implementation (See Table 1 for the catalogue.)
Exact Cardinality	Require a fixed cardinality.	Use constraints 1–2 from the catalogue with k_{\min} and k_{\max} being the GT cardinality.
Max. Cardinality	Limit the cardinality.	Set $k_{\max}^{\text{discard}}$ as the GT cardinality.
Start- and End-points	Require every motif to start and end around the start- and end-points of the GT motifs.	Use constraints 7–8 from the catalogue with the mask being 1 only within Δl from the GT motifs’ start- and end-points, where Δl is 1/4 of the average motif length.
Non-consecutive Motifs	Require a minimum time duration between motifs (within or across motif sets).	Define $H^{\text{mots-diff}}(\beta, \beta') = H^{\text{mots-same}}(\beta, \beta') : \neg(b \leq b' \leq e + l_{\text{buffer}}) \wedge \neg(b' \leq b \leq e' + l_{\text{buffer}})$ where l_{buffer} is half of the average time duration between consecutive motifs in the time series.
Positive Region	There has to be at least one motif in a specified ‘positive’ region.	Select a random GT motif $[b : e]$, extend it into a positive region as $\theta = [b - \frac{e-b+1}{2} : e + \frac{e-b+1}{2}]$, and set $H^{\text{mset}}(\mathcal{M}) : (\exists \beta \in \mathcal{M} : \beta \subseteq \theta)$.
Length	Require all motifs to be within the length range.	Use constraint 5 from the catalogue with (l_{\min}, l_{\max}) being the length range of the GT motifs.

Table 2: Hard constraints for every GT motif set in the benchmark data.

6.3 Validation Based on Selected Time Series

Leveraging domain knowledge represented by a mask \mathbf{m} has been shown to be essential for the existing TSMD technique MPV to discover interesting motifs in various applications (Dau and Keogh 2017). This leads us to:

RQ3: Can LoCoMotif-DoK leverage the available domain knowledge in multiple applications to discover (only) interesting motifs?

To answer this question, we consider the time series selected by Dau and Keogh (2017) from different application domains and evaluate the results qualitatively since there are no GT motif sets available. We present the results for the ECG time series in this section and for the remaining applications in Appendix A.

The ECG time series \mathbf{x} plotted in Figure 7 consists of a calibration signal and heartbeats Petrutiu et al. (2007), and only the latter are interesting to discover as motifs. The figure also shows the motifs discovered by different TSMD techniques as time segments (filled rectangles) and overlaid subsequences.

Among the existing TSMD techniques that don’t leverage domain knowledge, Matrix Profile (MP) discovers a pair of calibration waves, and LoCoMotif discovers two motif sets, one consisting of heartbeats and the other calibration waves.¹⁰ While the outcome of MP is not useful at all, the result of LoCoMotif is satisfactory, as one of the two discovered motif sets is interesting. LoCoMotif obtains a satisfactory result

¹⁰For MP and MPV, we use the motif length $l = 150$, as in Dau and Keogh (2017). For LoCoMotif(-DoK), we set $(l_{\min}, l_{\max}) = (0.5l, 1.5l)$, $\rho = 0.6$, and $\nu = 0$.


Constraint Type	Description	Implementation (See Table 1 for the catalogue.)
Cardinality	Cardinalities closer to the specified cardinality are more desirable.	Use constraints 1–2 from the catalogue with k_{\min} and k_{\max} being the GT cardinality.
Soft Mask	Motifs that occur in the specified regions are more desirable.	Specify a mask \mathbf{m} that is 1 during GT motifs and 0 elsewhere. Then, ‘soften’ the mask by making every transition linear with a duration of half of the average motif length (centered at the time of the original transition). Set the desirability of a motif set as the average of the mask values covered by the motifs: $D(\mathcal{M}) = \text{avg}(\mathbf{m}_{\mathcal{I}})$ with $\mathcal{I} = \bigcup_{\beta \in \mathcal{M}} \beta$.
Positive Region	It is desirable to have at least one motif that is fully in the specified positive region.	Determine the positive region θ as in the corresponding hard constraint. For every motif $\beta \in \mathcal{M}$, calculate the ratio of its time indices that are in θ as $r(\beta) = \frac{\beta \cap \theta}{\beta}$. Set the desirability to the maximum of these ratios: $D(\mathcal{M}) = \max_{\beta \in \mathcal{M}} r(\beta)$.
Length	It is more desirable to have motifs within the length range.	Calculate the desirability as the ratio of the motifs that are in the GT length range.

Table 3: Soft constraints for every GT motif set in the benchmark data.


due to its ability to discover multiple motif sets and its consideration of the total duration of motifs in a motif set (in addition to the similarity between them) which favors more frequently occurring heartbeats over calibration waves.

The essential domain knowledge in this ECG application can be expressed as “*motifs should not be similar to the calibration signal.*” We represent this knowledge in the same way as [Dau and Keogh \(2017\)](#), by a mask \mathbf{m} that quantifies the desirability of motifs that start at every time index. For the example time series, [Figure 7](#) shows \mathbf{m} , which disallows motifs that start before the time index 1153, after which the desirability fluctuates. Leveraging \mathbf{m} improves the discovered motifs: MPV identifies two heartbeats and LoCoMotif-DoK (denoted as LoCoMotif-DoK₁) discovers all the heartbeats without discovering the calibration signal as another motif set.

The subsequences in [Figure 7](#) show that motifs discovered by LoCoMotif-DoK₁ do represent periods of the quasiperiodic heartbeat signal; however, these motifs start with the peaks while it might be more preferable to have the peaks centered in time. To this end, we define additional domain knowledge through two constraints: First, we define a hard constraint that requires representative motifs to have a minimum skewness of $\gamma_{\min} = 2.5$ as $H^{\text{mot-repr}}(\alpha) : \text{skewness}(\mathbf{x}_{\alpha}) \geq \gamma_{\min}$. because a subsequence that contains a peak has a positively skewed distribution of measurements. Second, we define a soft constraint where the desirability of a motif set is 1 when its representative’s peak (i.e., the maximum value) is centered in time, and linearly decreases to

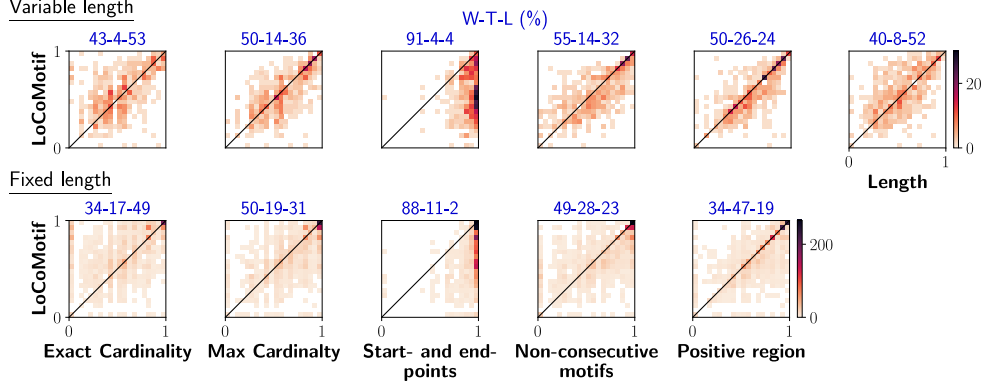

(a) Hard constraints.

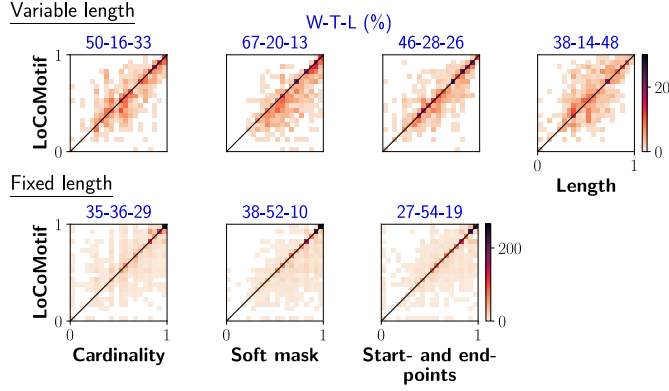

(b) Soft constraints.

Fig. 6: 2-D histograms that compare the F1-scores of LoCoMotif-DoK that uses every constraint with LoCoMotif without domain knowledge. The percentages of Wins-Ties-Losses are also shown.

0 when the peak approaches the beginning or the end:

$$D(\{[b_1 : e_1], \dots, [b_k : e_k]\}) = \begin{cases} \frac{2i_{\text{peak}}}{e_1 - b_1} & \text{if } i_{\text{peak}} \leq \frac{e_1 - b_1}{2} \\ 2 - \frac{2i_{\text{peak}}}{e_1 - b_1} & \text{otherwise} \end{cases} \quad (4)$$

where $i_{\text{peak}} = \arg \max \mathbf{x}_{[b_1 : e_1]}$ is the time index of the peak within the representative motif $\mathbf{x}_{[b_1 : e_1]}$. This constraint favors motifs where the peak occurs at the center (if any). LoCoMotif-DoK₂ represents the incorporation of these additional constraints in Figure 7. Unlike LoCoMotif-DoK₁, LoCoMotif-DoK₂ discovers motifs that contain heartbeats with the peaks being roughly centered, as desired.

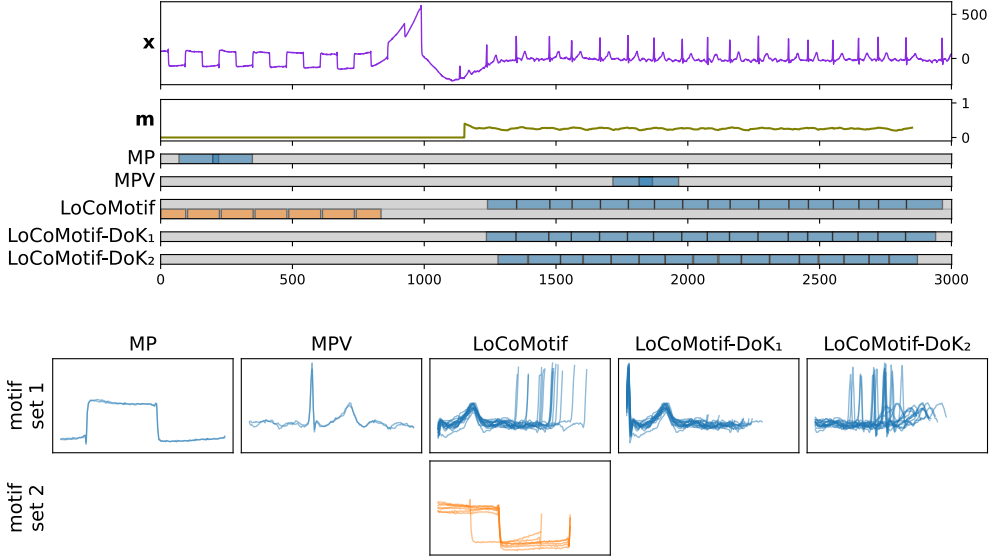


Fig. 7: In the ECG time series \mathbf{x} , domain knowledge is represented by a mask \mathbf{m} that quantifies the desirability of motifs that start at every time index. TSMD techniques MP and LoCoMotif, which cannot leverage \mathbf{m} , discover uninteresting calibration waves as motifs. In contrast, MPV and LoCoMotif-DoK₁ discover only heartbeats as motifs, as desired, by leveraging \mathbf{m} . LoCoMotif-DoK₂ uses additional domain knowledge to discover motifs where the peaks of heartbeats are roughly centered.

Therefore, the answer to RQ3 is yes: LoCoMotif-DoK successfully leverages the type of domain knowledge considered by MPV. While domain knowledge is essential for MP(V) to discover the desired pattern (heartbeats), it is useful for LoCoMotif(-DoK) to discover only the desired pattern. Moreover, LoCoMotif-DoK can leverage additional domain knowledge represented by constraints to discover the desired period of the quasiperiodic heartbeat signal. Domain knowledge is useful in the remaining applications as well, which are presented in Appendix A.

7 Conclusion

We have presented a framework that incorporates domain knowledge into TSMD in a generic form and an efficient implementation of the framework with the LoCoMotif-DoK algorithm. We have quantitatively and qualitatively evaluated LoCoMotif-DoK in a real physiotherapy use case, on a TSMD benchmark, and on other time series from different application domains. We have shown that LoCoMotif-DoK successfully leverages various types of domain knowledge and discovers higher-quality motifs than existing TSMD techniques in most cases.

As future work, one might optimize the efficiency of LoCoMotif-DoK for certain constraints.

Acknowledgements This research received funding from the Flemish Government under the “Onderzoeksprogramma Artificiële Intelligentie (AI) Vlaanderen” programme and the VLAIO ICON-AI Conscious project (HBC.2020.2795).

References

- Dau, H. A. and Keogh, E. (2017). Matrix Profile V: A generic technique to incorporate domain knowledge into motif discovery. In *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, page 125–134. <https://doi.org/10.1145/3097983.3097993>.
- Mohammad, Y. and Nishida, T. (2009). Constrained motif discovery in time series. *New Generation Computing*, 27:319–346.
- Petrutiu, S., Sahakian, A. V., and Swiryn, S. (2007). Abrupt changes in fibrillatory wave characteristics at the termination of paroxysmal atrial fibrillation in humans. *EP Europace*, 9(7):466–470.
- Schäfer, P. and Leser, U. (2023). Motiflets: Simple and accurate detection of motifs in time series. *Proceedings of the VLDB Endowment*, 16:725–737. <https://doi.org/10.14778/3574245.3574257>.
- Van Wesenbeeck, D., Yurtman, A., Meert, W., and Blockeel, H. (2024). LoCoMotif: Discovering time-warped motifs in time series. *Data Mining and Knowledge Discovery*.
- Wesenbeeck, D. V., Yurtman, A., Meert, W., and Blockeel, H. (2024). Quantitative evaluation of motif sets in time series.
- Yeh, C.-C. M., Kavantzias, N., and Keogh, E. (2017). Matrix profile IV: using weakly labeled time series to predict outcomes. *Proc. VLDB Endow.*, 10(12):1802–1812.
- Yurtman, A. and Barshan, B. (2014). Automated evaluation of physical therapy exercises using multi-template dynamic time warping on wearable sensor signals. *Computer Methods and Programs in Biomedicine*, 117(2):189–207. <https://doi.org/10.1016/j.cmpb.2014.07.003>.
- Yurtman, A. and Barshan, B. (2022). Physical therapy exercises dataset. <https://doi.org/10.13140/RG.2.2.20101.01768>.

A Additional Example Time Series for Validation

Here we answer RQ2 in Section 6.3 for the four remaining example time series from [Dau and Keogh \(2017\)](#). We use the same experimental setup as the ECG example in Section 6.3 and the same domain knowledge as the original paper ([Dau and Keogh 2017](#)). The motif length hyperparameter l of $\text{MP}(V)$ is selected in the same way as [Dau and Keogh \(2017\)](#). For $\text{LoCoMotif}(-\text{DoK})$, we select (l_{\min}, l_{\max}) according to l , disable time warping, and select a reasonable strictness (ρ). Hyperparameter values are provided in the captions of the figures that present the results.

The **electrooculogram (EOG)** time series that captures eye movements suffers from sensor saturation, which causes flat plateaus that are similar to each other (Figure 8) and don't have any medical significance. The domain knowledge is "*motifs should not include saturated measurements*" and is represented as a mask \mathbf{m} based on the ratio of unsaturated measurements over a sliding window. By leveraging \mathbf{m} , the MPV technique discovers a medically interesting motif pair instead of the regions with sensor saturation (discovered by MP). The interesting motif pair is discovered as the third motif set by LoCoMotif and as the first motif set by LoCoMotif-DoK thanks to the domain knowledge. Hence, LoCoMotif-DoK performs better than LoCoMotif , considering that the motif sets discovered by $\text{LoCoMotif}(-\text{DoK})$ are sorted from the best to the worst (unless constraints are determined differently in LoCoMotif-DoK for every (pair of) motif set(s) to be discovered, which is not the case here).

The **Functional Near Infrared Spectroscopy (fNIRS)** data that represents brain activities contains sensor artifacts due to motion of the body (high-amplitude fluctuations in Figure 9). The domain knowledge is "*motifs must not be found when there is substantial body motion*". To this end, time segments with substantial motion are detected based on another sensor (a body-worn accelerometer) and the corresponding values of \mathbf{m} are set to 0 while the remaining are 1. The use of \mathbf{m} enables MPV to discover a pair of medically significant motifs that represent neuronal activities instead of sensor artifacts (discovered by MP). On the other hand, both LoCoMotif and LoCoMotif-DoK obtain desired results: they only discover medically significant motifs, regardless of whether domain knowledge is used or not.

The **electrocorticography (ECoG)** time series measures the flexion of a finger. The example time series in Figure 10 contains three flexions, which causes three time periods with high-frequency oscillations that are interesting to discover. The domain knowledge in this application is "*not discovering simple motifs*". This is represented by \mathbf{m} that is calculated based on the "complexity" of the time series over a sliding window, where the complexity of a subsequence is measured by the Euclidean norm of the first-order difference. MP-based algorithms need the domain knowledge to discover the interesting finger flexions as motifs (although they can discover only two of them by design). Without domain knowledge, LoCoMotif obtains a satisfactory result: it discovers three motif sets where the last one consists of two finger flexions. LoCoMotif-DoK outperforms LoCoMotif thanks to the domain knowledge by successfully discovering all the three finger flexions as the first motif set and some uninteresting patterns as the second motif set. We note that \mathbf{m} approaches 0 but does not reach it most of the time; hence, motifs are allowed in these regions, albeit highly discouraged.

The **seismology** data shown in Figure 11 contains two earthquakes (around time samples 5,000 and 15,000) that are interesting to discover. However, neither MP nor LoCoMotif can discover them because they cannot leverage the domain knowledge. As in the ECoG application, the domain knowledge is represented by \mathbf{m} calculated based on the complexity. Thanks to the use of \mathbf{m} , both MPV and LoCoMotif-DoK discover the two earthquakes, LoCoMotif-DoK additionally discovering other patterns as another two motif sets.

From these four examples, we draw a similar conclusion to the ECG example in Section 6.3. LoCoMotif-DoK successfully leverages the domain knowledge defined for MPV in multiple applications. In general, domain knowledge is necessary for MP(V) to discover interesting motifs, whereas it is either necessary or useful for LoCoMotif(-DoK), depending on the application.

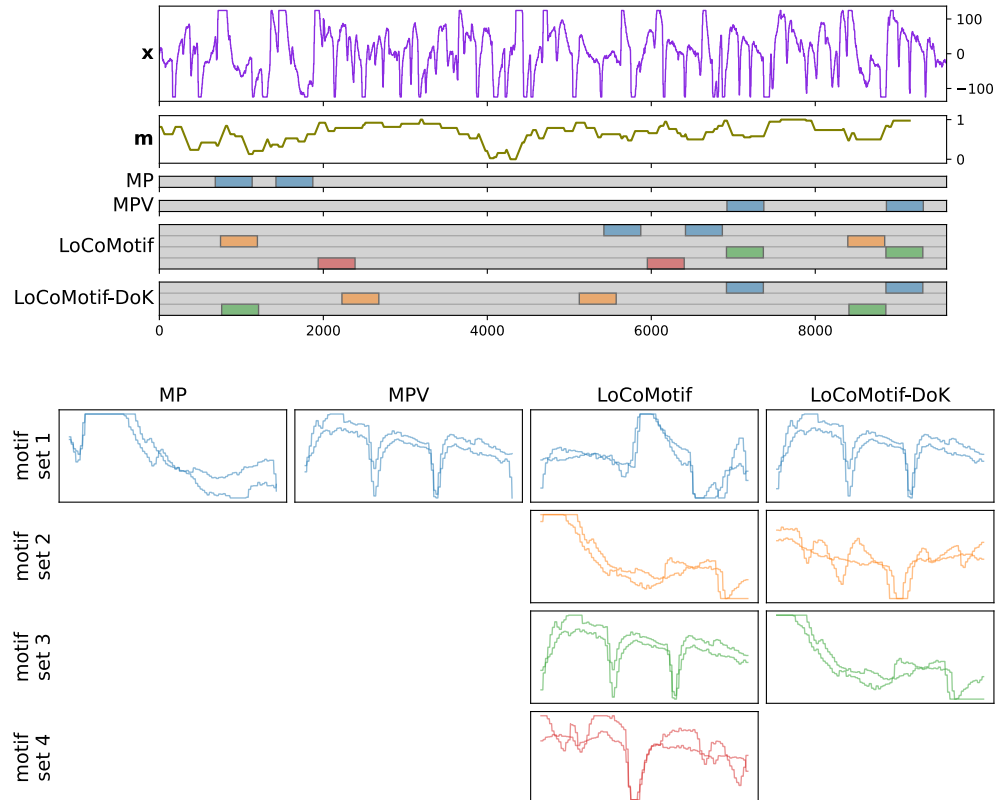


Fig. 8: The EOG example. Hyperparameters: $l = l_{\min} = l_{\max} = 450$, $\rho = 0.4$.

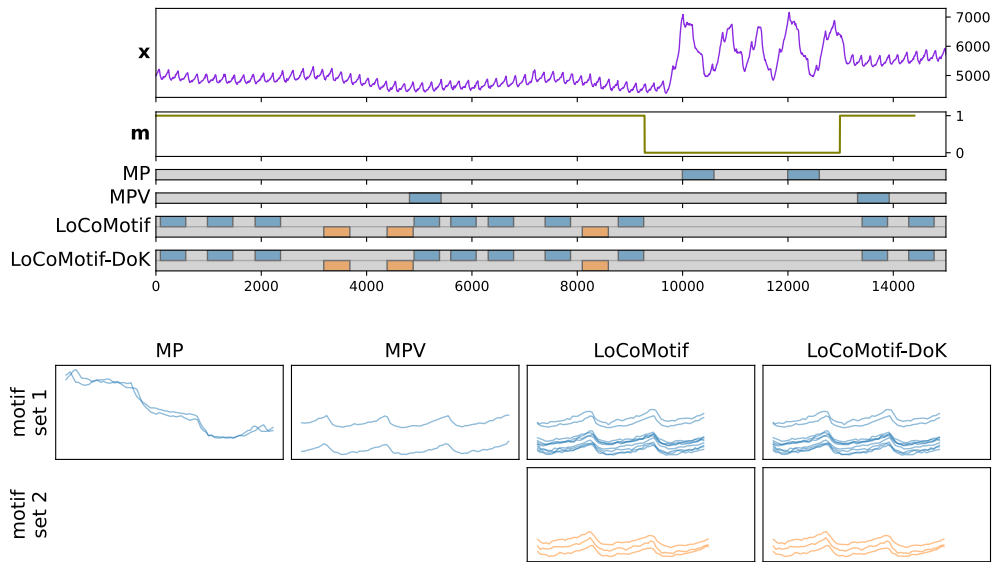


Fig. 9: The fNIRS example. Hyperparameters: $l = 600$, $(l_{\min}, l_{\max}) = (0.75l, 1.25l)$, $\rho = 0.3$.

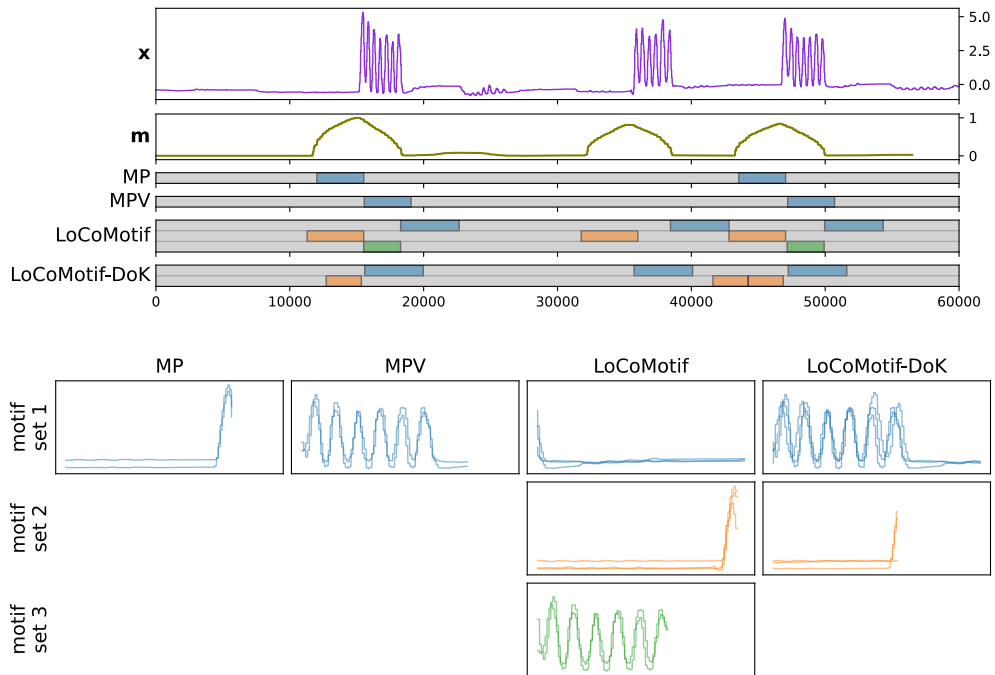


Fig. 10: The ECoG example. Hyperparameters: $l = 3500$, $(l_{\min}, l_{\max}) = (0.75l, 1.25l)$, $\rho = 0.1$.

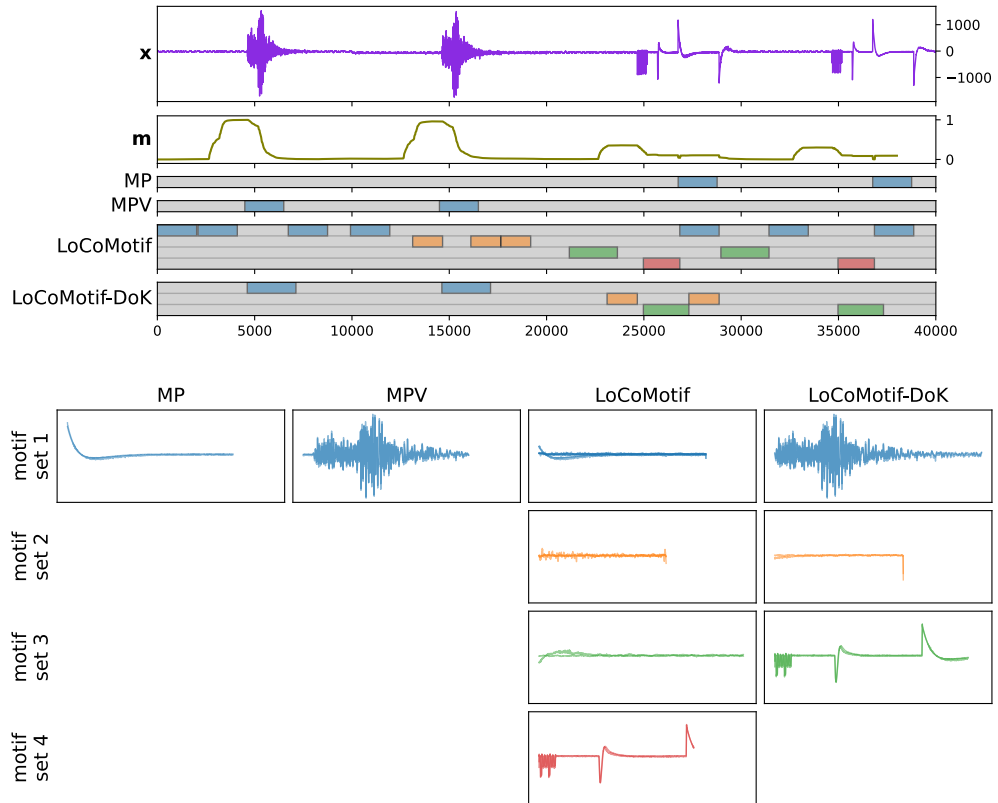


Fig. 11: The seismology example. Hyperparameters: $l = 2000$, $(l_{\min}, l_{\max}) = (0.75l, 1.25l)$, $\rho = 0.1$.