

Learning to Reason at the Frontier of Learnability

Thomas Foster^{*1} Jakob Foerster¹²

Abstract

Reinforcement learning is now widely adopted as the final stage of large language model training, especially for reasoning-style tasks such as maths problems. Typically, models attempt each question many times during a single training step and learn from their successes and failures. However, we demonstrate that throughout training with two popular algorithms (PPO and VinePPO) on two widely used datasets, many questions are either solved by all attempts—meaning they are already learned—or by none—providing no meaningful training signal. To address this, we adapt a method from the reinforcement learning literature—sampling for learnability—and apply it to the reinforcement learning stage of LLM training. Our curriculum prioritises questions with high variance of success, i.e. those where the agent sometimes succeeds, but not always. Our findings demonstrate that this curriculum consistently boosts training speed and overall test accuracy across multiple algorithms and datasets, paving the way for more efficient and effective reinforcement learning with LLMs.

1. Introduction

Reinforcement learning (RL) has become a crucial final step in the training pipeline of many state-of-the-art reasoning-focused large language models (LLMs), notably DeepSeek-R1 (DeepSeek-AI et al., 2025), Tulu (Lambert et al., 2025) and OpenAI’s O1 (OpenAI, 2024). In each training iteration models generate tens (Huang et al., 2024), hundreds (Hu et al., 2024), or even thousands (Kazemnejad et al., 2024) of attempts for each question in the training batch. Training typically runs for hundreds of iterations over large, distributed setups (Lambert et al., 2025). This incurs significant financial and infrastructural costs, and the high energy consumption raises environmental concerns (Chakraborty, 2024).

Most prior work on training LLMs to reason with RL lever-

^{*}Equal contribution ¹University of Oxford ²FAIR at Meta. Correspondence to: Thomas Foster <fosterthom16@gmail.com>.

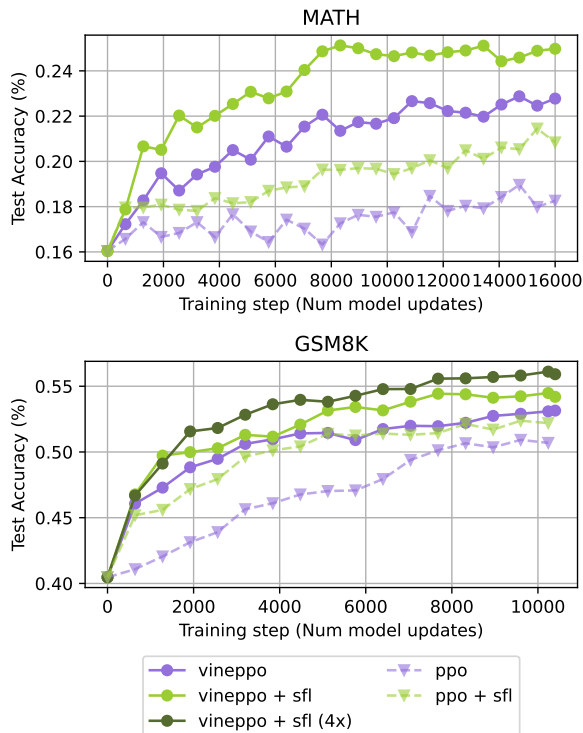


Figure 1. Test accuracy increases significantly faster when training with sampling for learnability (SFL) vs without for two RL algorithms (PPO, VinePPO) on two datasets (MATH, GSM8K). SFL populates each training batch with trajectories from the questions with highest “learnability”.

ages some form of policy gradient algorithm (Williams, 1992) with advantage estimation (Sutton & Barto, 2018) that require variance in returns to train (as we show in Section 2.2). However, we analyse the success rates of the questions attempted during training on two popular datasets, GSM8K (Cobbe et al., 2021) and MATH (Hendrycks et al., 2021), and observe that for a given training iteration a large proportion of questions have either a 0% or 100% success rate (Figure 3). Training on such questions is therefore a waste of computational resources.

Motivated by this, we frame the RL finetuning of LLMs as unsupervised environment design (Dennis et al., 2021, UED), a problem setting that models both an agent learning to reason and the curriculum of training questions it learns

on. We adapt a recent UED method, Sampling for Learnability (Rutherford et al., 2024a, SFL), originally developed for embodied-agent and robotics tasks, to the RL finetuning of LLMs for reasoning. Our curriculum adapts to the agent’s ability during training, prioritising training on questions with high variance in returns.

Due to the difficulty of value estimation with LLMs and the relative ease with which LLM inference can be scaled compared to scaling training, it has become popular to use a large number of rollouts per question during training. For such algorithms, like VinePPO and GRPO, the additional compute required to add SFL is minimal.

We evaluate our method across two RL algorithms: PPO (Schulman et al., 2017) and VinePPO (Kazemnejad et al., 2024), and two datasets of varying difficulty: the challenging MATH (Hendrycks et al., 2021) dataset and the simpler GSM8K (Cobbe et al., 2021) dataset. Our results demonstrate that our method significantly accelerates training while achieving superior final test accuracy. Furthermore, evaluations on unseen test datasets CollegeMath (Tang et al., 2024) and OlympiadBench (He et al., 2024) reveal that training with SFL not only improves in-distribution performance but also generalisation.

2. Background

2.1. RL finetuning of language models

A Markov Decision Process (MDP) (Sutton & Barto, 2018) is defined by the tuple $(p, S, A, \mathbb{T}, R, \gamma)$, where p is the starting state distribution, S represents the state space, A denotes the action space, \mathbb{T} is the transition function, R is the reward function, and γ is the discount factor. Language generation is commonly formulated as a token-level MDP, where the objective is to sequentially generate text conditioned on a given prompt or query.

- The initial state $\mathbf{x} = [x_0, \dots, x_n]$ corresponds to the input prompt or question, tokenized into n tokens.
- Action $y_t \in A$ corresponds to the generation of token y_t at each timestep t , sampled from the model’s output distribution.
- The transition function $\mathbb{T}(\cdot | \mathbf{xy}_{0:t-1}, y_t) = \mathbf{xy}_{0:t}$ is deterministic and involves concatenating the generated token y_t to the existing sequence $\mathbf{xy}_{0:t-1} = x_0, \dots, x_n, y_0, \dots, y_{t-1}$ to form $\mathbf{xy}_{0:t}$.
- The reward for generating y_t at timestep t is sparse, ie 0 for all t other than the final step in the episode, timestep T . In our setting it is binary, indicating correctness (1) or incorrectness (0) of the final complete question and generated answer \mathbf{xy} . Typically γ is set

Example 1: Too easy 🙄

Success Rate: 1.0 Learnability: 0.0

Problem: Alton owns a business. He is currently renting a space that costs \$20 per week. If Alton earns \$8 per day, how much is his total profit every week?

Solution:

1. Calculate weekly earnings: $8 \times 7 = 56$
2. Subtract weekly rent: $56 - 20 = 36$

Example 2: High learnability 😊

Success Rate: 0.5 Learnability: 0.25

Problem: Mrs. Smith wanted to buy items worth \$500. She went to a boutique with the \$500 but realized she would need two-fifths more money than she had. If the shop owner gave her a discount of 15%, how much more money will she still need?

Solution:

1. Calculate additional money needed: $\frac{2}{5} \times 500 = 200$
2. Total cost before discount: $500 + 200 = 700$
3. Calculate discount: $0.15 \times 700 = 105$
4. Subtract discount from total cost: $700 - 105 = 595$
5. Additional money needed: $595 - 500 = 95$

Example 3: Too hard 🤖

Success Rate: 0.0 Learnability: 0.0

Problem: In a fruit salad, there are raspberries, green grapes, and red grapes. There are seven more than 3 times the number of red grapes as green grapes. There are 5 fewer raspberries than green grapes. If there are 102 pieces of fruit in the salad, how many red grapes are in the salad?

Solution:

1. Let G represent the number of green grapes.
2. Red grapes: $3G + 7$
3. Raspberries: $G - 5$
4. Total fruit equation: $G + (3G + 7) + (G - 5) = 102$
5. Simplify: $5G + 2 = 102$
6. Solve for G : $5G = 100 \Rightarrow G = 20$
7. Calculate red grapes: $3 \times 20 + 7 = 67$

Table 1. There exist questions of varying difficulty, even on a heavily curated dataset such as GSM8K. Questions were evaluated at timestep 0 using 8 attempts per question. Examples for MATH in Appendix C.

to 1 (Kazemnejad et al., 2024) (Huang et al., 2024), giving the cumulative discounted finite-horizon return as $R(\mathbf{xy})$.

A large language model (LLM) produces a probability distribution over the next possible tokens, defining a stochastic policy $\pi(y_t | \mathbf{xy}_{0:t})$. The LLM is first pretrained on vast corpora of text and typically further finetuned on a curated set of exemplary generations before it undergoes RL finetuning.

In RL finetuning to goal is to learn a policy $\pi_\theta(y_t | \mathbf{xy}_{0:t})$ that maximises the expected undiscounted finite-horizon return:

$$J(\theta) = \mathbb{E}_{\mathbf{x} \sim \mathcal{D}, \mathbf{y} \sim \pi_\theta(\cdot | \mathbf{x})} R(\mathbf{xy}) \quad (1)$$

2.2. Policy gradients, PPO and VinePPO

Policy gradient methods are a family of RL algorithms that optimise Equation (1) via gradient descent. For each training step, a batch $\bar{\mathbf{X}} = [\mathbf{x}_1, \dots, \mathbf{x}_{N_t}]$ of N_t questions is sampled uniformly at random from the training set \mathcal{D} and L_{train} trajectories per question are generated. The policy gradient can be estimated as:

$$\nabla_\theta J(\theta) = \mathbb{E}_{\substack{\mathbf{x} \sim \bar{\mathbf{X}} \\ \mathbf{y} \sim \pi_\theta(\cdot | \mathbf{x})}} \left[\sum_{t=0}^{T-1} \nabla_\theta \log \pi_\theta(y_t | \mathbf{xy}_{0:t-1}) A_t \right] \quad (2)$$

where $A_t = A(\mathbf{xy}_{0:t-1}, y_t)$ is the advantage function. Intuitively, the advantage function quantifies how much better generating token y_t is compared to other tokens generated from state $\mathbf{xy}_{0:t-1}$. Formally, we define the *value* V of a state $\mathbf{xy}_{0:t}$ as the expected success rate following policy π_θ from $\mathbf{xy}_{0:t}$, to reach the final state $\mathbf{xy}_{0:t} \mathbf{y}'$, ie $V(\mathbf{xy}_{0:t}) = \mathbb{E}_{\mathbf{y}' \sim \pi_\theta(\cdot | \mathbf{xy}_{0:t})} R(\mathbf{xy}_{0:t} \mathbf{y}')$. The *action value* function Q , denotes the expected return from taking action y_t in state $\mathbf{xy}_{0:t-1}$. Since the transition function is deterministic and known, $Q(\mathbf{xy}_{0:t-1}, y_t) = V(\mathbf{xy}_{0:t})$. Advantage is defined as

$$A(\mathbf{xy}_{0:t-1}, y_t) = Q(\mathbf{xy}_{0:t-1}, y_t) - V(\mathbf{xy}_{0:t-1}) \\ = V(\mathbf{xy}_{0:t}) - V(\mathbf{xy}_{0:t-1}) \quad (3)$$

Consider a ‘‘low-variance’’ question \mathbf{x} for which all attempts are correct, ie $V(\mathbf{x}) = 1$. The expectation over trajectories $\mathbf{y} \sim \pi_\theta(\cdot | \mathbf{x})$ can be decomposed into a nested sequence of expectations over actions:

$$V(\mathbf{x}) = 1 \\ = \mathbb{E}_{\mathbf{y} \sim \pi_\theta(\cdot | \mathbf{x})} R(\mathbf{x}, \mathbf{y}) \\ = \mathbb{E}_{y_0 \sim \pi_\theta(\cdot | \mathbf{x})} \left[\dots \left[\mathbb{E}_{y_T \sim \pi_\theta(\cdot | \mathbf{x}, y_0:T-1)} R(\mathbf{x}, \mathbf{y}) \right] \dots \right] \quad (4)$$

Since $R(\mathbf{xy}) \in [0, 1]$ then it must be that for any partially generated solution generated by the model $\mathbf{xy}_{0:t'}$,

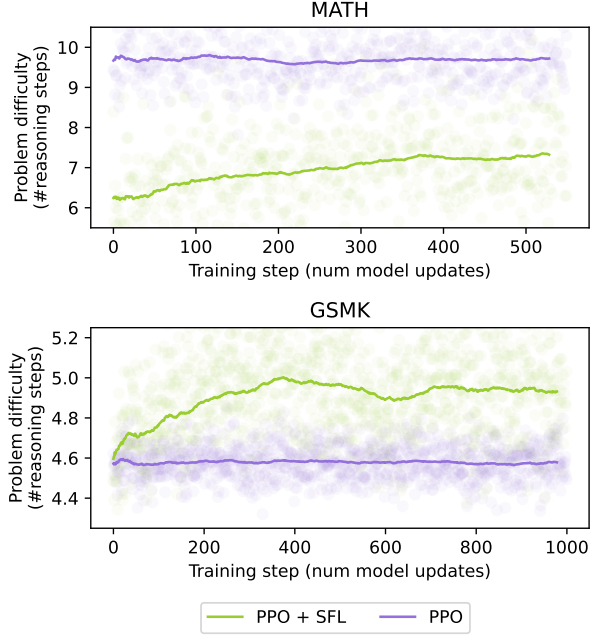


Figure 2. SFL designs an interpretable training curriculum using ‘‘learnability’’ (the variance of success over multiple attempts at a question). Visualizing question difficulty via the number of reasoning steps in the gold solution shows that, for MATH, SFL initially selects simpler questions (fewer steps) but gradually includes harder ones. On GSM8K, the model quickly masters the average question, prompting SFL to focus on more difficult ones.

$V(\mathbf{xy}_{0:t'}) = 1$ and thus $A_{t'} = 0$. The analogous result holds for $V(\mathbf{x}) = 0$ and we therefore have that **for any question x that the model consistently gets right or wrong, the policy gradient $\nabla_\theta J(\theta) = 0$, and the model does not learn.**

In practise, the advantage function is not known, and must be estimated. This is historically done using a value network, trained to minimize the mean squared error between the predicted value and the empirical return:

$$\mathcal{L}_V(\phi) = \mathbb{E}_{\substack{\mathbf{x} \sim \bar{\mathbf{X}} \\ \mathbf{y} \sim \pi_\theta(\cdot | \mathbf{x})}} \left[\frac{1}{T} \sum_t (V_\phi(\mathbf{xy}_{0:t}) - G_t)^2 \right] \quad (5)$$

where $G_t = \sum_{t'=t}^T r_{t'}$ is the empirical return from state $\mathbf{xy}_{0:t}$. Due to approximation errors between the learned value function and the true value function, the policy gradient may still be non-zero for questions with low variance in returns.

Recent work has shown that learning a value function in language domains can be challenging. RLOO (Ahmadian et al., 2024) abandons the value network, using the average reward of samples in the training batch as a baseline.

Algorithm 1 Learnability-Based Training

```

1: Hyperparameters:
2:  $T_{\text{total}}$ : Total #training steps
3:  $T_{\text{buffer}}$ : #training steps per buffer update
4:  $N$ : #candidate questions sampled per iteration
5:  $L_{\text{SFL}}$ : #rollout attempts per question for learnability estimation
6:  $K$ : #top questions by learnability stored in buffer
7:  $\rho$ : Fraction of training batch sampled from buffer
8:  $N_l$ : #questions in training batch
9:  $L_{\text{train}}$ : #rollout attempts per question during training
10:  $L_{\text{VinePPO}}$ : #rollout completions per step when using VinePPO
11:
12: for  $t = 1$  to  $T_{\text{total}}/T_{\text{buffer}}$  do
13:   Sample  $N$  questions from dataset
14:   Rollout  $L_{\text{SFL}}$  attempts per question
15:   Compute avg. reward per question =  $p$ 
16:   Compute learnability per question =  $p(1 - p)$ 
17:   Store top- $K$  questions by learnability in buffer
18:   for  $t' = 1$  to  $T_{\text{buffer}}$  do
19:      $\mathbf{B}_{\text{buffer}} \leftarrow$  sample  $\rho N_l$  questions from buffer,
20:      $\mathbf{B}_{\text{random}} \leftarrow$  sample  $(1 - \rho) N_l$  questions from dataset
21:     Form train batch  $\mathbf{B} = \mathbf{B}_{\text{buffer}} \cup \mathbf{B}_{\text{random}}$ 
22:     if reusing trajectories then
23:       Rollout  $L_{\text{train}} - L_{\text{SFL}}$  attempts per question
24:     else
25:       Rollout  $L_{\text{train}}$  attempts per question
26:     end if
27:     if using VinePPO then
28:       Split attempts into steps
29:       Rollout  $L_{\text{VinePPO}}$  completions per step
30:     end if
31:     Compute policy gradient, update model
32:   end for
33: end for
    
```

GRPO (Ramesh et al., 2024), as leveraged by DeepSeek-R (DeepSeek-AI et al., 2025), samples many attempts per question and uses the average per question performance as a baseline. VinePPO (Kazemnejad et al., 2024) goes further, rolling out k_τ trajectories from each intermediate state $\mathbf{xy}_{0:t}$. This is straightforward to do in the language MDP since the transition function is known and deterministic.

2.3. Unsupervised Environment Design, Sampling for learnability

An underspecified MDP $\langle p, S, A, \mathbb{T}, R, \gamma, \Theta \rangle$ is an extension of the traditional MDP to include parameters $\theta \in \Theta$ that parameterise the start state distribution p_θ , the transition function \mathbb{T}_θ and the reward function R_θ . A given choice of θ therefore determines a specific level or instance of the MDP. Unsupervised environment design (UED) is an auto-curricula paradigm that frames curriculum design as a two-player zero-sum game between a level-solving agent and an adversary. At each training step the adversary defines a distribution over levels $\theta \sim \Theta$, and the agent seeks to maximise expected return over this distribution using standard RL methods. The adversary can pursue various objectives.

- **Domain randomisation:** Each level is assigned an equal probability and the agent will look to maximise expected return over the uniform distribution of levels.
- **Worst case:** The adversary seeks to minimize the agents reward by indentifying and selecting the hardest levels. This can lead to the agent trying and failing to learn on impossible or degenerate levels.
- **Maximising regret:** The regret of an agent on a level is defined as the difference between the its return and the optimal return on that level. In theory, adversaries that maximise regret will not chose impossible levels, since both the current policy and optimal policy will achieve zero return, making regret zero. In practice, the optimal policy for a level is not known, and therefore regret has to be estimated, such as with MaxMC or Positive Value Loss.

Following (Tzannetos et al., 2023; Florensa et al., 2018; Rutherford et al., 2024a) we define learnability as $p(1 - p)$, where p is the success rate on a level. They argue that for a binary problem, p represents how likely the agent is to obtain positive learning experience, $1 - p$ is the maximum possible improvement of the success rate, and therefore learnability $p(1 - p)$ can be thought of as the expected improvement on the level. (Tzannetos et al., 2023) shows that for two specific simple learning settings selecting for the highest learnability is equivalent to greedily optimising expected improvement. Note: learnability is also the variance of Bernoulli distribution with success parameter p .

In sampling for learnability (SFL), the authors show that regret approximations have little correlation with learnability. Instead sampling for learnability outperforms existing UED methods on classic toy RL environments Minigrid (Chevalier-Boisvert et al., 2023), X-Land Minigrid (Nikulin et al., 2024) and robotics-sim environments JaxNav (Rutherford et al., 2024b).

SFL works by using a small number of samples to approximate the learnability of a level, and then maintains a buffer of the levels with highest learnability. Specifically SFL samples N levels iid from Θ and L_{SFL} rollouts for each level. SFL then computes each level’s success rate over the L_{SFL} rollouts, p , and its variance, $p(1 - p)$. The top- K levels with highest variance are selected to form the “SFL buffer”. At each training step, $p * N_l$ levels are sampled from the buffer and $(1 - p) * N_l$ iid from Θ to form the training batch of N_l levels. For each level in the batch L_{train} rollouts are sampled, typically with $L_{\text{train}} \gg L_{\text{sfl}}$, and the gradient in equation (2) is computed over these rollouts. Every T_{buffer} timesteps the buffer is resampled.

3. Related work

Unsupervised Environment Design: Prioritised level replay (PLR) (Jiang et al., 2021) generates random levels, samples trajectories, and adds high scoring levels to a buffer. TD-error is typically used as the score function. ACCEL (Parker-Holder et al., 2023) extends this with a mechanism to mutate previously high-scoring levels, to generate new levels that train the agent on the frontier of its capabilities. PAIRED (Dennis et al., 2021) co-trains a level-selecting adversary and two agents, a protagonist and an antagonist. It aims to maximise regret by maximising the difference in performance between the protagonist and antagonist. SFL (Rutherford et al., 2024a) discards the notion of regret, instead using learnability to select which levels to replay. The majority of the previous literature on UED has applied it to embodied-agent style robotics tasks, such as Minigrid (Chevalier-Boisvert et al., 2023), XLand-Minigrid (Nikulin et al., 2024), JaxNav (Rutherford et al., 2024b) and variants OpenAI’s bidpeal walker (Brockman et al., 2016).

In this work we explore regularly refreshing the SFL buffer and selecting which experience to train on according to learnability. This is similar to Prioritised Experience Replay (PER) (Schaul et al., 2016), with TD-error prioritisation swapped for learnability prioritisation.

Curricula with LLMs for RL: Rho-1b (Lin et al., 2025) showed the effectiveness of training curricula during supervised training of LLMs, but there has been little work so far on curricula for RL training on LLMs. There has been some work showing that online DPO (Qi et al., 2024) suffers when the variance in samples is low (Pal et al., 2024), i.e. when preference pairs are too similar to each other. (Pal et al., 2024) apply various heuristics to improve the diversity of samples for a given question, but do not go as far as forming curricula over the training distribution. In (Havrilla et al., 2024), the authors try PLR (Jiang et al., 2021) and backtracking (Salimans & Chen, 2018) as curricula for LLM training but see no improvement over PPO.

Leveraging additional rollouts to improve RL training of LLMs: Several RL approaches, including RLOO (Ahmadian et al., 2024), GRPO (Ramesh et al., 2024), and VinePPO (Kazemnejad et al., 2024), perform multiple rollouts per question to improve advantage estimation and stability. Additionally, techniques for training verifiers and process reward models require extensive sampling before fine-tuning with RL (Havrilla et al., 2024)(Zhang et al., 2025). Similarly, our work uses additional sampling, but does so in a unique way - to maximise the learnability of the training batch.

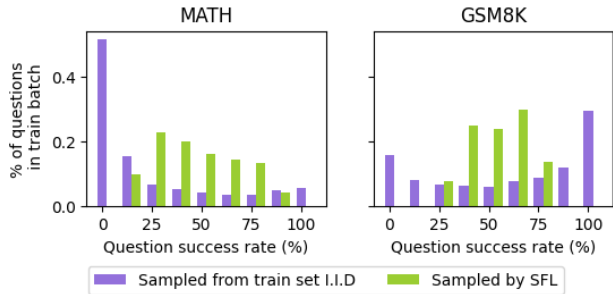


Figure 3. Composition of training batch averaged over the first 10 iterations: Each batch is composed of N_t questions, L_{train} attempts per question. PPO and VinePPO sample questions iid from the training set. For MATH, this results in training on mostly unsuccessful attempts, whereas for the easier GSM8K dataset this results in training on mostly successful experience. SFL samples $N > N_t$ questions iid, before selecting the N_t with the highest variance. This leads to a training batch with fewer 100% correct / incorrect questions.

4. Learning to Reason at the Frontier of Learnability

Reasoning models, LLMs trained with RL on reasoning tasks, are emerging as the next generation of foundation models. UED methods, especially SFL, have been shown to significantly boost training performance on toy embodied-agent tasks. By combining the formalisms defined in Section 2 for RL on LLMs and SFL, we can use Algorithm 1 to teach LLMs to reason at the frontier of learnability.

Formally, the language generation MDP is extended to use the parameter θ . Each $\theta \in \Theta$ corresponds to a question from a training dataset, and the UED adversary will determine the distribution over which θ is sampled from Θ . Given a choice of θ , the starting distribution for each level p_θ is just the question \mathbf{x} , and the reward function R_θ computes accuracy of the generation \mathbf{y} . The transition function is unchanged.

There are some key practical differences between the LLM reasoning setting and the setting UED was originally designed for. SFL was previously employed on simple, fast, vectorised environments such as Minigrid, XLand-Minigrid and JaxNav. These environments have millions of unique levels. GSM8K, on the contrary, is just 8,000 questions. Models in the traditional UED setting are small, perhaps 1M parameters. Whilst in this work we looked at a 1B parameter model, Rho-Math-1B (Lin et al., 2025), LLMs with far more parameters have been trained with RL, such as the 671B parameter Deepseek-R1 (DeepSeek-AI et al., 2025). SFL has therefore previously been employed in settings where each training batch contains experience from 1000s of levels and 100s of episodes per level, even on a single GPU. In contrast in VinePPO, they train on a batch of just 8 rollouts

for each of 64 levels.

Whilst the increase in popularity of JAX means that some popular RL environments are now vectorised, the sampling of trajectories remains expensive and a major bottleneck for many RL tasks. In many LLM training setups however, sampling new trajectories is far more scalable than model updates, as trajectory collection can be distributed across independent processes that require no inter-process communication. This sampling computation can be fully pipelined and leverages highly optimized specialized inference engines like vLLM. Furthermore, since trajectory sampling only involves forward passes, it eliminates the need to store activations or optimizer states, making it significantly more memory-efficient than training updates.

Using the same notation as in Algorithm 1, the equations below give the sampling overhead for using SFL. Note that whilst SFL generates more samples per iteration, it requires no additional backward passes or gradient updates.

$$\begin{aligned}
 \text{Original samples:} & T_{\text{total}} \cdot N_L \cdot L_{\text{train}} \\
 \text{Additional SFL samples:} & T_{\text{total}}/T_{\text{buffer}} \cdot N \cdot L_{\text{SFL}} \\
 \text{(with reuse of trajectories)} & T_{\text{total}}/T_{\text{buffer}} \cdot (N - K) \cdot L_{\text{SFL}} \\
 \\
 \text{Sampling overhead:} & \frac{\text{Original + Additional samples}}{\text{Original samples}} \\
 & = 1 + \frac{(N - K) \cdot L_{\text{SFL}}}{T_{\text{buffer}} \cdot N_L \cdot L_{\text{train}}} \quad (6)
 \end{aligned}$$

The popularity of using rollouts to estimate the advantage function, as in VinePPO and GRPO, mean that $L_{\text{SFL}} \ll L_{\text{train}}$, and this overhead is small.

5. Experimental setup

Hyperparameters: Our implementation of SFL is forked from VinePPO (Kazemnejad et al., 2024), and thus all non-SFL parameters can be found in the relevant configs for PPO and VinePPO at <https://github.com/McGill-NLP/VinePPO>. The PPO hyperparameters used by VinePPO were largely taken from (Huang et al., 2024), which provides recommendations for optimal hyperparameters for PPO and RLHF.

Unless otherwise stated, we set $T = 1$, $N = 256$, $K = 64$, $N_L = 64$, $p = 1.0$, $L_{\text{SFL}} = 8$ (see Algorithm 1 for hyperparameter definitions) and reused trajectories. I.e. we refreshed the buffer at each step and used the top- K levels as the entire training batch. To compute A_t , VinePPO breaks down trajectories into reasoning steps (approximately 4 per question on average for GSM8K and 8 for MATH) and samples 9 further trajectories from each intermediate step. This makes $L_{\text{train}} = 8 + 8 * 4 * 9 = 296$ for GSM8K and $L_{\text{train}} = 8 + 8 * 8 * 9 = 584$ for MATH. By Equation (6) this

gives sampling overheads of $1.08\times$ and $1.04\times$ respectively. For PPO we used $L_{\text{train}} = 8$ to maintain comparison with VinePPO’s hyperparameters, giving a sampling overhead of $4\times$. However, as we increase L_{train} this sampling overhead decreases linearly, making it negligible for large scale experiments. We present PPO results controlled for sampling overhead in Figure 8, finding minimal benefit from training on the additional samples.

To consider the effect of the extra generations on the overall runtime, let T_{gen} be the time taken to generate enough samples to fill up 1 training batch, and T_{train} be the time taken to update the model on that batch. In our setup with VLLM on 1 GPU $T_{\text{gen}} \approx 20s$. We are training a 7B param model on 1 x 48gb L40s GPU using CPU offloading, making $T_{\text{train}} \approx 200s$. Using more offloading, such as ZeRO stage 3 (Rajbhandari et al., 2020) as employed by Tulu3 (Lambert et al., 2025) will further increase T_{train} . Being selective about which experience to train on therefore has a large impact: **the time to train 1 iteration with SFL $4 * T_{\text{gen}} + T_{\text{train}} \approx 280s$ is $\approx 1.27\times$ longer than training without SFL $T_{\text{gen}} + T_{\text{train}} \approx 220s$, whereas training all the generated samples $4 * T_{\text{gen}} + 4 * T_{\text{train}} \approx 880s$ is $\approx 4\times$ longer.** For VinePPO on MATH, T_{gen} is $500\times$ larger, so SFL increases runtime proportional to the sampling overhead of $1.04\times$.

Datasets: We trained on mathematical reasoning datasets MATH (Hendrycks et al., 2021), consisting of 12,000 competition-level problems, and GSM8K (Cobbe et al., 2021), consisting of 8,000 simpler grade school problems. Both datasets are well-established and present a range of difficulty levels to be studied. We further evaluated downstream performance of the MATH trained models on CollegeMATH (Tang et al., 2024), 2,818 college-level questions, and OlympiadBench (He et al., 2024), 8,000 Olympiad level maths and physics competitions.

Metrics: We evaluate model performance on the test sets of each dataset, using accuracy (Pass@1) as the primary metric.

6. Results and discussion

6.1. SFL increases training speed and test accuracy

Figure 1 shows the test accuracy for 2 algorithms, PPO and VinePPO, when training on 2 datasets, MATH and GSM8K, with and without using SFL. In all cases, training with SFL results in a higher final test accuracy. Training speed also increases with SFL runs achieving the same test accuracy as their non-SFL counterparts in approximately 4x fewer training steps.

Figure 4 shows models achieve a significantly higher train

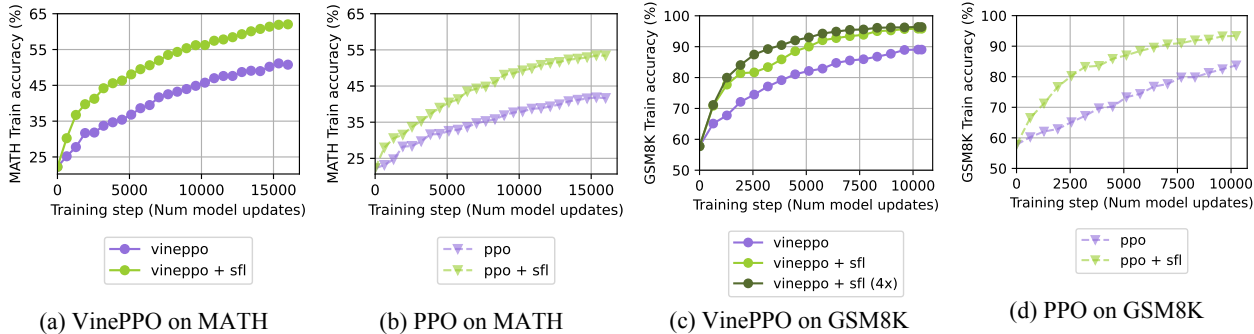


Figure 4. Train accuracy when training with and without sampling for learnability (SFL). For test accuracy and hyperparameters see Figure 1. For a full discussion of hyperparameters see section 4. **In all scenarios train accuracy increases faster with SFL.**

accuracy when using SFL. It is interesting how the difference between training with/without SFL is more greatly observed in train accuracy than test accuracy. To investigate this further, in Figure 5 we plot train accuracy vs test accuracy to compare generalisation. Despite achieving different train accuracies, each algorithm achieves roughly the same generalisation ratio. This holds especially true for GSM8K, which is surprising since it was trained for the longest time on the smallest amount of data. VinePPO perhaps has slightly better generalisation, but it’s very small compared to the differences in generalisation reported in the original paper.

Figure 3 looks at the composition of the training batch with and without SFL at the start of training. Without SFL, MATH batches have nearly 50% of questions with 0% success rate (and therefore 0 learnability) and has an average learnability of 0.07 (all questions having 50% success rate would have an average learnability of 0.25). Training on these batches wastes compute on problems that are too hard. At the start of training, GSM8K has a higher average learnability of 0.09, and the zero learnability questions are more evenly split between too-hard and too-easy. With SFL the training batch for both datasets contains far more questions between 25% and 75% success rate. Figure 1 looks at learnability scores over the course of training, and shows that for MATH, SFL is able to keep the learnability of each train batch high. On GSM8K, as the model starts to get nearer to

Table 2. Test accuracy@1 for 4 different training runs on the MATH dataset. CollegeMath and OlympidBench were not seen during training. **SFL consistently improves generalisation.**

	College Math (%)	Olympiad Bench (%)
Original SFT	20.3	2.6
PPO	25.4	3.5
PPO + SFL	26.4	3.8
VinePPO	26.9	4.1
VinePPO + SFL	28.8	4.5

100% training accuracy, the learnability of the SFL batch drops. This could explain why the train and test curves start to move together in GSM8K, but stay divergent in MATH.

Table 2 shows holdout performance on two unseen test datasets, CollegeMath and OlympiadBench, for the models trained on the MATH dataset. For both PPO and VinePPO, SFL improves generalisation to unseen tasks.

6.2. SFL leverages scalable, fast generation to boost sample efficiency

Whilst the sampling overhead for SFL with VinePPO is only $\approx 1.06\times$, our implementation of PPO only used $L_{train} = 8$ and thus the sampling overhead is $4\times$. Figure 8 in Appendix A shows the training performance of 3 different strategies to train on these additional samples. Brown shows the naive strategy of keeping the batch size the same, and doing 4x more model updates per iteration. This was very unstable, perhaps due to moving away from the refined set of hyperparameters we inherited from VinePPO(Kazemnejad et al., 2024). Green shows the impact of making the learning rate 4x smaller, ”sharing out” the update sizes between 4x more batches. This learnt more slowly than the PPO+SFL baseline. Yellow shows the impact of increasing the effective batch size by doing 4x more gradient accumulation steps. This restored the performance of SFL, but incurred 4x larger training costs. If, like our setup and many others, generation is fast but training is slow, then this experiment shows that you can achieve significant speed ups by removing 4x the experience. Interestingly, scaling up the number of levels was more effective than scaling up the number of rollouts per level.

6.3. Overfitting prevents further reductions to sampling overhead

In the original SFL paper, the authors only updated the buffer every $T = 50$ steps, cutting the sampling overhead by $50\times$. To minimise overfitting to the buffer, they ensure that the

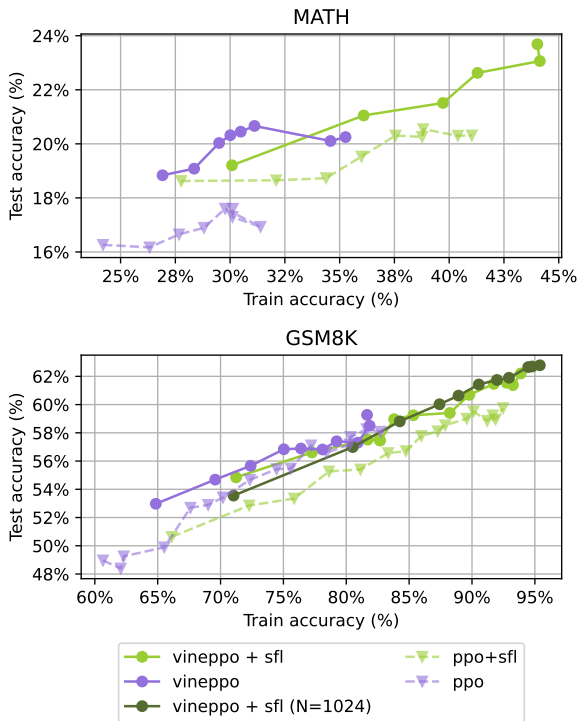


Figure 5. Train accuracy vs test accuracy shows overfitting and generalisation of different runs. **Despite SFL’s higher train accuracy, all runs fall roughly on the same line, indicating the same level of generalisation and degree of overfitting.**

buffer is 4x larger than the batch, and set $p = 0.5$, sampling 50% of the levels in the batch uniformly at random. The first panel of Figure 7 investigates using SFL with these settings on GSM8K. The model overfits to the buffer levels, reaching nearly 90% solve rate, before the buffer is updated and the cycle repeats. Train accuracy on non-buffer levels in orange is noisy but does not improve. Increasing the buffer update frequency, to 10 (second panel of Figure 7), the same overfitting cycles occur, just more frequently. When updating the buffer every 5 iterations, average training performance does start to slowly increase. We achieved best results with $T = 1$ (fourth panel), and not introducing randomly sampled levels.

There are likely 2 factors that cause LLMs to overfit with the original SFL settings: 1) the models are much much larger, and so have a larger capacity to overfit and 2) the batch sizes involved are nearly 100x smaller. Further investigation into the benefits of using large amounts of gradient accumulation to increase the effective batch size of LLM training may prove fruitful.

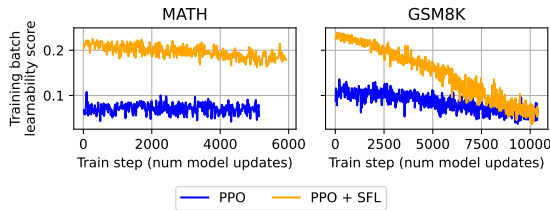


Figure 6. Comparing the learnability of the train batch over the course of training. Whilst SFL on MATH remains able to select high learnability batches, on GSM8K as train accuracy increases, the ability of SFL to find a high variance batches drops. **This could be a factor in why PPO closes in on PPO + SFL later in training on GSM8K, and motivates future work on dynamically choosing N at each iteration based on train accuracy.**

7. Conclusion and Future Work

In this work, we combined teaching LLMs to reason with RL and Unsupervised Environment Design (UED). Inspired by the UED method Sampling for Learnability (SFL) from robotics reinforcement learning literature, our method prioritises training on questions with high variance in success rates, ensuring that the model receives a more informative learning signal rather than wasting compute on tasks that are either too easy or too difficult.

By training on 2 different datasets (MATH and GSM8K) and with 2 different algorithms (PPO and VinePPO), we demonstrated that SFL consistently accelerates training, improves in-distribution test accuracy and boosts out-of-distribution test-accuracy on unseen datasets such as CollegeMath and OlympiadBench.

We investigated the practical considerations of applying SFL to LLM training, including the impact of buffer refresh frequency and the trade-offs between training efficiency and sampling overhead. Our analysis highlights the importance of frequent buffer updates to prevent overfitting. Additionally, we explored the computational cost of SFL and demonstrated that, in scenarios where model updates are more computationally expensive than sample generation, selectively training on the most informative samples leads to significant efficiency gains.

Future work could explore extensions of SFL to other reinforcement learning algorithms, such as preference-based fine-tuning (e.g., RLHF, DPO), where it might be useful to prioritise the sampling of contrasting pairs of answers. Further investigation into how to dynamically increase L_{SFL} over the course of training to keep the learnability of training batches high would also be interesting. Additionally, scaling our approach to even larger models and more diverse datasets of tasks may provide further insights into using curriculums for reinforcement learning for LLM training.

References

- Ahmadian, A., Cremer, C., Gallé, M., Fadaee, M., Kreutzer, J., Pietquin, O., Üstün, A., and Hooker, S. Back to basics: Revisiting reinforce style optimization for learning from human feedback in llms, 2024. URL <https://arxiv.org/abs/2402.14740>.
- Brockman, G., Cheung, V., Pettersson, L., Schneider, J., Schulman, J., Tang, J., and Zaremba, W. Openai gym, 2016. URL <https://arxiv.org/abs/1606.01540>.
- Chakraborty, S. Towards a comprehensive assessment of ai’s environmental impact, 2024. URL <https://arxiv.org/abs/2405.14004>.
- Chevalier-Boisvert, M., Dai, B., Towers, M., Perez-Vicente, R., Willems, L., Lahlou, S., Pal, S., Castro, P. S., and Terry, J. Minigrid & miniworld: Modular & customizable reinforcement learning environments for goal-oriented tasks. In Oh, A., Naumann, T., Globerson, A., Saenko, K., Hardt, M., and Levine, S. (eds.), *Advances in Neural Information Processing Systems*, volume 36, pp. 73383–73394. Curran Associates, Inc., 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/e8916198466e8ef218a2185a491b49fa-Paper-Datasets_and_Benchmarks.pdf.
- Cobbe, K., Kosaraju, V., Bavarian, M., Chen, M., Jun, H., Kaiser, L., Plappert, M., Tworek, J., Hilton, J., Nakano, R., Hesse, C., and Schulman, J. Training verifiers to solve math word problems, 2021. URL <https://arxiv.org/abs/2110.14168>.
- DeepSeek-AI, Guo, D., Yang, D., Zhang, H., Song, J., Zhang, R., Xu, R., Zhu, Q., Ma, S., Wang, P., Bi, X., Zhang, X., Yu, X., Wu, Y., Wu, Z. F., Gou, Z., Shao, Z., Li, Z., Gao, Z., Liu, A., Xue, B., Wang, B., Wu, B., Feng, B., Lu, C., Zhao, C., Deng, C., Zhang, C., Ruan, C., Dai, D., Chen, D., Ji, D., Li, E., Lin, F., Dai, F., Luo, F., Hao, G., Chen, G., Li, G., Zhang, H., Bao, H., Xu, H., Wang, H., Ding, H., Xin, H., Gao, H., Qu, H., Li, H., Guo, J., Li, J., Wang, J., Chen, J., Yuan, J., Qiu, J., Li, J., Cai, J. L., Ni, J., Liang, J., Chen, J., Dong, K., Hu, K., Gao, K., Guan, K., Huang, K., Yu, K., Wang, L., Zhang, L., Zhao, L., Wang, L., Zhang, L., Xu, L., Xia, L., Zhang, M., Zhang, M., Tang, M., Li, M., Wang, M., Li, M., Tian, N., Huang, P., Zhang, P., Wang, Q., Chen, Q., Du, Q., Ge, R., Zhang, R., Pan, R., Wang, R., Chen, R. J., Jin, R. L., Chen, R., Lu, S., Zhou, S., Chen, S., Ye, S., Wang, S., Yu, S., Zhou, S., Pan, S., Li, S. S., Zhou, S., Wu, S., Ye, S., Yun, T., Pei, T., Sun, T., Wang, T., Zeng, W., Zhao, W., Liu, W., Liang, W., Gao, W., Yu, W., Zhang, W., Xiao, W. L., An, W., Liu, X., Wang, X., Chen, X., Nie, X., Cheng, X., Liu, X., Xie, X., Liu, X., Yang, X., Li, X., Su, X., Lin, X., Li, X. Q., Jin, X., Shen, X., Chen, X., Sun, X., Wang, X., Song, X., Zhou, X., Wang, X., Shan, X., Li, Y. K., Wang, Y. Q., Wei, Y. X., Zhang, Y., Xu, Y., Li, Y., Zhao, Y., Sun, Y., Wang, Y., Yu, Y., Zhang, Y., Shi, Y., Xiong, Y., He, Y., Piao, Y., Wang, Y., Tan, Y., Ma, Y., Liu, Y., Guo, Y., Ou, Y., Wang, Y., Gong, Y., Zou, Y., He, Y., Xiong, Y., Luo, Y., You, Y., Liu, Y., Zhou, Y., Zhu, Y. X., Xu, Y., Huang, Y., Li, Y., Zheng, Y., Zhu, Y., Ma, Y., Tang, Y., Zha, Y., Yan, Y., Ren, Z. Z., Ren, Z., Sha, Z., Fu, Z., Xu, Z., Xie, Z., Zhang, Z., Hao, Z., Ma, Z., Yan, Z., Wu, Z., Gu, Z., Zhu, Z., Liu, Z., Li, Z., Xie, Z., Song, Z., Pan, Z., Huang, Z., Xu, Z., Zhang, Z., and Zhang, Z. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning, 2025. URL <https://arxiv.org/abs/2501.12948>.
- Dennis, M., Jaques, N., Vinitzky, E., Bayen, A., Russell, S., Critch, A., and Levine, S. Emergent complexity and zero-shot transfer via unsupervised environment design, 2021. URL <https://arxiv.org/abs/2012.02096>.
- Florensa, C., Held, D., Geng, X., and Abbeel, P. Automatic goal generation for reinforcement learning agents. In Dy, J. and Krause, A. (eds.), *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pp. 1515–1528. PMLR, 10–15 Jul 2018. URL <https://proceedings.mlr.press/v80/florensa18a.html>.
- Havrilla, A., Du, Y., Raparthy, S. C., Nalmpantis, C., Dwivedi-Yu, J., Zhuravinskyi, M., Hambro, E., Sukhbaatar, S., and Raileanu, R. Teaching large language models to reason with reinforcement learning, 2024. URL <https://arxiv.org/abs/2403.04642>.
- He, C., Luo, R., Bai, Y., Hu, S., Thai, Z. L., Shen, J., Hu, J., Han, X., Huang, Y., Zhang, Y., Liu, J., Qi, L., Liu, Z., and Sun, M. Olympiadbench: A challenging benchmark for promoting agi with olympiad-level bilingual multimodal scientific problems, 2024. URL <https://arxiv.org/abs/2402.14008>.
- Hendrycks, D., Burns, C., Kadavath, S., Arora, A., Basart, S., Tang, E., Song, D., and Steinhardt, J. Measuring mathematical problem solving with the math dataset, 2021. URL <https://arxiv.org/abs/2103.03874>.
- Hu, J., Wu, X., Zhu, Z., Xianyu, Wang, W., Zhang, D., and Cao, Y. Openrlhf: An easy-to-use, scalable and high-performance rlhf framework, 2024. URL <https://arxiv.org/abs/2405.11143>.
- Huang, S., Noukhovitch, M., Hosseini, A., Rasul, K., Wang, W., and Tunstall, L. The n+ implementation details of rlhf with ppo: A case study on tl;dr summarization, 2024. URL <https://arxiv.org/abs/2403.17031>.

- Jiang, M., Grefenstette, E., and Rocktäschel, T. Prioritized level replay, 2021. URL <https://arxiv.org/abs/2010.03934>.
- Kazemnejad, A., Aghajohari, M., Portelance, E., Sordoni, A., Reddy, S., Courville, A., and Roux, N. L. Vineppo: Unlocking rl potential for llm reasoning through refined credit assignment, 2024. URL <https://arxiv.org/abs/2410.01679>.
- Lambert, N., Morrison, J., Pyatkin, V., Huang, S., Ivison, H., Brahman, F., Miranda, L. J. V., Liu, A., Dziri, N., Lyu, S., Gu, Y., Malik, S., Graf, V., Hwang, J. D., Yang, J., Bras, R. L., Tafford, O., Wilhelm, C., Soldaini, L., Smith, N. A., Wang, Y., Dasigi, P., and Hajishirzi, H. Tulu 3: Pushing frontiers in open language model post-training, 2025. URL <https://arxiv.org/abs/2411.15124>.
- Lin, Z., Gou, Z., Gong, Y., Liu, X., Shen, Y., Xu, R., Lin, C., Yang, Y., Jiao, J., Duan, N., and Chen, W. Rho-1: Not all tokens are what you need, 2025. URL <https://arxiv.org/abs/2404.07965>.
- Nikulin, A., Kurenkov, V., Zisman, I., Agarkov, A., Sinii, V., and Kolesnikov, S. Xland-minigrid: Scalable meta-reinforcement learning environments in jax, 2024. URL <https://arxiv.org/abs/2312.12044>.
- OpenAI. Learning to reason with llms, 2024. URL <https://openai.com/index/learning-to-reason-with-llms/>.
- Pal, A., Karkhanis, D., Dooley, S., Roberts, M., Naidu, S., and White, C. Smaug: Fixing failure modes of preference optimisation with dpo-positive, 2024. URL <https://arxiv.org/abs/2402.13228>.
- Parker-Holder, J., Jiang, M., Dennis, M., Samvelyan, M., Foerster, J., Grefenstette, E., and Rocktäschel, T. Evolving curricula with regret-based environment design, 2023. URL <https://arxiv.org/abs/2203.01302>.
- Qi, B., Li, P., Li, F., Gao, J., Zhang, K., and Zhou, B. Online dpo: Online direct preference optimization with fast-slow chasing, 2024. URL <https://arxiv.org/abs/2406.05534>.
- Rajbhandari, S., Rasley, J., Ruwase, O., and He, Y. Zero: Memory optimizations toward training trillion parameter models, 2020. URL <https://arxiv.org/abs/1910.02054>.
- Ramesh, S. S., Hu, Y., Chaimalas, I., Mehta, V., Sessa, P. G., Ammar, H. B., and Bogunovic, I. Group robust preference optimization in reward-free rlhf, 2024. URL <https://arxiv.org/abs/2405.20304>.
- Rutherford, A., Beukman, M., Willi, T., Lacerda, B., Hawes, N., and Foerster, J. No regrets: Investigating and improving regret approximations for curriculum discovery, 2024a. URL <https://arxiv.org/abs/2408.15099>.
- Rutherford, A., Ellis, B., Gallici, M., Cook, J., Lupu, A., Ingvarsson, G., Willi, T., Hammond, R., Khan, A., de Witt, C. S., Souly, A., Bandyopadhyay, S., Samvelyan, M., Jiang, M., Lange, R. T., Whiteson, S., Lacerda, B., Hawes, N., Rocktaschel, T., Lu, C., and Foerster, J. N. Jaxmarl: Multi-agent rl environments and algorithms in jax, 2024b. URL <https://arxiv.org/abs/2311.10090>.
- Salimans, T. and Chen, R. Learning montezuma’s revenge from a single demonstration, 2018. URL <https://arxiv.org/abs/1812.03381>.
- Schaul, T., Quan, J., Antonoglou, I., and Silver, D. Prioritized experience replay, 2016. URL <https://arxiv.org/abs/1511.05952>.
- Schulman, J., Wolski, F., Dhariwal, P., Radford, A., and Klimov, O. Proximal policy optimization algorithms, 2017. URL <https://arxiv.org/abs/1707.06347>.
- Sutton, R. S. and Barto, A. G. *Reinforcement learning: An introduction*. MIT press, 2018.
- Tang, Z., Zhang, X., Wang, B., and Wei, F. Mathscales: Scaling instruction tuning for mathematical reasoning, 2024. URL <https://arxiv.org/abs/2403.02884>.
- Tzannetos, G., Ribeiro, B. G., Kamalaruban, P., and Singla, A. Proximal curriculum for reinforcement learning agents, 2023. URL <https://arxiv.org/abs/2304.12877>.
- Williams, R. J. Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Machine Learning*, 8(3):229–256, May 1992. ISSN 1573-0565. doi: 10.1007/BF00992696. URL <https://doi.org/10.1007/BF00992696>.
- Zhang, Z., Zheng, C., Wu, Y., Zhang, B., Lin, R., Yu, B., Liu, D., Zhou, J., and Lin, J. The lessons of developing process reward models in mathematical reasoning, 2025. URL <https://arxiv.org/abs/2501.07301>.

A. Additional plots

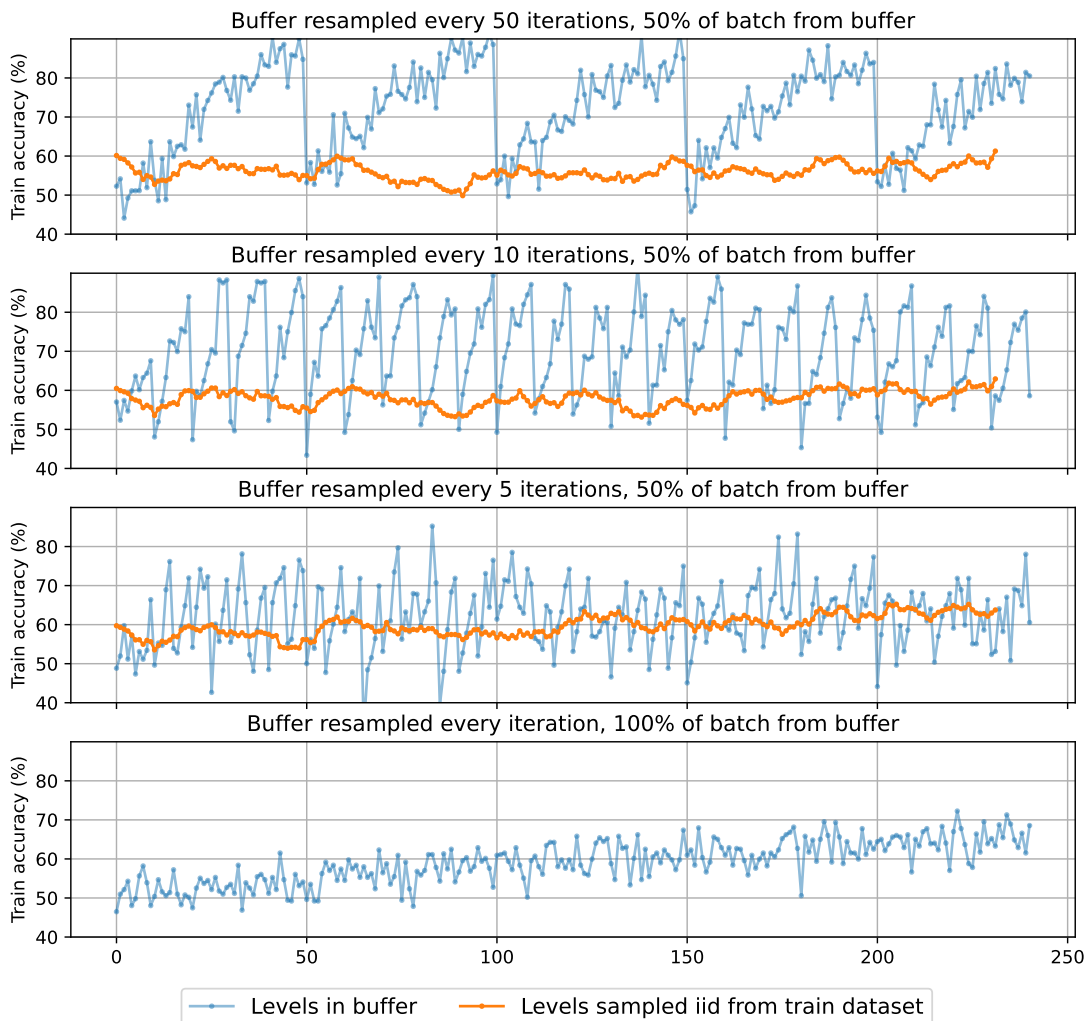


Figure 7. Exploring updating the buffer less frequently, using the settings used by (Rutherford et al., 2024a). Despite the fact that 50% of the batch is randomly sampled each iteration, the model overfits to the fixed buffer levels for $T_{\text{buffer}} = 50, 10, 5$. Only when $T_{\text{buffer}} = 1$ did we find overfitting stopped and generalisation started to occur.

B. Modifications to VinePPO training setup

We increased the number of gradient accumulation steps and added Deepspeed ZeRO stage 2 to allow for training on a single 48GB Nvidia L40s GPU and thus run multiple experiments in parallel on an 8 * 48GB node. This did not change the overall effective batch size of 512 episodes (64 levels * 8 rollouts per level) and thus our training dynamics are identical to VinePPO.

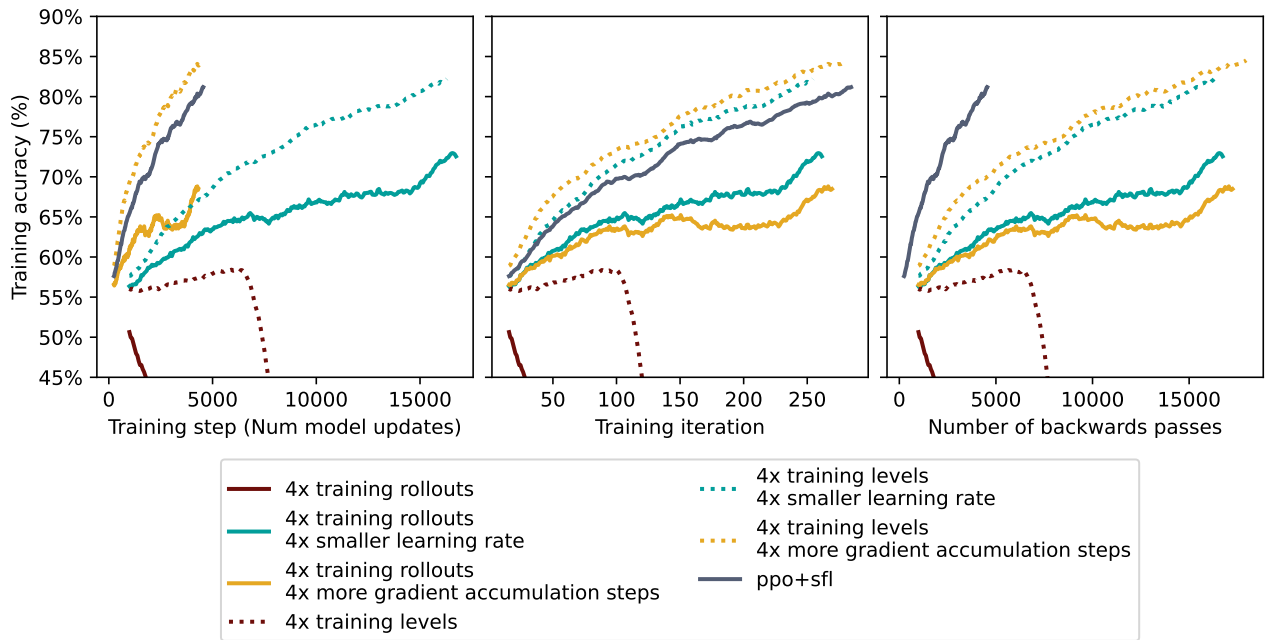


Figure 8. Training on all generated samples vs training on the top-K highest learnability samples. We compare generating the additional samples from 4x more levels, or 4x more rollouts per level. We use the additional samples 1) naively, by increasing the number of batches, 2) increasing the number of batches but decreasing the learning rate 4x and 3) increasing the effective batch size by doing 4x the gradient accumulation steps. Whilst training on 4x the samples can challenge the performance of PPO+SFL, it is significantly slower due to the outsized cost of doing more model forward/backwards passes during training.

C. Examples of high and low learnability questions

Dataset: GSM8K

- **Question:** Alton owns a business. He is currently renting a space that costs \$20 per week. If Alton earns \$8 per day, how much is his total profit every week?
 - **Gold Solution:**
 - * Calculate weekly earnings: $\$8 \times 7 = \56
 - * Subtract weekly rent: $\$56 - \$20 = \$36$
 - * **Answer:** 36
 - **Number of Reasoning Steps:** 3
 - **Success Rate (p) at $t = 0$:** 1.0
 - **Learnability ($p(1 - p)$) at $t = 0$:** 9

- **Question:** Mrs. Smith wanted to buy items worth \$500. She went to a boutique with the \$500 but realized she would need two-fifths more money than she had. If the shop owner gave her a discount of 15%, how much more money will she still need?
 - **Gold Solution:**
 - * Calculate additional money needed: $\frac{2}{5} \times 500 = 200$
 - * Total cost before discount: $\$500 + \$200 = \$700$
 - * Calculate discount: $0.15 \times 700 = 105$
 - * Subtract discount from total cost: $\$700 - \$105 = \$595$
 - * Additional money needed: $\$595 - \$500 = \$95$
 - * **Answer:** 95
 - **Number of Reasoning Steps:** 6
 - **Success Rate (p) at $t = 0$:** 0.5
 - **Learnability ($p(1 - p)$) at $t = 0$:** 0.25

- **Question:** In a fruit salad, there are raspberries, green grapes, and red grapes. There are seven more than 3 times the number of red grapes as green grapes. There are 5 fewer raspberries than green grapes. If there are 102 pieces of fruit in the salad, how many red grapes are in the salad?
 - **Gold Solution:**
 - * Let G represent the number of green grapes.
 - * Red grapes: $3G + 7$
 - * Raspberries: $G - 5$
 - * Total fruit equation: $G + (3G + 7) + (G - 5) = 102$
 - * Simplify: $5G + 2 = 102$
 - * Solve for G : $5G = 100 \Rightarrow G = 20$
 - * Calculate red grapes: $3 \times 20 + 7 = 67$
 - * **Answer:** 67
 - **Number of Reasoning Steps:** 10
 - **Success Rate (p) at $t = 0$:** 0
 - **Learnability ($p(1 - p)$) at $t = 0$:** 0

Dataset: MATH

- **Question:** Suppose $p(x)$ is a monic cubic polynomial with real coefficients such that $p(3 - 2i) = 0$ and $p(0) = -52$. Determine $p(x)$ (in expanded form).
 - **Gold Solution:**
 - * Since $p(x)$ has real coefficients and $3 - 2i$ is a root, its complex conjugate $3 + 2i$ is also a root.

* The quadratic factor with roots $3 - 2i$ and $3 + 2i$ is:

$$\begin{aligned}(x - (3 - 2i))(x - (3 + 2i)) &= (x - 3 + 2i)(x - 3 - 2i) \\ &= (x - 3)^2 - (2i)^2 \\ &= x^2 - 6x + 9 + 4 \\ &= x^2 - 6x + 13\end{aligned}$$

* Since $p(x)$ is cubic, it can be expressed as $p(x) = (x^2 - 6x + 13)(x - r)$.

* Given $p(0) = -52$:

$$\begin{aligned}p(0) &= (0^2 - 6 \cdot 0 + 13)(0 - r) \\ -52 &= 13(-r) \\ r &= 4\end{aligned}$$

* Therefore, $p(x)$ is:

$$\begin{aligned}p(x) &= (x^2 - 6x + 13)(x - 4) \\ &= x^3 - 4x^2 - 6x^2 + 24x + 13x - 52 \\ &= x^3 - 10x^2 + 37x - 52\end{aligned}$$

* **Answer:** $x^3 - 10x^2 + 37x - 52$

– **Number of Reasoning Steps:** 29

– **Success Rate (p) at $t = 0$:** 0

– **Learnability ($p(1 - p)$) at $t = 0$:** 0

- **Question:** If the sum of the squares of nonnegative real numbers a , b , and c is 13, and $ab + bc + ca = 6$, then what is the sum of a , b , and c ?

– **Gold Solution:**

* Start with the identity: $(a + b + c)^2 = a^2 + b^2 + c^2 + 2(ab + bc + ca)$

* Substitute the given values:

$$(a + b + c)^2 = 13 + 2 \times 6 = 13 + 12 = 25$$

* Take the square root of both sides:

$$a + b + c = \pm\sqrt{25} = \pm 5$$

* Since a , b , and c are nonnegative, $a + b + c$ must be nonnegative.

* **Answer:** 5

– **Number of Reasoning Steps:** 5

– **Success Rate (p) at $t = 0$:** 0.5

– **Learnability ($p(1 - p)$) at $t = 0$:** 0.25