Hugo Gimbert ⊠

LaBRI, CNRS, Université de Bordeaux, France

Soumyajit Paul □

University of Liverpool, UK¹

B. Srivathsan ✓

Chennai Mathematical Institute and CNRS, ReLaX, IRL 2000, Siruseri, India

- Abstract

In games with imperfect recall, players may forget the sequence of decisions they made in the past. When players also forget whether they have already encountered their current decision point, they are said to be absent-minded. Solving one-player imperfect recall games is known to be NP-hard, even when the players are not absent-minded. This motivates the search for polynomial-time solvable subclasses. A special type of imperfect recall, called A-loss recall, is amenable to efficient polynomial-time algorithms. In this work, we present novel techniques to simplify non-absent-minded imperfect recall games into equivalent A-loss recall games. The first idea involves shuffling the order of actions, and leads to a new polynomial-time solvable class of imperfect recall games that extends A-loss recall. The second idea generalises the first one, by constructing a new set of action sequences which can be "linearly combined" to give the original game. The equivalent game has a simplified information structure, but it could be exponentially bigger in size (in accordance with the NP-hardness). We present an algorithm to generate an equivalent A-loss recall game with the smallest size.

2012 ACM Subject Classification Theory of computation \rightarrow Representations of games and their complexity; Theory of computation \rightarrow Algorithmic game theory; Theory of computation \rightarrow Exact and approximate computation of equilibria

Keywords and phrases Games, Imperfect information games, Imperfect recall

Funding Soumyajit Paul - supported by the EPSRC through project EP/X03688X/1.

1 Introduction

Games play a central role in AI research. In the early 20^{th} century, [24] showed that perfect information games in extensive form can be solved by a bottom-up traversal of the game tree. Despite the fact that this does not readily provide efficient ways to solve large games such as Chess or Go in practice, this has indeed laid the foundation for the dramatic progress in the field of perfect information games, with computer programs being able to challenge human experts. Solving games becomes more intricate when the players (agents) have incomplete information about the state of the game – Poker for instance, where a player does not know the cards of the others. One of the remarkable imperfect information games where computer programs have been able to defeat professional human players is Texas Hold'em Poker [2, 17, 3]. A main technique used in these algorithms is the abstraction of large games into smaller imperfect recall games.

Perfect recall is the ability of a player to remember her own actions. Poker is an imperfect information game played by several players. However, ideally one would assume that the players have a perfect recall of their actions. An imperfect recall player does not remember

^{*} Full version of paper to appear in the proceedings of AAMAS 2025

A considerable part of this work was done when this author was at LaBRI, Université de Bordeaux and at IRIF, Université Paris Cité.

the sequence of her own actions. Imperfect recall allows for a structured mechanism to forget the information history and as [20] argues, it is particularly suited for AI agents.

From a modeling perspective, imperfect recall has been used to describe teams of agents, where each team can be represented as a single agent with imperfect recall [21, 4] or to describe agents modeling multiple nodes which do not share information between each other due to privacy reasons [7]. Moreover [15] argues that imperfect recall is a model of bounded rationality. Given the limited memory of players, it is not realistic to assume that the players remember all their actions. We refer the reader to [20] for an excellent introduction to different uses of imperfect recall. From a practical perspective, the most prominent use of imperfect recall is in abstracting games [22, 8, 1, 25]. The state space generated by usual games is typically very large and abstractions are crucial for solving such games. Abstractions that preserve perfect recall force a player to distinguish the current information gained, in all later rounds, even if it is not relevant. Abstractions using players with imperfect recall have been shown to outperform those using players with perfect recall [23, 10, 1, 6].

From a complexity perspective, imperfect recall games are known to be NP-hard

[13, 5] even when there is a single player, whereas perfect recall games can be solved in polynomial-time [13, 18]. Recent studies have aligned the complexity of different solution concepts for imperfect recall games to the modern complexity classes [9, 19, 20]. The hardness of imperfect recall games has motivated the search for subclasses which are polynomial-time solvable [12, 11], or where algorithms similar to the perfect recall case can be applied [16, 14]. The class of A-loss recall [12, 11] is a special kind of imperfect recall, where the loss of information can be traced back to a player forgetting her own action at a point in the past—the player remembers where it was played, but forgets what was played. We consider A-loss recall games to be simple since there are polynomial-time algorithms for solving them. To the best of our knowledge, A-loss recall games are the biggest known class of imperfect recall with a polynomial-time solution. This has led to research towards finding A-loss recall abstractions [5].

Contributions. Our broad goal in this work is to find efficient ways to solve imperfect recall games in extensive-form. We do so by simplifying them into A-loss recall games. We focus on games where the players are not absent-minded: a player is absent-minded if she even forgets whether a decision point was previously seen or not. Here are our major contributions.

- 1. We first identify a class of one-player games where the player's information structure is more complex than A-loss recall, but shuffling the order of actions results in an equivalent A-loss recall game. This leads to a new PTIME solvable class of imperfect recall games, that extends A-loss recall (Theorem 10, Corollary 21, Corollary 23). Furthermore, these classes themselves can be tested in PTIME.
- 2. We show that every game with *non-absentminded* players can be transformed into an equivalent A-loss recall game (Theorem 13). We present an algorithm to generate an equivalent A-loss recall game with the smallest size.

The caveat in the second result above is that the resulting A-loss recall game could be exponentially bigger. This is expected, since solving imperfect recall games is NP-hard, whereas A-loss recall games can be solved in polynomial-time. The result however shows that in order to solve imperfect recall games, one could either use a worst-case exponential-time algorithm on the original game, or apply our transformation to a worst-case exponential-sized game and run a polynomial-time algorithm on it. From a conceptual point of view, our result shows that as long as there is no absentmindedness, imperfect recall can be transformed into one where the information loss can be attributed to forgetting own actions at a past point.

Organization of the document. Section 2 introduces a modification of the popular matching pennies game that will be used as a running example to illustrate our results. Section 3 recalls necessary preliminaries on extensive-form games. Section 4 presents the new polynomial-time class of shuffled A-loss recall. Section 5 generalizes the idea of shuffling to incorporate a "linear combination" of action sequences, and presents the second result mentioned above. Section 6 extends the results to the two-player setting.

2 An example


Let us start with a one-player game called the *single team matching-unmatching pennies* game, which will be used as a running example. A team of players with the same goal can be interpreted as a single player. In this case, the team consists of two players Alice and Bob, each possessing a coin with two sides, Head (H) and Tail (T) and each of them must choose a side for their respective coins independently. The game unfolds in the following manner: a fair n-faced die with outcomes from $\{0,\ldots,n-1\}$ is rolled; then Alice chooses a side from $\{H,T\}$, followed by Bob choosing from $\{H,T\}$. Winning or losing depends on the parity of the die outcome. If the outcome of the die is even, then they win if and only if they match their sides. If the outcome is odd, they win if and only if their sides do not match. We consider three variants depending on what Alice and Bob can observe, and model it in extensive form in Figure 1 for n=3. An informal description of the figures follows after this paragraph.

- 1. Both Alice and Bob observe nothing (Figure 1a).
- II. Alice can't distinguish between die outcome 2i and 2i + 1 for $i \ge 0$, but Bob observes nothing (Figure 1b).
- III. Alice can't distinguish between die outcome 2i and 2i + 1 for $i \ge 0$, Bob only observes coin of Alice but not outcome of die (Figure 1c).


Alice and Bob want to maximize their *expected payoff*. We will see their possible strategies in Section 3. Later, we will see that game **I** falls under the simple class of A-loss recall. In Section 4 and Section 5 we will see how to simplify games **II** and **III** respectively.

Before we delve into the background and results, here is a description of the extensive-form model. The root node, marked with a triangle, is the event of rolling the die. The triangle nodes are called Chance nodes, and the edges out of them associate probabilities to each of the outcomes. For this game, the distribution is uniform. The circle nodes denote decision nodes of the team. The nodes in the second level (root being the first level) belong to Alice whereas the nodes in the third level belong to Bob. The actions labelled in edges out of these nodes denote the actions available to the corresponding players. A leaf node indicates an end state, and a path from root to leaf denotes a play from start to end. The number associated with a leaf gives the payoff that the team receives at the end of the corresponding play. E.g., in Figure 1a in the play resulting from the path 0, H, T the payoff is 0 because the team loses. It is 1 when they win.


Imperfect information is expressed using a dotted line: a player cannot distinguish between two nodes joined by a dotted line. For e.g., in Figure 1a the dotted red line joining all of Alice's nodes indicates that Alice cannot observe the die outcome. Similarly, the blue dotted line for Bob indicates, he neither observes the outcome of the die, nor the side of the coin chosen by Alice. These sets of indistinguishable nodes are called *information sets*.



(a) Alice and Bob, both observe nothing




(b) Alice can't distinguish between 2i and 2i + 1for $i \geq 0$, Bob observes nothing



(c) Bob only observes Alice's coin

Figure 1 Three versions of the single team matching-unmatching pennies game for n=3



(a) Max with perfect recall



(b) Max with absentmindedness

Figure 2 Recalls of Max

3 Background and notations

This section presents the formal definitions. The single team matching-unmatching pennies game has only one player and chance nodes, but in general we will talk about zero-sum two player games. As in Figure 5, there are two players Max (circle nodes) and Min (square nodes). The payoff at the leaf, is the amount Min loses and Max gains. The goal of Max is to maximize the expected payoff whereas Min wishes to minimize it. In Figure 1 Max was the team consisting of Alice and Bob.

In this paper, we mainly work with game-structures and not games themselves. Game-structures are essentially games sans the numerical quantities. Any game on a game structure can be represented symbolically as in shown Figure 4a with symbolic payoffs z_i s and symbolic chance probabilities p_i s (with constraints on p_i 's). An extensive form game can be obtained from a game structure by plugging in values for z_i s and p_i s. We work with game structures because the notions of perfect recall and imperfect recall can be determined simply by looking at the game-structure.

Formally, a game-structure \mathcal{T} is a tuple $(V, L, r, A, E, \mathcal{I})$ where V is a finite set of non-terminal nodes partitioned as V_{Max} , V_{Min} and V_{Chance} ; L is a finite set of leaves; $r \in V$ is a root node; $A = A_{\mathsf{Max}} \cup A_{\mathsf{Min}}$ is a finite set of actions; $E \subseteq V \times (V \cup L)$ is an edge relation that induces a directed tree; edges originating from $V_{\mathsf{Max}} \cup V_{\mathsf{Min}}$ are labelled with actions from A; we write $u \stackrel{a}{\to} v$ if (u,v) is labelled with a, and assume that there is no incoming edge $u \to r$ to the root node r; $\mathcal{I} = \mathcal{I}_{\mathsf{Max}} \cup \mathcal{I}_{\mathsf{Min}}$ is a set of information sets for $i \in \{\mathsf{Max}, \mathsf{Min}\}$, each information set $I \in \mathcal{I}_i$ is a subset of vertices belonging to i, i.e. $I \subseteq V_i$, and moreover, the set of information sets \mathcal{I}_i partitions V_i . E.g., in Figure 2a, $\mathcal{I}_{\mathsf{Max}} = \{I_1, I_2, I_3\}$ and $I_1 = \{r\}, I_2 = \{u_3, u_4\}$ and $I_3 = \{u_5, u_6\}$. We can understand these information sets as a signal that the player receives when she reaches a node in it. On receiving the signal, the player knows the actions that are available to play at that position.

An information set models the fact that a player cannot distinguish between the nodes within it. Therefore, the set of outgoing actions from each node in an information set is required to be the same. This allows us to define Act(I) as the set of actions available at information set I. E.g., in Figure 2a, $Act(I_2) = \{c, d\}$. For technical convenience, we make a second assumption: for all $I, I' \in \mathcal{I}$ with $I \neq I'$, we have $Act(I) \cap Act(I') = \emptyset$. Therefore, the actions identify the information sets. With this assumption, in Figure 1, the actions of Alice should be seen as H_A, T_A and those of Bob's as H_B, T_B . But we omit the subscripts in the figure for clarity.

▶ **Definition 1** (Extensive form games). A two-player zero-sum game in extensive form is a tuple $(\mathcal{T}, \delta, \mathcal{U})$ where \mathcal{T} is a game-structure, δ is the chance probability associating to each Chance node, a probability distribution on the outgoing actions, and $\mathcal{U}: L \mapsto \mathbb{Q}$ is the utility function associating a payoff to each leaf.

The size of a game is the sum of the bit-lengths of all chance probabilities and leaf payoffs in it. A behavioral strategy for player Max (Min resp.) assigns a probability distribution to $\operatorname{Act}(I)$ for each $I \in \mathcal{I}_{\mathsf{Max}}$ ($\mathcal{I}_{\mathsf{Min}}$ resp.). Once we fix behavioral strategies σ and τ for Max and Min respectively, each edge in the game has an associated probability of being taken, given by the corresponding strategy or Chance. The probability of reaching a leaf $u \in L$ is given by the product of all the numbers along the path to the leaf. Consider Figure 3a. Let σ assign $\frac{1}{4}$ to b and $\frac{3}{4}$ to b; 0 and 1 to c and c, and c, and c and

value of a game is the following:

```
\max_{\sigma} \min_{\tau} \mathbb{E}(\sigma, \tau)
```

where σ, τ are behavioral strategies of Max and Min respectively. A strategy of Max which provides the maxmin value is called a *maxmin strategy*. In one-player games, we only have Max player and the maxmin value of the game is $\max_{\sigma} \mathbb{E}(\sigma)$. For one-player non-absentminded games, the maxmin value can be in fact obtained by a *pure strategy* – pure strategies are special cases of behavioural strategies which assign either 0 or 1 to each action [13].

The maxmin value of the game in Figure 1a is $\frac{2}{3}$ since Alice and Bob can win at most in 2 of the 3 die rolls by playing matching sides. Another way to see this is to consider the four possible pure strategies HH, HT, TH, TT, which induce payoffs $\frac{2}{3}$, $\frac{1}{3}$, $\frac{1}{3}$ and $\frac{2}{3}$ respectively. Now since, in the rest of the following two versions, the team has more information 2 they can guarantee at least $\frac{2}{3}$ by playing the same strategy. Interestingly, one can observe (by enumerating all pure strategies) that they cannot do better than that in any version.

Histories and recalls.

We now move on to describing the various types of imperfect information, based on what the player remembers about her history. A node $w \in V$ is reached by a unique path from the root: $r = v_0 \to v_1 \to \cdots \to v_n = w$. Let $v_{i_1}, v_{i_2}, \ldots, v_{i_k}$ be the vertices in this sequence which do not belong to Chance. Then, $hist(w) = a_1 a_2 \cdots a_{k-1}$, where $v_{i_j} \stackrel{a_j}{\to} v_{i_{j+1}}$. For a player $i \in \{\text{Max}, \text{Min}\}$ the history of i at w, denoted by $hist_i(w)$, is the sequence of player i's actions in the path to w, which is simply the sub-sequence of hist(w) restricted to actions from A_i . E.g.: in Figure 2a, $hist_{\text{Max}}(u_3) = hist_{\text{Max}}(u_4) = a$; in Figure 3a, $hist_{\text{Max}}(u_3) = b$ and $hist_{\text{Max}}(u_2) = \epsilon$, the empty sequence. It is important to remark that this definition uses the assumption that actions determine information sets – otherwise, we would need to incorporate the information sets that were visited along the way, into the history.

Let \mathcal{H} denote the set of all histories and \mathcal{H}_i be the set of all histories of player i. For an information set $I \in \mathcal{I}_i$ let $\mathcal{H}(I) = \{hist(u) \mid u \in I\}$ be the set of histories of all nodes in I. Similarly, we can define $\mathcal{H}_i(I)$ with respect to \mathcal{H}_i . Let $\mathcal{H}(L)$ denote the set of all leaf histories. When $\mathcal{H}_i(I)$ has multiple histories, at a node $v \in I$ the player does not remember which history she traversed to reach v. Hence the player loses information. For two nodes u and v in I, comparing $hist_i(u)$ and $hist_i(v)$ reveals the loss or retention of previously withheld information at the respective nodes. To capture this there are different notions of v

Perfect recall. Player i is said to have perfect recall (PFR) if for every $I \in \mathcal{I}_i$, and every pair of distinct vertices $u, v \in I$, we have $hist_i(u) = hist_i(v)$, i.e. $|\mathcal{H}_i(I)| = 1$. Otherwise, the player is said to have imperfect recall. Figure 2a is an example of a perfect recall game. Imperfect recall. Figure 3a gives an example of a game-structure that has imperfect recall. Notice that states u_3 and u_4 lie in the same information set I_3 , but the sequence of the player's actions leading to these states is different: history at u_3 is b, whereas at u_4 it is \bar{b} . Within imperfect recall, there are distinctions. The imperfect recall in Figure 3b and the one in Figure 3a are in some sense different: in Figure 3b, the inability to distinguish between the two nodes in I_1 can be traced back to a point in the past where she forgets her own action from some information set $(I_3$ in this case), whereas in Figure 3a, the player has

² This can be observed by the fact that information sets in each version are refinements of the previous versions.

been able to distinguish between the two outcomes of the Chance node, but later forgets at I_3 where she started from, leading to four histories b, \bar{b}, c and \bar{c} at I_3 .

A-loss recall. Game-structures as in Figure 3b are said to have A-loss recall. A consequence of having A-loss recall is that a player always remembers any new information gained from Chance outcomes, which is not the case in Figure 3a. Player i has A-loss recall (ALR) if for all $I \in \mathcal{I}_i$, and every pair of distinct vertices $u, v \in I$, either $hist_i(u) = hist_i(v)$, or $hist_i(u)$ is of the form sas_1 , and $hist_i(v)$ of the form sbs_2 , where $a, b \in Act(I')$ for some $I' \in \mathcal{I}$, with $a \neq b$. The game in Figure 1a has A-loss recall, whereas the others, Figure 1b and Figure 1c do not.

Finally, player i is said to be non-absentminded (NAM) if $\forall u, v \in V_i$ with u lying on the path to v, the information set that u belongs to is different from the information set that v belongs to, i.e. all nodes of i on a path from r to leaf node lie in distinct information sets. Figure 2b is an example where Max is absentminded, since both r and u_1 lie in the same information set. Notice that PFR implies ALR, which in turn implies implies NAM.

When Max and Min have recalls R_{Max} , $R_{\text{Min}} \in \{\text{PFR, ALR, NAM}\}$ respectively we will denote the game as a $(R_{\text{Max}}, R_{\text{Min}})$ -game. A one-player game with recall R is denoted as R-game. In this paper we are only concerned with one-player NAM-games and two-player (NAM, NAM)-games. Let us now recall some known results.

- A maxmin solution in a (PFR, ALR)-game can be computed in polynomial-time [13, 18, 11]. As a corollary, an optimal solution in a one-player ALR-game can be computed in polynomial-time [11].
- The maxmin decision problem for (NAM, NAM)-games is both NP-hard [13] and SQUARE-ROOT-SUM-hard [9] ³. The NP-hardness and the SQUARE-ROOT-SUM-hardness hold even for (ALR, PFR)-games [5, 9]. The maxmin decision problem for one-player NAM-games is NP-complete [13].

Our core idea is to view game structures through the polynomials they generate.

Leaf monomials.

In a game structure, assigning variable x_a to each action a, the monomial obtained by taking the product of all x_a along the path to each leaf t is called a leaf monomial, and denoted as $\mu(t)$. E.g., the leaf monomials of the game-structure in Figure 2a are $\{x_ax_c, x_ax_d, x_bx_e, x_bx_f\}$. For a game structure \mathcal{T} , we will write $X(\mathcal{T})$ for the set of leaf monomials. For a game G, let $\operatorname{Prob}_{\mathsf{Chance}}(t)$ denote the product of Chance probabilities in the path to t. The polynomial given by $\sum_{t \in L} \operatorname{Prob}_{\mathsf{Chance}}(t) \cdot \mathcal{U}(t) \cdot \mu(t)$ is called the $\mathit{payoff polynomial}$ of a game. A constraint of the form $\sum_{a \in \mathsf{Act}(I)} x_a = 1$ for an information set I will be called a $\mathit{strategy constraint}$. Any

non-negative valuation satisfying these constraints gives a behavioral strategy to the players. The maxmin value in a game can be given by the maxmin of the payoff polynomial over all possible values satisfying the strategy constraints.

Overview of our work

In this work, our mantra for simplifying games is to find simpler games with same payoff polynomials (upto renaming of variables). Leaf monomials are the building blocks of payoff

³ SQUARE-ROOT-SUM is the decision problem of checking if the sum of the square roots of k positive integers is less than another positive number

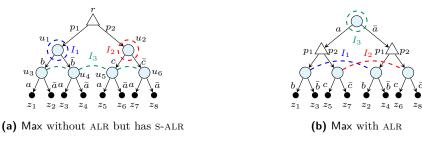


Figure 3 Equivalent ALR game using S-ALR for game without ALR

polynomials. We give methods to generate from a given game-structure \mathcal{T} , a transformed game-structure \mathcal{T}' with A-loss recall such that: either \mathcal{T}' has the same set of leaf monomials (Section 4), or each leaf monomial of \mathcal{T} is a linear combination of the leaf monomials of \mathcal{T}' (Section 5).

4 Shuffled A-loss recall

We start with an example. The game-structure in Figure 3a is an equivalent game of version II of the matching-unmatching game (Figure 1b) obtained by merging die outcome 0 and 1 (and renaming H,T), with $p_1=\frac{2}{3},p_2=\frac{1}{3}$. The game does not have ALR: we have $\mathcal{H}_{\mathsf{Max}}(I_3)=\{b,\bar{b},c,\bar{c}\}$. Since $\{b,\bar{b}\}$ and $\{c,\bar{c}\}$ are from different information sets, the pair of histories b and c, for instance, is a witness for no ALR. The player forgets what she knew about Chance actions. Now, consider the game-structure in Figure 3b, obtained by shuffling the actions (a goes above b and c). This game-structure has ALR. The crucial observation is that both the game-structures, Figure 3a and Figure 3b, lead to the same leaf monomials $\{x_ax_b, x_ax_{\bar{b}}, x_{\bar{a}}x_b, x_{\bar{a}}x_{\bar{b}}, x_ax_c, x_ax_{\bar{c}}, x_{\bar{a}}x_c, x_{\bar{a}}x_{\bar{c}}\}$. Similarly, in Figure 1b, by shuffling the turns of Alice and Bob, we get an ALR recall game that induces the same leaf monomials.

We say that the game-structure of Figure 3a has shuffled A-loss recall. Even though the game-structure originally does not have ALR, it can be shuffled in some way to get an ALR structure. Not every game-structure has shuffled A-loss recall. In this section, we provide a polynomial-time algorithm to identify whether a game-structure has shuffled A-loss recall. If the answer is yes, the algorithm also computes the shuffled game-structure. As a result, we are able to show that one-player shuffled A-loss recall games can be solved in polynomial-time. We will keep our discussion to one-player games played by Max, and later in Section 6 discuss extensions to two-player games. We will require few notions and notations, which we introduce gradually as we need them.

For a game structure \mathcal{T} , we write $L_{\mathcal{T}}$ for the set of its leaves. Define $|\mathcal{T}|$, the size of a game structure \mathcal{T} , to be $|L_{\mathcal{T}}|$, the total number of its leaves. We work with history sequences originating from game structures. Fix a finite set of information sets \mathcal{I} and a set of actions Act(I) for each $I \in \mathcal{I}$. Recall that the action sets of distinct information sets are disjoint. Let $A = \biguplus_{I \in \mathcal{I}} Act(I)$. A sequence is a finite word over A^* that contains at most one letter from each Act(I)⁵.

Let s[i] denote the *i*th action in s. For sequences s_1 and s_2 of length k, we say s_2 is a permutation of s_1 if \exists a bijective function $\rho: \{1, \ldots, k\} \mapsto \{1, \ldots, k\}$ such that $\forall i$,

 $^{^4}$ Two monomials are same if their sets of variables are same

⁵ We restrict to such words in A^* since histories in an NAM game structure have this property

```
s_1[i] = s_2[\rho(i)].
```

- ▶ **Definition 2** (Shuffled A-loss recall). A game structure \mathcal{T} is said to have shuffled A-loss recall (S-ALR) if \exists a game structure \mathcal{T}' with $|\mathcal{T}| = |\mathcal{T}'|$ such that
- \blacksquare \mathcal{T}' has A-loss recall
- There is a bijection $f: L_{\mathcal{T}} \mapsto L_{\mathcal{T}'}$ such that $\forall t \in L_{\mathcal{T}}$, hist(f(t)) is a permutation of hist(t).

When \mathcal{T} has S-ALR we call the structure \mathcal{T}' an S-ALR witness of \mathcal{T} . The following lemma is a consequence on leaf monomials.

▶ **Lemma 3.** Suppose \mathcal{T} has S-ALR with S-ALR witness \mathcal{T}' , then \mathcal{T} and \mathcal{T}' have the same set of leaf monomials.

Detecting S-ALR.

Checking whether a structure \mathcal{T} has PFR or ALR can be done in polynomial-time, simply by checking histories at every information set. On the other hand, from the definition of S-ALR, it is not immediate if one could test it efficiently. One approach could be finding good permutations for each leaf history in order to get the S-ALR witness but this could potentially lead to exponentially many checks. In the following discussion we will provide a polynomial-time algorithm to test S-ALR in a structure.

▶ **Theorem 4.** Given a game structure \mathcal{T} , there is an algorithm that checks if \mathcal{T} has S-ALR in time $O(|\mathcal{T}|)$. Moreover if \mathcal{T} does have S-ALR, this algorithm also outputs an S-ALR witness structure \mathcal{T}' .

To prove Theorem 4, we will work with the history sequences. For a game structure \mathcal{T} , recall that $\mathcal{H}(L_{\mathcal{T}})$ is the set of all leaf histories in \mathcal{T} . We will construct a set of leaf histories H' such that $H' = \mathcal{H}(L_{\mathcal{T}'})$ for some ALR structure \mathcal{T}' . Since we work with sequences, and not game-structures themselves, we will need a notion of ALR for sets of words. When we are given a game, ALR can be detected by looking at the histories. When we are given a set of histories, it is not as direct. We will need to determine some structure inside the sequences.

ALR on sequence sets.

Two sequences s_1, s_2 over A are said to be *connected* if there is some information set I such that both s_1 and s_2 contain an action from Act(I). E.g., suppose $Act(I_1) = \{a, b\}$, $Act(I_2) = \{c, d\}$, $Act(I_3) = \{e, f\}$; then $s_1 = ac$ and $s_2 = eb$ are connected since s_1 contains a, s_2 contains b, both of which are in $Act(I_1)$. Sequences s_1, s_2 are said to be disconnected if they are not connected. For the same alphabet as before, let $s_3 = e$, then s_1 and s_3 are disconnected.

We say that a set of sequences S is connected if for every disjoint partition of S as $S_1 \uplus S_2$ (where S_1, S_2 are non-empty), there exist $s_1 \in S_1$ and $s_2 \in S_2$ such that s_1 and s_2 are connected. E.g., consider $S = \{ac, eb, e\}$ with information sets as above. This set S is connected, even though ac and e are not connected. For a set S, we can construct an undirected graph as follows: each $s \in S$ is a vertex, and there is an edge between $s_1, s_2 \in S$ if they are connected. Notice that a set S is connected iff there is a path between any two vertices in this graph. This interpretation allows to decompose S uniquely as $S = \biguplus_i S_i$ where each S_i is a maximal connected component in the graph.

We can now give a definition of ALR on sequences. This is defined inductively as follows. The set $\{\epsilon\}$ has ALR. A disconnected set S with decomposition $\biguplus_i S_i$ has ALR if each of its connected components S_i has ALR. A connected set S has ALR if there exists an $I \in \mathcal{I}$ s.t.:

- 1. every sequence in S starts with Act(I): i.e. each $w \in S$ is of the form au for some $a \in Act(I)$, and
- 2. the set of continuations of each $a \in Act(I)$ has ALR: for each $a \in Act(I)$, the set $\{u \mid au \in S\}$ has ALR.

Let us illustrate this definition on examples from Figure 2. In 2a, we have the leaf histories $H_1 = \{ac, ad, be, bf\}$. Notice that H_1 is a connected set. There is an information set I_1 with $Act(I_1) = \{a, b\}$ such that the first condition above is true. For the second condition, let us look at the continuations: $H_1^a = \{c, d\}$ and $H_1^b = \{e, f\}$. Both H_1^a and H_1^b are connected and satisfy the first condition. The second condition is vacuously true for H_1^a and H_1^b . This shows H_1 has ALR (as expected, since on game-structures, PFR is a subclass of ALR). Now, let us look at Figure 3a. The leaf histories are given by $H_2 = \{ba, b\bar{a}, \bar{b}a, b\bar{a}, ca, c\bar{a}, \bar{c}a, c\bar{a}\}$. Observe that H_2 is connected. However, the first condition in the ALR definition does not hold. So H_2 is not ALR. We can show that the recursive definition of ALR-sets and that of ALR game structures are equivalent.

▶ **Proposition 5.** A game structure \mathcal{T} has ALR iff $\mathcal{H}(L_{\mathcal{T}})$ has ALR.

S-ALR on sequence sets.

We can also extend the definition of S-ALR to sequence sets. S has S-ALR if \exists another set S' such that (i) S' has ALR and (ii) there is a bijection $f: S \mapsto S'$ where $\forall s \in S, f(s)$ is a permutation of s. We call the set S' an S-ALR witness of S.

Exploiting the recursive definition of ALR sets we will provide recursive necessary and sufficient conditions for sequence sets to have S-ALR. Firstly, one can check for S-ALR for a set S by checking S-ALR for each individual maximal connected components.

- ▶ Proposition 6. Let S be a disconnected set and $S = \biguplus_i S_i$ be the decomposition of S into maximal connected components. Then S has S-ALR iff $\forall i, S_i$ has S-ALR.
- ▶ Corollary 7. Let $S = \bigcup_i S_i$ be the decomposition of S where each S_i has S-ALR witnessed by sets S'_i . Then S has S-ALR and $S' = \bigcup_i S'_i$ is an S-ALR witness of S.

Secondly, for connected sets we will provide another recursive condition to have S-ALR. We use another notation. For an action $a \in A$, we write $S_a := \{u_1u_2 \mid u_1au_2 \in S\}$, for the set of sequences obtained by picking a sequence in S that contains a, and dropping the afrom it.

- ▶ Proposition 8. Let S be a connected set. S has S-ALR iff there exists an information set $I \in \mathcal{I}$ such that
- 1. every sequence $s \in S$ contains an action from Act(I),
- **2.** and for all $a \in Act(I)$, the set S_a has S-ALR.

The above proposition can be naturally translated into an algorithm. However, this does not yet ensure a polynomial-time complexity. If there are two information sets I_1 and I_2 that satisfy Condition 1 of Proposition 8, the order in which we pick them might, in principle, create a difference and hence one has to guess the right order. The next lemma says this does not happen.

▶ Lemma 9. Let S be a connected set and let I be an arbitrary information set such that every sequence $s \in S$ contains an action from Act(I). Then: S has S-ALR iff for all $a \in Act(I)$, the set S_a has S-ALR. Moreover, if for each a, S'_a is S-ALR witness of S_a , then $\bigcup_a aS'_a$ is an S-ALR witness of S.

Algorithm 1 Compute shuffled A-loss recall

```
1: Input : S
 2: Output: S-ALR witness S' of S if it exists
 3: if S is connected then
      if \exists I such that every s \in S contains an action from Act(I) then
 4:
         for a \in Act(I) do
 5:
            S_a' \leftarrow \text{S-ALR} witness of S_a
 6:
         end for
 7:
         return \bigcup_a aS'_a
 8:
 9:
         EXIT and report S does not have S-ALR
10:
11:
      end if
12: else
      S = \uplus S_i where each S_i is connected
13:
       S_i' \leftarrow \text{S-ALR witness of } S_i
      return \bigcup_i S_i'
15:
16: end if
```

Proposition 8 and Lemma 9 lead to Algorithm 1. This algorithm runs in time $\mathcal{O}(|S|)$, proving Theorem 4. Here is an example run of the algorithm on Figure 3a.

We have $S = \{ba, b\bar{a}, b\bar{a}, b\bar{a}, ca, c\bar{a}, \bar{c}a, c\bar{a}\}$. All the sequences contain an action from $\operatorname{Act}(I_1) = \{a, \bar{a}\}$. For the recursive call, we the set $H = \{b, \bar{b}, c, \bar{c}\}$. This set is disconnected, with components $H_1 = \{b, \bar{b}\}$ and $H_2 = \{c, \bar{c}\}$. For H_1, H_2 the same sets are witness for s-Alr. For H, the witness is the same set again. For S, the witness is $aH \biguplus \bar{a}H = \{ab, a\bar{b}, \ldots, \bar{a}c, \bar{a}\bar{c}\}$. This set can be translated to the game Figure 3b, with Alr. Now, back to our running example Figure 1b. Let H_{01}, T_{01} and H_2, T_2 be Alice's actions out of the information sets obtained after die roll 0 or 1, and 2 respectively. The induced sequence set is $\{H_{01}H, H_{01}T, T_{01}H, T_{01}T, H_{2}H, T_{2}T\}$, which can be seen to have S-Alr. In fact, for all values for n, the game II has S-Alr.

Theorem 4 and the fact that ALR games can be solved in polynomial-time give us the following theorem, and hence a new polynomial-time solvable class with imperfect recall.

▶ **Theorem 10.** The maxmin value in one-player games with S-ALR can be computed in polynomial time.

5 Span

We move on to another way of simplifying game-structures by generalizing S-ALR. The game-structure in Figure 4a (call it \mathcal{T}_1) is an equivalent version of game **III** (Figure 1c). It neither has PFR, nor ALR. Using Algorithm 1, we can show that it does not have S-ALR either. Now, consider the game-structure in Figure 4b (call it \mathcal{T}'_1). It has ALR. Each leaf monomial of \mathcal{T}_1 can be written as a linear combination of the leaf monomials of \mathcal{T}'_1 : e.g., the leaf monomial $x_a x_{\bar{c}}$ of \mathcal{T}_1 is equal to $x_{\bar{c}} x_d x_a + x_{\bar{c}} x_{\bar{d}} x_a$, a combination of leaf monomials of \mathcal{T}'_1 . The game-structure \mathcal{T}_1 is said to be spanned by \mathcal{T}'_1 . This property allows to solve games derived from the structure \mathcal{T}_1 by converting them into a game on \mathcal{T}'_1 with a suitably designed utility function so that both games induce the same payoff polynomial, and then solving the resulting A-loss recall game. This is illustrated in Figure 4a and Figure 4b. Results in this section:

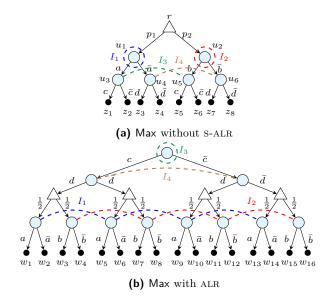


Figure 4 Equivalent ALR game using ALR-span for game without S-ALR

- We show that every NAM imperfect recall game structure is spanned by an A-loss recall structure (Theorem 13). The caveat is that the smallest A-loss recall span may be of exponential size: we exhibit a family of game structures where this happens (Theorem 18).
- We provide an algorithm to compute an A-loss recall span of smallest size. We show that the associated decision problem is in NP (Theorem 19). We also identify classes of games with 'small' Alr-span using a new parameter (Corollary 21).

We will now formally present ALR-span. Similar to last section, we will keep our discussion to one-player games and later discuss extensions to two players in Section 6.

Since we will deal with polynomials formed using leaf monomials, we need the notion of reducing one polynomial to another. Recall that since these variables are denoting behavioral strategies, every valuation to the variables satisfies the strategy constraints. We say polynomial f_1 reduces to f_2 under strategy constraints if we can get f_2 by applying finitely many substitutions in f_1 of the form $\sum_{a \in Act(I)} x_a = 1$. E.g., the polynomial

 $x_a x_d x_c + x_a x_d x_{\bar{c}} + x_{\bar{a}} x_d x_c + x_{\bar{a}} x_d x_{\bar{c}}$ reduces to x_d by applying the substitutions $x_a + x_{\bar{a}} = 1$ and $x_c + x_{\bar{c}} = 1$. Observe that, when f_1 reduces f_2 , they are essentially the same polynomials over the space with strategy constraints, i.e. they evaluate to the same value under every assignment of values satisfying the strategy constraints.

- ▶ **Definition 11** (ALR-span). Let \mathcal{T} be a game structure with set of leaf monomials $X(\mathcal{T})$. We call a structure \mathcal{T}' an ALR-span of \mathcal{T} if
- \mathcal{T}' has ALR.
- each monomial in $X(\mathcal{T})$ can be generated by monomials in $X(\mathcal{T}')$ by linear combinations i.e. $\forall \mu \in X(\mathcal{T})$ there exist coefficients $\{c^{\mu}_{\mu'}\}_{\mu' \in X(\mathcal{T}')} \in \mathbb{R}^{|X(\mathcal{T}')|}$ such that the polynomial $\sum_{\mu' \in X(\mathcal{T}')} c^{\mu}_{\mu'} \mu'$ reduces to μ under strategy constraints.

The game structure \mathcal{T}'_1 in Figure 4b is an ALR-span of \mathcal{T}_1 in Figure 4a. E.g., for the monomial $x_{\bar{b}}x_{\bar{d}}$ in \mathcal{T}_1 , the linear combination $x_cx_{\bar{d}}x_{\bar{b}}+x_{\bar{c}}x_{\bar{d}}x_{\bar{b}}$ reduces to it by substituting $x_d+x_{\bar{d}}=1$. In fact, observe that for any monomial μ in $X(\mathcal{T}_1)$, the sum of the two monomials in $X(\mathcal{T}'_1)$ that contain the actions in μ , reduces to μ .

The next proposition states that we can use ALR-span \mathcal{T}'_1 to solve games on structure \mathcal{T}_1 (see Figure 4a and Figure 4b). We can assign suitable payoffs w_i s in terms of z_i s and p_i s to get an equivalent game. Let t_i be the leaf that has payoff w_i . The payoff w_i is the sum of the quantities $\frac{\Pr{\text{ob}_{\text{Chance}}(t)c_{\mu(t_i)}^{\mu(t)}U(t)}}{\Pr{\text{ob}_{\text{Chance}}(t_i)}}$ for all t in \mathcal{T}_1 , in which $\mu(t_i)$ contributed to generate $\mu(t)$. E.g., t_1 , with polynomial $x_cx_dx_a$ contributes in generating only x_ax_c (for the leaf corresponding to z_1). Hence $w_1 = 2p_1z_1$. Similarly, $w_5 = 2p_1z_1$. In the payoff polynomial of the second game, since $x_cx_dx_a + x_c\bar{x}_dx_a = x_ax_c$, we will have the term $p_1z_1x_ax_c$ in the payoff polynomial. This way, we will get the same payoff polynomial as original game, thus reducing the original game to a game on \mathcal{T}'_1 .

▶ Proposition 12. Let \mathcal{T} be a game structure and \mathcal{T}' an ALR-span of \mathcal{T} . Then for every game $G = (\mathcal{T}, \delta, \mathcal{U})$ on \mathcal{T} , there exists a game $G' = (\mathcal{T}', \delta', \mathcal{U}')$ on \mathcal{T}' such that solving G can be reduced to solving G'.

Existence of ALR-spans.

From the definition, one can see that when \mathcal{T} has S-ALR, an S-ALR witness is also an ALR-span of \mathcal{T} . Surprisingly, we can show that every NAM structure has ALR-span.

▶ **Theorem 13.** Every NAM-game structure \mathcal{T} has an ALR-span.

Proof Sketch. We can explicitly provide an ALR-span \mathcal{T}' of \mathcal{T} . Let \mathcal{I} be the set of information sets in \mathcal{T} . The structure \mathcal{T}' has $|\mathcal{I}|$ levels of player nodes corresponding to each $I \in \mathcal{I}$. All nodes in a level are placed in one information set. Therefore the leaves of \mathcal{T}' are all possible monomials using the information sets \mathcal{I} . Moreover, \mathcal{T}' has ALR. To generate a monomial $\mu \in X(\mathcal{T})$ one can combine the monomials of all paths containing actions from μ in $X(\mathcal{T}')$.

Minimal ALR-span

In order to take advantage of Proposition 12, one would need to find small ALR-spans. We observe that the ALR-span obtained in the proof of Theorem 13 has exponential size. We will now delve into finding ALR-spans of smallest size: a minimal ALR-span. First we will list some key observations concerning minimal ALR-spans which will lead to an algorithm for computing one. Then we will show that the exponential blowup in size of ALR-spans is unavoidable in general by exhibiting a class of games with minimal ALR-span of exponential size. Since ALR-games are solvable in polynomial time, this aligns with the fact that the maxmin problem for general one-player NAM-games is NP-hard.

Similar to Section 4, we will work directly with sequence sets. The notions related to span are extended to sequence sets in a natural manner, i.e. when \mathcal{T}' is an ALR-span of \mathcal{T} , $\mathcal{H}(L_{\mathcal{T}'})$ is an ALR-span of $\mathcal{H}(L_{\mathcal{T}})$

▶ Proposition 14. For a sequence set S, let $S = \biguplus_i S_i$ be the decomposition of S into maximal connected components. Let S'_i be a minimal ALR-span of S_i . Then $S' = \biguplus_i S'_i$ is a minimal ALR-span of S

We can show that a minimal ALR-span of a connected set is also connected. By definition, the ALR-span is a set of sequences that has ALR, and by the first point in the definition of ALR on sequence sets, we deduce that there is an I such that all sequences in the minimal span start with Act(I).

▶ **Lemma 15.** Let S be a connected set and S' be a minimal ALR-span of S. Then $\exists I \in \mathcal{I}$, such that all sequences in S' start with Act(I).

The next observation says how to find this I.

▶ **Lemma 16.** Let S be a connected set. If there is an I such that every sequence of S has an action in Act(I), then there is a minimal ALR-span S' of S such that all sequences in S' start with Act(I).

If there is no such I, then we need to enumerate over all information sets to find the smallest. Once we fix an I, the next lemma says how to find a minimal ALR-span which starts with Act(I).

▶ Lemma 17. Let S be a connected set, and let $I \in \mathcal{I}$. An ALR-span of smallest size among all ALR-spans starting with Act(I) is the following: $S' = \bigcup_{a \in Act(I)} aH'_a$ where H'_a is a minimal ALR-span of $S_a \cup S_{\bar{I}}$ where $S_{\bar{I}} := \{s \in S \mid s \text{ contains no action from } Act(I)$.

Algorithm for computing minimal ALR-span.

Based on the lemmas above, we can design a recursive algorithm to compute a minimal ALR-span for an input sequence set S. Firstly, if S is disconnected, based on Proposition 14, S is decomposed into maximal connected components and a minimal ALR-span is computed for each component. When S is connected: (1) for each $I \in \mathcal{I}$, compute $H_I = \{s \mid s \text{ contains no action from Act}(I)\}$; (2) if there is some I such that $H_I = \emptyset$ (Lemma 16), find the smallest ALR-span starting with Act(I) using Lemma 17; (3) else, for each I, compute the smallest ALR-span starting from Act(I) using Lemma 17 and return the smallest. We remark that in the algorithm to find the minimal ALR-span, ϵ might appear in intermediate sequence sets. In that case, we just remove ϵ from the set and continue the algorithm.

Next, we show that there are game-structures whose minimal ALR-spans are exponentially large.

▶ **Theorem 18.** For every n > 0, there exists a game structure \mathcal{T}_n of size $\mathcal{O}(n^2)$ such that the size of a minimal ALR-span of \mathcal{T}_n is $\Omega(2^n)$.

Complexity

In order to investigate the complexity of computing a minimal ALR-span of a game structure, we consider the following decision problem and show it to be in NP. We leave open the question of whether it is NP-hard.

MIN-ALR-SPAN: Given a game structure \mathcal{T} and an integer k > 0, is there a game structure \mathcal{T}' such that $|\mathcal{T}'| \leq k$ and \mathcal{T}' is an ALR-span of \mathcal{T} ?

▶ **Theorem 19.** *The decision problem MIN-ALR-SPAN is in* NP.

Proof Sketch. One can guess a \mathcal{T}' of size at most k, and also the linear combinations required for each $\mu \in X(\mathcal{T})$. This is polynomial in size. For each monomial $\mu \in X(\mathcal{T})$ we verify if the monomials in $X(\mathcal{T}')$ containing all variables from μ can generate μ . This can be done efficiently in polynomial-time.

Efficiently solvable classes

We get back to finding efficiently solvable classes of imperfect recall games, this time using a parameter called $shuffle\text{-}depth\ SD$, that is naturally derived from our algorithm for computing a minimal ALR-span.

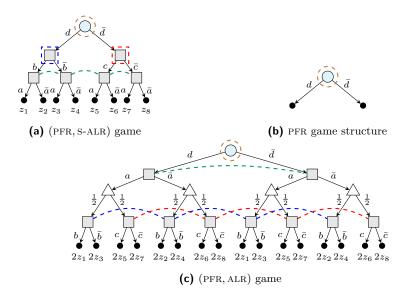


Figure 5 Equivalent two player game obtained by composing ALR-spans of respective Max, Min structures

When S is disconnected with $S = \bigcup S_i$ and each S_i connected : define $SD(S) = \max_i SD(S_i)$. When S is connected and S has S-ALR, define SD(S) = 0. Otherwise define

$$SD(S) = 1 + \min_{I} \max_{a \in I} SD(S_a \cup S_{\bar{I}})$$

For a \mathcal{T} with SD k, our minimal ALR-span algorithm would encounter sets with S-ALR after recursively running upto depth k. This takes $\mathcal{O}(|\mathcal{T}|^{k+1})$ time.

- ▶ **Proposition 20.** The minimal ALR-span of game structure \mathcal{T} with SD = k can be computed in time $\mathcal{O}(|\mathcal{T}|^{k+1})$.
- ▶ Corollary 21. The maxmin value in a one-player game can be computed in PTIME for games having structures with constant SD.

The game III for any n has SD 2, and using our algorithm one can find equivalent ALR-game with just a quadratic blowup in size.

6 Two-player games

For a two-player game structure \mathcal{T} and the corresponding sequence set S, we can look at the projection of sequences on individual player actions, S_{Max} and S_{Min} , consider their ALR-spans and knit them together. Consider the 2-player game in Figure 5. Projections of the sequence set in this game w.r.t individual players would correspond to game structures in Figure 5b (for Max) and Figure 3a (for Min). The structure Figure 5b already has PFR. As seen before, Figure 3b is an S-ALR witness for Figure 3a. We can plug in this S-ALR witness to all leaf nodes of Figure 5b and get the structure Figure 5c. Information sets are maintained across all copies of Figure 5c as shown in the illustration. More generally, if $\mathcal{T}'_{\text{Max}}$ is an ALR-span of \mathcal{T}_{Max} , and $\mathcal{T}'_{\text{Min}}$ is an ALR-span of \mathcal{T}_{Min} , we can obtain an (ALR, ALR) structure where all nodes of Max precede all nodes of Min, and a copy of $\mathcal{T}'_{\text{Min}}$ is attached to each leaf node of Max, and information sets of Min are maintained across all copies of $\mathcal{T}'_{\text{Min}}$, as shown in Figure 5.

We can assign suitable payoffs in a similar manner to Proposition 12 to get an equivalent game on this new game structure.

▶ Theorem 22. Solving an (NAM, NAM) game on structure \mathcal{T} can be reduced to solving an (ALR, ALR) game on a structure of size $|\mathcal{T}'_{\mathsf{Max}}||\mathcal{T}'_{\mathsf{Min}}|$ where $\mathcal{T}'_{\mathsf{Max}}$ and $\mathcal{T}'_{\mathsf{Min}}$ are minimal ALR-spans of $\mathcal{T}_{\mathsf{Min}}$.

Since (PFR, ALR)-games can be solved in polynomial-time, Theorem 22 and Corollary 21 lead to new polynomial-time solvable classes.

▶ Corollary 23. The maxmin value in a (PFR, NAM) game where SD of \mathcal{T}_{Min} is constant can be computed in polynomial time. As a consequence, (PFR, S-ALR) games can be solved in polynomial time.

7 Conclusion

We have presented a study of imperfect recall without absentmindedness, through the lens of A-loss recall. Specifically, we have given two methods to transform imperfect recall games to A-loss recall games. Behavioral strategies for the original game can be obtained by analyzing the transformed game. This investigation has resulted in new polynomial-time solvable classes of one-player and two-player games. We have also shown how to find a transformation of minimal size. It would be interesting to see the influence of these notions of S-ALR and ALR-span, and the idea of using sequence sets instead of games, in algorithms that use imperfect recall abstractions.

In summary, in this work, we have laid the foundations to simplify imperfect recall in terms of ALR. We do hope that this perspective leads to further theoretical and experimental investigations.

References

- Noam Brown, Sam Ganzfried, and Tuomas Sandholm. Hierarchical abstraction, distributed equilibrium computation, and post-processing, with application to a champion no-limit texas hold'em agent. In Gerhard Weiss, Pinar Yolum, Rafael H. Bordini, and Edith Elkind, editors, Proceedings of the 2015 International Conference on Autonomous Agents and Multiagent Systems, AAMAS 2015, Istanbul, Turkey, May 4-8, 2015, pages 7–15. ACM, 2015. URL: http://dl.acm.org/citation.cfm?id=2772885.
- Noam Brown and Tuomas Sandholm. Libratus: The superhuman ai for no-limit poker. In Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence, IJCAI-17, pages 5226–5228, 2017. doi:10.24963/ijcai.2017/772.
- 3 Noam Brown and Tuomas Sandholm. Superhuman ai for multiplayer poker. Science, 365(6456):885-890, 2019. URL: https://www.science.org/doi/abs/10.1126/science.aay2400, doi:10.1126/science.aay2400.
- 4 Andrea Celli and Nicola Gatti. Computational results for extensive-form adversarial team games. In *Proceedings of the Thirty-Second Conference on Artificial Intelligence*, AAAI'18, pages 965–972, New Orleans, Louisiana, USA, 2018. AAAI Press.
- 5 Jirí Cermák, Branislav Bosanský, Karel Horák, Viliam Lisý, and Michal Pechoucek. Approximating maxmin strategies in imperfect recall games using a-loss recall property. Int. J. Approx. Reasoning, 93:290–326, 2018.
- 6 Jiri Cermak, Branislav Bosanský, and Viliam Lisý. An algorithm for constructing and solving imperfect recall abstractions of large extensive-form games. In Carles Sierra, editor, Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence, IJCAI 2017, Melbourne, Australia, August 19-25, 2017, pages 936-942. ijcai.org, 2017. URL: https://doi.org/10.24963/ijcai.2017/130, doi:10.24963/IJCAI.2017/130.

- Vincent Conitzer. Designing preferences, beliefs, and identities for artificial intelligence. In The Thirty-Third AAAI Conference on Artificial Intelligence, AAAI 2019, The Thirty-First Innovative Applications of Artificial Intelligence Conference, IAAI 2019, The Ninth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2019, Honolulu, Hawaii, USA, January 27 February 1, 2019, pages 9755-9759. AAAI Press, 2019. URL: https://doi.org/10.1609/aaai.v33i01.33019755, doi:10.1609/AAAI.V33I01.33019755.
- 8 Sam Ganzfried and Tuomas Sandholm. Potential-aware imperfect-recall abstraction with earth mover's distance in imperfect-information games. In Carla E. Brodley and Peter Stone, editors, *Proceedings of the Twenty-Eighth AAAI Conference on Artificial Intelligence, July 27 -31, 2014, Québec City, Québec, Canada*, pages 682–690. AAAI Press, 2014. URL: https://doi.org/10.1609/aaai.v28i1.8816, doi:10.1609/AAAI.V28I1.8816.
- 9 Hugo Gimbert, Soumyajit Paul, and B. Srivathsan. A bridge between polynomial optimization and games with imperfect recall. In *Proceedings of the 19th International Conference on Autonomous Agents and Multiagent Systems, AAMAS '20.* International Foundation for Autonomous Agents and Multiagent Systems, 2020.
- Michael Johanson, Neil Burch, Richard Valenzano, and Michael Bowling. Evaluating state-space abstractions in extensive-form games. In Proceedings of the 2013 international conference on Autonomous agents and multi-agent systems, pages 271–278, 2013.
- Mamoru Kaneko and J Jude Kline. Behavior strategies, mixed strategies and perfect recall. International Journal of Game Theory, 24:127–145, 1995.
- J Jude Kline. Minimum memory for equivalence between ex ante optimality and timeconsistency. Games and Economic Behavior, 38(2):278–305, 2002.
- Daphne Koller and Nimrod Megiddo. The complexity of two-person zero-sum games in extensive-form. *Games and Economic Behavior*, 4(4):528–552, 1992.
- 14 Christian Kroer and Tuomas Sandholm. Imperfect-recall abstractions with bounds in games. In Vincent Conitzer, Dirk Bergemann, and Yiling Chen, editors, *Proceedings of the 2016 ACM Conference on Economics and Computation, EC '16, Maastricht, The Netherlands, July 24-28, 2016*, pages 459–476. ACM, 2016. doi:10.1145/2940716.2940736.
- Nicolas S. Lambert, Adrian Marple, and Yoav Shoham. On equilibria in games with imperfect recall. *Games and Economic Behavior*, 113:164–185, 2019. URL: https://www.sciencedirect.com/science/article/pii/S0899825618301490, doi:https://doi.org/10.1016/j.geb.2018.09.007.
- Marc Lanctot, Richard G. Gibson, Neil Burch, and Michael Bowling. No-regret learning in extensive-form games with imperfect recall. In *Proceedings of the 29th International Conference on Machine Learning, ICML 2012, Edinburgh, Scotland, UK, June 26 July 1, 2012.* icml.cc / Omnipress, 2012. URL: http://icml.cc/2012/papers/58.pdf.
- 17 Matej Moravčík, Martin Schmid, Neil Burch, Viliam Lisý, Dustin Morrill, Nolan Bard, Trevor Davis, Kevin Waugh, Michael Johanson, and Michael Bowling. Deepstack: Expert-level artificial intelligence in heads-up no-limit poker. *Science*, 356(6337):508–513, 2017. doi:10.1126/science.aam6960.
- 18 Bernhard Von Stengel. Efficient computation of behavior strategies. *Games and Economic Behavior*, 14(2):220–246, 1996.
- 19 Emanuel Tewolde, Caspar Oesterheld, Vincent Conitzer, and Paul W. Goldberg. The computational complexity of single-player imperfect-recall games. IJCAI '23, 2023. doi: 10.24963/ijcai.2023/321.
- 20 Emanuel Tewolde, Brian Hu Zhang, Caspar Oesterheld, Manolis Zampetakis, Tuomas Sandholm, Paul Goldberg, and Vincent Conitzer. Imperfect-recall games: Equilibrium concepts and their complexity. In Kate Larson, editor, Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24, pages 2994–3004. International Joint Conferences on Artificial Intelligence Organization, 8 2024. Main Track. doi:10.24963/ijcai.2024/332.

- 21 Bernhard von Stengel and Daphne Koller. Team-maxmin equilibria. *Games and Economic Behavior*, 21(1):309-321, 1997. URL: https://www.sciencedirect.com/science/article/pii/S0899825697905273, doi:https://doi.org/10.1006/game.1997.0527.
- 22 Kevin Waugh, Martin Zinkevich, Michael Johanson, Morgan Kan, David Schnizlein, and Michael H. Bowling. A practical use of imperfect recall. In *Eighth Symposium on Abstraction*, Reformulation, and Approximation, SARA'09, pages 175 – 182, California, USA, 2009. AAAI.
- 23 Kevin Waugh, Martin Zinkevich, Michael Johanson, Morgan Kan, David Schnizlein, and Michael H. Bowling. A practical use of imperfect recall. In Vadim Bulitko and J. Christopher Beck, editors, Eighth Symposium on Abstraction, Reformulation, and Approximation, SARA 2009, Lake Arrowhead, California, USA, 8-10 August 2009. AAAI, 2009. URL: http://www.aaai.org/ocs/index.php/SARA/SARA09/paper/view/839.
- 24 Ernst Zermelo. Uber eine anwendung der mengenlehre auf die theorie des schachspiels. inproceedings of the fifth international congress of mathematicians ii, 1913.
- 25 Jiří Čermák, Viliam Lisý, and Branislav Bošanský. Automated construction of bounded-loss imperfect-recall abstractions in extensive-form games. Artificial Intelligence, 282:103248, 2020. URL: https://www.sciencedirect.com/science/article/pii/S0004370220300126, doi:https://doi.org/10.1016/j.artint.2020.103248.

Appendix

A Shuffled A-loss recall

▶ **Lemma 3.** Suppose \mathcal{T} has S-ALR with S-ALR witness \mathcal{T}' , then \mathcal{T} and \mathcal{T}' have the same set of leaf monomials.

Proof. Let L and L' be set of leaf nodes of \mathcal{T} and \mathcal{T}' respectively. From definition of S-ALR, there is a bijection f between the sets $\mathcal{H}(L)$ and $\mathcal{H}(L')$ such that for $s \in \mathcal{H}(L)$, f(s) is a permutation of s. Since $\forall s \in \mathcal{H}(L)$, $\mu(s) = \mu(f(s))$ it follows that $X(\mathcal{T}) = X(\mathcal{T}')$.

▶ Proposition 5. A game structure \mathcal{T} has ALR iff $\mathcal{H}(L_{\mathcal{T}})$ has ALR.

Proof. First, starting with an ALR-game structure \mathcal{T} , we will show by induction on the size of \mathcal{T} , that $\mathcal{H}(L)$ has ALR.

When \mathcal{T} is a trivial leaf node, we have $\mathcal{H}(L) = \{\epsilon\}$ which has ALR by definition. Suppose the statement holds for all game structure of size at most k. Let \mathcal{T} be a game structure of size k+1. First note, that any structure can be reduced to a structure where Chance nodes do not have Chance children, and with the same leaf histories $\mathcal{H}(L)$. This can be done by absorbing the Chance children into the parent.

Now we can split into several cases and sub-cases.

Case 1: The root node r of $\mathcal T$ is a Chance node. When r is a Chance node, there can be two cases.

Case 1a: All children of r (which are player nodes) are in one single information set I. In this case, one can construct a structure \mathcal{T}' with first two levels of \mathcal{T} swapped i.e. the root of \mathcal{T}' is a player node in information set I and each actions leading to Chance nodes which again leads to the substructure from third level of \mathcal{T} . This way, \mathcal{T} is reduced to a structure \mathcal{T}' with player node at root and $\mathcal{H}(\mathcal{T}) = \mathcal{H}(\mathcal{T}')$. This falls in Case 2.

Case 1b: Not all children of r are in single information sets. From definition of ALR, substructure rooted at two children of r in two distinct information sets cannot share an

information set. This implies, these are substructures of size at most k and by inductive hypothesis, their set of leaf histories have ALR. Now since their leaf histories are mutually disconnected, this implies that $\mathcal{H}(L)$ has ALR.

Case 2: The root node r is a player node. In this case, for any action a out of root node, and any two node in the sub-tree out of a, a is the common prefix of histories of both node. Hence from definition of ALR, \mathcal{T} has ALR would imply for any a, the substructure rooted at each children must individually have ALR. By inductive hypothesis the sub-structure has size less than k+1 and hence the leaf histories of substructure has ALR as well. Since $\mathcal{H}(L)$ is connected in this case, it follows that $\mathcal{H}(L)$ has ALR as well.

The other direction can be proved similarly, again by using induction on the size of \mathcal{T} and breaking into similar cases.

▶ Proposition 6. Let S be a disconnected set and $S = \biguplus_i S_i$ be the decomposition of S into maximal connected components. Then S has S-ALR iff $\forall i, S_i$ has S-ALR.

Proof. Since S is disconnected from definition of s-ALR it follows that when S has s-ALR with s-ALR witness S', S' is also disconnected, i.e. the maximal connected components of S' are s-ALR witnesses of maxmimal connected components of S. Hence each S_i has s-ALR.

The other direction follows since the union of the S-ALR witnesses for connected components of S is an S-ALR witness of S.


- ▶ Proposition 8. Let S be a connected set. S has S-ALR iff there exists an information set $I \in \mathcal{I}$ such that
- 1. every sequence $s \in S$ contains an action from Act(I),
- **2.** and for all $a \in Act(I)$, the set S_a has S-ALR.

Proof. For the forward direction, let S' be an S-ALR witness of S. Since S is connected, it follows that S' is connected as well. Now from definition of ALR sets, $\exists I$, such that all sequences in S' starts with actions from $\operatorname{Act}(I)$. This proves the first statement. Now again it follows from the definition of ALR sets that for each $a \in \operatorname{Act}(I)$, S'_a has ALR. Moreover S'_a is S-ALR witness of S_a . This proves the second statement.

For the other direction $\bigcup_a aS'_a$ will have ALR by definition and hence is an S-ALR witness of S, implying S has S-ALR.

- ▶ Lemma 9. Let S be a connected set and let I be an arbitrary information set such that every sequence $s \in S$ contains an action from Act(I). Then: S has S-ALR iff for all $a \in Act(I)$, the set S_a has S-ALR. Moreover, if for each a, S'_a is S-ALR witness of S_a , then $\bigcup_a aS'_a$ is an S-ALR witness of S.
- **Proof.** Suppose S has S-ALR and I be an information set such that all sequences in S has actions from Act(I). Let S' be an S-ALR witness of S. We claim that for each $a \in Act(I)$, S'_a will have ALR.

For this we provide an equivalent formulation of ALR sets. A set has ALR iff every subset of size 2 has ALR. This is true because \mathcal{T} has ALR iff every pair of leaf histories s_1 and s_2 of \mathcal{T} satisfy the constraints imposed by ALR condition, i.e. either (i) $s_1 = sa_1s_1'$, $s_2 = sa_2s_2'$ for $a_1 \neq a_2$ with $a_1, a_2 \in \text{Act}(I')$ for some I' or (ii) $s_1 = ss_1'$, $s_2 = ss_2'$ where s_1' , s_2' are disconnected. Now it follows that if s_1 and s_2 share a common action a, the pair of sequences on removing this common a from both will still satisfy the ALR conditions. This implies that S_a' will also have ALR for each a. As a result for each a, S_a will have S-ALR.

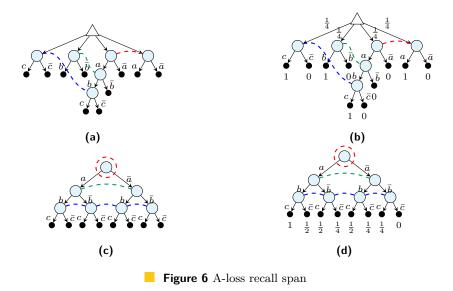

For the other direction $\bigcup_a aS'_a$ will have ALR by definition and hence is an S-ALR witness

▶ Theorem 10. The maxmin value in one-player games with S-ALR can be computed in polynomial time.

Proof. Since S-ALR witnesses are specific kinds of ALR-spans, using the construction in the proof of Proposition 12, we can reduce the input game G to a new game G' with ALR and with the same payoff polynomial. Since game structures with S-ALR have SD 0, this follows from Corollary 21.

B Span

of S.

B.1 Existence of alr-span

▶ **Theorem 13.** Every NAM-game structure \mathcal{T} has an ALR-span.

Proof. Suppose \mathcal{T} has information sets $\mathcal{I} = \{I_1, \dots, I_n\}$ and actions A. We will provide an explicit ALR-span \mathcal{T}' over the same information sets \mathcal{I} and actions A. An example of this construction for n = 3 can be found in Figure 6, where the game structure in Figure 6c is an ALR-span of the structure in Figure 6a obtained in this manner.

Let $S = \{\epsilon\} \cup \{a_{i_1} \dots a_{i_k} \mid k \leq n, \forall j \ a_{i_j} \in \operatorname{Act}(I_j)\}$. \mathcal{T}' be the game structure over the vertex set $V' = \{u_s | s \in S\}$, with v_{ϵ} being the root node and the set of leaves $L' = \{v_s \mid |s| = n\}$. The set of actions is A where for $u_s \in V' \setminus L'$, $u_s \stackrel{a}{\to} u_{sa}$. The set of information sets is \mathcal{I} and for each $1 \leq i \leq n$, $I_i = \{u_s \mid |s| = i - 1\}$.

We claim that \mathcal{T}' is an ALR-span of \mathcal{T} . Firstly \mathcal{T}' has ALR because it follows from the recursive definition of ALR-sequence sets that S has ALR. Now let $\mu(s)$ be a monomial generated by some leaf sequence s in \mathcal{T} . We will show that the leaf monomials of the set $\{s' \in \mathcal{H}(L') \mid \operatorname{Act}(s) \subseteq \operatorname{Act}(s')\}$ generate the monomial $\mu(s)$ where $\operatorname{Act}(s)$ is the set of actions in s. More particularly the expression $\sum_{s' \in \mathcal{H}(L') \mid \operatorname{Act}(s) \subseteq \operatorname{Act}(s')} \mu(s') \text{ reduces to } \mu(s).$ This is

because the previous expression can be re-written as

 $\mu(s) \prod_{\substack{I \mid \operatorname{Act}(I) \cap \operatorname{Act}(s) = \emptyset}} (\sum_{a \in \operatorname{Act}(I)} x_a) \text{ which reduces to } \mu(s) \text{ by repeated applications of } \sum_{a \in \operatorname{Act}I} x_a = 1 \text{ for } I \text{ with } \operatorname{Act}(I) \cap \operatorname{Act}(s) = \emptyset. \text{ Hence } \mathcal{T}' \text{ is an ALR-span of } \mathcal{T}.$

▶ **Proposition 12.** Let \mathcal{T} be a game structure and \mathcal{T}' an ALR-span of \mathcal{T} . Then for every game $G = (\mathcal{T}, \delta, \mathcal{U})$ on \mathcal{T} , there exists a game $G' = (\mathcal{T}', \delta', \mathcal{U}')$ on \mathcal{T}' such that solving G can be reduced to solving G'.

Proof. We will provide δ' and \mathcal{U}' to construct the game G' on \mathcal{T}' .

Firstly, we choose δ' which at every Chance node assigns an uniform distribution on its outgoing edges(any distribution with full support would work). We will factor out these Chance probabilities later in the payoff function \mathcal{U}' . For a leaf $t \in L$, it follows from definition of span that a linear combination of $\mu(t')$ for $t' \in \mathcal{T}'$, reduces to $\mu(t)$. Let that combination be $\sum_{t' \in L'} c^t_{t'} \mu(t')$. Recall that $\operatorname{Prob}_{\mathsf{Chance}}(t')$ is the product of Chance probabilities by δ' on path to t' in \mathcal{T}' . Define $\mathcal{U}'(t') = \frac{\sum_{t \in L} \operatorname{Prob}_{\mathsf{Chance}}(t) c^t_{t'} \mathcal{U}(t)}{\operatorname{Prob}_{\mathsf{Chance}}(t')}$ and let G' be the resulting game. Observe that payoff polynomial of G' turns out to be $\sum_{t' \in L'} \mu(t') \sum_{t \in L} \operatorname{Prob}_{\mathsf{Chance}}(t) c^t_{t'} \mathcal{U}(t)$. By rearranging terms, this is equivalent to $\sum_{t \in L} (\operatorname{Prob}_{\mathsf{Chance}}(t) \mathcal{U}(t)) \sum_{t' \in L'} c^t_{t'} \mu(t')$. It follows that this reduces to the payoff polynomial of G.

B.2 Minimal alr-span

▶ Proposition 14. For a sequence set S, let $S = \biguplus_i S_i$ be the decomposition of S into maximal connected components. Let S'_i be a minimal ALR-span of S_i . Then $S' = \biguplus_i S'_i$ is a minimal ALR-span of S

Proof. Firstly we can see that S' is indeed an ALR-span of S. Also for any distinct i and j, since S_i and S_j are not connected, it follows that S'_i and S'_j are not connected as well.

Let us assume that there is an ALR-span \hat{S} of S such that $|\hat{S}| < |S'| = \sum_i |S'_i|$. For each i, let \hat{S}_i be a minimal subset of \hat{S} that spans S_i . Again from the similar previous argument, for any distinct i and j, \hat{S}_i and \hat{S}_j are not connected. Since $|\hat{S}| = \sum_i |\hat{S}_i|$, $\exists i$ such that $|\hat{S}_i| < |S'_i|$. But this contradicts the minimality of S'_i for each S_i . This completes the proof.

▶ Lemma 15. Let S be a connected set and S' be a minimal ALR-span of S. Then $\exists I \in \mathcal{I}$, such that all sequences in S' start with Act(I).

Proof. Given a connected sequence set S, any minimal ALR-span S' of S is also connected. This is because if one could find a decomposition $S' = \bigcup_i S'_i$, such that S'_i 's are disconnected, then the subsets of S individually spanned by each S'_i would be disconnected as well leading to a contradiction.

Since an ALR-span is a set with ALR, it follows from definition of ALR-sets that for some I, all sequences in S' must start with an action from Act(I).

▶ Lemma 17. Let S be a connected set, and let $I \in \mathcal{I}$. An ALR-span of smallest size among all ALR-spans starting with $\operatorname{Act}(I)$ is the following: $S' = \bigcup_{a \in \operatorname{Act}(I)} aH'_a$ where H'_a is a minimal ALR-span of $S_a \cup S_{\bar{I}}$ where $S_{\bar{I}} := \{s \in S \mid s \text{ contains no action from } \operatorname{Act}(I)$.

•

Proof. Suppose there is an ALR-span \hat{S} of S starting with $\operatorname{Act}(I)$ such that $|\hat{S}| < |S'|$. Observe that $\hat{S} = \bigoplus_{a \in \operatorname{Act}(I)} a \hat{S}_a$. We will show that for each a, \hat{S}_a is an ALR-span of $S_a \cup S_{\bar{I}}$. Since $|\hat{S}| = \sum_a |\hat{S}_a|$ and $|S'| = \sum_a |H'_a|$ this would contradict the minimality of some H'_a .

Since \hat{S} is a span of S, for any $s \in S_a$, $\mu(as) = x_a\mu(s)$ is obtained by reduction from $\sum_{a \in \operatorname{Act}(I)} x_a f_a$ where f_a is combination of monomials of sequences with a. Substituting x_a with 0 for every term containing x_a we get an expression which reduces to 0. This implies the expression f_a reduces to $\mu(s)$ itself. Again for $s \in S_{\bar{I}}$ substituting for each $a \in \operatorname{Act}(I)$, x_a by 1 we get an expression devoid of x_a for $a \in \operatorname{Act}(I)$ that reduces to $\mu(s)$. These together implies that \hat{S}_a is an ALR-span of $S_a \cup S_{\bar{I}}$. This completes the proof.

▶ Lemma 16. Let S be a connected set. If there is an I such that every sequence of S has an action in Act(I), then there is a minimal ALR-span S' of S such that all sequences in S' start with Act(I).

Proof. We can show this by induction on the size of \mathcal{I} . This is trivially true when $|\mathcal{I}|=1$. Let this be true when number of information sets is at most k. Now if we have a sequence set S over k+1 information sets, since S is connected it follows from Lemma 15 that in a minimal span S' all sequences start with $\operatorname{Act}(I')$ for some I'. Moreover for each $a\in\operatorname{Act}(I')$, it follows from Lemma 17 that S'_a is a minimal ALR span of $S_a\cup S_{\bar{I}'}$. Now by inductive hypothesis since every $S_a\cup S_{\bar{I}'}$ has actions from I, we can assume that S'_a starts with actions from I. Finally one can swap the order of actions in each sequence, so that actions from I appear at the start. The resulting set will still have ALR because every pair of sequences satisfy the conditions put down in the proof of Lemma 9. Since the resulting set still remains a span of S, this completes the proof.

We provide the algorithm for computing minimal ALR-span described in the main text.

Algorithm 2 Compute minimal ALR-span

```
1: Input : S
 2: Output: minimal ALR-span S' of S
 3: if S is connected then
        if \exists I such that every s \in S contains an action from Act(I) then
 4:
           for a \in Act(I) do
 5:
              S'_a \leftarrow \text{minimal ALR-span of } S_a
 6:
           end for
 7:
           return \bigcup_a aS'_a
 8:
 9:
        else
           for I \in \mathcal{I} do
10:
              S_{\bar{I}} \leftarrow \{s \in S \mid s \text{ contains no action from } \operatorname{Act}(I)\}
11:
              for a \in Act(I) do
12:
                  S'_a \leftarrow \text{minimal ALR-span of } S_a \cup S_{\bar{I}}
13:
              end for
14:
              \hat{S}_I \leftarrow \bigcup_{a \in Act(I)} S'_a
15:
           end for
16:
           return \hat{S}_I that satsfies \min_{I \in \mathcal{I}} |\hat{S}_I|
17:
        end if
18:
19:
20:
        S = \bigcup S_i where each S_i is connected
        S_i' \leftarrow \text{minimal ALR-span of } S_i
21:
22:
        return \bigcup_i S_i'
23: end if
```

As mentioned in the main text, at every step if ϵ is also in the set we get rid of it. This doesn't affect the computation of the minimal ALR-span. This is because for any ALR structure \mathcal{T} , $X(\mathcal{T})$ can always generate ϵ . This can be show using the existence of "strongly branching" (see Lemma L1) subsets in $\mathcal{H}(L_{\mathcal{T}})$. In Algorithm 2, at every recursive call for computing minimal ALR-span, the returned structure will have ALR and hence will generate ϵ anyway.

▶ Theorem 18. For every n > 0, there exists a game structure \mathcal{T}_n of size $\mathcal{O}(n^2)$ such that the size of a minimal ALR-span of \mathcal{T}_n is $\Omega(2^n)$.

Proof. For n > 0, let $\mathcal{I}_n = \{I_1, \dots, I_n\}$, $\operatorname{Act}(I_i) = \{a^i, b^i\}$ and $A_n = \bigcup_i \operatorname{Act}(I_i)$. Define $S_n = \{a^i b^j \mid i < j\} \cup \{b^i a^j \mid i < j\} \cup \{a^i a^j \mid i < j\} \cup \{b^i b^j \mid i < j\}$. Let $\hat{S}_n = A_n \cup S_n$. We claim that the class of game structures with sequence set \hat{S}_n has minimal ALR-span of size $\Omega(2^n)$.

Since $A_n \cup S_n$ is connected, according to Lemma 15, a minimal span must start with actions from $\operatorname{Act}(I)$ for some I. Now in order to choose an I and apply Lemma 17, we will observe that the set of monomials of S_n is symmetric w.r.t each I and the choice of I doesn't make a difference. For a set S, observe that for any $I \in \mathcal{I}_n$, the leaf monomials of the set $\{s \in A_n \cup S_n \mid \operatorname{Act}(I) \cap \operatorname{Act}(s) = \emptyset\}$ and that of the set $S_{n-1} \cup S_{n-1}$ are same up to renaming of variables. Also, for any I and for any I are again same upto renaming of variables. Hence for any choice of I from I, applying Lemma 17 yields a minimal ALR-span.

Following this argument if we pick I_n , since $(S_{n-1} \cup A_{n-1}) \cup (A_{n-1} \cup \{\epsilon\}) = \hat{S}_{n-1}$ (ignoring the ϵ) we are then left with finding the minimal ALR-span of \hat{S}_{n-1} . Let T(n) be the size of a

minimal ALR-span of \hat{S}_n . Then from Lemma 17 it follows T(n) = 2T(n-1). Since for n = 1, the minimal ALR-span has size 2, it follows that a minimal ALR-span of \hat{S}_n has size $\Omega(2^n)$.

▶ **Theorem 19.** The decision problem MIN-ALR-SPAN is in NP.

To prove Theorem 19 we first define something called a *strongly branching set* recursively. The trivial set $S = \{\epsilon\}$ is a strongly branching set. S is a strongly branching set if there exists $I \in \mathcal{I}$ such that there is a partition of $S = \bigcup_{a_i \in Act(I)} a_i S_i$ such that (i) $a_i S_i$ s are non-empty (ii) each of S_i are strongly branching sets.

We prove the following lemma, that we will use in our proof.

▶ Lemma L1. Let S be a sequence set with ALR. Then $\sum_{s \in S} \mu(s) = 1$ under strategy constraints iff S is a strongly branching set.

Proof. First we will prove the backward direction by induction on the number of actions. Observe that any strongly branching set always has ALR, hence ALR assumption is redundant in this case. When $S = \{\epsilon\}$ recall that $\mu(\epsilon) = 1$. Now for any non-trivial strongly branching set S, from definition we have $S = \biguplus_{a_i \in \operatorname{Act}(I)} a_i S_i$ where S_i s are strongly branching. We have $\sum_{s \in S} \mu(s) = \sum_{a_i} x_{a_i} (\sum_{s' \in S_i} \mu(s'))$. By induction hypothesis the statement holds for each S_i and hence this equals 1. Hence this extends to S as well.

For the the forward direction we will again use induction on the number of actions. The statement is true when $A=\emptyset$. Now suppose S be a sequence set over non-trivial action set. For any set S', if $\sum_{s\in S'}\mu(s)$ is a constant value then this value is at least 1 due to the fact that any $\mu(s)$ has either no constant terms or 1 in its full expansion. Observe that S is connected. Otherwise, if S has at least two connected components S' and S'', since $\mu(S')$ and $\mu(S'')$ have no variable in common, $\sum_{s\in S'}\mu(s)$ would become strictly more than 1.

Since S is connected and has ALR, it follows that $S = \bigoplus_{a_i \in Act(I)} a_i S_i$ for some I where each S_i has ALR. Let $Z_i = \sum_{s' \in S_i} \mu(s')$. Then we have $\sum_{s \in S} \mu(s) = \sum_{a_i} x_{a_i} Z_i = 1$, which implies each of Z_i s must equal 1. Hence by induction hypothesis each of S_i s are strongly branching sets and as a result S is also a strongly branching set.

Proof of Theorem 19. Given a structure \mathcal{T} , we will guess an ALR-span \mathcal{T}' of size at most k along with the linear combinations for each leaf monomial. Since from Algorithm 2 we can get the minimal span and all the co-efficient needed lies in $\{0,1\}$, we can restrict to this kind of combinations. Hence, this is of size at most $k|\mathcal{T}|$.

Firstly, checking if \mathcal{T}' has ALR can be done efficiently by traversing the tree from root. Now, to verify if each for $s \in \mathcal{H}(L)$, the linear combination for generating $\mu(s)$, is correct, we just need to consider all $s' \in \mathcal{H}(L')$ that has all actions from s, i.e. we consider the set $S_s = \{s' \in \mathcal{H}(L') \mid \operatorname{Act}(s) \subseteq \operatorname{Act}(s')\}$ where $\operatorname{Act}(s)$ is the set of actions in s. This is because monomials of sequences not containing all actions form $\operatorname{Act}(s)$, will either vanish (thus not affecting the final outcome) or not reduce to $\mu(s)$.

Hence, if $\sum \mu'$ is the candidate linear combination for μ , $\sum \mu'$ reduces to μ iff the $\sum \frac{\mu'}{\mu} = 1$. Let $\frac{s'}{s}$ denote the sequence s' restricted to actions from $\operatorname{Act}(s') \setminus \operatorname{Act}(s)$. But since S_s is assumed to have ALR, this set will also have ALR. Hence from Lemma L1, we need to check if the set $\{\frac{s'}{s}|s'\in S_s\}$ has a strongly branching subset. This can be checked recursively in polynomial time.

▶ Corollary 21. The maxmin value in a one-player game can be computed in PTIME for games having structures with constant SD.

Proof. Since \mathcal{T} has SD k, the size of the minimal ALR-span \mathcal{T}' of \mathcal{T} is at most $|\mathcal{T}|^{k+1}$. Now given a game $G = (\mathcal{T}, \delta, \mathcal{U})$ on \mathcal{T} , consider the game $G' = (\mathcal{T}', \delta', \mathcal{U}')$ obtained using the construction in Proposition 12. It follows from Proposition 12 that solving G can be reduced to solving G'. Since δ' assigns uniform distribution at every chance nodes, probabilities in δ' need at most $\mathcal{O}(\log(|\mathcal{T}|^{k+1}))$ bits. It also follows from Algorithm 2 that the coefficients $c_{t'}^t$ in the proof of Proposition 12 can be either 1 or 0 for the minimal ALR-span. Hence each payoff in \mathcal{U}' uses $\mathcal{O}(\log(\mathcal{U}|\mathcal{T}|^{k+1}))$ bits where \mathcal{U} is the maximum possible payoff in \mathcal{U} . Since k is constant, hence size of G' is polynomial in the size of G.

C Extension to Two-player games

▶ Lemma L2. Let \mathcal{T} be a two player game structure with sequence set S and let S_{Max} and S_{Max} be the projection of S onto actions of Max and Min respectively. Then, there exists game structures $\mathcal{T}_{\mathsf{Min}}$, $\mathcal{T}_{\mathsf{Min}}$ such that S_{Max} (resp S_{Min}) is the sequence set of $\mathcal{T}_{\mathsf{Max}}$ (resp. $\mathcal{T}_{\mathsf{Min}}$).

Proof. Fix a behavioral strategy for Min and this makes the structure a one-player structure with Max player. The game structure of this game, \mathcal{T}_{Max} is a structure such that the sequence set of \mathcal{T}_{Max} is S_{Max} . This works for Min in a similar way.

▶ Theorem 22. Solving an (NAM, NAM) game on structure \mathcal{T} can be reduced to solving an (ALR, ALR) game on a structure of size $|\mathcal{T}'_{\mathsf{Max}}||\mathcal{T}'_{\mathsf{Min}}|$ where $\mathcal{T}'_{\mathsf{Max}}$ and $\mathcal{T}'_{\mathsf{Min}}$ are minimal ALR-spans of $\mathcal{T}_{\mathsf{Min}}$.

Proof. Given $\mathcal{T}'_{\mathsf{Max}}$ and $\mathcal{T}'_{\mathsf{Min}}$, the ALR spans of $\mathcal{T}_{\mathsf{Max}}$ and $\mathcal{T}_{\mathsf{Min}}$, we construct \mathcal{T}' as follows: the top part of \mathcal{T}' is the game structure $\mathcal{T}'_{\mathsf{Max}}$ and to each leaf of $\mathcal{T}'_{\mathsf{Max}}$ a copy of $\mathcal{T}'_{\mathsf{Min}}$ is attached. Nodes in two different copies of $\mathcal{T}'_{\mathsf{Min}}$ that are in the same information set in $\mathcal{T}'_{\mathsf{Min}}$ are also in same information set of \mathcal{T}' .

Now \mathcal{T}' is a structure of size $|\mathcal{T}'_{\mathsf{Max}}||\mathcal{T}'_{\mathsf{Min}}|$. We will show that \mathcal{T}' spans \mathcal{T} , i.e. it satisfies the 2nd condition in the definition of ALR span. Once we have shown this, the proof will follow using the same construction in Proposition 12.

Any leaf history in \mathcal{T}' will have a Max part followed by a Min part, i.e. for $t' \in L'$, $\mu(t') = \mu_{\mathsf{Max}}(t')\mu_{\mathsf{Min}}(t')$. This is true for \mathcal{T} as well. Since $\mathcal{T}'_{\mathsf{Max}}$ and $\mathcal{T}'_{\mathsf{Min}}$ are ALR spans of $\mathcal{T}_{\mathsf{Max}}$ and $\mathcal{T}_{\mathsf{Min}}$, for any $t \in L$, for $\mu_{\mathsf{Max}}(t)$ we have witness linear combination $\sum_{t'} c_{t'}^t \mu_{\mathsf{Max}}(t')$. The same holds for Min. Hence we have $\mu(t) = \mu_{\mathsf{Max}}(t)\mu_{\mathsf{Min}}(t) = f_{\mathsf{Max}}f_{\mathsf{Min}}$ where f_i is linear combination of monomials from \mathcal{T}'_i . Expanding this, it follows that $\sum_{t' \in L'} c_{t'}^t \mu(t')$ reduces to any $\mu(t)$. This completes the proof.