Towards a perturbation-based explanation for medical AI as differentiable programs

Takeshi Abe and Yoshiyuki Asai

Yamaguchi University

Abstract. Recent advancement in machine learning algorithms reaches a point where medical devices can be equipped with artificial intelligence (AI) models for diagnostic support and routine automation in clinical settings. In medicine and healthcare, there is a particular demand for sufficient and objective explainability of the outcome generated by AI models. However, AI models are generally considered as black boxes due to their complexity, and the computational process leading to their response is often opaque. Although several methods have been proposed to explain the behavior of models by evaluating the importance of each feature in discrimination and prediction, they may suffer from biases and opacities arising from the scale and sampling protocol of the dataset used for training or testing. To overcome the shortcomings of existing methods, we explore an alternative approach to provide an objective explanation of AI models that can be defined independently of the learning process and does not require additional data. As a preliminary study for this direction of research, this work examines a numerical availability of the Jacobian matrix of deep learning models that measures how stably a model responses against small perturbations added to the input. The indicator, if available, are calculated from a trained AI model for a given target input. This is a first step towards a perturbation-based explanation, which will assist medical practitioners in understanding and interpreting the response of the AI model in its clinical application.

Keywords: Explainability \cdot Deep learning \cdot Perturbation \cdot Jacobian matrix.

1 Introduction

Recent innovation of machine learning algorithms, including deep learning, has promoted the use of AI in various scientific and technological fields. In clinical medicine and healthcare, it is highly expected to introduce AI for diagnostic support and automation of routine tasks. However, there are several pressing issues in AI's medical application. One of them is the fragility of mechanisms to ensure explainability for the results of classification or prediction task generated by AI models. This is of practical importance because a stricter standard is imposed on the responsibility for explaining decisions made by medical practitioners than in other fields, such as marketing, leading the applications of AI ahead.

2 T. Abe et al.

In the realm of explainable AI (XAI), there are two typical approaches to conventional explainability. One approach is to explain the tendencies of the output from the inherent characteristics of the modelling or learning algorithm. For example, there are methods that clarify the contribution of each feature to prediction or discrimination in generalized linear regression models or decision tree-based models. The other approach forms a group of methods to measure the importance of features independently of the model type, i.e., in a model-agnostic way. Notable examples of this group include local algorithms for individual targets, such as LIME [5] and SHAP [3]. In both approaches, the indices of explainability are calculated based on the accuracy or other performance measures on correct responses. It is also assumed that the dataset used for learning and/or testing follows the distribution of the target population. There is a risk of bias when this premise fails to hold. Moreover, there is opacity when information about the dataset in use cannot be accessed [1]. Some criticism of current XAI technology argues that it is more appropriate to use models designed to be interpretable from the start, rather than trying to explain from black-boxed models post-hoc [6]. However, methodological significance resides in methods improving explainability of the AI models actually utilized in clinical practice.

In this work, focusing on deep learning models, we explore an alternative approach to explain how sensitive the model's response is with respect to a perturbation to each instance. Here an instance means an input subject of the model, and perturbation refers to a small change in the input features of an instance. We aim at providing this approach with the following desirable properties. (a) It can be applied to trained AI models and does not depend on the learning process of them. (b) It is free from additional data collection. (c) It measures the stability of the output against the virtual variation of input features. (d) It returns a value for each instance, not the average value for the entire dataset, making it local. In addition, (e) it offers explainability not only for a single feature but also for interactions between features. We call such an approach a perturbation-based explanation (PBX). Complementing existing indicators for XAI with a PBX will facilitate medical practitioners to appropriately understand and interpret the behavior of a medical AI.

By considering the AI model as a function with argument of many features, the impact of perturbations on each feature is often represented as a gradient. From the components of the partial derivative at the point of the instance, it can be judged how stably each feature is outputting against perturbations. Examples of such gradient-based approaches include SmoothGrad [7] and Integrated Gradients [8], but the unification with perturbation-based approaches is still under development.

For a preliminary study of a PBX, this work examines when and how a partial derivative of the deep learning model, as a multivariate function, is computationally available. In particular, since the Jacobian matrix is the most fundamental kind of partial derivatives, we concentrate on the numerical computability of the model's Jacobian matrix in this work. To formalize our argument for general applicability, the next Methods section describes the standard model of deep learning, representing a multivariate function. Then we demonstrate that the Jacobian matrix of this function can be calculated by a certain forward pass algorithm in the Results section. We summarizes the implication of this work and potential future development in the Discussion and Conclusion sections.

2 Methods

To represent the standard model of deep learning, we employ the following notation adapted from Higham et al. [2]. Figure 1 illustrates the layered structure

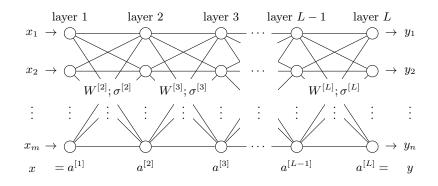


Fig. 1. Schematic diagram for the standard model of deep learning.

of a model.

- -L: the number of layers in the model
- $-n^{[l]}$: the number of nodes in *l*-th layer (l = 1, ..., L)
- -x: the column vector of input (of length $m = n^{[1]}$)

$$x = a^{[1]} \in \mathbb{R}^m$$

- $W^{[l]}$: weight matrix for weighted input at *l*-th layer (l = 2, ..., L):

$$W^{[l]} = \left(w_{ij}^{[l]}\right)_{i,j} : n^{[l]} \times n^{[l-1]} \text{ matrix}$$

 $-z^{[l]}$: weighted input at *l*-th layer (l = 2, ..., L):

$$z^{[l]} = W^{[l]} a^{[l-1]}$$

 $-\sigma^{[l]}$: activation function at *l*-th layer (l = 2, ..., L):

$$\sigma^{[l]}: \mathbb{R}^{n^{[l]}} \to \mathbb{R}^{n^{[l]}}$$

- 4 T. Abe et al.
- $-a^{[l]}$: activation at *l*-th layer $(l = 1, \ldots, L)$:

$$a^{[l]} = \begin{cases} x & \text{if } l = 1; \\ \sigma^{[l]}(z^{[l]}) & \text{otherwise.} \end{cases}$$

- y: the column vector of output (of length $n = n^{[L]}$):

 $y = a^{[L]} \in \mathbb{R}^n$

Note that, unlike [2], we exclude the so-called bias term in this representation because it can be replaced with additional elements of weight matrices by introducing an corresponding input variables that are always constant 1. Another modification to the formulation of [2] is that the activation function $\sigma^{[\cdot]}$ can differ from layer to layer. Moreover, $\sigma^{[\cdot]}$ is allowed to be multivariate.

In this work we suppose that every element of vectors and matrices is realvalued in a given model. Hereafter the model is denoted as a vector-valued multivariate function $f : \mathbb{R}^m \to \mathbb{R}^n$: y = f(x). That is, $y_i = f_i(x)$ for $i = 1, \ldots, m$, if written in an element-wise way.

3 Results

The following theorem states a sufficient condition that the model's Jacobian matrix can be computed.

Theorem 1. Let be f a model represented in the above notation. if $\sigma^{[l]}$ has a Jacobian matrix that is computable at any point for each layer l = 2, ..., L, then f's Jacobian matrix \mathbf{J}_f is computable at a given point.

Proof. Since $y = \sigma^{[L]}(W^{[L]}\sigma^{[L-1]}(W^{[L-1]}\cdots\sigma^{[2]}(W^{[2]}x)\cdots))$, the matrix version of the chain rule tells that f's Jacobian matrix is decomposed into $\sigma^{[l]}(W^{[l]}\cdot)$'s Jacobian matrices:

$$\mathbf{J}_{f} = \frac{\partial y}{\partial a^{[L-1]}} \frac{\partial a^{[L-1]}}{\partial a^{[L-2]}} \cdots \frac{\partial a^{[2]}}{\partial x} = \prod_{l=2}^{L} \frac{\partial a^{[l]}}{\partial a^{[l-1]}},\tag{1}$$

The multiplication in the above equation means the matrix product. In addition, each element of $\frac{\partial a^{[l]}}{\partial a^{[l-1]}}$ is as follows:

$$\frac{\partial a_i^{[l]}}{\partial a_j^{[l-1]}} = \boldsymbol{\nabla} \sigma_i^{[l]}(\boldsymbol{z}^{[l]}) \bullet \begin{pmatrix} \frac{\partial \boldsymbol{z}_1^{[l]}}{\partial \boldsymbol{a}_j^{[l-1]}} \\ \vdots \\ \frac{\partial \boldsymbol{z}_n^{[l]}}{\partial \boldsymbol{a}_j^{[l-1]}} \end{pmatrix} = \boldsymbol{\nabla} \sigma_i^{[l]}(\boldsymbol{z}^{[l]}) \bullet \begin{pmatrix} \boldsymbol{w}_{1j}^{[l]} \\ \vdots \\ \boldsymbol{w}_{n^{[l]}j}^{[l]} \end{pmatrix}$$
(2)

where • is the dot product and $\nabla \sigma_i^{[l]}(z^{[l]})$ denotes the gradient of the *i*-th node's activation at layer *l*, which is computable because its transpose corresponds to a row vector of $\sigma^{[l]}$'s Jacobian matrix.

While Theorem 1 looks similar with a well-known property of standard deep learning models that the backpropagation algorithm takes advantage of, it is more general as it can hold even for activation functions that do not meet the element-wise diagonal condition [2].

From Theorem 1's proof in the above, we extract a foward-pass algorithm to calculate the Jacobian matrix at a given input numerically (Algorithm 1).

Algorithm 1

 $\begin{array}{l} \textbf{Require: Input: a given model } f; \text{ an input } x \in \mathbb{R}^m \text{ of model } f. \\ & \text{Procedures to calculate } \sigma^{[l]} \text{'s Jacobian matrix } \textbf{J}_{\sigma^{[l]}} \text{ at } z \ (l = 2, \ldots, L); \\ & \textbf{J}_{\sigma^{[l]}} \Big|_z = \begin{pmatrix} (\boldsymbol{\nabla} \sigma_1^{[l]}(z))^\top \\ \vdots \\ (\boldsymbol{\nabla} \sigma_{n^{[l]}}^{[l]}(z))^\top \end{pmatrix} \\ \textbf{Ensure: Output: } f' \text{s Jacobian matrix } \textbf{J}_f \text{ at } x; \\ & \textbf{J}_f \Big|_x = \left(\frac{\partial f_i}{\partial x_j}\right)_{i,j} \Big|_x \quad (i = 1, \ldots, n; j = 1, \ldots, m). \\ 1: \ a^{[1]} \leftarrow x \\ 2: \ J^{[1]} \leftarrow I_m: \text{ the identity matrix of size } m \\ 3: \ \textbf{for } l = 2 \text{ to } L \ \textbf{do} \\ 4: \ | \ z^{[l]} \leftarrow W^{[l]} a^{[l-1]} \\ 5: \ a^{[l]} \leftarrow \textbf{J}_{\sigma^{[l]}}|_{z^{[l]}} W^{[l]} J^{[l-1]} \\ 7: \ \textbf{return } J^{[L]} \end{array}$

4 Discussion

The numerical computation of the Jacobian matrix of a deep learning model demonstrated in our results can be applied to a wide variety of pre-trained deep learning models potentially used for classification and regression tasks in a medical AI. Our treatment of activation functions is so general that it covers not only the usual activation functions of a scalar argument, e.g., the logistic or softplus function, but also the one taking the argument of two or more nodes, such as the softmax function often appended in the output layer. When applied, this local method calculates for each individual input data, so it does not require additional data. Since Algorithm 1 is implemented as a simple extension of the forward differentiation algorithm, it is straightforward to port the algorithm to any libraries of recent real-world machine learning frameworks, such as PyTorch and TensorFlow.

The proposed algorithm calculates the exact value of the Jacobian matrix at given instance, provided that the computation of the gradient of activation functions is exact. This fact makes a difference when comparing with the numerical calculation of the Jacobian matrix by the classical finite difference method [4].

6 T. Abe et al.

Also, the proposed algorithm will outperform in terms of computational efficiency, as it evaluates the target multivariate function just in one pass, while the finite difference method evaluates the model m + 1 times, i.e., one more times than the number of input features. Another advantage of Algorithm 1 is that it generates the Jacobian matrix $J^{[l]}$ of any initial part of the model up to an intermediate layer l as a byproduct. These matrices may be as important as the full model's e.g. when investigating how the encoder part of an autoencoder model is sensitive to a small perturbation to the input.

On the other hand, there are some limitations to the proposed method. One of them is the assumption that the activation function of each layer must have a (computable) partial derivative at an arbitrary point. For instance, the ReLU function, a popular choice of the activation function in many AI applications, has a singular point at zero. When the proposed algorithm is applied to a deep learning model containing such a piecewise differentiable activation function, involving its Jacobian matrix at singular points may produce unexpected results. Another limitation is that the proposed algorithm does not specify how to prepare the procedure to compute the Jacobian matrix or gradient of activation functions in the trained model. While the information necessary for coding the prodecure is available in the model, this work leaves the details on how to extract and transform them into a computable function.

Regarded as an indicator of the stability or sensitivity of a model's response to perturbed inputs, the computed gradient shows which input feature is the most influential per unit change. One compares the columns of the gradient for the purpose. On the other hand, comparing the rows of a computed Jacobian matrix finds which element of responses is the most affected for the same perturbation. This type of knowlege helps especially when the each element of responses is of the same unit, e.g., representing the probability that the input target belongs to a different category posed in a classification task.

5 Conclusion

This work is our first step towards a PBX that makes an objective interpretation of medical AI models without the burden of data cost. The Jacobian matrix, once computed, favorably satisfies PBX's properties (a) to (d) mentioned in the Introduction section. However, to fulfill (e), the matrix is insufficient for revealing the stability of responses around given perturbed input since it lacks the information of interactions among input variables. That is, higher-order partial derivatives are called for when adding perturbations to multiple input features at the same time.

For future development of PBX, it is promising to utilize a wider range of mathematical tools, including the concept of perturbation theory developed in the analysis of mathematical models succeeded in physics and engineering. Moreover, some extension of this work is required for models built with machine learning algorithms other than deep learning.

References

- Drukker, K., Chen, W., Gichoya, J.W., Gruszauskas, N.P., Kalpathy-Cramer, J., Koyejo, S., Myers, K.J., Sá, R.C., Sahiner, B., Whitney, H.M., Zhang, Z., Giger, M.L.: Toward fairness in artificial intelligence for medical image analysis: Identification and mitigation of potential biases in the roadmap from data collection to model deployment. Journal of Medical Imaging 10(6), 061104 (Apr 2023). https://doi.org/10.1117/1.JMI.10.6.061104
- Higham, C.F., Higham, D.J.: Deep Learning: An Introduction for Applied Mathematicians. SIAM Review 61(4), 860–891 (Jan 2019). https://doi.org/10.1137/18M1165748
- Lundberg, S.M., Lee, S.I.: A Unified Approach to Interpreting Model Predictions. In: Advances in Neural Information Processing Systems. vol. 30. Curran Associates, Inc. (2017)
- Press, W.H., Teukolsky, S.A., Vetterling, W.T., Flannery, B.P.: Numerical Recipes 3rd Edition: The Art of Scientific Computing. Cambridge University Press, USA, 3 edn. (Aug 2007)
- Ribeiro, M.T., Singh, S., Guestrin, C.: "Why Should I Trust You?": Explaining the Predictions of Any Classifier. In: Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining. pp. 1135–1144. ACM, San Francisco California USA (Aug 2016). https://doi.org/10.1145/2939672.2939778
- Rudin, C.: Stop explaining black box machine learning models for high stakes decisions and use interpretable models instead. Nature Machine Intelligence 1(5), 206–215 (May 2019). https://doi.org/10.1038/s42256-019-0048-x
- 7. Smilkov, D., Thorat, Ν., Kim, В., Viégas, F., Wattenberg, M.: SmoothGrad: Removing noise adding 2017).by noise (Jun https://doi.org/10.48550/arXiv.1706.03825
- Sundararajan, M., Taly, A., Yan, Q.: Axiomatic attribution for deep networks. In: Proceedings of the 34th International Conference on Machine Learning - Volume 70. pp. 3319–3328. ICML'17, JMLR.org, Sydney, NSW, Australia (Aug 2017)