

Discovering Global False Negatives On the Fly for Self-supervised Contrastive Learning

Vicente Balmaseda¹, Bokun Wang¹, Ching-Long Lin², Tianbao Yang¹

¹Department of Computer Science and Engineering, Texas A&M University, Texas, USA

²Department of Mechanical Engineering, University of Iowa, Iowa, USA

Abstract

In self-supervised contrastive learning, negative pairs are typically constructed using an anchor image and a sample drawn from the entire dataset, excluding the anchor. However, this approach can result in the creation of negative pairs with similar semantics, referred to as “false negatives”, leading to their embeddings being falsely pushed apart. To address this issue, we introduce GLOFND, an optimization-based approach that automatically learns on the fly the threshold for each anchor data to *identify* its false negatives during training. In contrast to previous methods for false negative discovery, our approach *globally* detects false negatives across the entire dataset rather than locally within the mini-batch. Moreover, its per-iteration computation cost remains independent of the dataset size. Experimental results on image and image-text data demonstrate the effectiveness of the proposed method. Our implementation is available at “<https://github.com/vibalcam/GloFND>”.

1 Introduction

Representation learning is a fundamental problem in machine learning that aims to learn a good representation of the data for downstream tasks. Conventional supervised approaches rely on large quantities of high-quality labeled data, which is hard to collect. Recently, self-supervised learning has achieved promising performance for image representation learning [Chen et al., 2020a, Grill et al., 2020]. Its success extends to bimodal learning [Radford et al., 2021] and semi-supervised learning [Chen et al., 2020b]. These methods exploit unlabeled data to acquire general-purpose representations that exhibit robust performance and transferability across diverse downstream tasks.

Notably, many self-supervised learning approaches center around contrastive learning. Contrastive learning operates on a straightforward principle: it seeks to bring together the embeddings of positive (similar) pairs while simultaneously pushing apart those of negative (dissimilar) pairs. This principle is combined with well-chosen data augmentations to improve the model’s invariance to non-semantic variations.

In the absence of reliable labels to determine whether a pair of data is positive or negative, many methods resort to instance discrimination. To this end, positive pairs are defined as distinct augmented views of the anchor data, while negative pairs are generated by sampling from the whole dataset excluding the anchor data, irrespective of their semantics [Chen et al., 2020a, Yuan et al., 2022]. However, negative pairs produced through this method lack reliability. Specifically, augmented views from images sharing similar semantic meanings are incorrectly deemed negative, leading to their embeddings being pushed apart. This inadvertently encourages the model to discard

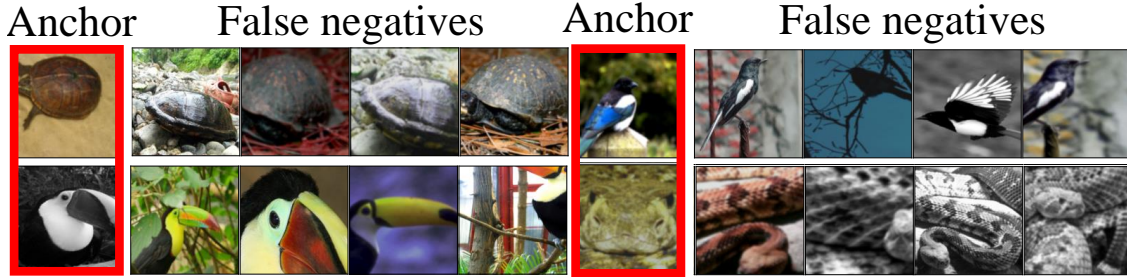


Figure 1: Examples of false negative images seen during training on ImageNet. The left column is the anchor image and the rest are observed false negative samples.

crucial semantic information. We term these undesirable negative pairs as false negatives (FN). Figure 1 shows some examples of false negatives seen during training on ImageNet, where the anchor images are different from their negative samples, but semantically similar. The presence of false negatives detrimentally impacts the representations learned through contrastive learning [Saunshi et al., 2019], with this effect becoming more pronounced in large-scale datasets featuring numerous semantic concepts [Chen et al., 2022].

Given an approach to identify false negatives, we can take corrective actions such as filtering them from the training set (i.e., false negative elimination) or incorporating them as additional positive pairs (i.e., false negative attraction) [Huynh et al., 2022]. However, confidently identifying the potential false negatives in the absence of labels poses a challenging problem. The desire to eliminate false negatives is motivated by the goal of improving representation learning, yet the identification of these instances may necessitate some level of semantic knowledge to determine whether two pairs are indeed negative. Looking at Figure 1, we can observe some of the false negatives are not straightforward to identify, especially after data augmentation.

Previous works addressing this problem fall into two categories: local (batch-wise) and global (dataset-wise) approaches. Local methods [Zheng et al., 2021, Huynh et al., 2022] identify false negatives for an anchor by assessing its similarities or adjacency to other data within the same mini-batch. However, the most similar or adjacent item to the anchor in the mini-batch may not necessarily be semantically similar to the anchor in the entire data space, particularly when the mini-batch size is small. The global approach IFND [Chen et al., 2022] aims to discover false negatives for each anchor in the whole dataset. However, their method involves clustering the entire dataset at specific epochs, which could be computationally expensive for large-scale datasets.

This paper addresses existing limitations in false negative *detection* by introducing a novel algorithm, named **Global False Negative Discovery** (GLOFND), which learns global and dynamic thresholds for each anchor in the dataset. This enables the selection of the top- $\alpha\%$ most similar negative data points from the entire dataset on the fly, with top- $\alpha\%$ being the set above the $(1 - \alpha)$ -quantile ($\alpha \in [0, 1]$). The GLOFND algorithm alternates between two key steps: i) Updating the per-anchor thresholds by SGD to solve a convex optimization problem of finding a threshold that can filter out the top- $\alpha\%$ of a set of scores. ii) Updating the parameters of the encoder network by using a stochastic gradient estimator of the modified contrastive loss that takes care of the false negatives identified via the learned thresholds (e.g., excluding them).

GLOFND can be integrated with various CL techniques with minimal computational overhead. It effectively identifies false negatives for each sample, offering flexibility in how these are addressed. We demonstrate the empirical success of our method in unimodal, bimodal, and semi-supervised contrastive learning on several CL techniques without using a large batch size. Figure 2(a) and

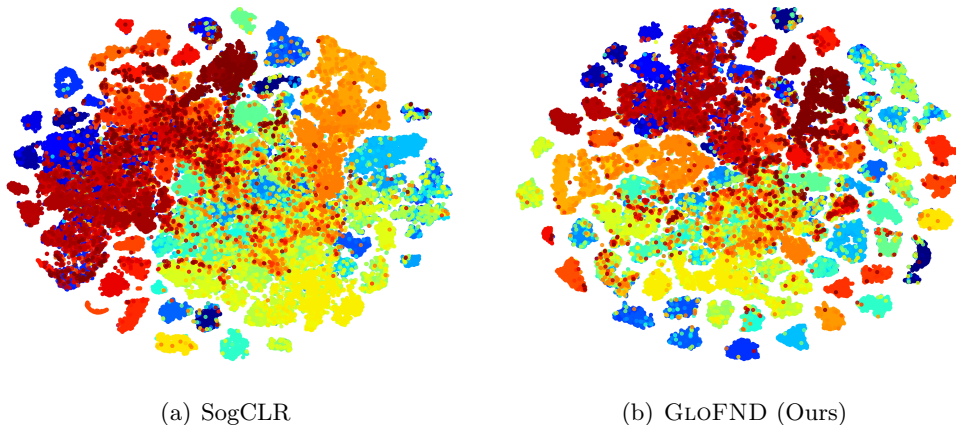


Figure 2: ImageNet100 features (t-SNE projected) learned by SogCLR [Yuan et al., 2022] and GLOFND (this work).

2(b) qualitatively showcases that identifying and removing false negatives using GLOFND achieves better separation between the learned representations of different classes. One example of this observation is that clusters close to the periphery appear more tightly packed and distinct.

2 Related Work

Self-supervised learning (SSL). SSL has garnered substantial attention for its capacity to generate general-purpose representations from unlabeled data, facilitating scalability to large-scale datasets [Gui et al., 2023]. SSL learns a data encoder network by leveraging *intrinsic* relationships within the data. The encoder network is then used to learn predictive models in downstream tasks through transfer learning. Noteworthy applications span computer vision [Kolesnikov et al., 2019], natural language processing [Lan et al., 2019], and healthcare [Sowrirajan et al., 2021], among others.

Early efforts in SSL formulated pretext tasks to enable models to learn representations from unlabeled data. Examples include predicting the relative offset between two patches within the same image [Doersch et al., 2016], solving jigsaw puzzles [Noroozi and Favaro, 2017], colorizing grayscale images [Zhang et al., 2016], and unsupervised deep clustering [Caron et al., 2019]. However, these methods necessitate carefully crafted pretext tasks, which may not always apply to diverse domains, leading to a lack of generality.

Contrastive learning (CL). CL has emerged as a prevalent paradigm in SSL, primarily grounded in instance discrimination [Wu et al., 2018, Zhao et al., 2021]. This approach employs contrastive losses, compelling the model to bring the embedding vectors of positive pairs closer while simultaneously pushing those of negative pairs apart. In essence, it promotes the learning of representations with high similarity among positive pairs and low similarity among negative pairs. Positive pairs can be easily generated from different views of the same image. However, generating quality negative pairs is more challenging. MoCo [He et al., 2020] addresses this through (i) a momentum encoder network that generates representations of images for contrast with the anchor, and (ii) a long queue to provide a large number of negative samples. SimCLR [Chen et al., 2020a] instead uses a large batch size and data augmentations, generating negative pairs with augmented views of images other than the anchor image. However, its performance degrades

a lot as the batch size decreases. To address this issue, Yuan et al. [2022] propose a stochastic algorithm called SogCLR that does not rely on large batch size. Ge et al. [2024] generates negatives that preserve superfluous instead of semantic features. Shah et al. [2022] introduced a max-margin criterion inspired by support vector machines (SVMs). While these methods have shown promising results, they overlook the semantic relationship when generating negative pairs. Despite two images being semantically similar, their augmented views are treated as negative pairs, a phenomenon referred to as “false negatives”. The false negatives result in the loss of crucial semantic information, consequently impacting representation learning [Saunshi et al., 2019].

Semantic-aware CL. Recently, several studies have enhanced instance-discrimination-based CL by leveraging the underlying semantics. Qiu et al. [2023] introduce the iSogCLR algorithm that learns individualized temperatures for each sample depending on the frequency of its semantics to increase the tolerance of false negatives. In contrast, GLOFND tackles the more challenging task of *detecting* each sample’s false negatives, thus providing more freedom on how to deal with them. Supervised CL (SupCon) [Khosla et al., 2021] has demonstrated that employing the CL objective with labels to define positive and negative pairs (i.e., avoiding false negatives) can be more effective than the conventional supervised cross-entropy loss. Weakly supervised CL (WCL) [Zheng et al., 2021] constructs an undirected graph based on auxiliary embeddings of mini-batch data, whose connected components are used to define weak labels for the SupCon. Huynh et al. [2022] adopt a different approach called FNC, addressing false negatives for each anchor by selecting the top k similar samples in the batch. The limitation of the last two works is that the top similar negative samples in the batch may not be reliable false negatives when the mini-batch size is small.

Instead of detecting false negatives within the mini-batch, Chen et al. [2022] introduce an incremental dataset-wide clustering-based approach. At specific epochs, embeddings are computed for all samples in the dataset, followed by clustering using k -means. Pairs of samples within the same cluster are designated as false negatives. Nevertheless, this approach entails high computational costs, particularly for large-scale datasets, due to the necessity of computing embeddings for the entire dataset and subsequently applying k -means clustering. Hence, there remains a need for a global (dataset-wide) false-negative discovery approach that is agnostic to batch size and scalable for large-scale datasets.

3 CL with Global False Negative Identification

Let $\mathcal{D} = \{\mathbf{x}_1, \dots, \mathbf{x}_n\}$ denote a dataset of size n , and let \mathcal{P} be a collection of data augmentation operators. $E_{\mathbf{w}}(\cdot)$ represents an encoder network parametrized by $\mathbf{w} \in \mathbb{R}^d$.

The global contrastive objective [Yuan et al., 2022] $\mathcal{L}_{\text{GCL}}(\mathbf{w})$ contrasts each $\mathbf{x}_i \in \mathcal{D}$ with negative data $\mathcal{S}_i^- = \{A(\mathbf{x}) \mid \forall A \in \mathcal{P}, \forall \mathbf{x} \in \mathcal{D} \setminus \{\mathbf{x}_i\}\}$ in the whole dataset. Let $\mathbf{z}_i = E_{\mathbf{w}}(A(\mathbf{x}_i))$, $\mathbf{z}'_i = E_{\mathbf{w}}(A'(\mathbf{x}_i))$ denote the embeddings and $\text{sim}(\cdot, \cdot)$ the cosine similarity. Then,

$$\mathcal{L}_{\text{GCL}}(\mathbf{w}) = \mathbf{E}_{\mathbf{x}_i \in \mathcal{D}, A, A' \in \mathcal{P}} \left[-\tau \log \frac{\exp(\text{sim}(\mathbf{z}_i, \mathbf{z}'_i)/\tau)}{\sum_{\mathbf{x} \in \mathcal{S}_i^-} \exp(\text{sim}(\mathbf{z}_i, E_{\mathbf{w}}(\mathbf{x}))/\tau)} \right], \quad (1)$$

While GLOFND is not restricted to any CL technique, the following sections present how GLOFND can be integrated with the global contrastive loss. GLOFND’s application to other CL techniques can be done in a similar manner and we empirically show its effectiveness in Section 4. Since GLOFND’s focus is on *detecting* false negatives, it does not restrict what actions to take with the detected false negatives. This paper will consider the straightforward approach of filtering them from the loss, leaving how to make the best use of false negatives for future work.

3.1 Learning Dynamic Per-Anchor Thresholds

The challenge in the false negative discovery problem appears akin to a chicken-and-egg dilemma: the reliable identification of false negatives demands good representations, yet achieving quality representation learning necessitates detecting and dealing with false negatives. Thus, our approach starts with a *sufficiently* pre-trained encoder network $E_{\mathbf{w}}$ (this can be done with a warm-up stage using existing CL methods) and further refines it by systematically and dynamically eliminating the identified false negatives. Moreover, we assume that the top $\alpha\%$ most similar negative data share similar semantics with the anchor data based on their current representations, where α is a hyper-parameter to be tuned that allows adapting to different settings. We will identify as false negatives of the anchor \mathbf{x}_i the negative data with similarity scores above the $(1 - \alpha)$ -quantile ($\alpha \in [0, 1]$).

Previous work [Huynh et al., 2022] either selects the top- k most similar negatives or sets a threshold on similarity scores. However, the former involves the expensive computation and ranking of cosine similarities across the entire dataset, while the latter presents challenges due to the need for manually crafted scheduling of the threshold for each anchor. Moreover, both approaches are problematic as similarity scores change when we update the parameters of the encoding network.

Instead, we choose an optimization-based approach to automatically *learn* the per-anchor threshold λ_i to select the top $\alpha\%$ most similar negative data for the i -th anchor. To achieve this, we cast the problem of finding the $(1 - \alpha)$ -quantile of all similarity scores between \mathbf{x}_i and all other samples, i.e., $R_i = \{\text{sim}(E_{\mathbf{w}}(\mathbf{x}_i), E_{\mathbf{w}}(\mathbf{x})) \mid \mathbf{x} \in \mathcal{S}_i^-\}$ as the following optimization problem [Ogryczak and Tamir, 2003]:

$$\lambda_i = \arg \min_{\nu \in [-1, 1]} \nu \alpha + \frac{1}{|R_i|} \sum_{r \in R_i} (r - \nu)_+ \quad (2)$$

Then, we will have a set of threshold $\{\lambda_i\}_{i \in [|\mathcal{D}|]}$. The following lemma shows that the solution λ_i to (2) can be used to select the top- $\alpha\%$ most similar negative data.

Lemma 3.1. *Let $k = \lceil \alpha |\mathcal{S}_i^-| \rceil$. The solution λ_i to (2) is either the k -th largest value or between k -th and $(k + 1)$ -th largest value in the set R_i .*

We modify the contrastive loss in (1) to eliminate the false negatives, yielding the following optimization problem:

$$\begin{aligned} \min_{\mathbf{w}} \mathcal{L}_{\text{GCL}}(\mathbf{w}, \boldsymbol{\lambda}) &= \frac{1}{n} \sum_{\mathbf{x}_i \in \mathcal{D}} \mathbf{E}_{A, A'} \left[-\text{sim}(\mathbf{z}_i, \mathbf{z}'_i) + \tau \log(|\tilde{\mathcal{S}}_i^-| g(\mathbf{w}, \lambda_i; \mathbf{x}_i, \tilde{\mathcal{S}}_i^-)) \right], \\ g(\mathbf{w}, \lambda_i; \mathbf{x}_i, \tilde{\mathcal{S}}_i^-) &= \frac{1}{|\tilde{\mathcal{S}}_i^-|} \sum_{\mathbf{x} \in \tilde{\mathcal{S}}_i^-} \exp(\text{sim}(\mathbf{z}_i, E_{\mathbf{w}}(\mathbf{x}))/\tau), \end{aligned} \quad (3)$$

where $\tilde{\mathcal{S}}_i^- = \{\mathbf{x} \mid \mathbf{x} \in \mathcal{S}_i^-, \text{sim}(\mathbf{z}_i, E_{\mathbf{w}}(\mathbf{x})) \leq \lambda_i\}$ is obtained by removing the false negatives (identified via the threshold λ_i) in the negative dataset \mathcal{S}_i^- for anchor \mathbf{x}_i .

Note that $\min_{\mathbf{w}} \mathcal{L}_{\text{GCL}}(\mathbf{w}, \boldsymbol{\lambda})$ can be viewed as a stochastic bilevel optimization problem [Ghadimi and Wang, 2018] since the minimization of $\mathcal{L}_{\text{GCL}}(\mathbf{w}, \boldsymbol{\lambda})$ involves the solution $\boldsymbol{\lambda}$ to a lower level problem in (2). However, the problem in (3) is more challenging than most bilevel problems in the literature [Ghadimi and Wang, 2018, Ji et al., 2021] because the lower-level problem in (2) is non-smooth and non-strongly convex while the upper-level function $\mathcal{L}_{\text{GCL}}(\mathbf{w}, \boldsymbol{\lambda})$ is non-differentiable to $\boldsymbol{\lambda}$. To tackle this challenge, we just ignore the hypergradient of $\boldsymbol{\lambda}$ in terms of \mathbf{w} , which has been used in model-agnostic meta-learning [Finn et al., 2017].

3.2 GloFND for Unimodal CL

We propose an efficient algorithm called GLOFND for dynamically discovering and eliminating the false negatives in contrastive learning. Our GLOFND can be combined with previous contrastive learning algorithms, e.g., SogCLR [Yuan et al., 2022]. In each iteration, SogCLR + GLOFND first randomly samples a batch of data $\mathcal{B} \subset \mathcal{D}$ and data augmentations A, A' . Then, it alternatively executes two steps: (i) updating the thresholds $\lambda_i, i \in \mathcal{B}$; (ii) removing the identified false negatives from the loss function and updating the parameters \mathbf{w} of the encoding network.

3.2.1 Updating the threshold λ

First, the threshold λ_i can be updated by calculating the stochastic subgradient of (2) and employing the regular SGD update. Given the predetermined sampled negative data of \mathbf{x}_i in the mini-batch, i.e., $\mathcal{B}_i^- = \{A(\mathbf{x}), A'(\mathbf{x}) \mid \mathbf{x} \in \mathcal{B} \setminus \{\mathbf{x}_i\}\} \subset \mathcal{S}_i^-$, we can compute an stochastic estimator $\widehat{\nabla}_{\lambda_i}$ of the subgradient of (2) w.r.t. λ_i . Then, we update those λ_i 's that correspond to those sampled anchors $\mathbf{x}_i \in \mathcal{B}$ while keeping others unchanged, i.e.,

$$\begin{aligned} \widehat{\nabla}_{\lambda_i} &= \alpha - \frac{1}{|\mathcal{B}_i^-|} \sum_{\mathbf{x} \in \mathcal{B}_i^-} \mathbb{I}(\text{sim}(\mathbf{z}_i, E_{\mathbf{w}}(\mathbf{x})) > \lambda_i) \\ \lambda_i &\leftarrow \begin{cases} \Pi_{[-1,1]} \left[\lambda_i - \theta \widehat{\nabla}_{\lambda_i} \right], & \mathbf{x}_i \in \mathcal{B}, \\ \lambda_i, & \mathbf{x}_i \notin \mathcal{B}, \end{cases} \end{aligned} \quad (4)$$

where $\mathbb{I}(\cdot)$ is the indicator function, $\Pi_{[-1,1]}[\cdot]$ denotes the projection onto the interval $[-1, 1]$ due to that are similarity scores are in $[-1, 1]$, and θ is the learning rate of λ_i . In this way, we keep track of a threshold λ_i for detecting global false negatives in the whole dataset for each anchor $\mathbf{x}_i \in \mathcal{D}$.

3.2.2 Updating Encoder Network $E_{\mathbf{w}}$

For each anchor $\mathbf{x}_i \in \mathcal{B}$, we eliminate the false negatives identified through the threshold λ_i from its negative data batch \mathcal{B}_i^- , resulting in $\widetilde{\mathcal{B}}_i^- = \{\mathbf{x} \mid \mathbf{x} \in \mathcal{B}_i^-, \text{sim}(\mathbf{z}_i, E_{\mathbf{w}}(\mathbf{x})) \leq \lambda_i\}$. Following the SogCLR algorithm [Yuan et al., 2022], we use a moving average estimator of $g(\mathbf{w}, \lambda_i; \mathbf{x}_i, \widetilde{\mathcal{S}}_i^-)$ for each anchor $\mathbf{x}_i \in \mathcal{D}$ to alleviate the requirement of a large batch size. For each \mathbf{x}_i , we maintain a scalar u_i to estimate $g(\mathbf{w}, \lambda_i; \mathbf{x}_i, \mathcal{S}_i^-)$ as

$$\begin{aligned} u_i &\leftarrow \begin{cases} (1 - \gamma)u_i + \gamma \widehat{g}(\mathbf{w}, \lambda_i; \mathbf{x}_i, \widetilde{\mathcal{B}}_i^-), & \mathbf{x}_i \in \mathcal{B}, \\ u_i, & \mathbf{x}_i \notin \mathcal{B}, \end{cases} \\ \widehat{g}(\mathbf{w}, \lambda_i; \mathbf{x}_i, \widetilde{\mathcal{B}}_i^-) &= \frac{1}{|\widetilde{\mathcal{B}}_i^-|} \sum_{\mathbf{x} \in \widetilde{\mathcal{B}}_i^-} \exp(\text{sim}(\mathbf{z}_i, E_{\mathbf{w}}(\mathbf{x}))/\tau), \end{aligned} \quad (5)$$

where $\gamma \in [0, 1]$ is the parameter and $\widehat{g}(\mathbf{w}, \lambda_i; \mathbf{x}_i, \widetilde{\mathcal{B}}_i^-)$ is an stochastic estimator of $g(\mathbf{w}, \lambda_i; \mathbf{x}_i, \widetilde{\mathcal{S}}_i^-)$. Finally, we can update \mathbf{w} by computing a stochastic estimator of the gradient of $\mathcal{L}_{\text{GCL}}(\mathbf{w}, \boldsymbol{\lambda})$ in (3) w.r.t. the parameters of encoding network \mathbf{w} as:

$$\widehat{\nabla}_{\mathbf{w}} = \frac{1}{|\mathcal{B}|} \sum_{\mathbf{x}_i \in \mathcal{B}} -\nabla_{\mathbf{w}} \text{sim}(\mathbf{z}_i, \mathbf{z}'_i) + \frac{\tau \nabla_{\mathbf{w}} \widehat{g}(\mathbf{w}, \lambda_i; \mathbf{x}_i, \widetilde{\mathcal{B}}_i^-)}{u_i}.$$

The whole algorithm, incorporating GLOFND to address the false negative issue in SogCLR through filtering, is outlined in Algorithm 1. Noteworthy differences compared to the vanilla SogCLR

Algorithm 1 SogCLR + GLOFND

- 1: **Initialize:** $\mathbf{w} \in \mathbb{R}^d$, initialize $\mathbf{u} \in \mathbb{R}^n$ and $\boldsymbol{\lambda} \in \mathbb{R}^n$
 - 2: **for** $t = 1, \dots, T$ **do**
 - 3: Draw a batch of B samples $\mathcal{B} \subset \mathcal{D}$ and data augmentations A, A' , and construct $\mathcal{B}_i^- = \{A(\mathbf{x}), A'(\mathbf{x}) \mid \mathbf{x} \in \mathcal{B} \setminus \{\mathbf{x}_i\}\}$ for each $\mathbf{x}_i \in \mathcal{B}$
 - 4: **for** $\mathbf{x}_i \in \mathcal{B}$ **do**
 - 5: Update λ_i according to (4)
 - 6: Construct $\tilde{\mathcal{B}}_i^-$ by excluding the false negatives identified via λ_i and compute $\hat{g}(\mathbf{w}; \mathbf{x}_i, A, \tilde{\mathcal{B}}_i^-)$
 - 7: Update $u_{i,t}$ according to (5)
 - 8: **end for**
 - 9: Compute the gradient estimator $\hat{\nabla}_{\mathbf{w}}$
 - 10: Update \mathbf{w} by the momentum or Adam method
 - 11: **end for**
-

algorithm are highlighted in blue. Note that GLOFND adds little overhead, since it just requires basic matrix computations and runs in $O(B^2)$, which is relatively negligible compared to the cosine similarity and forward/backward computations.

Our approach GLOFND can be extended to resolve the global false negative discovery in bimodal CL, e.g., CLIP [Radford et al., 2021]. This can be achieved by learning a threshold for each instance for two modalities and following the same general procedure as for unimodal CL. We refer readers to Appendix B for more details.

4 Experiments

In this section, we evaluate GLOFND in unimodal, semi-supervised unimodal, and bimodal scenarios. It is not our focus to leverage multiple techniques for achieving state-of-the-art performance, but to showcase GLOFND’s improvements in *identifying* false negatives across different settings while being scalable to large-scale datasets (with negligible overhead) and compatible with small batch sizes. Additionally, we perform an ablation study to analyze the effect of the different components of GLOFND. We report the score average and standard deviation in parenthesis over 3 runs with different random seeds.

For unimodal and semi-supervised experiments, we compare GLOFND with SogCLR [Yuan et al., 2022] and its FNC [Huynh et al., 2022] version. FNC computes the top k for negative data within a mini-batch by utilizing a support set. The support set includes additional views for each image, and the similarity scores are averaged across these views. For a fair comparison, we set $k = \alpha|\mathcal{D}|$ and use a support set of size 1. For bimodal experiments, we compare with SogCLR, FastCLIP [Wei et al., 2024], and their FNC versions.

4.1 Unimodal and Semi-supervised Experiments

Dataset. We run our experiments on ImageNet100 [Wu et al., 2019], a subset of ImageNet with 100 randomly selected classes (about 128k images), and report scores on its official validation split. Additionally, we examine the transfer learning performance on Food-101 [Bossard et al., 2014], CIFAR-10 and CIFAR-100 [Krizhevsky, 2009], Stanford Cars [Krause et al., 2013], Describable Textures Dataset (DTD) [Cimpoi et al., 2014], Oxford-IIIT Pets [Parkhi et al., 2012], Caltech-101 [Li et al., 2022], and Oxford 102 Flowers [Nilsback and Zisserman, 2008].

Experiment Setup. Following previous work [Yuan et al., 2022], we pretrain ResNet-50 [He et al., 2015] with a 2-layer 128×128 projection head on top of the backbone encoder. We pretrain for 200 epochs with a batch size of 128 and the same set of augmentations as in SogCLR. We use LARS optimizer [You et al., 2017] with square root learning rate scaling ($0.075 \times \text{sqrt}(\text{BatchSize})$) and cosine decay schedule without restart. For SogCLR, we set the temperature (τ) to 0.1 and $\gamma = 0.9$. We start using GLOFND when we reach 70 epochs. We use $\alpha = 0.01$, initialize $\lambda_i = 1$, and learn it with Adam with a learning rate of 0.05 ($\beta_1 = 0.9, \beta_2 = 0.98$) during the remaining epochs. For FNC, we set $\alpha = 0.01$ and tune the starting epoch in $\{10, 30, 50, 70, 90, 110, 130\}$, choosing the value that achieves the best semi-supervised average performance.

Evaluation. We evaluate our model in three ways: false negative identification, semi-supervised linear evaluation, and transfer learning. First, given that GLOFND’s main objective is false negative identification, we assess its effectiveness to correctly detect false negatives. To construct the ground truth, we compare the labels of each sample pair, if both samples have the same label they are considered a false negative. We report precision, recall, and F1-scores for the final epoch of pretraining. Second, we evaluate GLOFND’s ability to achieve better representations through linear evaluation. That is, we freeze the weights of the encoder at the last iteration of pretraining, remove its projection head, and train a linear classifier on top of the encoder’s output. We follow a semi-supervised learning setup, where we use different fractions of labeled training data during linear evaluation, i.e., we train on random subsets of 100% (full dataset), 10%, 1%, and 0.1% of the training data. We report each top-1 accuracy on the validation set and average the performance across percentages obtaining the overall semi-supervised score. Lastly, we evaluate the transfer learning performance of the learned representations. We train an ℓ_2 -regularized logistic regression classifier on features extracted from the frozen pretrained network after removing the projector head. For each method, we report linear evaluation and transfer learning results for the model that achieves the highest semi-supervised average performance.

Results. We report false negative identification performance in Table 2. GLOFND achieves significant improvements in false negative identification over FNC, with a 20.83% and 5.14% increase in mean precision and recall, leading to an F1-score of 53.10%, which is 16.68% higher than FNC. Tables 1 and 3 report linear evaluation and transfer learning results, respectively. Observe that simply removing the false negatives identified by FNC or GLOFND improves both the semi-supervised and transfer learning performance of SogCLR. GLOFND achieves greater improvements in both scenarios, achieving 1.04%-2.44% improvement in the semi-supervised scenario and an average 1.64% improvement in transfer learning, while increasing the per-epoch computation by only 2% (from 427 s to 435 s). More details can be found in Appendix D.3. Note these improvements are achieved by simply removing the false negatives identified by GLOFND from the loss, while a more careful treatment can potentially improve the performance even further.

Table 1: Linear evaluation results in unimodal semi-supervised scenario. We train the linear classifiers with different percentages of randomly sampled labeled training data and present their top-1 accuracies (%) on the validation set. We include the overall average and, in parenthesis, its improvement WRT SogCLR baseline.

Method	100.0%	10.0%	1.0%	0.1%	Average
SogCLR	76.55 (0.09)	72.24 (0.14)	62.92 (0.34)	34.94 (0.60)	61.66
+ FNC	77.12 (0.14)	72.89 (0.25)	64.29 (0.34)	36.11 (0.70)	62.60 (+0.94)
+ GLOFND	77.59 (0.03)	73.36 (0.15)	65.09 (0.49)	37.38 (0.97)	63.36 (+1.70)

Table 2: False negatives identification results. We report the average of recall, precision, and f1-score of the identified false negatives over the final epoch of pretraining.

Method	Precision	Recall	F1-Score
SogCLR + FNC	27.57 (0.03)	53.67 (0.27)	36.42 (0.07)
SogCLR + GLOFND	48.40 (0.65)	58.81 (0.60)	53.10 (0.31)

Table 3: Unimodal transfer learning results. We report the overall average and its improvement WRT SogCLR baseline.

Method	CIFAR10	CIFAR100	Food101	Caltech101	Cars
SogCLR	82.46 (0.36)	60.20 (0.22)	59.66 (0.20)	77.73 (0.17)	25.99 (0.64)
+ FNC	82.77 (0.36)	60.96 (0.31)	59.82 (0.14)	78.34 (0.92)	26.28 (0.50)
+ GLOFND	82.81 (0.23)	61.94 (0.24)	59.87 (0.16)	79.18 (0.52)	27.88 (0.44)

Method	DTD	Pets	Flowers	Average
SogCLR	57.80 (0.30)	60.63 (0.34)	76.91 (0.33)	62.67
+ FNC	58.60 (0.29)	61.67 (0.66)	78.77 (0.51)	63.40 (+0.73)
+ GLOFND	58.97 (0.96)	63.91 (0.22)	79.89 (0.09)	64.31 (+1.64)

4.2 Bimodal Experiments

Datasets. For bimodal learning, we use the Conceptual Captions 3M (CC3M) [Sharma et al., 2018] dataset. We evaluate the performance by leveraging the Datacomp Benchmark [Gadre et al., 2023], which includes 38 zero-shot downstream tasks. We report the average performance, named Datacomp. For each scenario, we select the model with the best Datacomp average and also report its average performance on two subsets of the tasks: zero-shot image classification on ImageNet-1k [Russakovsky et al., 2015] and 6 ImageNet distribution shift datasets [Wang et al., 2019, Recht et al., 2019, Hendrycks et al., 2021b,a, Barbu et al., 2019] (IN & Variants), and zero-shot cross-modal image-text retrieval on Flickr30K [Plummer et al., 2017], MSCOCO [Lin et al., 2015], and WinoGAViL [Bitton et al., 2022].

Experiment Setup. Following previous work [Wei et al., 2024], we use a 12-layer transformer [Vaswani et al., 2017] as the text encoder, and ResNet50 as the vision encoder. All experiments are conducted in a multi-node setting with 2 nodes, each with two A100 40GB GPUs. We pretrain for 37 epochs with a global batch size of 1024. For SogCLR, we start using FNC/GLOFND after 15 epochs, setting $\alpha = 5e - 4$, while for FastCLIP we start after 20 epochs with $\alpha = 1e - 3$. For both losses, we initialize $\lambda_i = 1$ and use Adam updates with a learning rate of 0.05. More details on hyperparameters can be found in Appendix D.2.

Results. We present the bimodal results in Table 4. Despite using a larger batch compared to the unimodal case, the bimodal scenario proves more challenging for FNC, which generally underperforms compared to the baseline models. In contrast, GLOFND enhances both SogCLR and FastCLIP across most metrics. Notably, it improves the overall Datacomp score for both models. These results highlight the benefit of integrating false negative detection into bimodal contrastive losses, demonstrating that GLOFND is an effective approach for this task.

Table 4: Results in bimodal zero-shot downstream tasks. Datacomp provides the average across 38 tasks, Retrieval averages the performance on 3 image-text retrieval datasets, and IN & Variants averages 7 ImageNet datasets.

Method	Datacomp	Retrieval	IN & Variants
SogCLR [Wei et al., 2024]	24.87 (0.13)	29.28 (0.30)	18.86 (0.09)
+ FNC	24.55 (0.20)	29.69 (0.19)	18.69 (0.62)
+ GLOFND	25.37 (0.16)	29.92 (0.35)	19.44 (0.16)
FastCLIP [Wei et al., 2024]	24.76 (0.26)	30.36 (0.18)	19.08 (0.16)
+ FNC	24.63 (0.72)	28.87 (0.93)	18.51 (0.19)
+ GLOFND	25.37 (0.13)	30.22 (0.32)	19.38 (0.15)

4.3 Ablation Study

Verification of Algorithm Design. We empirically validate three aspects of GLOFND’s design: (i) the necessity to have a global threshold (as opposed to batch-wise), (ii) the necessity to have a different λ_i for each anchor $\mathbf{x}_i \in \mathcal{D}$, and (iii) the quality of the learned λ_i threshold. We will cover (ii) and (iii) in this section and (i) in the next section.

(ii) Do we need a different threshold for each anchor?

We first examine the distribution of λ_i learned by GLOFND after pretraining. Rather than being concentrated around a single value, we expect it to span a range, indicating that different anchors adopt different thresholds when computing their top $(1 - \alpha)$ -quantile. Figure 4(a) illustrates this distribution for ImageNet100 (red line). As expected, λ_i varies within the range $[0.1, 0.6]$, highlighting the necessity of a per-anchor threshold.

To empirically validate this, we compare GLOFND, which assigns a distinct λ_i per anchor, against a variant that uses a single λ for all anchors, referred to as “Single λ .” Figure 3 reports the semi-supervised performance on ImageNet100, demonstrating that GLOFND with per-anchor λ_i consistently outperforms the single-threshold variant.

(iii) How good are the learned λ_i thresholds?

We train SogCLR on ImageNet100 and apply GLOFND ($\alpha = 0.01$) with SGD updates starting at epoch 20. We monitor the percentage of negative pairs predicted to be false negatives, computed as $1 - |\tilde{\mathcal{S}}_i^-|/|\mathcal{S}_i^-|$, throughout training. We initialize $\lambda_i = 1$ (indicating no false negatives) and expect the percentage to converge to the target α . As shown in Figure 4(b), GLOFND successfully reaches and maintains the desired α after a few epochs.

Next, we evaluate the error of the learned λ_i relative to its optimal value. Since computing the exact optimal λ_i is intractable, requiring similarity calculations for every anchor against all other samples under different augmentations, we approximate it instead. We freeze the network and estimate the optimal threshold λ_i^a by randomly selecting 100,000 samples per anchor. Empirically, GLOFND approximates the desired threshold significantly better than FNC with a batch size of 128, achieving a Mean Absolute Error (MAE) of 0.1 and a Root Mean Squared Error (RMSE) of 0.13 ($\lambda_i \in [-1, 1]$), whereas FNC obtains MAE and RMSE of 0.21 and 0.28, respectively. This means GLOFND has less than half the error of FNC. Qualitatively, Figure 4(a) compares the distribution of the learned λ_i , the approximated λ_i^a , and the thresholds used by FNC. Since FNC computes thresholds at the mini-batch level, we sample 20 random batches per anchor and plot their respective distributions. The results show that GLOFND learns a λ_i distribution that more closely aligns with

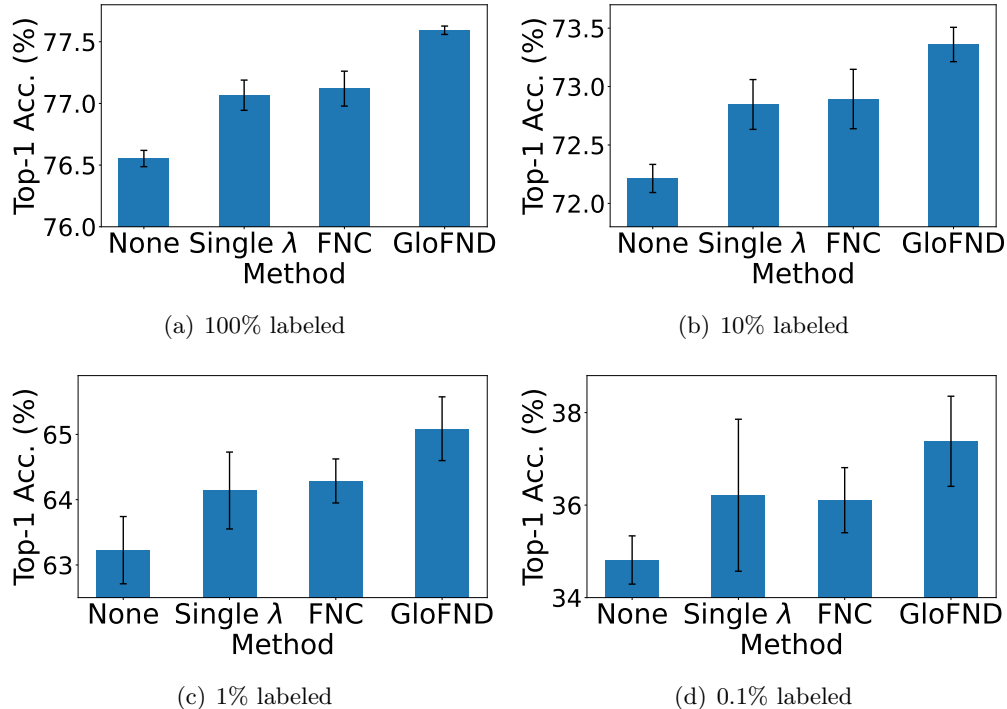


Figure 3: Linear evaluation (top-1 accuracy %) on ImageNet100 for SogCLR without FN identification, with FNC (*top* 1%), with a single learned threshold ($\alpha = 0.1$), and GLOFND ($\alpha = 0.01$).

the desired threshold than FNC.

Impact of Starting Epoch. GLOFND requires a *sufficiently* pre-trained network to ensure that the similarity between embeddings reflects semantic similarity. This is achieved by applying GLOFND after a certain number of training epochs. However, the optimal start time involves a trade-off. If GLOFND is applied too early, the embedding space may not be well-formed, leading to incorrect classification of pairs as false negatives. Conversely, if applied too late, the potential benefits of GLOFND may be limited due to insufficient training time. To assess the necessity and impact of this “wait” period, we evaluate GLOFND’s semi-supervised performance on ImageNet100 as we vary the start epoch in $\{10, 30, 50, 70, 90, 110\}$. The linear evaluation results, presented in Figure 5(d), show that GLOFND’s performance improves as the wait time increases, peaking at 70 epochs. Beyond this point, performance begins to decline.

4.4 Comparison with Mini-batch Top- k Method

In this section, we assess the necessity of a global threshold by comparing GLOFND’s global thresholds to FNC, which computes a threshold for each mini-batch.

Semi-supervised Linear Evaluation. We present the semi-supervised linear evaluation performance for different percentages of labeled training data in Figure 3. Both GLOFND and FNC outperform not addressing false negatives, highlighting the importance of handling them. Furthermore, GLOFND consistently outperforms FNC across all settings, with improvements ranging from 0.47% to 1.27%. This demonstrates the advantage of using a global threshold, as opposed to a threshold specific to each mini-batch.

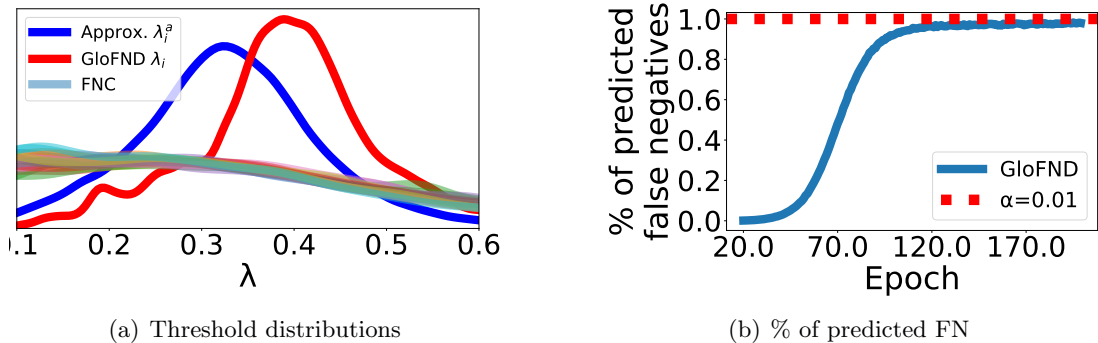


Figure 4: Analysis of learned λ_i for GLOFND with $\alpha = 0.01$. (a) Kernel density estimation of the distributions of GLOFND’s λ_i , the approximated optimal λ_i^a , and 20 randomly sampled FNC thresholds. (b) Average percentage of negative pairs predicted to be false negatives during training (i.e., $1 - |\hat{\mathcal{S}}_i^-|/|\mathcal{S}_i^-|$).

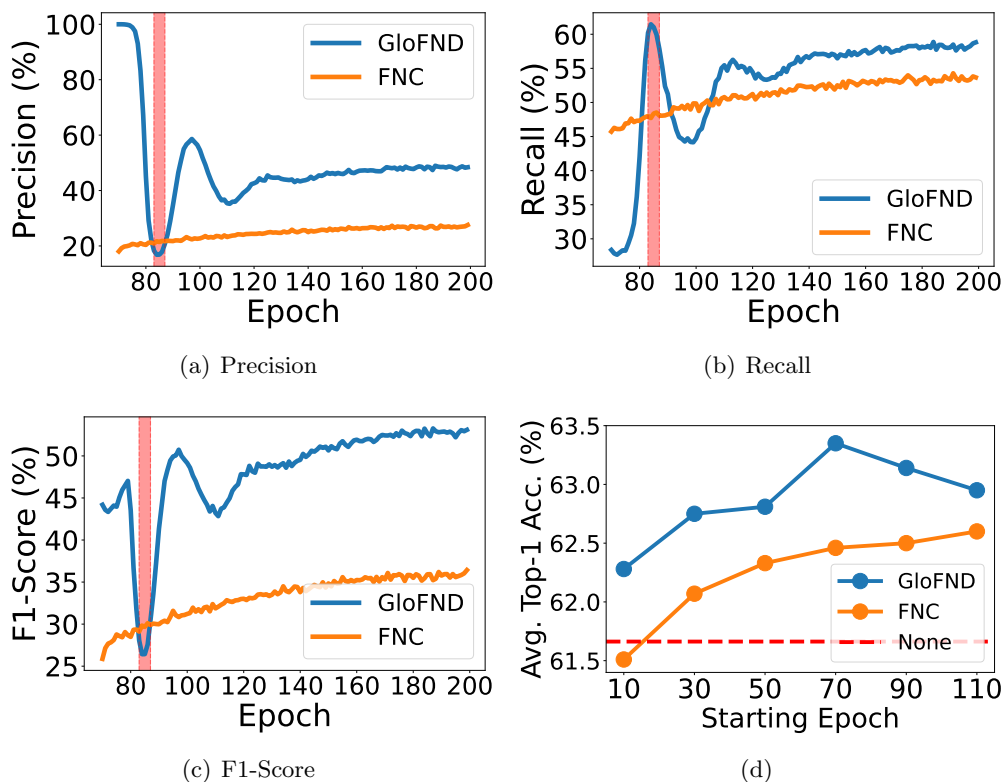


Figure 5: FNC and GLOFND comparison. (a): False negative prediction performance scores for ImageNet100 using the labels as ground truth. We report the per-epoch mean precision, recall, and f1-score for SogCLR + FNC and SogCLR + GLOFND ($\alpha = 0.01$). (b): Starting epoch comparison on linear evaluation performance.

Quality of Found False Negatives. We analyze the quality of the false negatives identified by GLOFND and FNC. In Section 4.3 (iii), we discussed how GLOFND matches more closely the optimal dataset-wide threshold than FNC, with half the approximation error. Here, we examine

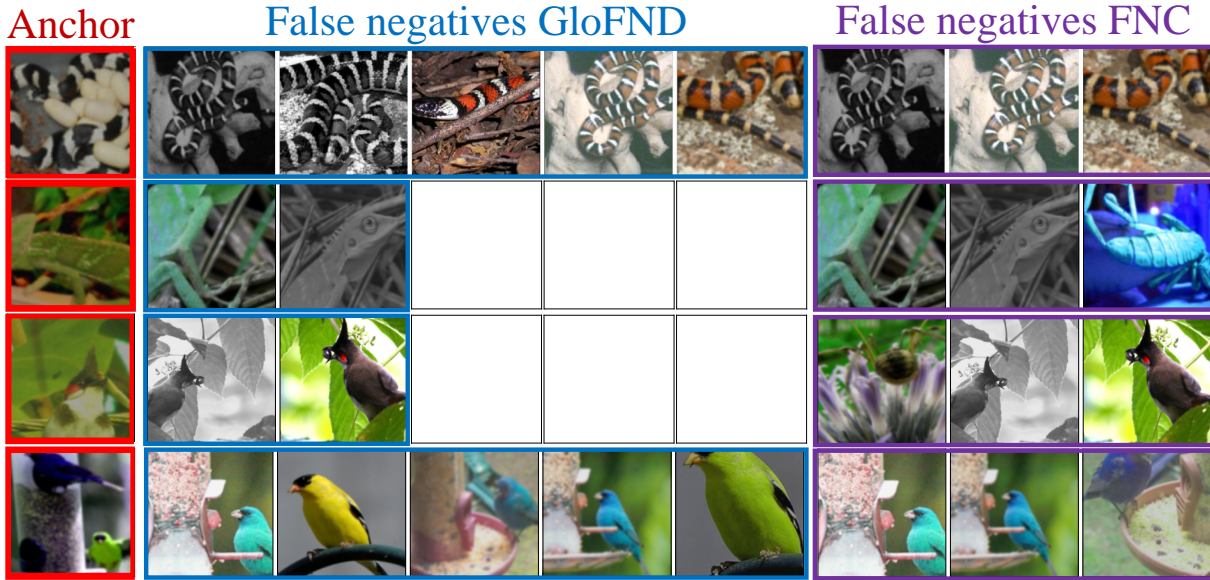


Figure 6: Examples of false negatives identified for ImageNet100 by GLOFND and FNC. The left column shows the anchor images, while the middle and right columns present the false negatives identified by GLOFND and FNC respectively.

how this improved threshold alignment affects the quality of the false negatives identified. To do so, we calculate the per-epoch mean precision, recall, and F1-score for each method, using the class labels as ground truth (i.e., a pair is considered a false negative if both samples share the same label). As training progresses and the embedding space improves, we expect these metrics to increase, reflecting better alignment between embedding and semantic similarity. Furthermore, for GLOFND, we expect an increase in recall as λ_i reaches the desired quantile, capturing more false negatives. This should lead to a decrease in precision due to early representations not being sufficiently pretrained. After some oscillation, GLOFND should follow a steady upward trend.

The results are presented in Figure 5. We observe that GLOFND behaves as expected, with the oscillations diminishing and becoming minimal around epoch 120. Regardless, GLOFND shows a 14.89% average improvement in F1-score, surpassing FNC for all but 4 epochs (indicated by the red area in Figure 5). Moreover, after epoch 120, GLOFND consistently maintains a mean F1-score between 14.64% and 18.05% higher than FNC. This underscores GLOFND’s superiority in identifying false negatives.

This is quantitatively illustrated in Figure 6, which shows examples of false negatives identified in a mini-batch by GLOFND and FNC. While the number of false negatives identified by FNC remains constant across mini-batches, GLOFND’s dynamic threshold allows this number to vary, adapting to each mini-batch more effectively. For instance, in the second and third rows, FNC’s fixed top- k approach results in the selection of negative samples that are not sufficiently similar, leading to errors. In contrast, GLOFND is not constrained to a fixed number and instead selects only the most similar samples according to λ_i . The opposite occurs in the first and last rows, where GLOFND identifies more false negatives than FNC.

5 Conclusions

In this work, we have addressed the problem of *identifying* global false negatives in self-supervised contrastive learning through an optimization-based approach. We propose identifying as false negatives for a given anchor those negative samples whose similarity exceeds the desired quantile across the *entire dataset*. We then introduce GLOFND, an optimization-based method that automatically learns a threshold for each anchor, enabling the identification of its false negatives on the fly. Experimental results demonstrate that GLOFND improves existing contrastive learning methods, both for unimodal and bimodal tasks, with minimal computational overhead. An open question is whether GLOFND could be extended to non-CL methods and whether the parameter α could be individualized.

Limitations. Since the focus of this paper is on false negative *detection* for contrastive learning, we address false negatives through filtering. While this straightforward approach has proven effective in our settings, future work could explore more advanced methods that may further enhance downstream performance. Additionally, the benefits of GLOFND and similar false-negative techniques on downstream tasks depend on how false negatives are defined within the downstream task and the proportion of false negatives in the pretraining dataset, a factor we expect to become more significant as foundational model datasets continue to scale.

References

- Andrei Barbu, David Mayo, Julian Alverio, William Luo, Christopher Wang, Dan Gutfreund, Josh Tenenbaum, and Boris Katz. ObjectNet: A large-scale bias-controlled dataset for pushing the limits of object recognition models. In H. Wallach, H. Larochelle, A. Beygelzimer, F. dAlché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019.
- Yonatan Bitton, Nitzan Bitton-Guetta, Ron Yosef, Yuval Elovici, Mohit Bansal, Gabriel Stanovsky, and Roy Schwartz. Winogavil: gamified association benchmark to challenge vision-and-language models. In *Proceedings of the 36th International Conference on Neural Information Processing Systems*, NIPS '22, Red Hook, NY, USA, 2022. Curran Associates Inc. ISBN 9781713871088.
- Lukas Bossard, Matthieu Guillaumin, and Luc Van Gool. Food-101 – mining discriminative components with random forests. In *European Conference on Computer Vision*, 2014.
- Mathilde Caron, Piotr Bojanowski, Armand Joulin, and Matthijs Douze. Deep Clustering for Unsupervised Learning of Visual Features, March 2019. URL <http://arxiv.org/abs/1807.05520>.
- Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A Simple Framework for Contrastive Learning of Visual Representations, June 2020a. URL <http://arxiv.org/abs/2002.05709>.
- Ting Chen, Simon Kornblith, Kevin Swersky, Mohammad Norouzi, and Geoffrey Hinton. Big Self-Supervised Models are Strong Semi-Supervised Learners, October 2020b. URL <http://arxiv.org/abs/2006.10029>.
- Tsai-Shien Chen, Wei-Chih Hung, Hung-Yu Tseng, Shao-Yi Chien, and Ming-Hsuan Yang. Incremental False Negative Detection for Contrastive Learning, March 2022. URL <http://arxiv.org/abs/2106.03719>.

- M. Cimpoi, S. Maji, I. Kokkinos, S. Mohamed, , and A. Vedaldi. Describing textures in the wild. In *Proceedings of the IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2014.
- Carl Doersch, Abhinav Gupta, and Alexei A. Efros. Unsupervised Visual Representation Learning by Context Prediction, January 2016. URL <http://arxiv.org/abs/1505.05192>.
- Chelsea Finn, Pieter Abbeel, and Sergey Levine. Model-agnostic meta-learning for fast adaptation of deep networks. *CoRR*, abs/1703.03400, 2017. URL <http://arxiv.org/abs/1703.03400>.
- Samir Yitzhak Gadre, Gabriel Ilharco, Alex Fang, Jonathan Hayase, Georgios Smyrnis, Thao Nguyen, Ryan Marten, Mitchell Wortsman, Dhruva Ghosh, Jieyu Zhang, Eyal Orgad, Rahim Entezari, Giannis Daras, Sarah Pratt, Vivek Ramanujan, Yonatan Bitton, Kalyani Marathe, Stephen Mussmann, Richard Vencu, Mehdi Cherti, Ranjay Krishna, Pang Wei Koh, Olga Saukh, Alexander Ratner, Shuran Song, Hannaneh Hajishirzi, Ali Farhadi, Romain Beaumont, Sewoong Oh, Alex Dimakis, Jenia Jitsev, Yair Carmon, Vaishaal Shankar, and Ludwig Schmidt. DataComp: In search of the next generation of multimodal datasets. *arXiv preprint arXiv:2304.14108*, (arXiv:2304.14108), October 2023. doi: 10.48550/arXiv.2304.14108.
- Songwei Ge, Shlok Mishra, Haohan Wang, Chun-Liang Li, and David Jacobs. Robust contrastive learning using negative samples with diminished semantics. In *Proceedings of the 35th International Conference on Neural Information Processing Systems, Nips '21*, Red Hook, NY, USA, 2024. Curran Associates Inc. ISBN 978-1-7138-4539-3.
- Saeed Ghadimi and Mengdi Wang. Approximation methods for bilevel programming. *arXiv preprint arXiv:1802.02246*, 2018.
- Jean-Bastien Grill, Florian Strub, Florent Althé, Corentin Tallec, Pierre H. Richemond, Elena Buchatskaya, Carl Doersch, Bernardo Avila Pires, Zhaohan Daniel Guo, Mohammad Gheshlaghi Azar, Bilal Piot, Koray Kavukcuoglu, Rémi Munos, and Michal Valko. Bootstrap your own latent: A new approach to self-supervised Learning, September 2020. URL <http://arxiv.org/abs/2006.07733>.
- Jie Gui, Tuo Chen, Jing Zhang, Qiong Cao, Zhenan Sun, Hao Luo, and Dacheng Tao. A Survey on Self-supervised Learning: Algorithms, Applications, and Future Trends, September 2023. URL <http://arxiv.org/abs/2301.05712>.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep Residual Learning for Image Recognition, December 2015.
- Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum Contrast for Unsupervised Visual Representation Learning, March 2020. URL <http://arxiv.org/abs/1911.05722>.
- Dan Hendrycks, Steven Basart, Norman Mu, Saurav Kadavath, Frank Wang, Evan Dorundo, Rahul Desai, Tyler Zhu, Samyak Parajuli, Mike Guo, Dawn Song, Jacob Steinhardt, and Justin Gilmer. The many faces of robustness: A critical analysis of out-of-distribution generalization, 2021a. URL <https://arxiv.org/abs/2006.16241>.
- Dan Hendrycks, Kevin Zhao, Steven Basart, Jacob Steinhardt, and Dawn Song. Natural adversarial examples, 2021b. URL <https://arxiv.org/abs/1907.07174>.

- Tri Huynh, Simon Kornblith, Matthew R. Walter, Michael Maire, and Maryam Khademi. Boosting Contrastive Self-Supervised Learning with False Negative Cancellation, January 2022. URL <http://arxiv.org/abs/2011.11765>.
- Kaiyi Ji, Junjie Yang, and Yingbin Liang. Bilevel optimization: Convergence analysis and enhanced design. In *International conference on machine learning*, pages 4882–4892. PMLR, 2021.
- Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschinot, Ce Liu, and Dilip Krishnan. Supervised Contrastive Learning, March 2021. URL <http://arxiv.org/abs/2004.11362>.
- Alexander Kolesnikov, Xiaohua Zhai, and Lucas Beyer. Revisiting self-supervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 1920–1929, 2019.
- Jonathan Krause, Jia Deng, Michael Stark, and Li Fei-Fei. Collecting a large-scale dataset of fine-grained cars. In *Second Workshop on Fine-Grained Visual Categorization*, 2013.
- Alex Krizhevsky. Learning Multiple Layers of Features from Tiny Images. 2009.
- Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. Albert: A lite bert for self-supervised learning of language representations. *arXiv preprint arXiv:1909.11942*, 2019.
- Fei-Fei Li, Marco Andreeto, Marc’Aurelio Ranzato, and Pietro Perona. Caltech 101, Apr 2022.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, Lubomir Bourdev, Ross Girshick, James Hays, Pietro Perona, Deva Ramanan, C. Lawrence Zitnick, and Piotr Dollár. Microsoft COCO: Common Objects in Context, February 2015. URL <http://arxiv.org/abs/1405.0312>.
- Ilya Loshchilov and Frank Hutter. Decoupled Weight Decay Regularization. *arXiv:1711.05101 [cs, math]*, January 2019. URL <http://arxiv.org/abs/1711.05101>. arXiv: 1711.05101.
- Maria-Elena Nilsback and Andrew Zisserman. Automated flower classification over a large number of classes. In *Indian Conference on Computer Vision, Graphics and Image Processing*, Dec 2008.
- Mehdi Noroozi and Paolo Favaro. Unsupervised Learning of Visual Representations by Solving Jigsaw Puzzles, August 2017. URL <http://arxiv.org/abs/1603.09246>.
- Wlodzimierz Ogryczak and Arie Tamir. Minimizing the sum of the k largest functions in linear time. *Information Processing Letters*, 85(3):117–122, 2003.
- Omkar M. Parkhi, Andrea Vedaldi, Andrew Zisserman, and C. V. Jawahar. Cats and dogs. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2012.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zach DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. *PyTorch: an imperative style, high-performance deep learning library*. Curran Associates Inc., Red Hook, NY, USA, 2019.

- Bryan A. Plummer, Liwei Wang, Chris M. Cervantes, Juan C. Caicedo, Julia Hockenmaier, and Svetlana Lazebnik. Flickr30k Entities: Collecting Region-to-Phrase Correspondences for Richer Image-to-Sentence Models. *International Journal of Computer Vision*, 123(1):74–93, May 2017. ISSN 1573-1405. doi: 10.1007/s11263-016-0965-7. URL <https://doi.org/10.1007/s11263-016-0965-7>.
- Zi-Hao Qiu, Quanqi Hu, Yongjian Zhong, Lijun Zhang, and Tianbao Yang. Large-scale Stochastic Optimization of NDCG Surrogates for Deep Learning with Provable Convergence, February 2023. URL <http://arxiv.org/abs/2202.12183>.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning Transferable Visual Models From Natural Language Supervision, February 2021. URL <http://arxiv.org/abs/2103.00020>.
- Benjamin Recht, Rebecca Roelofs, Ludwig Schmidt, and Vaishaal Shankar. Do ImageNet classifiers generalize to ImageNet? In Kamalika Chaudhuri and Ruslan Salakhutdinov, editors, *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 5389–5400. PMLR, 09–15 Jun 2019. URL <https://proceedings.mlr.press/v97/recht19a.html>.
- Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet Large Scale Visual Recognition Challenge. *International Journal of Computer Vision (IJCV)*, 115(3):211–252, 2015. doi: 10.1007/s11263-015-0816-y.
- Nikunj Saunshi, Orestis Plevrakis, Sanjeev Arora, Mikhail Khodak, and Hrishikesh Khandeparkar. A theoretical analysis of contrastive unsupervised representation learning. In Kamalika Chaudhuri and Ruslan Salakhutdinov, editors, *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 5628–5637. PMLR, June 2019. URL <https://proceedings.mlr.press/v97/saunshi19a.html>.
- Anshul Shah, Suvrit Sra, Rama Chellappa, and Anoop Cherian. Max-Margin Contrastive Learning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 36(8):8220–8230, June 2022. ISSN 2374-3468, 2159-5399. doi: 10.1609/aaai.v36i8.20796.
- Piyush Sharma, Nan Ding, Sebastian Goodman, and Radu Soricut. Conceptual captions: A cleaned, hypernymed, image alt-text dataset for automatic image captioning. In Iryna Gurevych and Yusuke Miyao, editors, *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2556–2565, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1238. URL <https://aclanthology.org/P18-1238>.
- Hari Sowrirajan, Jingbo Yang, Andrew Y. Ng, and Pranav Rajpurkar. MoCo-CXR: MoCo Pretraining Improves Representation and Transferability of Chest X-ray Models, May 2021. URL <http://arxiv.org/abs/2010.05352>.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc., 2017.

- Haohan Wang, Songwei Ge, Eric P. Xing, and Zachary C. Lipton. Learning robust global representations by penalizing local predictive power, 2019. URL <https://arxiv.org/abs/1905.13549>.
- Xiyuan Wei, Fanjiang Ye, Ori Yonay, Xingyu Chen, Baixi Sun, Dingwen Tao, and Tianbao Yang. FastCLIP: A Suite of Optimization Techniques to Accelerate CLIP Training with Limited Resources, October 2024.
- Yue Wu, Yinpeng Chen, Lijuan Wang, Yuancheng Ye, Zicheng Liu, Yandong Guo, and Yun Fu. Large Scale Incremental Learning, May 2019. URL <http://arxiv.org/abs/1905.13260>.
- Zhirong Wu, Yuanjun Xiong, Stella Yu, and Dahua Lin. Unsupervised Feature Learning via Non-Parametric Instance-level Discrimination, May 2018. URL <http://arxiv.org/abs/1805.01978>.
- Yang You, Igor Gitman, and Boris Ginsburg. Large batch training of convolutional networks, 2017. URL <https://arxiv.org/abs/1708.03888>.
- Zhuoning Yuan, Yuexin Wu, Zi-Hao Qiu, Xianzhi Du, Lijun Zhang, Denny Zhou, and Tianbao Yang. Provable Stochastic Optimization for Global Contrastive Learning: Small Batch Does Not Harm Performance, September 2022. URL <http://arxiv.org/abs/2202.12387>.
- Richard Zhang, Phillip Isola, and Alexei A. Efros. Colorful Image Colorization, October 2016. URL <http://arxiv.org/abs/1603.08511>.
- Nanxuan Zhao, Zhirong Wu, Rynson W. H. Lau, and Stephen Lin. What makes instance discrimination good for transfer learning?, January 2021. URL <http://arxiv.org/abs/2006.06606>.
- Mingkai Zheng, Fei Wang, Shan You, Chen Qian, Changshui Zhang, Xiaogang Wang, and Chang Xu. Weakly Supervised Contrastive Learning. In *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 10022–10031, Montreal, QC, Canada, October 2021. IEEE. ISBN 978-1-66542-812-5. doi: 10.1109/ICCV48922.2021.00989. URL <https://ieeexplore.ieee.org/document/9710997/>.

A Proof of Lemma 3.1

Proof. For simplicity, we denote that $n_i^- = |S_i^-|$ and s_j is the j -th largest value in $\{\text{sim}(\mathbf{z}_i, E_{\mathbf{w}}(\mathbf{x})) \mid \mathbf{x} \in S_i^-\}$, i.e., $s_1 \geq s_2 \geq \dots \geq s_{n_i^-}$. A subgradient $\phi_i'(\lambda_i)$ of the objective at λ_i in (2) is

$$\phi_i'(\lambda_i) = \alpha n_i^- - \sum_{j=1}^{n_i^-} \psi(s_j - \lambda_i), \quad \psi(s_j - \lambda_i) = \begin{cases} 1, & s_j > \lambda_i \\ \epsilon, & s_j = \lambda_i \\ 0, & s_j < \lambda_i, \end{cases}$$

where $\epsilon \in [0, 1]$. We define $k = \lceil \alpha n_i^- \rceil$. $0 \in \partial \phi_i(\lambda_i)$ only happens when $\lambda_i \in [s_{k''}, s_{k'}]$ since $k - 1 < \alpha n_i^- \leq k$, where $k' = \max\{j \mid s_j > s_k, j > k\}$, $k'' = \min\{k''', k + 1\}$, $k''' = \max\{j \mid s_j < s_k, j > k\}$. Thus, s_k is a solution to (2). Besides, when αn_i^- is an integer (i.e. $k = \alpha n_i^- = \lceil \alpha n_i^- \rceil$), any value between $[s_k, s_{k+1}]$ is also a solution to (2), which could be different from s_k . □

B More Details on Extension to Bimodal CL

Our approach GLOFND can be extended to resolve the global false negative discovery in bimodal CL, e.g., CLIP [Radford et al., 2021]. Consider a dataset of image-text pairs $\mathcal{D} = \{(\mathbf{x}_1, \mathbf{t}_1), \dots, (\mathbf{x}_n, \mathbf{t}_n)\}$, a collection of image augmentation operators \mathcal{P}_I , and a collection of text augmentation operators \mathcal{P}_T . Suppose that the encoder network E_I for images and the encoder network E_T for text are parametrized by \mathbf{w} . For each $(\mathbf{x}_i, \mathbf{t}_i) \in \mathcal{D}$, the negative dataset for each anchor image \mathbf{x}_i is $\mathcal{S}_{I,i}^- = \{A_T(\mathbf{t}) \mid \forall A_T \in \mathcal{P}_T, \forall (\mathbf{x}, \mathbf{t}) \in \mathcal{D}\}$ while the negative dataset for each anchor text \mathbf{t}_i is $\mathcal{S}_{T,i}^- = \{A_I(\mathbf{x}) \mid \forall A_I \in \mathcal{P}_I, \forall (\mathbf{x}, \mathbf{t}) \in \mathcal{D}\}$. For the i -th anchor image \mathbf{x}_i with representation $\mathbf{z}_{I,i}$, the threshold $\lambda_{I,i} \in [-1, 1]$ for finding the top $\alpha\%$ text neighbors among all negatives $\mathcal{S}_{I,i}^-$ can be solved by

$$\min_{\nu \in [-1, 1]} \nu \alpha + \frac{1}{|\mathcal{S}_{I,i}^-|} \sum_{\mathbf{t} \in \mathcal{S}_{I,i}^-} (\text{sim}(\mathbf{z}_{I,i}, E_T(\mathbf{t})) - \nu)_+.$$

Similarly, we can obtain the threshold $\lambda_{T,i} \in [-1, 1]$ for the i -th anchor text \mathbf{t}_i . Given the thresholds λ_I, λ_T , the bimodal contrastive loss can be written as

$$\begin{aligned} \mathcal{L}_{\text{BGCL}}(\mathbf{w}, \lambda_I, \lambda_T) &= \frac{1}{n} \sum_{(\mathbf{x}_i, \mathbf{t}_i) \in \mathcal{D}} \mathbf{E}[\ell(\mathbf{w}, \lambda_{I,i}, \lambda_{T,i}; \mathbf{x}_i, \mathbf{t}_i)], \\ \ell(\mathbf{w}, \lambda_{I,i}, \lambda_{T,i}; \mathbf{x}_i, \mathbf{t}_i) &= -2\text{sim}(\mathbf{z}_{I,i}, \mathbf{z}_{T,i}) \\ &\quad + \tau \log |\mathcal{S}_{I,i}^-| g_I(\mathbf{w}, \lambda_{I,i}; \mathbf{x}_i, \tilde{\mathcal{S}}_{I,i}^-) \\ &\quad + \tau \log |\mathcal{S}_{T,i}^-| g_T(\mathbf{w}, \lambda_{T,i}; \mathbf{t}_i, \tilde{\mathcal{S}}_{T,i}^-), \\ g_I(\mathbf{w}, \lambda_{I,i}; \mathbf{x}_i, \tilde{\mathcal{S}}_{I,i}^-) &= \frac{1}{|\tilde{\mathcal{S}}_{I,i}^-|} \sum_{\mathbf{t} \in \tilde{\mathcal{S}}_{I,i}^-} \exp(\text{sim}(\mathbf{z}_{I,i}, E_T(\mathbf{t}))/\tau), \\ g_T(\mathbf{w}, \lambda_{T,i}; \mathbf{t}_i, \tilde{\mathcal{S}}_{T,i}^-) &= \frac{1}{|\tilde{\mathcal{S}}_{T,i}^-|} \sum_{\mathbf{x} \in \tilde{\mathcal{S}}_{T,i}^-} \exp(\text{sim}(E_I(\mathbf{x}), \mathbf{z}_{T,i})/\tau), \end{aligned}$$

where $\tilde{\mathcal{S}}_{I,i}^- = \{\mathbf{t} \mid \mathbf{t} \in \mathcal{S}_{I,i}^-, \text{sim}(\mathbf{z}_{I,i}, E_T(\mathbf{t})) \leq \lambda_{I,i}\}$, $\tilde{\mathcal{S}}_{T,i}^- = \{\mathbf{x} \mid \mathbf{x} \in \mathcal{S}_{T,i}^-, \text{sim}(E_I(\mathbf{x}), \mathbf{z}_{T,i}) \leq \lambda_{T,i}\}$ are the negative datasets for anchor $(\mathbf{x}_i, \mathbf{t}_i)$ excluding the false negatives identified through the learned thresholds $\lambda_{I,i}, \lambda_{T,i}$.

We extend the GLOFND to the bimodal setting as follows. First, we sample a mini-batch of image-text pairs $\mathcal{B} \subset \mathcal{D}$, sampled image augmentations A_I , and text augmentations A_T , we construct the sampled negative sets $\mathcal{B}_{I,i}^- = \{A_T(\mathbf{t}) \mid (\mathbf{x}, \mathbf{t}) \in \mathcal{B} \setminus \{(\mathbf{x}_i, \mathbf{t}_i)\}\}$, $\mathcal{B}_{T,i}^- = \{A_I(\mathbf{x}) \mid (\mathbf{x}, \mathbf{t}) \in \mathcal{B} \setminus \{(\mathbf{x}_i, \mathbf{t}_i)\}\}$ for each $(\mathbf{x}_i, \mathbf{t}_i) \in \mathcal{B}$. Given the image embedding $\mathbf{z}_{I,i} = E_I(A_I(\mathbf{x}_i))$ and text embedding $\mathbf{z}_{T,i} = E_T(A_T(\mathbf{t}_i))$ for anchor $(\mathbf{x}_i, \mathbf{t}_i)$, the thresholds λ_I for images can be updated by

$$\begin{aligned} \hat{\nu}_{\lambda_{I,i}} &= \alpha - \frac{1}{|\mathcal{B}_{I,i}^-|} \sum_{\mathbf{t} \in \mathcal{B}_{I,i}^-} \mathbb{I}(\text{sim}(\mathbf{z}_{I,i}, E_T(\mathbf{t})) > \lambda_{I,i}), \\ \lambda_{I,i} &\leftarrow \begin{cases} \Pi_{[-1, 1]} \left[\lambda_{I,i} - \theta \hat{\nu}_{\lambda_{I,i}} \right], & (\mathbf{x}_i, \mathbf{t}_i) \in \mathcal{B}, \\ \lambda_{I,i}, & (\mathbf{x}_i, \mathbf{t}_i) \notin \mathcal{B}, \end{cases} \end{aligned}$$

Similarly, we can update the thresholds λ_T for texts. Given the thresholds λ_I for images and thresholds λ_T for texts, we can construct $\tilde{\mathcal{B}}_{I,i}^- = \{\mathbf{t} \mid \mathbf{t} \in \mathcal{B}_{I,i}^-, \text{sim}(\mathbf{z}_{I,i}, E_T(\mathbf{t})) \leq \lambda_{I,i}\}$ and $\tilde{\mathcal{B}}_{T,i}^- =$

$\{\mathbf{x} \mid \mathbf{x} \in \mathcal{B}_{T,i}^-, \text{sim}(E_I(\mathbf{x}), \mathbf{z}_{T,i}) \leq \lambda_{T,i}\}$ by excluding the false negative images and texts identified via the thresholds $\lambda_{I,i}$ and $\lambda_{T,i}$.

Then, we employ the moving-average estimators $u_{I,i}$, $u_{T,i}$ for $g_I(\mathbf{w}, \lambda_{I,i}; \mathbf{x}_i, \tilde{\mathcal{B}}_{I,i}^-)$, $g_T(\mathbf{w}, \lambda_{T,i}; \mathbf{t}_i, \tilde{\mathcal{B}}_{T,i}^-)$, respectively.

$$\begin{aligned} \hat{g}_I(\mathbf{w}, \lambda_{I,i}; \mathbf{x}_i, \tilde{\mathcal{B}}_{I,i}^-) &= \frac{1}{|\tilde{\mathcal{B}}_{I,i}^-|} \sum_{\mathbf{t} \in \tilde{\mathcal{B}}_{I,i}^-} \exp(\text{sim}(\mathbf{z}_{I,i}, E_T(\mathbf{t}))/\tau), \\ \hat{g}_T(\mathbf{w}, \lambda_{T,i}; \mathbf{t}_i, \tilde{\mathcal{B}}_{T,i}^-) &= \frac{1}{|\tilde{\mathcal{B}}_{T,i}^-|} \sum_{\mathbf{x} \in \tilde{\mathcal{B}}_{T,i}^-} \exp(\text{sim}(E_I(\mathbf{x}), \mathbf{z}_{T,i})/\tau), \\ u_{I,i} &\leftarrow \begin{cases} (1-\gamma)u_{I,i} + \gamma\hat{g}_I(\mathbf{w}, \lambda_{I,i}; \mathbf{x}_i, \tilde{\mathcal{B}}_{I,i}^-), & (\mathbf{x}_i, \mathbf{t}_i) \in \mathcal{B}, \\ u_{I,i}, & (\mathbf{x}_i, \mathbf{t}_i) \notin \mathcal{B}, \end{cases} \\ u_{T,i} &\leftarrow \begin{cases} (1-\gamma)u_{T,i} + \gamma\hat{g}_T(\mathbf{w}, \lambda_{T,i}; \mathbf{t}_i, \tilde{\mathcal{B}}_{T,i}^-), & (\mathbf{x}_i, \mathbf{t}_i) \in \mathcal{B}, \\ u_{T,i}, & (\mathbf{x}_i, \mathbf{t}_i) \notin \mathcal{B}. \end{cases} \end{aligned}$$

Finally, we can update the parameters \mathbf{w} for image-text encoder networks by the stochastic gradient estimator.

$$\begin{aligned} \hat{\nabla}_{\mathbf{w}} &= \frac{1}{|\mathcal{B}|} \sum_{(\mathbf{x}_i, \mathbf{t}_i) \in \mathcal{B}} \left[-2\nabla_{\mathbf{w}} \text{sim}(\mathbf{z}_{I,i}, \mathbf{z}_{T,i}) \right. \\ &\quad \left. + \frac{\tau}{u_{I,i}} \nabla_1 \hat{g}_I(\mathbf{w}, \lambda_{I,i}; \mathbf{x}_i, \tilde{\mathcal{B}}_{I,i}^-) \right. \\ &\quad \left. + \frac{\tau}{u_{T,i}} \nabla_1 \hat{g}_T(\mathbf{w}, \lambda_{T,i}; \mathbf{t}_i, \tilde{\mathcal{B}}_{T,i}^-) \right]. \end{aligned}$$

C More Details on GloFND

C.1 High-level Intuition for α Hyperparameter

The hyperparameter α allows GLOFND to adapt to different definitions of false negatives. Note that the "optimal definition" of false negative depends on the task of interest. For instance, in a dataset like ImageNet, we might consider two classification tasks: (1) classifying between cars and animals, and (2) classifying dog breeds. Two images of a dog from different breeds might be considered a false negatives for (1) but not for (2). Consequently, the optimal percentage of false negatives (i.e., α) for tasks (1) and (2) is different. Thus, α enables GLOFND to adapt to varying levels of granularity in false negative definitions.

The value of α can be set based on prior knowledge of the number/probability of false negatives, the desired granularity of representations, or tuned like other hyperparameters such as the temperature. If α is too low, GLOFND may fail to identify sufficient false negatives, leading to minimal impact on the learned representations, though not degrading performance, as setting $\alpha = 0$ is equivalent to disabling GLOFND. Conversely, if α is too high, GLOFND may identify too many false negatives. If these are filtered out during training, the reduced number of negative pairs can limit contrastive learning, potentially harming performance. For tuning, it is recommended to start with a low α and gradually increase it until no further performance gains are observed.

C.2 More Details on Computational Efficiency

When using GLOFND with a contrastive method based on embedding similarity (e.g., SimCLR, SogCLR, and CLIP), pairwise similarities are already computed as part of the loss function. Thus, the only additional computations required are: (1) updating the λ_i values for the mini-batch samples and (2) filtering the false negatives. Both operations involve basic matrix computations and run in linear time with respect to the number of pairs in a batch ($O(B^2)$, where B is the batch size). The computational overhead of GLOFND is minimal compared to the cost of cosine similarity computation and forward/backpropagation.

Our experiments on ImageNet100 with a batch size of 128 show that GLOFND introduces only a **2% increase** in per-epoch training time for SogCLR (435.19 s for SogCLR + GLOFND vs. 426.67 s for SogCLR). This overhead is comparable to that of the batch-wise method FNC (434.06 s).

D More Details on Experiments

All the experiments are implemented using the PyTorch [Paszke et al., 2019] library. The unimodal experiments are run on a single NVIDIA A30 with 24GB memory size, while the bimodal experiments make use of a multi-node setup with 2 nodes, each with 2 NVIDIA A100 GPUs with 40GB each. The estimated amount of time to run a single experiment is 1.5 days for ImageNet100, and 14 hours for CC3M.

D.1 Additional Details for Unimodal Experiments

Experiment Setup. Following prior work [Yuan et al., 2022], we pretrain a ResNet-50 [He et al., 2015] with a 2-layer 128×128 projection head on top of the backbone encoder. We use square root learning rate scaling ($0.075 \times \sqrt{\text{BatchSize}}$) with a cosine decay schedule without restart. Additionally, we apply a linear learning rate warm-up for 10 epochs, where the learning rate linearly increases to its maximum value.

We adopt the same augmentation pipeline as in SogCLR [Yuan et al., 2022], utilizing the torchvision implementation. This includes RandomResizedCrop (resizing to 224×224), random ColorJitter, RandomGrayscale, random GaussianBlur, RandomHorizontalFlip, and normalization using ImageNet statistics.

The network is pretrained for 200 epochs with a batch size of 128. We use the LARS optimizer [You et al., 2017] with a weight decay of $1e - 6$ and momentum of 0.9. The temperature (τ) is set to 0.1, and for SogCLR, $\gamma = 0.9$. For GLOFND, we set $\alpha = 0.01$ and tune the starting epoch from $\{70, 90, 110\}$, after which we begin updating λ_i with Adam updates using a learning rate of 0.05, $\beta_1 = 0.9$, and $\beta_2 = 0.98$. For FNC, $\alpha = 0.01$ and the starting epoch is tuned from $\{10, 30, 50, 70, 90, 110, 130\}$, selecting the value that yields the best semi-supervised average performance.

Linear Evaluation. We evaluate GLOFND’s ability to produce better representations through linear evaluation. Specifically, we freeze the encoder’s weights at the last iteration of pretraining, remove its projection head, and train a linear classifier (a single fully connected layer) on top of the encoder’s output.

Additionally, we employ a semi-supervised learning setup, using different fractions of labeled training data during linear evaluation. We train on random subsets of 100% (full dataset), 10%, 1%, and 0.1% of the training data. For each fraction, we report the top-1 accuracy on the validation set

and average the performance across the different percentages to obtain the overall semi-supervised performance.

We train for 90, 285, 900, and 900 epochs corresponding to 100%, 10%, 1%, and 0.1% labeled data, respectively, with a batch size of 1024 and early stopping if the validation accuracy does not improve for 100 epochs. We use AdamW [Loshchilov and Hutter, 2019] with a weight decay of 0, momentum of 0.9, and a learning rate of 0.1. The same augmentation pipeline used in SogCLR is applied for linear evaluation. For training, we use RandomResizedCrop (resizing to 224×224), RandomHorizontalFlip, and normalization. For testing, we resize the images to 256×256 , apply CenterCrop to 224×224 , and normalize.

Transfer Learning Datasets. We additionally examine the transfer learning performance on Food-101 [Bossard et al., 2014], CIFAR-10 and CIFAR-100 [Krizhevsky, 2009], Stanford Cars [Krause et al., 2013], Describable Textures Dataset (DTD) [Cimpoi et al., 2014], Oxford-IIIT Pets [Parkhi et al., 2012], Caltech-101 [Li et al., 2022], and Oxford 102 Flowers [Nilsback and Zisserman, 2008]. We follow the evaluation protocols in the papers introducing these datasets, i.e., we report top-1 accuracy for Food-101, CIFAR-10, CIFAR-100, Stanford Cars, and DTD; and mean per-class accuracy for Oxford-IIIT Pets, Caltech-101, and Oxford 102 Flowers. We report results on the test set and, for DTD, we report results only for the first split. Caltech-101 defines no train/test split, so we randomly select 20% of images per class to create the test set.

Transfer Learning Evaluation. We train an ℓ_2 -regularized multinomial logistic regression classifier on features extracted from the frozen pretrained network after removing the projector head. For each method, we select the pretrained network that achieved the highest semi-supervised average performance, as used in the semi-supervised results.

We employ L-BFGS and apply the same preprocessing as during validation in the linear evaluation setting: resizing to 256, center-cropping to 224, and normalizing. We report the best test performance across different ℓ_2 regularization parameters, selecting from a range of 10 logarithmically spaced values between 10^{-6} and 10^5 .

D.2 Additional Details for Bimodal Experiments

Datasets. For bimodal learning, we use the Conceptual Captions 3M (CC3M) [Sharma et al., 2018] dataset. Because some links have expired, our downloaded training set of CC3M contains 2, 723, 840 image-text pairs. We evaluate the performance by leveraging the Datacomp Benchmark [Gadre et al., 2023], which includes 38 zero-shot downstream tasks. We report the average performance, named Datacomp. For each scenario, we select the model with the best Datacomp average and also report its average performance on two subsets of the tasks: zero-shot image classification on ImageNet and its different variants (IN & Variants), and zero-shot cross-modal image-text retrieval. IN & Variants includes ImageNet-1k [Russakovsky et al., 2015] and 6 ImageNet distribution shift datasets (i.e., ImageNet-Sketch [Wang et al., 2019], ImageNet-V2 [Recht et al., 2019], ImageNet-A [Hendrycks et al., 2021b], ImageNet-O [Hendrycks et al., 2021b], ImageNet-R [Hendrycks et al., 2021a], and ObjectNet [Barbu et al., 2019]). Retrieval tasks consist of Flickr30K [Plummer et al., 2017], MSCOCO [Lin et al., 2015], and WinoGAViL [Bitton et al., 2022].

Experiment Setup. Following previous work [Wei et al., 2024], we use a 12-layer transformer [Vaswani et al., 2017] as the text encoder and ResNet50 as the vision encoder. All experiments are conducted in a multi-node setting with 2 nodes, each equipped with two A100 40GB GPUs. We pretrain for 37 epochs with a global batch size of 1024. The AdamW [Loshchilov and Hutter, 2019]

optimizer is used with $(\beta_1, \beta_2) = (0.9, 0.999)$, $\epsilon = 1e-8$, and a learning rate of $1e-3$. A weight decay of 0.1 is applied, with a warm-up period of 10k steps. The learning rate follows a cosine schedule, initially increasing linearly during the warm-up phase and then decreasing according to a cosine function. A cosine γ schedule is employed, with a minimum γ of 0.2 and decay epochs set to 18.

For SogCLR, the temperature parameter is set to 0.03. In FastCLIP, we set the initial temperature parameter to 0.07, ρ to 6.5, and the learning rate for τ to $2e-4$. Additionally, the learning rate of τ decays to one-third of its original value when τ falls below 0.03. The complete set of hyperparameters is summarized in Table 5. We tune $\alpha \in \{5e-4, 1e-3\}$ and the starting epoch in $\{15, 20\}$. For SogCLR, we start using FNC/GLOFND after 15 epochs with $\alpha = 5e-4$, while for FastCLIP we start after 20 epochs with $\alpha = 1e-3$. For both losses, we initialize $\lambda_i = 1$ and use Adam updates with a learning rate of 0.05.

Table 5: Hyperparameters for bimodal training

Hyperparameter	CC3M
Optimizer	AdamW
β_1, β_2	(0.9, 0.999)
ϵ	1e-8
Learning rate	1e-3
Weight decay	0.1
Warm-up steps	10k
Cosine γ min	0.2
Decay epochs	18
Temperature (SogCLR)	0.03
Initial temperature (FastCLIP)	0.07
ρ (FastCLIP)	6.5
Learning rate of τ (FastCLIP)	2e-4

D.3 Additional Unimodal Experimental Results

Statistical Significance. We check for statistical significance between using the false negative approaches against not using them, which we consider the baseline. Thus, we compute p-values via a paired t-test between SogCLR + FNC/GLOFND and SogCLR baseline across multiple runs, with the alternative hypothesis testing for performance greater than the baseline.

We report in Tables 6 and 7 the p-values with respect to the baseline for the unimodal semi-supervised and transfer learning experiments respectively, and consider a standard significance level of 5%. For the semi-supervised scenario, we can observe GLOFND achieves a p-value below 0.018

Table 6: Unimodal semi-supervised linear evaluation p-values WRT the baseline (SogCLR). We color red those above the 0.05 threshold. The p-values are calculated via a paired t-test across multiple runs with the alternative hypothesis testing for performance greater than the baseline.

Method	100.0%	10.0%	1.0%	0.1%
SogCLR + FNC	0.011	0.035	0.014	0.024
SogCLR + GLOFND	0.002	0.011	<0.001	0.018

Table 7: Unimodal transfer learning evaluation p-values WRT the baseline (SogCLR). We color red those above the 0.05 threshold. The p-values are calculated via a paired t-test across multiple runs with the alternative hypothesis testing for performance greater than the baseline.

Method	CIFAR10	CIFAR100	Food101	Caltech101	Cars	DTD	Pets	Flowers
SogCLR + FNC	0.158	0.056	0.219	0.249	0.235	0.080	0.032	0.036
SogCLR + GLoFND	0.143	0.005	0.021	0.024	0.006	0.123	0.002	0.005

on all scenarios, thus achieving statistically significant improvements in all scenarios. Moreover, GLoFND achieves statistical significance below the 1 % level on both the 100% and 1% scenarios. For the transfer learning case, GLoFND achieves statistically significant improvements on 6 out of 8 datasets, while FNC only achieves it on 2 of 8.

More examples of false negatives identified by GLoFND. Figure 7 shows examples of false negatives identified by GLoFND for ImageNet100 with $\alpha = 0.01$ during training. We can observe that the number of false negatives identified is not constant for all anchors since we are using a dynamic threshold for each anchor, as opposed to a mini-batch top k approach. Moreover, the false negatives identified by GLoFND are semantically similar to the anchor image, which is what we aim to achieve.

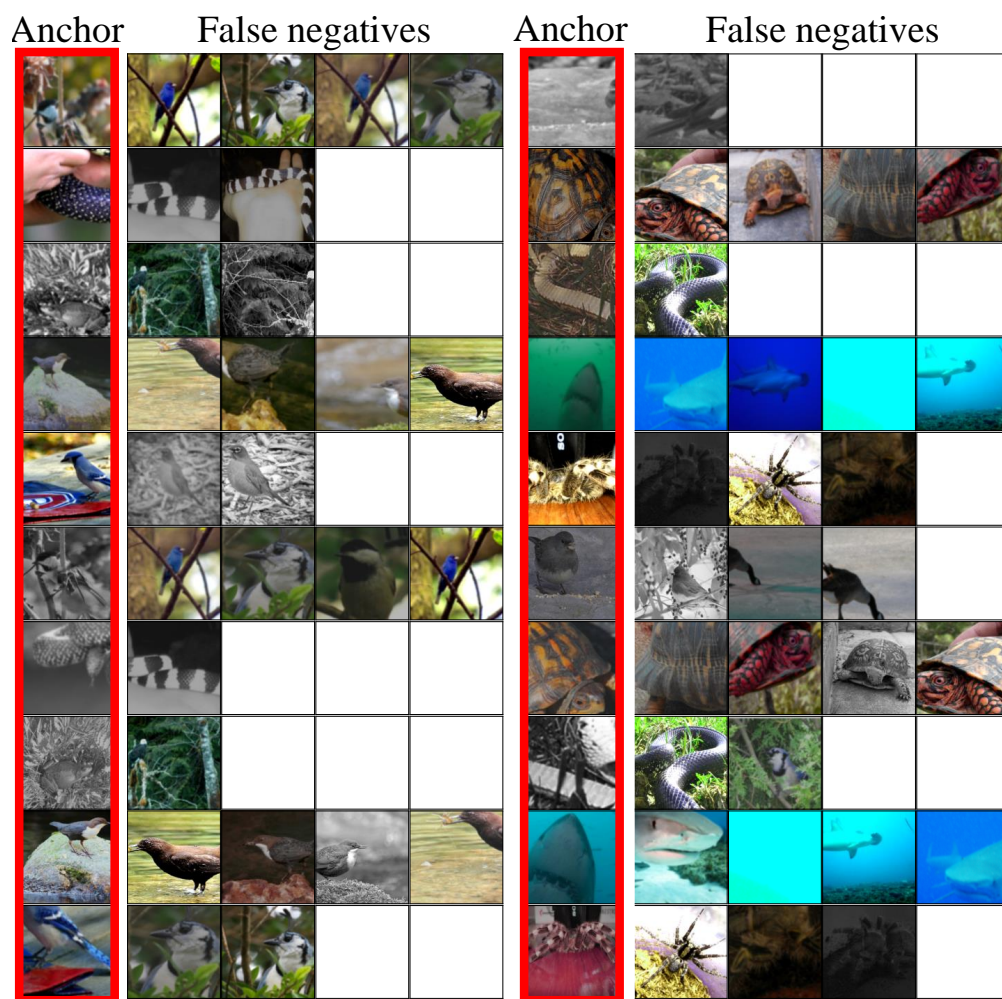


Figure 7: Examples of false negatives identified for ImageNet100 by GLOFND with $\alpha = 1\%$. The left column is the anchor image and the rest are identified false negative samples.