

WorldModelBench: Judging Video Generation Models As World Models

Dacheng Li^{1*} Yunhao Fang^{2*} Yukang Chen³ Shuo Yang¹
 Shiyi Cao¹ Justin Wong¹ Michael Luo¹ Xiaolong Wang^{2,3}
 Hongxu Yin³ Joseph E. Gonzalez¹ Ion Stoica¹ Song Han^{3,4} Yao Lu³
 UC Berkeley¹ UC San Diego² NVIDIA³ MIT⁴

Abstract

Video generation models have rapidly progressed, positioning themselves as video world models capable of supporting decision-making applications like robotics and autonomous driving. However, current benchmarks fail to rigorously evaluate these claims, focusing only on general video quality, ignoring important factors to world models such as physics adherence. To bridge this gap, we propose WorldModelBench, a benchmark designed to evaluate the world modeling capabilities of video generation models in application-driven domains. WorldModelBench offers two key advantages: (1) **Against to nuanced world modeling violations:** By incorporating instruction-following and physics-adherence dimensions, WorldModelBench detects subtle violations, such as irregular changes in object size that breach the mass conservation law—issues overlooked by prior benchmarks. (2) **Aligned with large-scale human preferences:** We crowd-source 67K human labels to accurately measure 14 frontier models. Using our high-quality human labels, we further fine-tune an accurate judge to automate the evaluation procedure, achieving 8.6% higher average accuracy in predicting world modeling violations than GPT-4o with 2B parameters. In addition, we demonstrate that training to align human annotations by maximizing the rewards from the judge noticeably improve the world modeling capability. The website is available at <https://worldmodelbench-team.github.io>.

1. Introduction

Video generation models have achieved remarkable success in creating high-fidelity and realistic videos [8, 13, 18, 22, 27, 40, 42, 49, 54, 59]. Beyond generating visually compelling content, these models are increasingly seen as potential **video world models**. Video world models simulate

*indicates equal contribution. Part of the work was done when Dacheng Li and Yunhao Fang were summer interns at NVIDIA. Correspondence to: dacheng177@berkeley.edu, yuf026@ucsd.edu, songhan@mit.edu, jasonlu@nvidia.com.

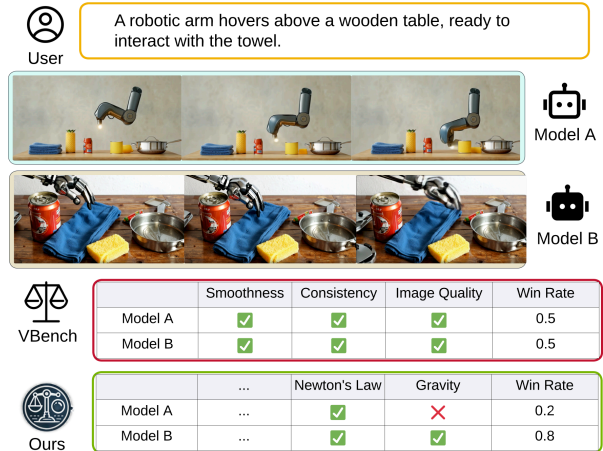


Figure 1. Model A and B generate high quality videos, but the robotic arm in A’s video is on the air, violating gravity. Established benchmarks focus on general video quality assessment, and does not distinguish videos that violate physical laws.

feasible future frames based on given text and image instruction [1, 29, 40]. These future frames obey real-world dynamics and unlock grounded planning on decision-making tasks such as robotics, autonomous driving, and human body prediction [1, 6, 7, 9, 10, 19, 60].

Despite their potential, the ability of video generation models to act as reliable world models remains speculative. Existing benchmarks primarily evaluate on general video quality such as temporal consistency and aesthetic coherence [24, 34, 51]. While these measures are necessary for video world models, they are inadequate. Importantly, they do not adequately capture real-world dynamics, e.g. adhere to basic real-world physics (Figure 1). While efforts like VideoPhy [4] introduce physics-based evaluations, their focus on interactions between daily objects overlooks broader application-driven scenarios.

To address the gap, we introduce WorldModelBench to judge the world modeling capability of video generation models. WorldModelBench consists of 350 image and text condition pairs, ranging over 7 application driven domains, 56 diverse subdomains, and provides support for both text-to-

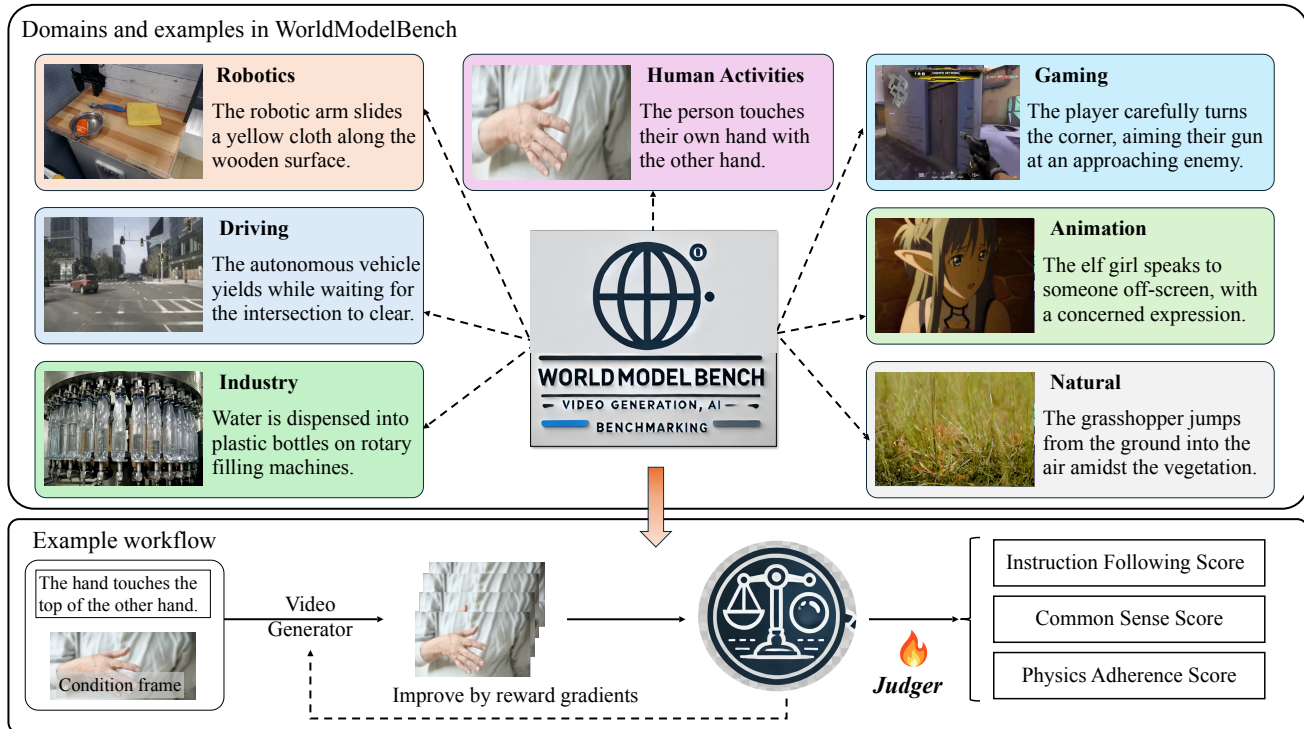


Figure 2. **Overview of WorldModelBench.** WorldModelBench **judges** the **world modeling** capability of video generation models across diverse **application-driven** domains. On WorldModelBench, a model generates a video based on text and optionally image conditions and is scored along **commonsense**, **instruction following**, and **physics adherence** dimensions. We collect **67K human labels** to evaluate 14 frontier models. WorldModelBench is paired with a fine-tuned judge, providing fine-grained feedback for future models, and training to aligns its reward improves world modeling capabilities.

video (T2V) and image-to-video (I2V) models. In addition to being a comprehensive benchmark, WorldModelBench features two **unique** advantages.

Firstly, WorldModelBench detects nuanced world modeling violations that are overlooked by previous benchmarks. WorldModelBench maintains a minimal evaluation on general video quality (frame-wise and temporal quality), and focuses to introduce two dimensions specifically for world modeling: instruction following and physics adherence. It further provides fine-grained categories for these two dimensions to capture nuances: instruction following dimension is broken down into four levels and physics adherence are listed into five common violations (§ 3.1). By using this setup, it effectively capture cases such as object changing sizes as Newton’s law violation.

Secondly, WorldModelBench is paired with large-scale human labels. We conduct a large scale human annotation procedure and collect **67K** human labels to accurately reflect the performance of existing models with the proposed metrics (§ 3.3). Using these human annotations, we offer several key insights of current video generation models, e.g. insufficient tuning on I2V models, in §4. We further fine-tune a 2B parameter judge on the collected human labels to facil-

itate future model evaluations. We find that the fine-tuned judge, despite lightweight, learns to predict human preference with 9.9% lower error rate than GPT-4o [2], thanks to our high-quality human labels. More importantly, we find that aligning the human annotations by maximizing the scores from the fine-tuned judge improves the world modeling capability of video generation models [42, 62]. Our contributions are:

1. We demonstrate that previous benchmarks are insufficient for video world models, and contribute WorldModelBench to measure world modeling capability of video generation models on diverse application driven domains.
2. An accurate fine-tuned judge. This judge accurately predicts world modeling violations, and fine-tuning on its rewards leads to better generation.

2. Related Works

Video generation models Many diffusion-based video generation models have made major improvement in synthesizing realistic videos [3, 12–15, 18, 21, 22, 27, 28, 35, 36, 36, 37, 40, 45, 47, 49, 53, 54, 56, 57, 59, 62]. Many of these models synthesized videos based on input text condition, e.g. [12, 13, 21, 27, 35, 37, 40, 47, 49, 56, 62] image con-

dition [5], or both [28, 53, 54, 62]. In this paper, we focus on evaluation of video models that take in text and image conditions.

Evaluation of video generation models. Previous video generation evaluation mainly uses single-number metric such as Frechet Video Distance (FVD) [46] and CLIPSIM [43]. Huang et al. [24] establishes VBench that provides a comprehensive evaluation on video generation models, focusing on general video quality and video-condition consistency. Wu et al. [51] proposes T2VScore with text-video and general video quality criteria. Bansal et al. [4] further proposes to evaluate videos on whether it follows the correct physics rules in a 0 or 1 granularity. They also keep an instruction following category in a 0 or 1 granularity. Our WorldModelBench further improves along the direction with more fine-grained physics scoring and instruction following scoring, incorporating diverse application domains, and also incorporate previous metrics from VBench. He et al. [20] also uses human annotators, but does not focus on physics and instruction following capability. [25] studies the physics adherence of video generation models on 2D simulation.

Reward models for video generation models Li et al. [31], Prabhudesai et al. [42] explores using reward models to improve the quality of video generation models. Unlike a rich set of image reward models [26, 52, 55], there is fewer video reward models [31]. VideoPhy collects human labeled data with 0-1 corase labels on whether the model follows instruction or physics. However, they do not further improve the video generation based on the trained reward model. In this paper, we collected a large scale of human preference in video, specifically in the context of world modeling, and train an accurate reward model to reflect human preference.

Learning from reward models has been shown effective to align the model output with human preference in the text domain [30, 41]. In the video generation domain, [58] uses a text-image reward model (RM) to improve the generation quality from human feedback. [31] further extends the idea to use a mixture of text-image and text-video RM to improve model. [42] proposes the reward gradient framework that incorporates multiple reward models. We follow the reward gradients framework with our fine-tuned judger as the reward model to improve the video generation capability.

3. WorldModelBench

In this section, we formally introduce WorldModelBench.

Design principle An ideal video world model should synthesize feasible next few frames of the world in response to text (and image) instruction, to facilitate decision-making downstream applications. Thus, the assessment of these models should include: the judgment on the ability to precisely *follow instruction* in input condition, the judgment on the ability to accurately *synthesize next few frames*, and include *diverse application domains*.

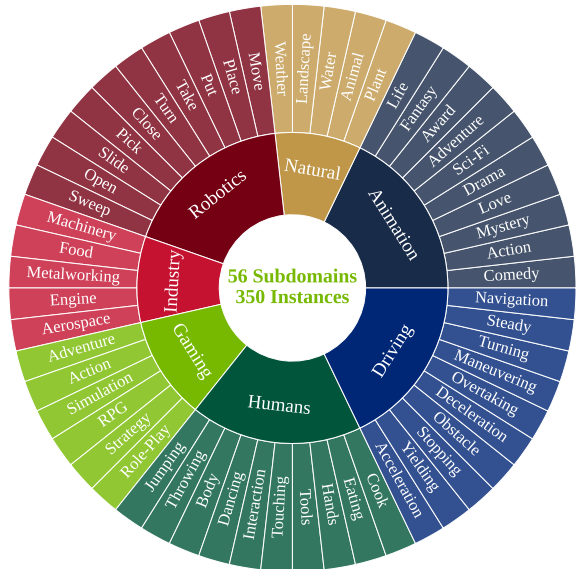


Figure 3. WorldModelBench consists of 7 domains and 56 subdomains, totaling 350 image and text conditions.

Specifically, we breakdown our grading criteria into two parts: (1) **Instruction following**: whether the generated videos correctly follow the text (and image) prompt, and (2) **Future frame generation**: whether the generated videos represents feasible next state of the world, including *physics adherence* and *commonsense*. We introduce fine-grained categories under these two parts in §3.1. The detailed curation procedure is described in §3.2. Finally, we present the procedure for obtaining human annotations in §3.3.

3.1. Grading Criteria

For each instances in WorldModelBench, a model generates a video based on the text (and image) condition. Each video is then graded in a fine-grained manner along the following dimensions, totaling a score up to 10. Table 1 compares WorldModelBench with existing benchmarks.

3.1.1. Instruction Following

We define four levels of instruction-following performance and assign scores according to the level (scores 0–3).

Level 0 The subject is either absent or remains stationary.

Level 1 The subject moves but fails to follow the intended action. For example, if the prompt instructs a car to turn left, but the generated video shows the car turning right.

Level 2 The subject partially follows the instruction but fails to complete the task. For instance, if the prompt asks a human to touch their shoulder, but the generated video only shows the human moving their hand toward the shoulder without completing the action.

Level 3 The subject fully and accurately completes the instructed task.

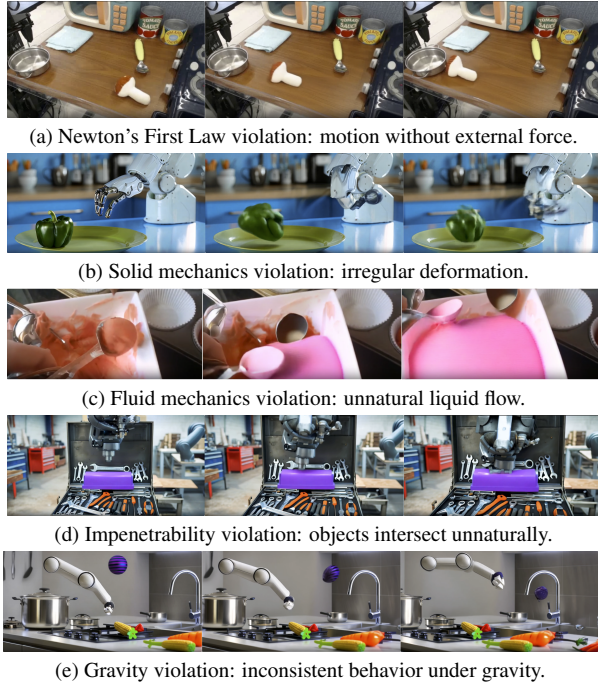


Figure 4. Examples of violations across physics categories.

3.1.2. Physics Adherence

Physics laws are the foundational principles of the physical world, and their adherence serves as a critical proxy for assessing the plausibility of generated frames. WorldModelBench evaluates video generation models using five fundamental physical laws, selected based on common failures of contemporary models and findings from related work [4]. Each law is assigned a binary score of 0 or 1, totaling scores from 0 to 5. Examples of violations are illustrated in Figure 4.

Law 1: Newton's First Law: Objects does not move without external forces.

Law 2: Conservation of Mass and Solid Mechanics: objects do not irregularly deform or distort.

Law 3: Fluid Mechanics: Liquid does not flow unnaturally or irregularly.

Law 4: Impenetrability: Objects does not unnaturally pass through each other.

Law 5: Gravitation: Objects does not violate gravity, such as floating.

3.1.3. Commonsense

While measures of general video generation quality is not the main focus of WorldModelBench, they are a prerequisite to a good video world model, i.e., *commonsense*. For instance, a feasible representation of future states needs to have coherent motion and visually reasonable quality. In particular, we follow the categorization of Huang et al. [24], and summarize the commonsense into temporal-level and frame-wise quality.

We give a score of 0 or 1 for each quality (total scores 0–2).

Frame-wise quality: Whether there is visually unappealing frames or low-quality content.

Temporal quality: whether there is noticeable flickering, choppy motion, or abrupt appearance (disappearance) of irrelevant objects.

Table 1. Comparison of WorldModelBench to other existing video benchmarks: VBench, VideoArena, and VideoPhy.

	VBench	VideoArena	VideoPhy	Ours
<i>Metrics</i>				
Instruction				
Following	✓	×	✓	✓
Common				
Sense	✓	×	×	✓
Physics				
Adherence	×	×	✓	✓
<i>Support Types</i>				
T2V	✓	✓	✓	✓
I2V	✓	✓	×	✓
<i>Basic Statistics</i>				
Prompt				
Suite Size	946	1500	688	350
Human Label	-	30k	73k	67k
Label Release?	-	No	No	Yes

3.2. Curating Procedure for Diverse Domains

WorldModelBench covers a diverse domains of autonomous driving, robotics, human activities, industrial, natural scenes, simulation gaming, and animation. Each domain consists of 50 samples from 5-10 subdomains. Each sample is a text and image condition pair. Figure 3 visualizes the subdomains. To ensure the quality, we perform the following three steps to obtain each sample.

- Obtaining a reference video.** To ensure that texts and images condition pairs are feasible, we select a initial sets of videos from existing datasets as reference: driving from [11], robotics from [39] and human activities from [10]. These datasets originally have categories, so we select common ones as our subdomains. We select the reference video of the remaining domains from [38]. Specifically, we use GPT-4 [2] to caption videos and filter keywords of the domains. We also select the most popular subdomains within these domains.
- Obtaining the text and image condition.** For each reference video, we select the first frame as an image condition. We use GPT-4o [2] to caption the difference between the first frame and the subsequent frames as the action. We also recaption the image condition to support T2V model. We perform detailed prompt engineering so that the T2V model can have a coherent view of the video (e.g. the objects described in the action will appear in the description of the first frame description).

3. **Human-in-the-loop verification** The previous two steps can introduce errors. For instance, some videos can have black initial frames, the captioning from GPT-4 is not always precise, and that some videos do not have potential violation of the grading criteria. Thus, we manually verify all the 350 images and text conditions are of good quality.

3.3. Obtaining a Reliable World Modeling Judge

While large (visual) language models have achieved decent agreement with human judges in domains such as chat assistants [17, 61], it is unclear whether this ability holds true on the world modeling domain, in particular, when it involves subjects such as understanding physics laws. To draw reliable conclusions on contemporary video generation models, we perform a large scale of human annotations. For each vote, we require the human voter to complete a dense annotation with selection of all criteria described in 3.1. In the other words, one complete annotation contains a rich set of 8 human labels on world modeling. Thanks to the scale of our annotations, one generated video can receive more than one vote, which allows us to compute human agreement to validate our vote quality.

Vote statistics We show the statistics of human votings in Table 2. For basic statistics, we collect 8336 complete votes, translating into 67K human labels. We also check the quality of our votes by computing agreement statistics between voters: 87.1% of votes are within an absolute score difference of 2. To inspect the quality of our votes by comparing to related works that are mainly arena-style, we convert our votes into pairwise comparison. In particular, if there are more than one vote for a video, we compute the win or loss against other models of the same prompt by comparing the total scores, and report the probability of getting the same result (win or loss) as the pairwise agreement. We found a 70% pairwise agreement, which is comparable to the 70 ~ 75% in Bansal et al. [4] and 72.8% ~ 83.1% in Chiang et al. [17]. Furthermore, we select votes from 10 experts that are at least CS PhD level as experts. We compute an interval of 1 standard deviation away from the mean of expert votes. We find that 96.2% and 95.4% of experts and crowd votes fall into this interval, validating the quality from crowd votes.

Table 2. Vote statistics of WorldModelBench.

Basic Statistics		Agreement Statistics	
# complete votes	8336	Pairwise agreement	70.0%
# voters	65	Score agreement (± 2)	87.1%
# votes per video	1.70	Experts agreement ($\pm \sigma$)	96.2%
# labels	67K	Crowd agreement ($\pm \sigma$)	95.4%

WorldModelBench-Hard Based on the previous voting results, we curate a smaller hard subset WorldModelBench-Hard to facilitate the model evaluation. Specifically, WorldModelBench-Hard consists of 45 prompts with the

lowest average score from the five closed-source models. More details can be found at Table 8.

Fine-tuning for automatic evaluation To obtain an automatic judge for future released model, we fine-tune a visual language model(VLM) on the collected annotations [48]. We process a single vote as 8 question answering pair, where the VLM takes in the text (and image) condition and the generated videos, and output the score for individual grading criteria in § 3.1. For each prompt, we randomly select 12 generated videos as the training set, and the remaining generated videos as the test set. The results are shown in §4. As a preview, we found that existing *leading propriety VLM (GPT-4o)* achieves decent performance in world model understanding, providing a new use case for VLM-as-a-judge paradigm. Our fine-tuned judge, with only 2B parameter, efficiently achieves higher accuracy.

3.4. Alignment Using the Fine-tuned Judge

VLMs trained on internet-scale visual (images and videos) and text data possess broad world knowledge and strong reasoning capacities, making them promising candidates as “world model teachers”. Our judge model, a VLM fine-tuned with human data, is well-suited to provide real-world feedback to enhance video generation models as a more accurate world simulator. We propose a differentiable “learn from feedback” approach to improve a pre-trained video diffusion model using our autoregressive judge.

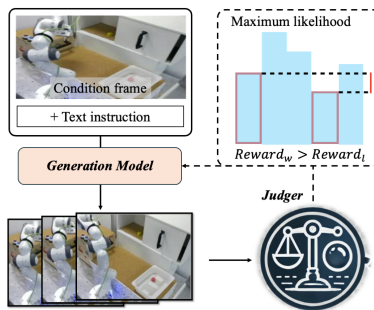


Figure 5. We enhance video generation models by leveraging sparse rewards from our fine-tuned judge. Solid arrows indicate the forward process, while dashed lines are gradient directions.

Building on VADER[42], we formulate our training objectives as follows, given a pre-trained video diffusion model $p_\theta(\cdot)$, an *autoregressive* reward model $R(\cdot)$, a grading criteria G , and a context dataset D_c . Our training objective is to maximize the reward from the world model judge:

$$J(\theta) = \mathbb{E}_{c \sim D_c, \mathbf{x}_0 \sim p_\theta(\mathbf{x}_0|c)} \left[\sum_{g \sim G} R(\mathbf{x}_0, c, g) \right] \quad (1)$$

where \mathbf{x}_0 represents the generated video. The reward model evaluates the generated video based on key crite-

Table 3. Model performance on WorldModelBench on human annotations. Bold and underline indicates the best performance over all models, and open models respectively. "Deform.", "Penetr.", "Grav." is short for "Deformation", "Penetration", "Gravitation".

Model	Instruction	Common Sense		Physics Adherence					Total
		Frame	Temporal	Newton	Mass	Fluid	Penetr.	Grav.	
Closed Models									
KLING [27]	2.36	0.94	0.92	0.93	0.88	0.96	0.89	0.93	8.82
Minimax [37]	2.29	0.91	0.88	0.93	0.81	0.96	0.86	0.94	8.59
Mochi-official [3]	2.01	0.89	0.83	0.94	0.82	0.99	0.92	0.98	8.37
Runway [44]	2.15	0.87	0.78	0.91	0.69	0.94	0.82	0.91	8.08
Luma [35]	2.01	0.81	0.76	0.89	0.62	0.95	0.77	0.90	7.72
Open Models									
Mochi [3]	2.22	0.63	0.63	0.94	0.58	<u>0.97</u>	0.71	0.94	<u>7.62</u>
OpenSoraPlan-T2V [28]	1.79	<u>0.70</u>	<u>0.77</u>	0.9	<u>0.66</u>	<u>0.97</u>	0.89	0.93	7.61
CogVideoX-T2V [56]	2.11	0.60	0.51	0.91	0.52	0.96	0.74	0.95	7.31
CogVideoX-I2V [56]	1.89	0.56	0.43	0.87	0.43	0.96	0.66	<u>0.96</u>	6.75
OpenSora-Plan-I2V [28]	1.77	0.47	0.54	0.84	0.42	<u>0.97</u>	0.70	0.92	6.62
Pandora [53]	1.56	0.42	0.53	0.91	0.50	0.96	0.74	0.94	6.57
T2VTurbo [32]	1.33	0.49	0.43	0.88	0.42	0.96	0.75	<u>0.96</u>	6.22
OpenSora-T2V [62]	1.71	0.40	0.33	0.89	0.32	0.95	0.60	0.92	6.11
OpenSora-I2V [62]	1.60	0.37	0.25	0.90	0.25	0.92	0.60	0.94	5.83

ria: instruction following, physical adherence, and commonsense as detailed in Section 3, and naively combine all sub-rewards through summation. To address the non-differentiability introduced by the discrete nature of language models, we instead optimize the probability gap of the categorical distribution over the answer tokens (e.g., $p(\text{token}("No")) - p(\text{token}("Yes"))$), where $p(\cdot)$ represents the categorical distribution after softmax for the final hidden states). This method enable us to compute the gradient $\nabla_{\theta} R(\mathbf{x}_0, c, g)$ and propagate it back to update the parameters of the video generation models.

4. Experiments

In the experiment section, we first show and analyze the results of current popular video generation models in our benchmark (§ 4.1) with their absolute average scores, pairwise elo score [16, 17], and per category breakdown scores. Additionally, we follow [17] to demonstrate the quality of the votes being used. Then, we evaluate our fine-tuned judge (§ 4.2), by showing its accuracy in prediction human annotations, and furthermore, the video quality improvement when applying the reward gradients method with it as the reward model. Lastly, we show ablation studies (§ 4.3) on the scaling effect of number of annotations, and the correlation of our benchmark to the ones in existing VBench [24].

Models We measure 14 models in total. For open-sourced models, we include OpenSora-v1.2 (T2V and I2V) [62], OpenSora-Plan-v1.3 (T2V and I2V) [28], T2VTurbo-v2 [32], CogVideoX-5B (T2V and I2V) [56], Pandora [53], and mochi [3]. For close-sourced models, we include luma-1.6 [35], runway-3.0 [44], minimax [37], kling-v1.5 [27],

and an API version of mochi (Mochi-official). We use the recommended hyper-parameters for open-source models (details in the appendix).

4.1. Evaluation Results

This section analyzes the performance of evaluated models and the quality of the votes.

Detailed scores Table 3 shows scores for all models averaged over all prompts. We present four key observations:

- **Large gap to ideal video world model:** The top scoring model, kling, has only 61% of videos correctly finish the specified task. Furthermore, 12% of the generated videos violate mass conservation law and 11% synthesize objects penetrating each others. This indicates that it not yet has a perfect understanding of properties of physical objects.

- **Better commonsense metrics do not lead to a better video world model.** Luma has higher frame-wise quality (0.81 versus 0.63) and temporal quality (0.76 versus 0.63) scores than the best open model, mochi. Yet, its instruction following capability is much worse than mochi (44% versus 53% videos finish the specified task), and similar physics adherence (4.13 versus 4.14). While previous benchmark [24] mainly focus on the common sense dimension, our results further indicate dimensions that need be considered when training the video generation models.

- **I2V models are worse than their T2V counterpart.** We observe this trend on all three pairs of models (cogvideox 7.31 versus 6.75, opensoraplan 7.62 versus 6.62, opensora 6.11 versus 5.83). This calls for a need to improve the I2V counterpart of released models.

Model	Scores \uparrow		Prediction
	Human (H)	Judge (J)	Error (100%)
Closed Models			
kling	8.82	9.08	2.95%
minimax	8.59	8.92	3.84%
mochi-official	8.37	8.66	3.46%
runway	8.08	8.63	6.81%
luma	7.72	8.24	6.74%
Open Models			
mochi	7.62	7.91	3.81%
OpenSoraPlan-T2V	7.61	8.04	5.65%
CogVideoX-T2V	7.31	7.65	4.65%
CogVideoX-I2V	6.75	7.08	4.89%
OpenSora-Plan-I2V	6.63	6.86	3.47%
pandora	6.57	6.90	5.02%
T2VTurbo	6.22	6.56	5.47%
OpenSora-T2V	6.11	6.17	0.98%
OpenSora-I2V	5.83	5.82	-0.17%

Table 4. **Score comparison between scores provided by humans and by the judge model.** The averaged predicting error ($\frac{1}{n} \sum_{i=1}^n \frac{Judge-Human}{Human}$) is 4.1%. The highest prediction error is 6.81%, showing the reliability of our judge model.

• **Top open models are competitive.** We found that the best open models, mochi and opensoraplan achieve close performance to some closed models (7.62, 7.61 total score versus 7.72 of luma). In particular, mochi has promising instruction following and physics adherence ability.

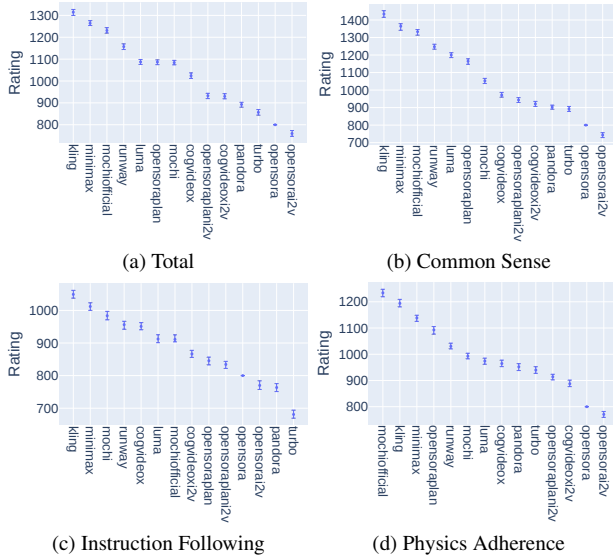


Figure 6. Model ELO rating for categories in WorldModelBench.

Pairwise comparison We further conduct a pairwise comparison of models in Figure 6. We convert our annotations to pairwise setting by enumerating all possible model combination for the same prompt. Following [17], we compute the ELO score using Bradley-Terry model with 100 bootstrapping rounds, using opensora as the 800 ELO calibration. We

further observe that there is a **tradeoff** between world modeling capability: e.g. mochi-official has the highest Physics adherence score, yet a middle instruction following score.

Subdomain breakdown We visualize the total scores against all 56 subdomains using heatmap in Figure 7. We find that most models suffer from autonomous driving, human activities and robotics categories, e.g. human throwing objects or jumping, robotics arm opening certain objects. These domains require complex interaction with the environment and accurate modeling of the subject (e.g. human bodies). While most models perform well on natural domains, e.g. on subjects such as plants, animals and water bodies. This calls for a new generation of model that specifically address these hard categories.

4.2. Quality of the Fine-tuned Judger

In this section, we show the quality of our fine-tuned judger in two dimensions. Firstly, we compare its accuracy against leading visual language models (GPT-4o) with various strategies on the test set of our benchmark. Then, we show that its score can be used to improve OpenSora-T2V.

Accuracy on test set To evaluate the effectiveness of our world model judger, we divide all benchmark votes into a training set and a test set. For each of the 350 prompts, we use videos from 14 different video generation models and annotations from up to 3 distinct voters. We randomly select outputs from 12 models, along with the original video (the video that generates the text prompt and the first frame as conditions, receiving full rewards), to construct the training set, while reserving the rest 2 models for the test set. Our fine-tuned judger is thus trained on a diverse mix of high-reward (high-quality) and low-reward (low-quality) samples, enabling it to effectively distinguish quality differences and predict scores for unseen videos generated from the same prompts.

Our dataset includes a total of 4421 videos with 8 human annotations for training, and 713 videos for evaluation (excluding some samples that closed API endpoints refuse). For prompts with multiple votes, we use the majority agreement as the ground truth sparse labels. To enhance alignment with world knowledge and the underlying reasoning processes, we prompt GPT-4o and Gemini-1.5-pro to generate reasoning chains on the training set, and retain chains that reach the correct final answer as additional training data. We then compare our fine-tuned judger’s accuracy with different decoding strategies applied to GPT-4o (with zero-shot, and chain-of-thought prompting [50]). Results from Table 5 show that the fine-tuned world model judger achieves higher accuracy than GPT-4o model.

Score comparison between judge and humans score We further compare the total score graded by humans or the judge model in Table 4. On average, the judge achieves 4.1% averaged prediction error on all 350 instances in our

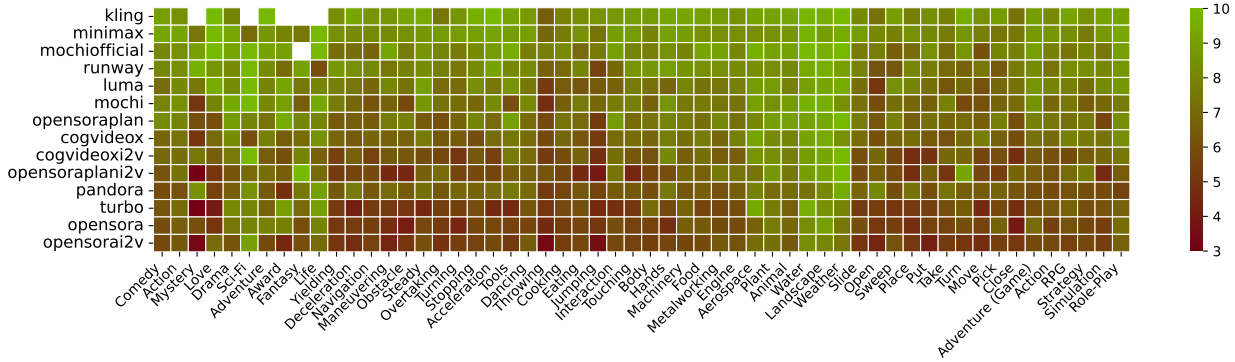


Figure 7. Total scores of model performance visualized with all subdomains. More red colors indicate lower scores; more green colors indicate higher scores. White color denotes missing values due to response refusal from private models.

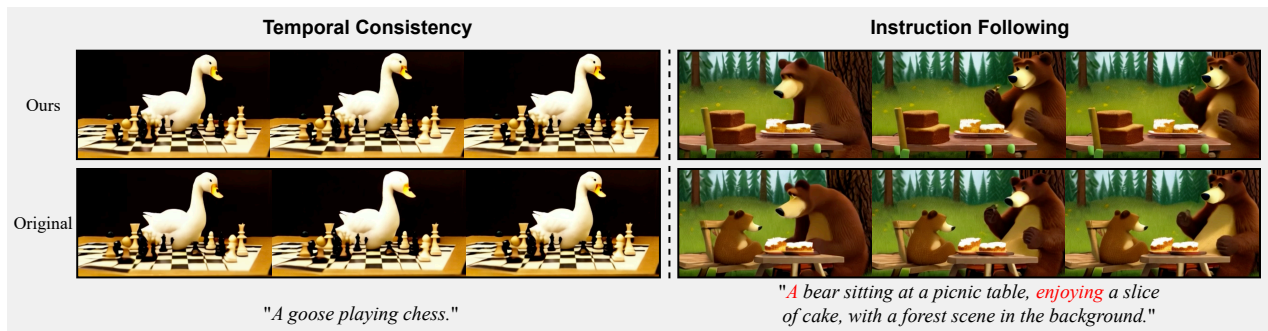



Figure 8. Improvement of our world model gradient method. The bottom row shows videos generated by the original Open-Sora 1.2, while the bottom row features videos produced by the reward-fine-tuned Open-Sora. The original issues of video flickering (left) and instruction non-compliance (right) are mitigated through learning from world model rewards. More results can be found at Figure 11.

Table 5. **Model prediction error results of different judge choices on WorldModelBench.** VILA-2B is a vision-language model with 2B parameters, trained on image and video understanding tasks [33]. We report the average error rate between the model’s predictions and the ground truth.

Model Prediction Error +Method	Instruction (%) following ↓	Common (%) Sense ↓	Physics (%) Adherence ↓
GPT-4o	29.3	35.0	36.0
+CoT	29.7	28.5	45.6
Gemini-1.5-Pro	30.7	34.5	29.3
+CoT	29.3	19.5	28.3
Qwen2-VL-2B	30.3	39.0	39.7
VILA-2B +Zero-Shot	21.0	28.0	24.0
VILA-2B +CoT Fine-tuned	32.3	16.4	29.7

benchmark. We provide further details of the instruction following dimension in Appendix 8.4.

Using the judge as the reward model We apply the algorithm in § 3.4 with our judge on OpenSora-v1.2 T2V. We show qualitative samples in Figure 8. This shows positive signs for future works to further improve the reward model.

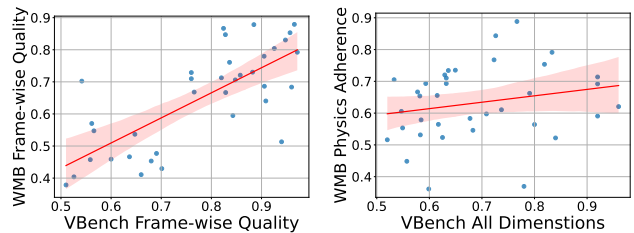

(a) Frame-wise Quality Correlation (b) Physics Adherence Correlation

Figure 9. Correlation of model win rates based on different dimensions on VBench and WorldModelBench. Each point represents the win rate between two models. The x-axis denotes the win rate according to VBench, while the y-axis denotes the win rate according to WorldModelBench.

4.3. Correlation to Established Benchmarks

Figure 1 provides a motivating example of WorldModelBench, over existing general video quality benchmark. In this section, we conduct an in depth comparative analysis with VBench [23].

We evaluate generated videos on WorldModelBench conditions with VBench grading procedure for Opensora, Pandora, Luma, minimax, mochi, Cogvideox, Kling and runway. We compute a pairwise win rate between a pair of models by

averaging their pairwise win or loss on the same text (and image) condition, over all available conditions in WorldModelBench, where the win rate $W_{A,B}$ for model A and model B is calculated as follows:

$$W_{A,B} = \frac{1}{|\text{prompts}|} \sum_{p \in \text{prompts}} \begin{cases} 1 & \text{if } \text{eval}_{A,p} > \text{eval}_{B,p} \\ 0 & \text{otherwise} \end{cases}$$

In Figures 9a and 9b, each point represents the win rate between two models, with the x-axis denoting the win rate according to VBench and the y-axis denoting the win rate according to WorldModelBench. Figure 9a illustrates the win rates when models are evaluated solely on frame-wise quality, while Figure 9b shows the win rates when models are evaluated based on physics adherence using WorldModelBench and on all dimensions using VBench. We observed a correlation coefficient of **0.69** between the frame-wise quality win rates, indicating a relatively strong correlation. This suggests that both benchmarks are effective in assessing general video quality and that our benchmark aligns with established standards. However, when examining the benchmarks’ ability to assess physics adherence, the correlation diminishes significantly to merely **0.28**. This indicates that VBench does not effectively distinguish between videos based on their adherence to physical laws. Supporting this observation, the supplementary material presents an analysis of VBench’s other dimension scores, revealing their inability to discriminate based on physics adherence.

5. Discussion

This section discusses several potential limitations and assumptions in the paper.

Compare to VideoPhy VideoPhy focuses on dality objects, which are not the most relevant domains to world models![4]. We directly measure performance on application domains such as robotics. In addition, WorldModelBench supports image-to-video models, and will open-source fine-grained labels.

Sample size WorldModelBench has a considerably smaller size of other video benchmarks, e.g., VideoPhy (688). We choose to lower the amount of prompts in our benchmark to enable fast evaluation due to the high inference cost of contemporary models (e.g. Mochi takes 5 minutes for 4 A100 GPUs). Nevertheless, WorldModelBench is indicative (Table 3): top 2 propriety models has a clear separation (8.82 versus 8.59)

6. Conclusion

This paper introduces WorldModelBench to evaluate video world models. We found that existing general video quality benchmark is insufficient in evaluating world modeling capability, such as physics adherence. WorldModelBench pro-

vides fine-grained world modeling capability feedback to existing video generation models on commonsense, instruction following, and physics adherence dimensions. We collect a large scale of human annotations of 67K to analyze contemporary video generation models as world models. We further fine-tune a VLM to accurately perform automatic judgement on the benchmark. Finally, we show promising signals that maximizing the rewards on the provided judge can improve current video generation models world modeling capability.

7. Acknowledgement

We would like to also thank student volunteers from the 6.5940 MIT course (2024 Fall), Qinghao Hu, Guangxuan Xiao, Jiaming Tang, Muyang Li, Shang Yang, Yujun Lin, Zhuoyang Zhang, Haotian Tang, Han Cai, Jinyi Hu, Yuxian Gu, Liuning He from MIT, Enze Xie from Nvidia, Xiuyu Li and Ziming Mao from UC Berkeley, Zeqi Xiao from NTU for helping us to set up annotation pipeline and helpful technical discussions.

References

- [1] 1X. 1x world model, 2024. Accessed: 2024-09-17. 1
- [2] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. 2, 4
- [3] Genmo AI. Genmo ai blog. <https://www.genmo.ai/blog>. Accessed: 2024-11-11. 2, 6, 1, 3
- [4] Hritik Bansal, Zongyu Lin, Tianyi Xie, Zeshun Zong, Michal Yarom, Yonatan Bitton, Chenfanfu Jiang, Yizhou Sun, Kai-Wei Chang, and Aditya Grover. Videophy: Evaluating physical commonsense for video generation. *arXiv preprint arXiv:2406.03520*, 2024. 1, 3, 4, 5, 9
- [5] Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. Stable video diffusion: Scaling latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127*, 2023. 3
- [6] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Joseph Dabis, Chelsea Finn, Keerthana Gopalakrishnan, Karol Hausman, Alex Herzog, Jasmine Hsu, et al. Rt-1: Robotics transformer for real-world control at scale. *arXiv preprint arXiv:2212.06817*, 2022. 1
- [7] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Xi Chen, Krzysztof Choromanski, Tianli Ding, Danny Driess, Avinava Dubey, Chelsea Finn, et al. Rt-2: Vision-language-action models transfer web knowledge to robotic control. *arXiv preprint arXiv:2307.15818*, 2023. 1
- [8] T Brooks, B Peebles, C Homes, W DePue, Y Guo, L Jing, D Schnurr, J Taylor, T Luhman, E Luhman, et al. Video generation models as world simulators, 2024. 1
- [9] Jake Bruce, Michael D Dennis, Ashley Edwards, Jack Parker-Holder, Yuge Shi, Edward Hughes, Matthew Lai, Aditi Mavalankar, Richie Steigerwald, Chris Apps, et al. Genie:

- Generative interactive environments. In *Forty-first International Conference on Machine Learning*, 2024. 1
- [10] Fabian Caba Heilbron, Victor Escorcia, Bernard Ghanem, and Juan Carlos Niebles. Activitynet: A large-scale video benchmark for human activity understanding. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 961–970, 2015. 1, 4
- [11] Holger Caesar, Varun Bankiti, Alex H Lang, Sourabh Vora, Venice Erin Liong, Qiang Xu, Anush Krishnan, Yu Pan, Giancarlo Baldan, and Oscar Beijbom. nuscenes: A multi-modal dataset for autonomous driving. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11621–11631, 2020. 4
- [12] Haoxin Chen, Menghan Xia, Yingqing He, Yong Zhang, Xiaodong Cun, Shaoshu Yang, Jinbo Xing, Yaofang Liu, Qifeng Chen, Xintao Wang, Chao Weng, and Ying Shan. Videocrafter1: Open diffusion models for high-quality video generation, 2023. 2
- [13] Haoxin Chen, Yong Zhang, Xiaodong Cun, Menghan Xia, Xintao Wang, Chao Weng, and Ying Shan. Videocrafter2: Overcoming data limitations for high-quality video diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7310–7320, 2024. 1, 2
- [14] Tsai-Shien Chen, Chieh Hubert Lin, Hung-Yu Tseng, Tsung-Yi Lin, and Ming-Hsuan Yang. Motion-conditioned diffusion model for controllable video synthesis. *arXiv preprint arXiv:2304.14404*, 2023.
- [15] Xinyuan Chen, Yaohui Wang, Lingjun Zhang, Shaobin Zhuang, Xin Ma, Jiashuo Yu, Yali Wang, Dahua Lin, Yu Qiao, and Ziwei Liu. Seine: Short-to-long video diffusion model for generative transition and prediction. In *The Twelfth International Conference on Learning Representations*, 2023. 2
- [16] Herman Chernoff. *Sequential design of experiments*. Springer, 1992. 6
- [17] Wei-Lin Chiang, Lianmin Zheng, Ying Sheng, Anastasios Nikolas Angelopoulos, Tianle Li, Dacheng Li, Hao Zhang, Banghua Zhu, Michael Jordan, Joseph E Gonzalez, et al. Chatbot arena: An open platform for evaluating llms by human preference. *arXiv preprint arXiv:2403.04132*, 2024. 5, 6, 7
- [18] Patrick Esser, Johnathan Chiu, Parmida Atighehchian, Jonathan Granskog, and Anastasis Germanidis. Structure and content-guided video synthesis with diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7346–7356, 2023. 1, 2
- [19] Shenyan Gao, Jiazhi Yang, Li Chen, Kashyap Chitta, Yihang Qiu, Andreas Geiger, Jun Zhang, and Hongyang Li. Vista: A generalizable driving world model with high fidelity and versatile controllability. *arXiv preprint arXiv:2405.17398*, 2024. 1
- [20] Xuan He, Dongfu Jiang, Ge Zhang, Max Ku, Achint Soni, Sherman Siu, Haonan Chen, Abhranil Chandra, Ziyang Jiang, Aaran Arulraj, et al. Mantisscore: Building automatic metrics to simulate fine-grained human feedback for video generation. *arXiv preprint arXiv:2406.15252*, 2024. 3
- [21] Yingqing He, Tianyu Yang, Yong Zhang, Ying Shan, and Qifeng Chen. Latent video diffusion models for high-fidelity long video generation. 2022. 2
- [22] Jonathan Ho, Tim Salimans, Alexey Gritsenko, William Chan, Mohammad Norouzi, and David J Fleet. Video diffusion models. *Advances in Neural Information Processing Systems*, 35:8633–8646, 2022. 1, 2
- [23] Ziqi Huang, Yanan He, Jiashuo Yu, Fan Zhang, Chenyang Si, Yuming Jiang, Yuanhan Zhang, Tianxing Wu, Qingyang Jin, Nattapol Chanpaisit, Yaohui Wang, Xinyuan Chen, Limin Wang, Dahua Lin, Yu Qiao, and Ziwei Liu. VBench: Comprehensive benchmark suite for video generative models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024. 8
- [24] Ziqi Huang, Yanan He, Jiashuo Yu, Fan Zhang, Chenyang Si, Yuming Jiang, Yuanhan Zhang, Tianxing Wu, Qingyang Jin, Nattapol Chanpaisit, et al. Vbench: Comprehensive benchmark suite for video generative models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21807–21818, 2024. 1, 3, 4, 6
- [25] Bingyi Kang, Yang Yue, Rui Lu, Zhijie Lin, Yang Zhao, Kaixin Wang, Gao Huang, and Jiashi Feng. How far is video generation from world model: A physical law perspective. *arXiv preprint arXiv:2411.02385*, 2024. 3
- [26] Yuval Kirstain, Adam Polyak, Uriel Singer, Shahbuland Matiana, Joe Penna, and Omer Levy. Pick-a-pic: An open dataset of user preferences for text-to-image generation. *Advances in Neural Information Processing Systems*, 36:36652–36663, 2023. 3
- [27] Kuaishou. Kling, 2024. Accessed: [2024]. 1, 2, 6, 3
- [28] PKU-Yuan Lab and Tuzhan AI etc. Open-sora-plan, 2024. 2, 3, 6, 1
- [29] Yann LeCun. A path towards autonomous machine intelligence version 0.9. 2, 2022-06-27. *Open Review*, 62(1), 2022. 1
- [30] Jan Leike, David Krueger, Tom Everitt, Miljan Martic, Vishal Maini, and Shane Legg. Scalable agent alignment via reward modeling: a research direction. *arXiv preprint arXiv:1811.07871*, 2018. 3
- [31] Jiachen Li, Weixi Feng, Tsu-Jui Fu, Xinyi Wang, Sugato Basu, Wenhui Chen, and William Yang Wang. T2v-turbo: Breaking the quality bottleneck of video consistency model with mixed reward feedback. *arXiv preprint arXiv:2405.18750*, 2024. 3
- [32] Jiachen Li, Qian Long, Jian Zheng, Xiaofeng Gao, Robinson Piramuthu, Wenhui Chen, and William Yang Wang. T2v-turbo-v2: Enhancing video generation model post-training through data, reward, and conditional guidance design. *arXiv preprint arXiv:2410.05677*, 2024. 6, 1, 3
- [33] Ji Lin, Hongxu Yin, Wei Ping, Yao Lu, Pavlo Molchanov, Andrew Tao, Huizi Mao, Jan Kautz, Mohammad Shoeybi, and Song Han. Vila: On pre-training for visual language models. *arXiv preprint arXiv:2312.07533*, 2023. 8
- [34] Yaofang Liu, Xiaodong Cun, Xuebo Liu, Xintao Wang, Yong Zhang, Haoxin Chen, Yang Liu, Tiejong Zeng, Raymond Chan, and Ying Shan. Evalcrafter: Benchmarking and evaluating large video generation models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22139–22149, 2024. 1

- [35] Luma AI. Luma dream machine — ai video generator, 2024. Accessed: 2024-11-11. [2](#), [6](#), [3](#)
- [36] Zhengxiong Luo, Dayou Chen, Yingya Zhang, Yan Huang, Liang Wang, Yujun Shen, Deli Zhao, Jingren Zhou, and Tieniu Tan. Videofusion: Decomposed diffusion models for high-quality video generation. *arXiv preprint arXiv:2303.08320*, 2023. [2](#)
- [37] MiniMax AI. Minimax ai, 2024. Accessed: 2024-11-11. [2](#), [6](#), [3](#)
- [38] Kepan Nan, Rui Xie, Penghao Zhou, Tiehan Fan, Zhenheng Yang, Zhijie Chen, Xiang Li, Jian Yang, and Ying Tai. Openvid-1m: A large-scale high-quality dataset for text-to-video generation. *arXiv preprint arXiv:2407.02371*, 2024. [4](#)
- [39] Abby O’Neill, Abdul Rehman, Abhinav Gupta, Abhiram Maddukuri, Abhishek Gupta, Abhishek Padalkar, Abraham Lee, Acorn Pooley, Agrim Gupta, Ajay Mandlekar, et al. Open x-embodiment: Robotic learning datasets and rt-x models. *arXiv preprint arXiv:2310.08864*, 2023. [4](#)
- [40] OpenAI. Sora, 2024. Accessed: [2024]. [1](#), [2](#)
- [41] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022. [3](#)
- [42] Mihir Prabhudesai, Russell Mendonca, Zheyang Qin, Katerina Fragkiadaki, and Deepak Pathak. Video diffusion alignment via reward gradients. *arXiv preprint arXiv:2407.08737*, 2024. [1](#), [2](#), [3](#), [5](#)
- [43] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021. [3](#)
- [44] Runway ML. Introducing gen-3 alpha, 2024. Accessed: 2024-11-11. [6](#), [3](#)
- [45] Uriel Singer, Adam Polyak, Thomas Hayes, Xi Yin, Jie An, Songyang Zhang, Qiyuan Hu, Harry Yang, Oron Ashual, Oran Gafni, et al. Make-a-video: Text-to-video generation without text-video data. *arXiv preprint arXiv:2209.14792*, 2022. [2](#)
- [46] Thomas Unterthiner, Sjoerd Van Steenkiste, Karol Kurach, Raphael Marinier, Marcin Michalski, and Sylvain Gelly. Towards accurate generative models of video: A new metric & challenges. *arXiv preprint arXiv:1812.01717*, 2018. [3](#)
- [47] Jiuniu Wang, Hangjie Yuan, Dayou Chen, Yingya Zhang, Xiang Wang, and Shiwei Zhang. Modelscope text-to-video technical report. *arXiv preprint arXiv:2308.06571*, 2023. [2](#)
- [48] Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, et al. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024. [5](#)
- [49] Yaohui Wang, Xinyuan Chen, Xin Ma, Shangchen Zhou, Ziqi Huang, Yi Wang, Ceyuan Yang, Yinan He, Jiashuo Yu, Peiqing Yang, et al. Lavie: High-quality video generation with cascaded latent diffusion models. *arXiv preprint arXiv:2309.15103*, 2023. [1](#), [2](#)
- [50] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837, 2022. [7](#)
- [51] Jay Zhangjie Wu, Guian Fang, Haoning Wu, Xintao Wang, Yixiao Ge, Xiaodong Cun, David Junhao Zhang, Jia-Wei Liu, Yuchao Gu, Rui Zhao, et al. Towards a better metric for text-to-video generation. *arXiv preprint arXiv:2401.07781*, 2024. [1](#), [3](#)
- [52] Xiaoshi Wu, Keqiang Sun, Feng Zhu, Rui Zhao, and Hongsheng Li. Human preference score: Better aligning text-to-image models with human preference. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2096–2105, 2023. [3](#)
- [53] Jiannan Xiang, Guangyi Liu, Yi Gu, Qiyue Gao, Yuting Ning, Yuheng Zha, Zeyu Feng, Tianhua Tao, Shibo Hao, Yemin Shi, et al. Pandora: Towards general world model with natural language actions and video states. *arXiv preprint arXiv:2406.09455*, 2024. [2](#), [3](#), [6](#), [1](#)
- [54] Jinbo Xing, Menghan Xia, Yong Zhang, Haoxin Chen, Xintao Wang, Tien-Tsin Wong, and Ying Shan. Dynamicrafter: Animating open-domain images with video diffusion priors. *arXiv preprint arXiv:2310.12190*, 2023. [1](#), [2](#), [3](#)
- [55] Jiazheng Xu, Xiao Liu, Yuchen Wu, Yuxuan Tong, Qinkai Li, Ming Ding, Jie Tang, and Yuxiao Dong. Imagereward: Learning and evaluating human preferences for text-to-image generation. *Advances in Neural Information Processing Systems*, 36, 2024. [3](#)
- [56] Zhuoyi Yang, Jiayan Teng, Wendi Zheng, Ming Ding, Shiyu Huang, Jiazheng Xu, Yuanming Yang, Wenyi Hong, Xiaohan Zhang, Guanyu Feng, et al. Cogvideox: Text-to-video diffusion models with an expert transformer. *arXiv preprint arXiv:2408.06072*, 2024. [2](#), [6](#), [1](#), [3](#)
- [57] Shengming Yin, Chenfei Wu, Jian Liang, Jie Shi, Houqiang Li, Gong Ming, and Nan Duan. Dragnuwa: Fine-grained control in video generation by integrating text, image, and trajectory. *arXiv preprint arXiv:2308.08089*, 2023. [2](#)
- [58] Hangjie Yuan, Shiwei Zhang, Xiang Wang, Yujie Wei, Tao Feng, Yining Pan, Yingya Zhang, Ziwei Liu, Samuel Albanie, and Dong Ni. Instructvideo: instructing video diffusion models with human feedback. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6463–6474, 2024. [3](#)
- [59] David Junhao Zhang, Jay Zhangjie Wu, Jia-Wei Liu, Rui Zhao, Lingmin Ran, Yuchao Gu, Difei Gao, and Mike Zheng Shou. Show-1: Marrying pixel and latent diffusion models for text-to-video generation. *arXiv preprint arXiv:2309.15818*, 2023. [1](#), [2](#)
- [60] Guosheng Zhao, Xiaofeng Wang, Zheng Zhu, Xinze Chen, Guan Huang, Xiaoyi Bao, and Xingang Wang. Drivedreamer-2: Llm-enhanced world models for diverse driving video generation. *arXiv preprint arXiv:2403.06845*, 2024. [1](#)
- [61] Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan

Li, Dacheng Li, Eric Xing, et al. Judging llm-as-a-judge with mt-bench and chatbot arena. *Advances in Neural Information Processing Systems*, 36:46595–46623, 2023. [5](#)

- [62] Zangwei Zheng, Xiangyu Peng, Tianji Yang, Chenhui Shen, Shenggui Li, Hongxin Liu, Yukun Zhou, Tianyi Li, and Yang You. Open-sora: Democratizing efficient video production for all, 2024. [2](#), [3](#), [6](#), [1](#)

WorldModelBench: Judging Video Generation Models As World Models

Supplementary Material

8. Appendix

8.1. Correlation to VBench’s Dimensions

Section 4.3 illustrates the high correlation (**0.69**) between frame-wise quality win rates of WorldModelBench and VBench, as well as the low correlation (**0.28**) between WorldModelBench’s physics adherence win rates and VBench’s total score win rates. In this section, we present an analysis of the correlations between WorldModelBench’s physics adherence and VBench’s other dimension scores.

We compare all VBench dimensions that support customized videos, including subject consistency, background consistency, motion smoothness, dynamic degree, aesthetic quality and imaging quality. Using the same metrics as in Section 4.3, we compute the correlation of model win rates on each VBench dimension and the physics adherence win rates on WorldModelBench. According to Table 6 and Figure 10, the highest correlation coefficient is **0.41** (for aesthetic quality), and the lowest correlation coefficient is **-0.05** (for dynamic degree). Both are significantly lower than the **0.69** correlation coefficient observed for frame-wise quality in Section 4.3. These findings support that VBench does not effectively distinguish videos based on their adherence to physical laws, highlighting the importance of our benchmark in evaluating physical realism.

Table 6. Correlation coefficient of VBench Dimensions with Physics Adherence

VBench Dimension	Correlation Coefficient
Subject Consistency	0.15
Background Consistency	0.19
Motion Smoothness	0.34
Dynamic Degree	-0.05
Aesthetic Quality	0.41
Imaging Quality	0.24

8.2. More Examples of Reward Optimization

We provide more examples as the results of optimization from the world model judge feedback, as shown in Figure 11. Our method shows potential in leveraging world model feedback to enhance instruction following, improve physics adherence, and achieve better aesthetics, leaving opportunities for future exploration.

8.3. Model Inference details

We provide the model inference details for open models in our evaluation in section 4.

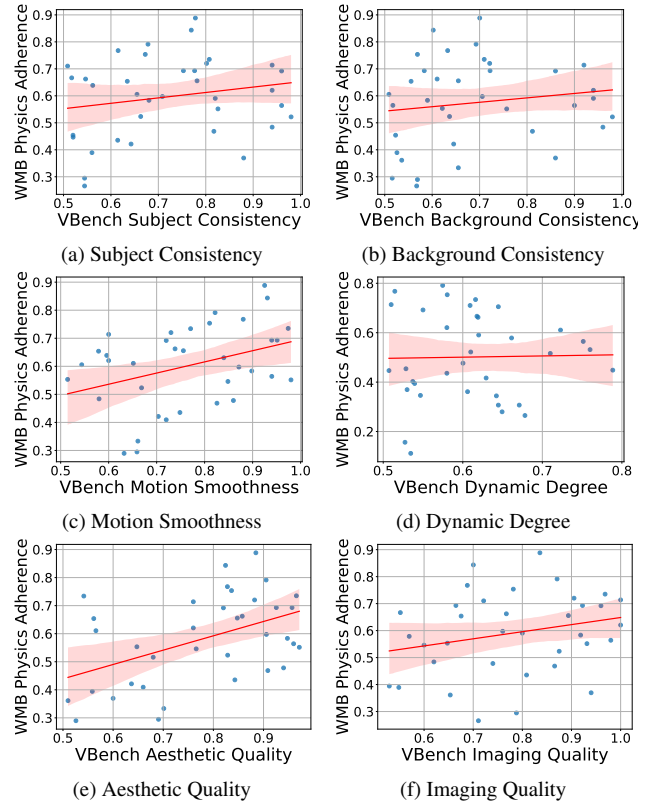


Figure 10. Correlation of model win rates based on all dimensions on VBench and WorldModelBench’s physics adherence.

CogVideoX [56] We use CogVideox-5B T2V and I2V model. We use a classifier guidance ratio of 6.0, and 50 step DDIM solver, following the official usage of the model.

Open-Sora [62] We use 720P, 4 second, aspect ratio 9:16, 30 sampling steps, with a flow threshold 5.0 and aesthetic threshold 6.5, as recommended by the official website.

Pandora [53] We use its official checkpoint, with the default setting provided in the github, with 50 DDIM steps.

Mochi [3] we use the default setting with a cfg scale of 4.5, with 65 sampling steps.

t2v-turbo [32] We use 4 steps of sampling, 7.5 as classifier free guidance scale, 16 fps and 16 frames as recommended by the official usage.

Open-Sora-Plan [28] We use fps 18, guidance scale 7.5, 100 sampling steps, 352 as height and 640 as width as recommended by the official usage.

8.4. The judge reliability for instruction following

We further demonstrate the judge’s instruction following capacity by computing the Kendall rank correlation between the judge predictions and human annotations, and get $\tau =$

0.96 (1 as the max value). We show the score comparison in Table 7, where the average prediction error is 2.79%.

Model	Scores ↑		Prediction
	Human (H)	Judge (J)	Error (100%)
Closed Models			
klings	2.36	2.31	-2.12%
minimax	2.29	2.28	-0.44%
mochi-official	2.01	2.00	-0.50%
runway	2.15	2.17	0.93%
luma	2.01	1.98	-1.49%
Open Models			
mochi	2.22	2.06	-7.21%
OpenSoraPlan-T2V	1.79	1.72	-3.91%
CogVideoX-T2V	2.11	2.03	-3.79%
CogVideoX-I2V	1.89	1.78	-5.82%
OpenSora-Plan-I2V	1.77	1.76	-0.56%
pandora	1.56	1.56	0.00%
T2VTurbo	1.33	1.37	3.01%
OpenSora-T2V	1.71	1.61	-5.85%
OpenSora-I2V	1.60	1.42	-11.25%

Table 7. **Score comparison between scores provided by humans and by the judge model, on instruction following.** The averaged predicting error is 2.79%.

8.5. Performance on WorldModelBench-Hard

We provide the detailed score comparison between all models for the hard subset in Table 8. The most performance klings has observed 1.21 regression (from 9.08 to 7.87). These problems are lightweight to evaluate, and also hard enough to distinguish models.

Model	Full dataset	Hard Subset Score
Closed Models		
klings	9.08	7.87
minimax	8.92	7.27
mochi-official	8.66	7.24
runway	8.63	7.31
luma	8.24	6.58
Open Models		
mochi	7.91	6.93
OpenSoraPlan-T2V	8.04	7.04
CogVideoX-T2V	7.65	6.13
CogVideoX-I2V	7.08	6.27
OpenSora-Plan-I2V	6.86	5.67
pandora	6.90	6.49
T2VTurbo	6.56	5.64
OpenSora-T2V	6.17	4.82
OpenSora-I2V	5.82	4.71

Table 8. **Comparison of Judge Model Scores and Hard Subset Scores across Closed and Open Models.**

Table 9. Model performance on WorldModelBench (graded by our judge). Bold and underline indicates the best performance over all models, and open models respectively. "Deform.", "Penetr.", "Grav." is short for "Deformation", "Penetration", "Gravitation".

Model	Instruction	Common Sense		Physics Adherence					Total
		Frame	Temporal	Newton	Deform.	Fluid	Penetr.	Grav.	
Closed Models									
KLING [27]	2.32	0.99	0.97	1.00	0.90	1.00	0.93	0.99	9.10
Minimax [37]	2.28	0.99	0.93	1.00	0.86	0.99	0.88	0.99	8.92
Mochi-official [3]	2.00	0.97	0.89	1.00	0.88	1.00	0.93	0.99	8.66
Runway [44]	2.17	0.99	0.87	1.00	0.77	0.98	0.89	0.96	8.64
Luma [35]	1.98	0.96	0.81	1.00	0.70	0.98	0.87	0.95	8.24
Open Models									
OpenSoraPlan-T2V [28]	1.72	<u>0.83</u>	<u>0.85</u>	<u>1.00</u>	<u>0.77</u>	<u>0.99</u>	<u>0.91</u>	0.98	8.04
Mochi [3]	<u>2.06</u>	0.78	0.68	0.99	<u>0.63</u>	<u>0.99</u>	0.79	0.98	7.91
CogVideoX-T2V [56]	2.03	0.75	0.60	0.99	0.58	<u>0.99</u>	0.73	0.98	7.65
CogVideoX-I2V [56]	1.78	0.61	0.52	<u>1.00</u>	0.52	<u>0.99</u>	0.68	<u>0.99</u>	7.08
Pandora [53]	1.56	0.49	0.53	<u>1.00</u>	0.55	0.98	0.79	<u>0.99</u>	6.90
T2V-Turbo [32]	1.37	0.64	0.44	0.99	0.41	<u>0.99</u>	0.73	0.98	6.56
OpenSora-T2V [62]	1.61	0.40	0.29	0.98	0.30	0.98	0.64	0.97	6.17
OpenSora-I2V [62]	1.42	0.36	0.18	0.98	0.22	0.98	0.68	0.98	5.82

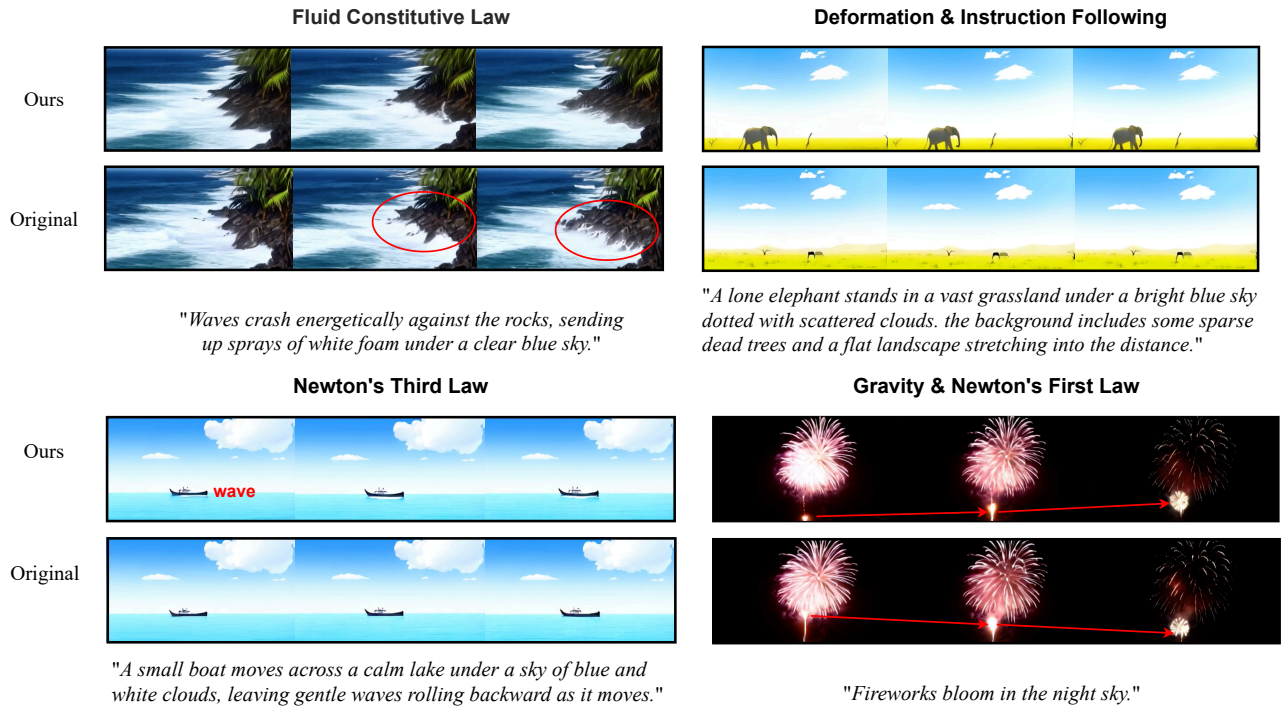


Figure 11. Improvement of our world model gradient method. "Original" shows videos generated by the original Open-Sora 1.2, while "Ours" features videos produced by the reward-fine-tuned Open-Sora. Fine-tuning with the ensembled reward leads to better adherence to world physics, such as: (top left) alleviating the sticky properties of fluids, (top right) recovering from deformation, (bottom left) simulating waves as a result of Newton's third law, and (bottom right) correcting violations of inertia.