

ADAPTIVE CAMERA SENSOR FOR VISION MODELS

Eunsu Baek*Graduate School of Data Science
Seoul National University
Seoul, Republic of Korea
beshu9407@snu.ac.kr**Sung-Hwan Han**Department of Computer Science & engineering
Seogang University
Seoul, Republic of Korea
sunghwan.Na@gmail.com**Taesik Gong†**Department of Computer Science & Engineering
Ulsan National Institute of Science and Technology
Ulsan, Republic of Korea
taesik.gong@unist.ac.kr**Hyung-Sin Kim†**Graduate School of Data Science
Seoul National University
Seoul, Republic of Korea
hyungkim@snu.ac.kr

ABSTRACT

Domain shift remains a persistent challenge in deep-learning-based computer vision, often requiring extensive model modifications or large labeled datasets to address. Inspired by human visual perception, which adjusts input quality through corrective lenses rather than over-training the brain, we propose *Lens*, a novel camera sensor control method that enhances model performance by capturing high-quality images from the model’s perspective, rather than relying on traditional human-centric sensor control. *Lens* is lightweight and adapts sensor parameters to specific models and scenes in real-time. At its core, *Lens* utilizes *VisiT*, a training-free, model-specific quality indicator that evaluates individual unlabeled samples at test time using confidence scores, without additional adaptation costs. To validate *Lens*, we introduce *ImageNet-ES Diverse*, a new benchmark dataset capturing natural perturbations from varying sensor and lighting conditions. Extensive experiments on both ImageNet-ES and our new *ImageNet-ES Diverse* show that *Lens* significantly improves model accuracy across various baseline schemes for sensor control and model modification, while maintaining low latency in image captures. *Lens* effectively compensates for large model size differences and integrates synergistically with model improvement techniques. Our code and dataset are available at github.com/Edw2n/Lens.git.

1 INTRODUCTION

Domain shift, the distribution gap between training and test data, is a well-known challenge that degrades the performance of deep-learning-based computer vision models. Existing solutions mainly focus on either model generalization (Hendrycks et al., 2021; 2019; Sohn et al., 2020; Zhou et al., 2023; Ganin et al., 2016; Cherti et al., 2023; Liu et al., 2021b; 2022; Oquab et al., 2023) or model adaptation (French et al., 2017; Sun & Saenko, 2016; Gong et al., 2024; Yuan et al., 2023; Wang et al., 2022b; Youn et al., 2022), which require modifying the model itself. However, they typically necessitate significant changes to the model and access to large, labeled target datasets, making them costly, time-consuming, and impractical for real-time applications on resource-constrained devices.

In contrast, human visual perception operates through a fine-tuned interplay between the eyes (sensors) and the brain (model). The eyes function as precise sensors, capturing visual data, while the brain processes and interprets it. When visual input is compromised, whether by blurriness or glare, the typical response is to improve the quality of the input through corrective lenses, sunglasses, or magnifying lenses, rather than retraining the brain to interpret flawed images better. This analogy highlights that **the model is not all you need**; acquiring high-quality images through camera sensors is essential to mitigate covariate shifts and improve visual perception.

* edw2n.github.io.

† Corresponding authors.

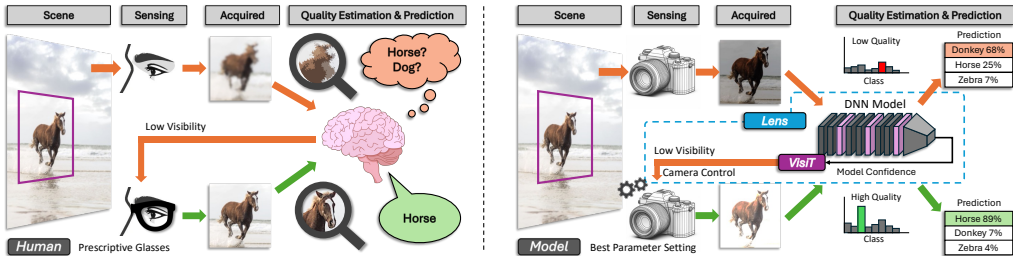


Figure 1: The concept of *Lens*: *Lens* mimics the human vision system, where eyesight quality can be improved through visual sensor control, such as glasses. It leverages sensor parameter adjustments to acquire higher-quality images, thereby enhancing model accuracy.

Despite existing sensor controls like auto-exposure, which are optimized for human perception, we argue that camera sensor control designed for high-quality image acquisition to improve *model perception* requires a fundamentally different approach. Furthermore, in dynamic environments and on resource-constrained devices, sensor control mechanisms must be able to quickly adapt to varying scenes. To address these issues, we introduce *Lens* (Figure 1), a novel adaptive sensor control system that captures high-quality images robust to real-world perturbations. The core idea of *Lens* is to identify optimal sensor parameters that allow the target neural network to better discriminate between objects, akin to adjusting a pair of glasses for clear vision. *Lens* achieves this by leveraging *VisiT* (Vision Test for neural networks), a training-free, model-specific quality indicator that operates on individual unlabeled samples at test time without additional adaptation costs. *VisiT* assesses data quality based on confidence scores tailored to the target model, ensuring high-quality data without the need for extensive retraining or data collection. By acquiring the most discriminative images for the target model, *Lens* significantly boosts model accuracy without requiring model modification.

To demonstrate the effectiveness of *Lens* in realistic sensor control environments, we construct a testbed *ES-Studio Diverse*, where images are captured using a physical camera with varying sensor parameters and light conditions. Using this setup, we create a new dataset called *ImageNet-ES Diverse*, including 192,000 images that capture diverse natural covariate shifts via variations in sensor and light settings, based on 1,000 samples from TinyImageNet (Le & Yang, 2015).

As the first in-depth study on model-centric sensor control, we thoroughly evaluate *Lens* across two benchmarks – ImageNet-ES (Baek et al., 2024) and our newly created *ImageNet-ES Diverse* – using multiple model architectures. We compare *Lens* against various baselines, including human-targeted or random sensor control methods, domain generalization techniques, and lightweight test-time adaptation (TTA) methods. Our results show that *Lens* with *VisiT* significantly outperforms these methods, improving accuracy by up to **47.58%** while effectively reducing image capture time to only **0.16 seconds**, making it fast enough for real-time operation. The effect of sensor control even compensates for a model size difference of **up to 50×**. Additionally, an ablation study on the quality estimator shows that *VisiT* outperforms state-of-the-art out-of-distribution (OOD) scoring methods, validating confidence scores as an effective quality proxy. Our qualitative analysis further supports these findings with visual insights.

Our key contributions are as follows:

- **Lens**: We introduce *Lens*, a **simple yet effective** adaptive sensor control method that evaluates image quality from the model’s perspective and optimizes camera parameters to improve accuracy.
- **ViSiT (Vision Test for neural networks)**: *Lens* adopts *VisiT*, a training-free, model-aware quality indicator that operates on individual unlabeled samples at test time. As the first attempt of its kind, *VisiT* estimates data quality based on confidence scores for **generalizability and simplicity**.
- **CSAs (Candidate Selection Algorithms)**: We propose CSAs to balance real-time adaptation and accuracy improvements, enabling *Lens*’s efficient operation under practical constraints.
- **ImageNet-ES Diverse**: We release *ImageNet-ES Diverse*, a new benchmark dataset containing 192,000 images that capture natural covariate shifts through varying sensor and lighting conditions.
- **Insights and Findings**: Our extensive experiments not only highlight the superiority of *Lens* but also reveal valuable insights for future research: (1) Sensor control significantly improves accuracy without model modification. (2) Sensor control synergistically integrates with model improvement techniques. (3) Sensor control must be tailored in a model- and scene-specific manner. (4) High-quality images for model perception differ from those optimized for human vision.

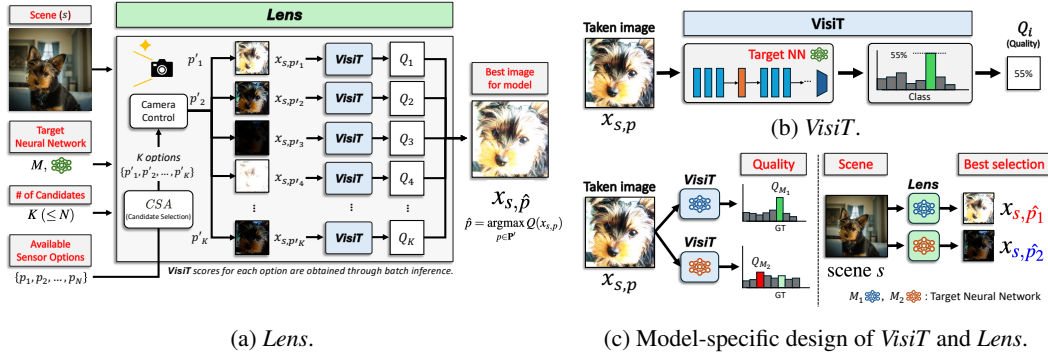


Figure 2: Workflow of *Lens*. *Lens* is a post-hoc, adaptive, and camera-agnostic sensor control system that dynamically responds to scene characteristics while accounting for model- and scene-specific manners based on *VisiT* scores to provide optimal image quality for neural networks.

2 RELATED WORK

2.1 MODEL IMPROVEMENT: HANDLING DOMAIN-SHIFTED INPUT DATA

Frequent domain shifts pose a significant challenge when deploying neural networks in dynamic real-world environments. Although traditional studies have aimed to improve a model’s generalizability or adaptability, these methods place a computational burden, particularly for resource-constrained devices operating in real-time applications. **Domain generalization** techniques (Hendrycks et al., 2021; 2019; Sohn et al., 2020; Zhou et al., 2023; Cherti et al., 2023; Liu et al., 2021b; 2022; Oquab et al., 2023) aim to train models to handle diverse data distributions, but typically results in significantly larger and more complex models. **Domain adaptation** approaches (Ganin et al., 2016; French et al., 2017; Sun & Saenko, 2016) adapt models to a specific target domain, which necessitates frequent retraining and the collection of substantial amounts of labeled target data.

To address the need for lightweight, real-time adaptation without the cost of labeling, **test-time adaptation (TTA)** (Nado et al., 2020; Schneider et al., 2020; Wang et al., 2021) methods have been developed, allowing models to adjust to new domains using a small amount of unlabeled target data with unsupervised objectives. However, these lightweight TTA methods can lead to model collapse when faced with rapidly changing environments.

Lastly, a fundamental limitation of these model-centric techniques is their inability to address the data acquisition process itself. They struggle to cope with severe domain shifts that stem from low-quality data, such as images captured in over-exposed or low-light conditions (Baek et al., 2024).

2.2 INPUT DATA IMPROVEMENT: MITIGATING DOMAIN SHIFTS

To address domain shifts through improved data quality, camera sensor control has recently gained attention. Unlike traditional camera auto-exposure methods designed for human perception (Kuno et al., 1998; Liang et al., 2007), this new research focuses on optimizing sensor inputs specifically for deep-learning models. However, the absence of suitable benchmark datasets led early work to rely on camera sensor simulation (Paul et al., 2023), which falls short in generalizing to real-world domain shifts. Although some research has explored the control of physical camera sensors (Odinaev et al., 2023; Onzon et al., 2021), these efforts have been limited to highly-constrained environments with only a narrow range of exposure options.

To overcome these shortcomings, the ImageNet-ES dataset (Baek et al., 2024) was introduced, capturing domain shifts in real-world conditions by employing a physical camera with varying sensor parameters, such as ISO, shutter speed, and aperture. While the ImageNet-ES dataset demonstrates the potential of sensor control in addressing covariate shifts, identifying the optimal sensor parameters for specific models remains an open challenge. Furthermore, additional benchmark datasets are needed to enhance the generalizability of emerging control mechanisms. To the best of our knowledge, this work offers the first comprehensive exploration on camera sensor control using realistic benchmarks, including ImageNet-ES and our newly introduced *ImageNet-ES Diverse* dataset.

3 Lens: ADAPTIVE GLASSES FOR VISION MODELS

We introduce *Lens*, a post-hoc, adaptive, and camera-agnostic sensor control system for neural networks, designed to adaptively respond to dynamic scene characteristics. The key idea behind *Lens* is to identify the optimal sensor control parameters that capture images in a way that enhances the target model’s ability to discriminate features—both in a model-specific and scene-specific manner—akin to adjusting a pair of prescription glasses to provide clear vision tailored to an individual’s needs and environment. By **focusing solely on sensor parameter adjustments** and avoiding any modifications to the model itself, *Lens* prevents model collapse and catastrophic forgetting, ensuring reliable performance across varying domains. Moreover, it is lightweight and efficient in terms of both computation and memory. To achieve this, we propose *VisiT* (Vision Test for Neural Networks), a lightweight vision tester integrated into *Lens* that evaluates whether the images captured by the camera sensor are optimally suited for the target model and scene. *VisiT* operates during test time on individual unlabeled samples without modifying the target model.

3.1 OVERALL FRAMEWORK

Figure 2a illustrates the overall framework of *Lens*, which operates with a target neural network M that supports batch inference and a camera sensor equipped with a set of N available parameter options, $\mathbf{P} = \{p_1, p_2, \dots, p_N\}$. Let $x_{s,p}$ represent the image captured by the camera from a target scene s using a sensor parameter option p . The goal of *Lens* is to select the optimal sensor parameter \hat{p} such that the captured image $x_{s,\hat{p}}$ maximizes the accuracy of the target model’s interpretation of the scene s . Let $Q(x_{s,p}; M)$ denote the quality estimate for image $x_{s,p}$ in the context of model M . The optimal parameter option \hat{p} , as selected by *Lens*, can be represented as:

$$\hat{p} = \arg \max_{p \in \mathbf{P}} Q(x_{s,p}; M)$$

Model- and Scene-Specific Sensor Control. *Lens* adaptively selects the optimal sensor parameter \hat{p} for each model and scene in real-time, rather than relying on a globally fixed parameter determined through offline training for all models and/or scenes. The key insight is that different models have distinct ways of extracting and prioritizing features for scene interpretation. As shown in Figure 2c, two different models can perceive the same captured image differently (left side of the figure), leading to different optimal parameters for each model, even for the same scene (right side of the figure). Similarly, even with a fixed model, each scene contains unique features that are crucial for accurate prediction (further discussed in Appendix ??). As a result, the optimal sensor parameter is likely to vary for each specific combination of model and scene (Baek et al. (2024)).

VisiT (Lightweight Vision Test for neural networks). *Lens* incorporates *VisiT* (Figure 2b) to estimate $Q(x_{s,p}; M)$, which represents the quality of an unlabeled captured image $x_{s,p}$ when interpreted by the target model M . *VisiT* is designed for real-time applications, operating as a lightweight and training-free module at test time, providing model-specific quality estimates for unlabeled images. To achieve the design goal, it is essential to determine an appropriate metric as a proxy for image quality. Specifically, we utilize the model’s **confidence score** for its prediction on the image $x_{s,p}$ as a simple yet effective proxy for image quality, which will be further discussed in Section 3.2.

CSA (Candidate Selection Algorithm). The latency of *Lens* in selecting the optimal parameter highly depends on the camera sensor’s latency to capture multiple images for different candidate parameter options. While capturing and evaluating images for all N available parameter options would provide the highest accuracy, it introduces significant latency for a single scene prediction, which is undesirable for real-time operation. To address the issue, *Lens* uses CSA to select a subset of the full parameter set \mathbf{P} , denoted as $\mathbf{P}' = \{p'_1, \dots, p'_K\}$, as the candidate options. The number of candidate options, $K (\leq N)$, can be determined based on the system’s need to balance temporal overhead with accuracy. Note that, since *Lens* operates with batch inference, capturing multiple images doesn’t incur additional inference costs.

A crucial aspect of CSA is minimizing capture latency without sacrificing accuracy when selecting K candidate options. For example, sensor parameters like shutter speed significantly impact the capture time. Therefore, within the same time budget, it may (or may not) be more beneficial to prioritize multiple high-shutter-speed options over a single low-shutter-speed option, depending on the specific target scene and model. We explore this trade-off by implementing and evaluating several simple CSAs their performance in Section 5 and discuss their camera-agnostic properties in Appendix ??.

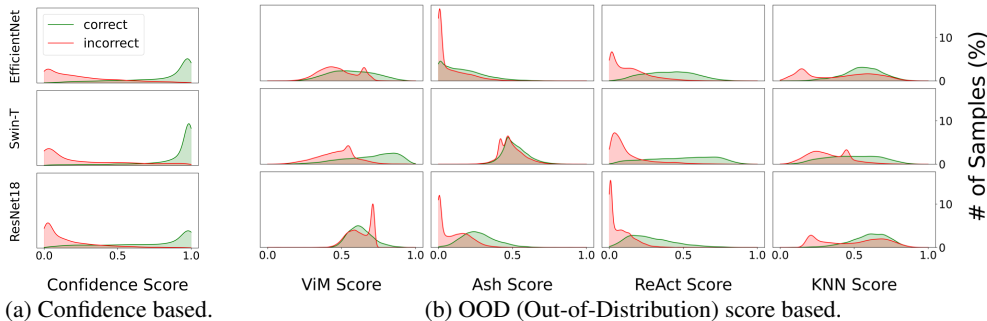


Figure 3: Quality indicators as proxies for image quality assessment: Each score is normalized between 0 to 1.

3.2 *VisiT*: LIGHTWEIGHT VISION TEST FOR NEURAL NETWORKS

In this subsection, we provide a detailed description of *VisiT*, the real-time image quality estimator for unlabeled test-time data. The key requirements for *VisiT* design are: (1) Alignment with correctness: The quality estimator must reliably indicate whether the model can accurately predict the sample. (2) Label-free operation: It must function with unlabeled data provided during test time (3) Single-sample assessment: The estimator should be capable of evaluating each image sample independently and immediately. (4) Lightweight operation: It should involve minimal computational overhead, ensuring seamless integration into sensor control pipeline.

Confidence as a Proxy for Image Quality Assessment. We propose using the *confidence score* as a simple yet effective proxy. For a sample image x and target model M , it is defined as:

$$Confidence(x; M) = \max_{c \in \mathbf{C}} \text{Softmax}(f_M(x))_c$$


where \mathbf{C} is the set of all possible classes, and $f_M(x)$ represents the output logits of the model M before applying the softmax function. The confidence score reflects how certain a model is about its predictions and has been widely used in tasks such as pseudo-labeling, consistency regularization, and high-quality image selection in semi- and self-supervised learning (Oliver et al., 2018; Sajjadi et al., 2016; Sohn et al., 2020; Lee et al., 2013; Cui et al., 2022; Chen et al., 2020; Xie et al., 2020). It is particularly well-suited for real-time applications, as it requires only inference on a sample without incurring additional computational overhead, such as training.

Correlation between Proxies and Image Quality. We conducted an experiment to evaluate the correlation between various proxies and image quality under real-world covariate shifts, using the ImageNet-ES validation dataset (Baek et al., 2024) (details in Appendix ??). We compared our confidence score with out-of-distribution (OOD) scores, commonly used to identify OOD samples, across three models: EfficientNet (Tan & Le, 2019b), Swin-T (Liu et al., 2021b), and ResNet18 (He et al., 2016). The OOD scores were sourced from four state-of-the-art methods: ViM (Wang et al., 2022a), ASH (Djurisic et al., 2023), ReAct (Sun et al., 2021), and KNN (Sun et al., 2022)).

As shown in Figure 3, OOD scores tend to overlap between correct and incorrect samples across all OOD techniques and models, suggesting that OOD scores are not always reliable indicators of image quality. This discrepancy arises because OOD scores are primarily designed to detect semantic shifts (high-level features), but are less effective in identifying covariate shifts, which reflect variations in low-level features. In contrast, samples with higher confidence scores have a greater likelihood of being correct, while those with lower confidence scores are more likely to be incorrect. These results underscore the effectiveness of confidence scores as a reliable proxy for image quality.

4 *ImageNet-ES Diverse*: A NEW REAL-WORLD BENCHMARK

Lens improves image quality by dynamically controlling camera sensor settings, such as ISO, shutter speed, and aperture, to optimize environmental light for each scene. The quality of an image is significantly influenced by the amount and distribution of light within a scene, which depends on both the characteristics of the objects and the surrounding environment. Therefore, it is essential to evaluate the robustness of *Lens* across various scene characteristics. While the recent ImageNet-ES (Baek et al., 2024) dataset captures real-world scenes with varying sensor parameters, it is limited to only two lighting conditions. Furthermore, as it features images displayed on a screen – representing *light-emitting objects* (e.g., traffic lights) – the impact of ambient light conditions can be restricted.

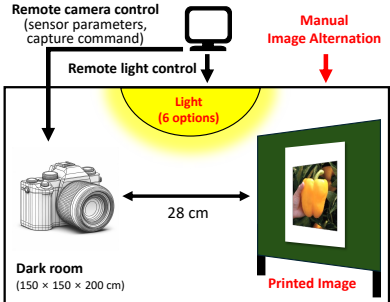

(a) *ES-Studio Diverse*.

(b) Specifics of data collection scheme.

Considerations	Descriptions	
Dataset	Test	
Original samples	1,000 (5 samples / class)	
Light	6 options, L1-L7 (w/o L5)	
Camera sensor	Auto Exposure	Manual
Num. shots	5	27
ISO	Auto	250 / 2000 / 16000
Shutter speed	Auto	(1/4 th) / (1/60 th) / (1/1000 th)
Aperture	Auto	f5.0 / f9.0 / f16
Captured images	30,000	162,000

Other collection settings are the same as in the testset of ImageNet-ES Baek et al. (2024), except for the lighting settings.

(c) Light options.

Light Options	Left	Right
L1 *	255	255
L2	127	127
L3	255	0
L4	0	255
L6	127	0
L7	0	127
L5 * (excluded)	0	0

*: Included in ImageNet-ES (Baek et al., 2024).

Figure 4: Environment and sensor specifics of *ImageNet-ES Diverse*.

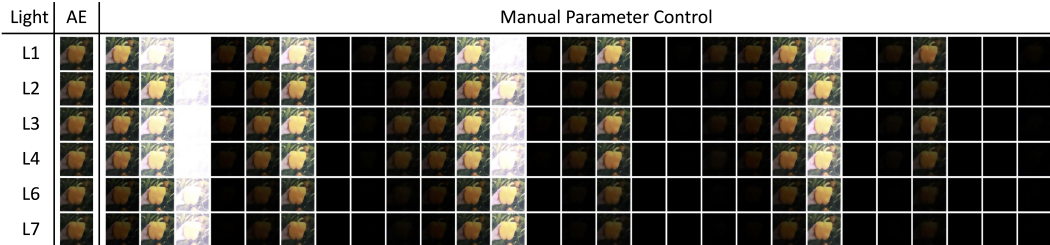


Figure 5: Representative examples of our *ImageNet-ES Diverse* dataset.

To rigorously evaluate *Lens*, a new benchmark dataset is necessary to complement ImageNet-ES and effectively capture the impact of diverse environmental perturbations. To this end, we developed *ImageNet-ES Diverse*, a more versatile dataset with 192,000 samples of *non-illuminous objects* taken with a physical camera on a customized testbed called *ES-Studio Diverse* (Figure 4a). This dataset includes various sensor parameter settings (Figure 4b) and a broader range of lighting conditions (Figure 4c). As illustrated in Figure 5, *ImageNet-ES Diverse* unveils how sensor control interacts with diverse scene characteristics, valuable not only for *Lens* evaluation but also for future research exploring the effects of sensor settings and light conditions. Further details are in Appendix ??.

5 EXPERIMENTS

We design experiments to evaluate the impact of *Lens*, which is the first approach to introduce **model- and scene-specific sensor control**, in comparison to traditional model-adjustment solutions that completely overlook image capture pipelines and focus solely on over-training for optimizing prediction accuracy under real-world perturbations. Our experiments are conducted across various model architectures, including widely used methods for domain generalization and test-time adaptation.

Datasets. We utilize the test sets of **ImageNet-ES** (Baek et al., 2024) and our new **ImageNet-ES Diverse**, both derived from Tiny ImageNet (Le & Yang, 2015) (TIN). These datasets encompass extensive natural perturbations in both environmental and sensor domains including 27 manual controls and 5 auto-exposure shots. ImageNet-ES focuses on Luminous objects, while *ImageNet-ES Diverse* features non-luminous objects, allowing them to complement each other effectively. This diversity allows us to validate our approach across a wide range of real-world covariate shifts. More details about each dataset are in Appendix ??.

Baselines and Oracles in the Image Acquisition Pipeline. For performance comparison, we consider two baselines and two oracles within the data acquisition pipeline. The first baseline, Auto-Exposure (AE), is a commonly used sensor control designed to optimize images for human perception, though not necessarily for computer vision models. The second baseline, called **Random**, randomly selects parameter settings, and we calculate its performance as the average over all available options. To explore the potential of model- and scene-specific parameter control, we introduce two oracles: Oracle-Specific (**Oracle-S**) and Oracle-Fixed (**Oracle-F**). Oracle-S ideally selects the best sensor parameter for each sample and model, representing the upper bound for *Lens*. Oracle-F, on the other hand, serves as the upper bound for fixed parameter settings, without considering model-scene interactions. The best global parameter option for Oracle-F is selected based on the average accuracy across all models in Table 1 and all scenes in both datasets.

Table 1: Accuracy comparison among the baselines and *Lens* with various models.

Model	Num. Params	Pretraining Dataset	DG method	ImageNet-ES (Baek et al., 2024)					<i>ImageNet-ES Diverse</i> (new)					
				IN	Oracle		Naive control		<i>Lens</i> (Ours)	Oracle		Naive control		<i>Lens</i> (Ours)
					S	F	AE	Random		S	F	AE	Random	
ResNet-50 (He et al., 2016)	26M	IN-1K	-	86.0	92.4	49.5	32.1	50.4	78.6	63.1	38.2	17.6	12.0	43.3
		IN-21K	DeepAugment* +AugMix†	87.0	93.0	66.9	53.3	61.4	83.2	80.2	64.1	36.2	23.6	65.1
ResNet-152 (He et al., 2016)	60M	IN-1K	-	87.8	93.6	58.2	41.1	54.3	81.1	69.2	43.4	21.9	14.2	48.8
EfficientNet-B0 (Tan & Le, 2019b)	5M	IN-1K	-	88.2	94.1	68.2	51.8	58.3	80.9	66.9	42.2	21.8	14.0	45.9
EfficientNet-B3 (Tan & Le, 2019b)	12M	IN-1K	-	88.1	94.8	73.9	62.0	66.3	83.5	75.9	57.2	33.6	21.4	55.7
SwinV2-T (Liu et al., 2022)	28M	IN-1K	-	90.7	95.1	70.4	54.1	63.1	82.6	71.5	50.8	26.5	17.0	50.3
SwinV2-S (Liu et al., 2022)	50M	IN-1K	-	91.7	95.4	74.4	60.0	65.5	84.5	75.3	53.9	31.0	19.0	55.6
SwinV2-B (Liu et al., 2022)	88M	IN-1K	-	91.9	95.3	75.3	60.0	65.5	85.3	74.6	53.6	30.8	18.9	55.3
OpenCLIP-b (Cherti et al., 2023)	87M	LAION-2B	Text-guided pretrain	94.3	97.4	81.4	66.1	71.3	90.9	83.0	66.5	38.8	24.5	67.6
OpenCLIP-h (Cherti et al., 2023)	632M	LAION-2B		94.9	98.5	87.1	79	77.6	93.0	87.9	74.6	45.5	29.3	74.4
DINOv2-b (Oquab et al., 2023)	90M	LVD-142M	Dataset curation	93.6	97.6	85.2	74.5	73.9	90.6	87.5	72.6	44.5	28.3	72.9
DINOv2-g (Oquab et al., 2023)	1.1B	LVD-142M		94.7	98.0	90.7	84.3	79.8	93.1	92.8	82.5	62.8	35.3	82.9
All models				90.7	95.4	73.4	59.8	65.6	85.6	77.3	58.3	34.4	21.4	59.8

*: (Hendrycks et al., 2021), †: (Hendrycks et al., 2019), IN: ImageNet (Le & Yang, 2015), S: Specific, F: Fixed, AE: Auto exposure, Random: Random selection

5.1 GENERALIZABILITY OF *Lens*

We investigate the effectiveness of *Lens* across various models, including representative (He et al., 2016; Liu et al., 2022), lightweight (Tan & Le, 2019b), and foundation (Cherti et al., 2023; Oquab et al., 2023) models. Furthermore, we examine whether *Lens* can be constructively integrated with domain generalization (DG) techniques. Detailed model setups are in Appendix ??.

Table 1 summarizes the results. While Oracle-F selects the best fixed parameter to maximize average accuracy, it still suffers performance drops in many cases, revealing the limitations of using fixed parameters – *no single parameter optimally supports all scenarios*. In contrast, Oracle-S consistently outperforms Oracle-F by large margins and even matches or exceeds performance on ImageNet (IN), the training domain. This highlights the potential of scene- and model-specific sensor control. More importantly, *Lens* consistently boosts model performance compared to AE and Random across both benchmarks and all models, by large margins ranging from **8.71% to 47.58%**. *Lens* also delivers significantly better worst-case performance than Oracle-F, with gains of 47.58% in ImageNet-ES and 5.43% in *ImageNet-ES Diverse*, demonstrating the robustness of adaptive sensor control. These results show the importance of targeting sensor control to the model, rather than human perception, and demonstrate that *Lens* effectively *unlocks* the potential of model-specific adaptive sensor control.

Moreover, *Lens*, without additional pretraining or extra data collection, outperforms the baseline methods even when they are combined with complex DG techniques like DeepAugment (Hendrycks et al., 2021) and AugMix (Hendrycks et al., 2019)), and applied to significantly larger models. For instance, *Lens* on ResNet-50 (He et al., 2016) outperforms baseline controls on DG-applied ResNet-50, and even those on the larger ResNet-152 (He et al., 2016), with gains ranging from **7.09% to 37.48%**. Furthermore, *Lens* on EfficientNet-B3 (Tan & Le, 2019b), with only 12M parameters, surpasses the DG-enhanced OpenCLIP-h (Cherti et al., 2023), a model with 632M parameters, delivering **7.34%** higher accuracy; *Lens* can compensate for a **50× model size difference** through real-time sensor control. Lastly, when combined with DG techniques and larger models, *Lens*’s performance improves further, highlighting its synergistic nature. These findings emphasize the importance of optimizing data acquisition process, rather than focusing solely on model improvements.

5.2 REAL-TIME ADAPTATION PERFORMANCE

To assess the real-time adaptability of *Lens*, we compare its performance with lightweight Test-Time Adaptation (TTA) methods, which are designed for real-time model adaptation. Additionally, we analyze the adaptation cost of *Lens*, focusing on the image capturing overhead associated with selected sensor parameter candidates, demonstrating its efficiency in real-time scenarios.

Table 2: Real-time adaptation performance analysis of *Lens* against TTA methods.

Model	TIN	Environments	Oracle		Naive control		Test-Time Adaptation			<i>Lens</i> (Ours)			
			S	F	AE	Random	BN1	BN2	TENT	Full (k=27)	CSA1 (k=6)	CSA2 (k=6)	CSA3 (k=18)
ResNet-18 (He et al., 2016)	80.4	ImageNet-ES (Baek et al., 2024)	87.9	54.1	39.2	46.6	30.7	34.2	32.0	73.8 (2.41sec)	73.4 (0.53sec)	72.6 (0.53sec)	73.7 (0.16sec)
		ImageNet-ES Diverse	52.6	32.5	13.1	9.2	15.8	20.0	16.0	34.6 (2.41sec)	26.9 (0.53sec)	27.4 (0.53sec)	25.1 (0.16sec)
EfficientNet-B0 (Tan & Le, 2019b)	84.9	ImageNet-ES (Baek et al., 2024)	92.3	61.2	42.6	51.2	31.9	41.7	42.6	77.8 (2.41sec)	76.2 (0.53sec)	77.4 (0.53sec)	78.6 (0.16sec)
		ImageNet-ES Diverse	60.5	38.5	19.9	11.7	15.0	17.5	15.6	39.6 (2.41sec)	32.4 (0.53sec)	32.9 (0.53sec)	31.4 (0.16sec)

TIN: Tiny-ImageNet (Le & Yang, 2015), AE: Auto Exposure, Random: Random Selection, S: Specific, F: Fixed
 BN1: (Nado et al., 2020), BN2: (Schneider et al., 2020), TENT: (Wang et al., 2021)
 CSA1: Random Selection, CSA2: Grid Random Selection, CSA3: Cost-Based Selection

TTA Baselines and Target Models. We establish three representative TTA baselines: **BN1** (Prediction-time batch normalization, Nado et al. (2020)), **BN2** (Batch Normalization Adaption, Schneider et al. (2020)), and **TENT** (Wang et al., 2021). These methods are applied to the batch normalization layer and offer minimal computational and memory overhead. We apply these TTA baselines to two lightweight models – **ResNet-18** (He et al., 2016) and **EfficientNet-B0** (Tan & Le, 2019b) – using data acquired via the traditional auto-exposure (AE) method. We then compare their performance against the same models when used with data acquired through *Lens*. Detailed explanations of each TTA method and the deployed models are provided in Appendix ??.

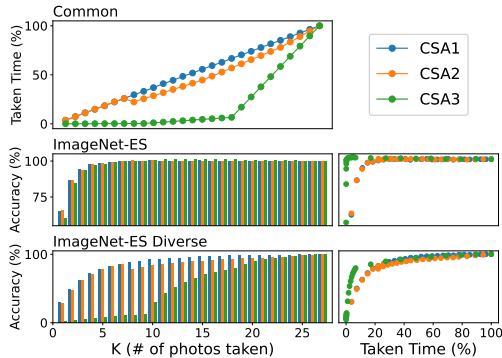


Figure 6: Cost analysis of CSAs (EfficientNet-B0) on ImageNet-ES & *ImageNet-ES Diverse*.

Table 3: Ablations on the Quality Estimator

Models		C1	C2	V1	V2	
Tiny ImageNet		80.4	84.9	93.7	89.3	
Oracle	S	87.9	92.3	96.3	95.0	
	F	54.1	61.2	81.5	74.8	
ImageNet	Naive control	AE	39.2	51.2	70.4	62.0
	Random	46.6	42.6	71.4	66.5	
ES	<i>Lens</i> with	ViM	53.4	60.6	81.3	74.8
		ReAct	53.2	60.1	81.5	74.0
	OOD techniques	ASH	47.2	55.9	61.2	3.2
		KNN	53.2	60.6	81.5	74.8
<i>Lens</i> with <i>VisiT</i> (ours)		73.8	77.8	89.7	85.6	

Tiny ImageNet (Le & Yang, 2015), ImageNet-ES (Baek et al., 2024)
 S: Specific, F: Fixed
 AE: Auto exposure, Random: Random selection
 C1: ResNet18 (He et al., 2016), C2: EfficientNet-B0 (Tan & Le, 2019b)
 V1: Swin-B (Liu et al., 2021b), V2: DeiT (Touvron et al., 2022)

Candidate Selection Algorithms (CSAs) for *Lens*. Capturing images for all available parameter options for a scene introduces high latency, so we develop three candidate selection algorithms (CSAs) for *Lens* to enable lightweight, real-time operation. These CSA algorithms consider two key factors: **the number of image captures (K)** and **the overall capture time per scene**.

- **CSA1:** A simple method that randomly selects K options from the available options.
- **CSA2:** A grid-based random selection leveraging spatial locality. Observing that parameter settings closer in parameter space often yield similar image qualities, CSA2 divides the parameter space into grids and randomly selects K options from these grids. With 27 available options in our benchmarks (i.e., three options per each of the three parameters), the number of grids becomes 1^3 for $K = 1-7$, 2^3 for $K = 8-26$, and 3^3 for $K = 27$.
- **CSA3:** This method selects K options with the lowest capture costs, prioritizing settings with shorter shutter speeds, which are the primary contributors to capture latency. If multiple options share the same capture cost, the selection is made randomly.

Results. Table 2 shows that *Lens* with full options ($K = 27$) significantly outperforms all TTA baselines across all models and both benchmarks, with gains from **14.6% to 45.9%**. This underscores the superiority of sensor adaptation to model adaptation. Furthermore, the three CSAs for *Lens* drastically reduce capturing time by **93.4%** (to only **0.16 seconds**) or require as few as **6 image captures** while maintaining accuracy. Figure 6 shows detailed interactions between capture time, K , and accuracy for EfficientNet-B0 (Tan & Le, 2019b) across both benchmarks, using five random seeds. Note that the correlation between capture time and K is consistent across both benchmarks (marked as “common”) because the CSAs are neither model- nor scene-specific, relying instead on non-deterministic selection at the time of capture. While each CSA has a different trade-off between

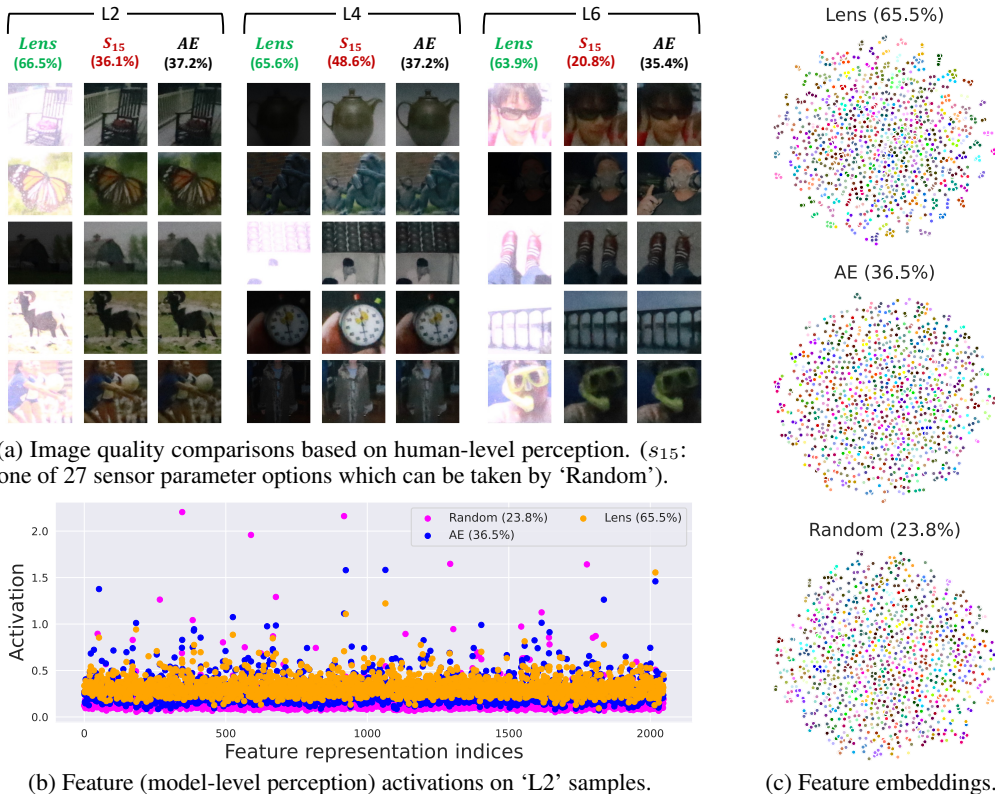


Figure 7: Sensing for human vs. sensing for DNN (ResNet-50 (He et al., 2016) augmented with AugMix (Hendrycks et al., 2019) and DeepAug (Hendrycks et al., 2021)) on *ImageNet-ES Diverse*.

K and taken time, all CSAs maintain high accuracy until taken time significantly decreases. These results verify *Lens*’s ability to balance accuracy and efficiency in real-time scenarios.

5.3 ABLATION STUDY ON THE QUALITY ESTIMATOR

To investigate the effectiveness of *VisiT*, we replace *VisiT* with four state-of-the-art OOD scoring methods, as introduced in Section 3.2. We evaluate these approaches on the *ImageNet-ES* dataset across four models: ResNet-18 (He et al., 2016), EfficientNet (Tan & Le, 2019b), Swin-T (Liu et al., 2021b), and DeiT (Touvron et al., 2022). As shown in Table 3, *Lens* integrated with *VisiT* consistently outperforms *Lens* paired with all OOD scoring baselines across every model, achieving an average gain of 20.7%. This verifies that confidence scores are more reliable than OOD scores for evaluating the image quality from the model’s perspective in the face of real-world perturbations.

5.4 QUALITATIVE ANALYSIS

Sensing for Human Vision vs. Model Vision. Figure 7a highlights the fundamental difference in how humans and neural networks perceive images, using examples from *ImageNet-ES Diverse*. While humans may struggle to discern details in dark or bright images (those selected by *Lens* in L2, L4, and L6), these images lead to better model accuracy (63.9-66.5%). In contrast, models perform poorly (20-48.6%) on images captured using auto-exposure (AE) settings or human-centered settings (S_{15} in L2, L4, and L6). Figure 7b further emphasizes this perceptual mismatch by showcasing distinct feature activation distributions for sample images under different sensor control methods. Specifically, the images provided by AE and Random settings cause the model to heavily activate certain features (those far from the average) that are treated as marginal for images acquired by *Lens*, which can degrade prediction performance. Moreover, Figure 7c demonstrates that, although *Lens*-acquired images may seem unintuitive from a human perspective, they enable the model to generate feature embeddings—consisting of 1,000 points with 5 points per label and color-coded accordingly—that are more clearly distinguishable between classes compared to those captured with AE and Random settings. These findings highlight the critical need to understand perception differences between humans and neural networks when designing effective sensor control strategies.

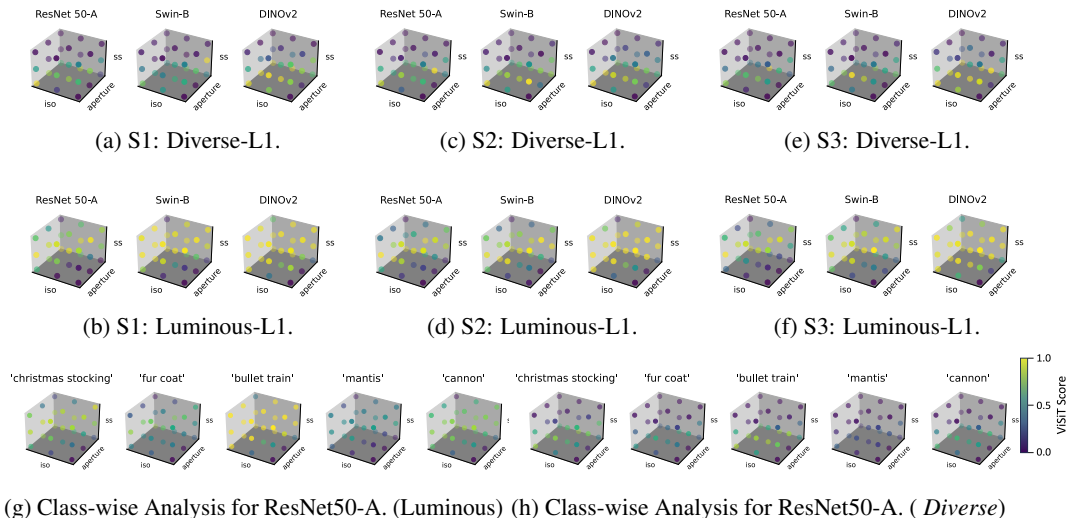


Figure 8: Model- and scene-specific solution spaces of parameter control in real perturbations. ResNet50-A: ResNet50 (He et al., 2016) + Augmix (Hendrycks et al., 2019) + DeepAugment (Hendrycks et al., 2021), Swin-B (Liu et al., 2022), and DINOv2 (Oquab et al., 2023).

Solution Space Analysis. Figure 8 shows the necessity of model- and scene-specific sensor control to handle real-world perturbations. Each grid point is one of the 27 parameter options from ImageNet-ES and *ImageNet-ES Diverse*, color-coded by the *VisiT* score of the image captured with that option. Each subfigure shows the results from three different models, showing that the same parameter setting for an identical sample can yield significantly different quality scores when the model is changed. For example, an optimal parameter for Swin-B (Liu et al., 2022) may perform poorly for DINOv2 (Oquab et al., 2023) or ResNet18 (He et al., 2016), verifying the need for model-specific control. The figure pairs (8a and 8b), (8c and 8d), and (8e and 8f) represent the same class sample captured under an identical lighting condition but with different object characteristics from “Diverse” scenes in *ImageNet-ES Diverse* and “Luminous” scenes in ImageNet-ES. The column-wise differences between the two datasets emphasize the importance of scene-specific control. With the same sample and L1 setting, fast shutter speeds yield low-quality images in “Diverse” scenes but high-quality images in “Luminous” scenes. Finally, Figures 8g and 8h show that under the same model, lighting conditions, and object characteristics, optimal parameters can vary across different classes. Overall, sensor parameters must be dynamically adjusted based on both model and scene characteristics.

6 CONCLUSION

Lens is the first method to introduce **model- and scene-specific camera sensor control** inspired by human visual perception; by capturing high-quality images from the model’s perspective, *Lens* improves model performance. *Lens* employs *VisiT*, a lightweight, training-free, model-specific quality indicator based on model confidence, which operates on individual unlabeled samples at test time. Evaluations on two benchmarks of real perturbations, including our new dataset *ImageNet-ES Diverse* collected to address previously missing but notable perturbations, demonstrate that *Lens* with *VisiT* improves accuracy by up to **47.58%**, outperforming representative TTA baselines and DG techniques based on naive control. Furthermore, *Lens* shows generalizability across various architectures and can be synergistically combined with all DG methods. By ensuring efficiency in adaptation costs while maintaining performance, *Lens* has the potential for real-time applications. Qualitative analysis validates model/scene-specific sensor control’s importance, showing its significant impact over DG/TTA, and offering a promising approach for real-world AI adaptability.

Limitations and Future Work. While *Lens* presents a novel paradigm of sensing for deep neural networks with significant potential for adoption in challenging scenarios across various tasks, such as autonomous driving, surveillance, and real-time 3D vision applications, it also opens avenues for further exploration. In this work, model confidence serves as a simple yet effective proxy for image quality assessment, but this can lead to overconfidence, especially in poorly calibrated models. Future work could explore robust quality estimators, synergies with TTA, and improved Candidate Selection Algorithms (CSAs) using model/scene factors and reinforcement learning for resource scheduling. Further discussions are detailed in Appendix ??.

REPRODUCIBILITY STATEMENT

We include the source code in the supplementary material, along with instructions. Detailed information on the experiments, including datasets, scenarios, and hyperparameters, are in Appendix.

ACKNOWLEDGMENTS

This work was supported in part by Institute of Information communications Technology Planning Evaluation (IITP) grant funded by the Korea government (MSIT) (No. RS-2023-00223530), in part by the National Research Foundation (NRF) of Korea grant funded by the Korea government (MSIT) (No. RS-2023-00222663), and in part by the Creative-Pioneering Researchers Program through Seoul National University.

REFERENCES

- Eunsu Baek, Keondo Park, Jiyeon Kim, and Hyung-Sin Kim. Unexplored faces of robustness and out-of-distribution: Covariate shifts in environment and sensor domains. In *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024.
- Liang-Chieh Chen, George Papandreou, Florian Schroff, and Hartwig Adam. Rethinking atrous convolution for semantic image segmentation. *arXiv preprint arXiv:1706.05587*, 5, 2017.
- Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pp. 1597–1607. PMLR, 2020.
- Mehdi Cherti, Romain Beaumont, Ross Wightman, Mitchell Wortsman, Gabriel Ilharco, Cade Gordon, Christoph Schuhmann, Ludwig Schmidt, and Jenia Jitsev. Reproducible scaling laws for contrastive language-image learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2818–2829, 2023.
- Peng Cui, Yang Yue, Zhijie Deng, and Jun Zhu. Confidence-based reliable learning under dual noises. *Advances in Neural Information Processing Systems*, 35:35116–35129, 2022.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pp. 248–255. Ieee, 2009.
- Andrija Djuricic, Nebojsa Bozanic, Arjun Ashok, and Rosanne Liu. Extremely simple activation shaping for out-of-distribution detection. In *The Eleventh International Conference on Learning Representations*, 2023.
- Geoffrey French, Michal Mackiewicz, and Mark Fisher. Self-ensembling for visual domain adaptation. *arXiv preprint arXiv:1706.05208*, 2017.
- Yaroslav Ganin, Evgeniya Ustinova, Hana Ajakan, Pascal Germain, Hugo Larochelle, François Laviolette, Mario March, and Victor Lempitsky. Domain-adversarial training of neural networks. *Journal of machine learning research*, 17(59):1–35, 2016.
- Taesik Gong, Yewon Kim, Taeckyoung Lee, Sorn Chottananurak, and Sung-Ju Lee. Sotta: Robust test-time adaptation on noisy data streams. *Advances in Neural Information Processing Systems*, 36, 2024.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 770–778, 2016.
- Dan Hendrycks and Kevin Gimpel. A baseline for detecting misclassified and out-of-distribution examples in neural networks. In *International Conference on Learning Representations*, 2017. URL <https://openreview.net/forum?id=Hkg4TI9xl>.

- Dan Hendrycks, Norman Mu, Ekin D Cubuk, Barret Zoph, Justin Gilmer, and Balaji Lakshminarayanan. Augmix: A simple data processing method to improve robustness and uncertainty. *arXiv preprint arXiv:1912.02781*, 2019.
- Dan Hendrycks, Steven Basart, Norman Mu, Saurav Kadavath, Frank Wang, Evan Dorundo, Rahul Desai, Tyler Zhu, Samyak Parajuli, Mike Guo, et al. The many faces of robustness: A critical analysis of out-of-distribution generalization. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 8340–8349, 2021.
- Andrew Howard, Mark Sandler, Grace Chu, Liang-Chieh Chen, Bo Chen, Mingxing Tan, Weijun Wang, Yukun Zhu, Ruoming Pang, Vijay Vasudevan, et al. Searching for mobilenetv3. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 1314–1324, 2019.
- Tetsuya Kuno, Hiroaki Sugiura, and Narihiro Matoba. A new automatic exposure system for digital still cameras. *IEEE Transactions on Consumer Electronics*, 44(1):192–199, 1998.
- Ya Le and Xuan Yang. Tiny imagenet visual recognition challenge. *CS 231N*, 7(7):3, 2015.
- Dong-Hyun Lee et al. Pseudo-label: The simple and efficient semi-supervised learning method for deep neural networks. In *Workshop on challenges in representation learning, ICML*, volume 3, pp. 896. Atlanta, 2013.
- JiaYi Liang, YaJie Qin, and ZhiLiang Hong. An auto-exposure algorithm for detecting high contrast lighting conditions. In *2007 7th International Conference on ASIC*, pp. 725–728. IEEE, 2007.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *Computer Vision—ECCV 2014: 13th European Conference, Zurich, Switzerland, September 6–12, 2014, Proceedings, Part V 13*, pp. 740–755. Springer, 2014.
- Wei Liu, Dragomir Anguelov, Dumitru Erhan, Christian Szegedy, Scott Reed, Cheng-Yang Fu, and Alexander C Berg. Ssd: Single shot multibox detector. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part I 14*, pp. 21–37. Springer, 2016.
- Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 10012–10022, October 2021a.
- Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 10012–10022, 2021b.
- Ze Liu, Han Hu, Yutong Lin, Zhuliang Yao, Zhenda Xie, Yixuan Wei, Jia Ning, Yue Cao, Zheng Zhang, Li Dong, et al. Swin transformer v2: Scaling up capacity and resolution. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 12009–12019, 2022.
- Jonathan Long, Evan Shelhamer, and Trevor Darrell. Fully convolutional networks for semantic segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 3431–3440, 2015.
- Sébastien Marcel and Yann Rodriguez. Torchvision the machine-vision package of torch. In *Proceedings of the 18th ACM international conference on Multimedia*, pp. 1485–1488, 2010.
- Zachary Nado, Shreyas Padhy, D Sculley, Alexander D’Amour, Balaji Lakshminarayanan, and Jasper Snoek. Evaluating prediction-time batch normalization for robustness under covariate shift. *arXiv preprint arXiv:2006.10963*, 2020.
- Ismoil Odinaev, Jing Wei Chin, Kin Ho Luo, Zhang Ke, Richard H.Y. SO, and Kwan Long Wong. Optimizing camera exposure control settings for remote vital sign measurements in low-light environments. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pp. 6086–6093, 2023.

- Avital Oliver, Augustus Odena, Colin A Raffel, Ekin Dogus Cubuk, and Ian Goodfellow. Realistic evaluation of deep semi-supervised learning algorithms. *Advances in neural information processing systems*, 31, 2018.
- Emmanuel Onzon, Fahim Mannan, and Felix Heide. Neural auto-exposure for high-dynamic range object detection. In *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 7706–7716, 2021.
- Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. Dinov2: Learning robust visual features without supervision. *arXiv preprint arXiv:2304.07193*, 2023.
- Sibendu Paul, Kunal Rao, Giuseppe Coviello, Murugan Sankaradas, Oliver Po, Y. Charlie Hu, and Srimat Chakradhar. Enhancing video analytics accuracy via real-time automated camera parameter tuning. In *Proceedings of the 20th ACM Conference on Embedded Networked Sensor Systems, SenSys '22*, pp. 291–304, 2023.
- Shaoqing Ren, Kaiming He, Ross Girshick, and Jian Sun. Faster r-cnn: Towards real-time object detection with region proposal networks. *IEEE transactions on pattern analysis and machine intelligence*, 39(6):1137–1149, 2016.
- Mehdi Sajjadi, Mehran Javanmardi, and Tolga Tasdizen. Regularization with stochastic transformations and perturbations for deep semi-supervised learning. *Advances in neural information processing systems*, 29, 2016.
- Mark Sandler, Andrew Howard, Menglong Zhu, Andrey Zhmoginov, and Liang-Chieh Chen. Mobilenetv2: Inverted residuals and linear bottlenecks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 4510–4520, 2018.
- Steffen Schneider, Evgenia Rusak, Luisa Eck, Oliver Bringmann, Wieland Brendel, and Matthias Bethge. Improving robustness against common corruptions by covariate shift adaptation. *Advances in neural information processing systems*, 33:11539–11551, 2020.
- Kihyuk Sohn, David Berthelot, Nicholas Carlini, Zizhao Zhang, Han Zhang, Colin A Raffel, Ekin Dogus Cubuk, Alexey Kurakin, and Chun-Liang Li. Fixmatch: Simplifying semi-supervised learning with consistency and confidence. *Advances in neural information processing systems*, 33:596–608, 2020.
- Baochen Sun and Kate Saenko. Deep coral: Correlation alignment for deep domain adaptation. In *Computer Vision—ECCV 2016 Workshops: Amsterdam, The Netherlands, October 8–10 and 15–16, 2016, Proceedings, Part III 14*, pp. 443–450. Springer, 2016.
- Yiyou Sun, Chuan Guo, and Yixuan Li. React: Out-of-distribution detection with rectified activations. *Advances in Neural Information Processing Systems*, 34:144–157, 2021.
- Yiyou Sun, Yifei Ming, Xiaojin Zhu, and Yixuan Li. Out-of-distribution detection with deep nearest neighbors. In *International Conference on Machine Learning*, pp. 20827–20840. PMLR, 2022.
- Mingxing Tan and Quoc Le. EfficientNet: Rethinking model scaling for convolutional neural networks. In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pp. 6105–6114. PMLR, 2019a.
- Mingxing Tan and Quoc Le. Efficientnet: Rethinking model scaling for convolutional neural networks. In *International conference on machine learning*, pp. 6105–6114. PMLR, 2019b.
- Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. *CoRR*, abs/2012.12877, 2020. URL <https://arxiv.org/abs/2012.12877>.
- Hugo Touvron, Matthieu Cord, and Hervé Jégou. Deit iii: Revenge of the vit. In *European conference on computer vision*, pp. 516–533. Springer, 2022.

- Dequan Wang, Evan Shelhamer, Shaoteng Liu, Bruno Olshausen, and Trevor Darrell. Tent: Fully test-time adaptation by entropy minimization. In *International Conference on Learning Representations*, 2021.
- Haoqi Wang, Zhizhong Li, Litong Feng, and Wayne Zhang. Vim: Out-of-distribution with virtual-logit matching. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 4921–4930, 2022a.
- Qin Wang, Olga Fink, Luc Van Gool, and Dengxin Dai. Continual test-time domain adaptation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 7201–7211, 2022b.
- Ross Wightman. Pytorch image models. <https://github.com/rwightman/pytorch-image-models>, 2019.
- Qizhe Xie, Zihang Dai, Eduard Hovy, Thang Luong, and Quoc Le. Unsupervised data augmentation for consistency training. *Advances in neural information processing systems*, 33:6256–6268, 2020.
- Jingkang Yang, Pengyun Wang, Dejian Zou, Zitang Zhou, Kunyuan Ding, Wenxuan Peng, Haoqi Wang, Guangyao Chen, Bo Li, Yiyu Sun, et al. Openood: Benchmarking generalized out-of-distribution detection. *Advances in Neural Information Processing Systems*, 35:32598–32611, 2022.
- Jiseok Youn, Jaehun Song, Hyung-Sin Kim, and Saewoong Bahk. Bitwidth-adaptive quantization-aware neural network training: a meta-learning approach. In *European Conference on Computer Vision*, pp. 208–224. Springer, 2022.
- Longhui Yuan, Binhui Xie, and Shuang Li. Robust test-time adaptation in dynamic scenarios. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 15922–15932, 2023.
- Kaiyang Zhou, Chen Change Loy, and Ziwei Liu. Semi-supervised domain generalization with stochastic stylematch. *International Journal of Computer Vision*, 131(9):2377–2387, 2023.