

TAIL: Text-Audio Incremental Learning

Yingfei Sun^{1*}, Xu Gu^{2*}, Wei Ji¹, Hanbin Zhao³, Hao Fei¹, Yifang Yin¹, Roger Zimmermann^{1†}
¹National University of Singapore, ²Renmin University of China, ³Zhejiang University

Abstract

Many studies combine text and audio to capture multimodal information but they overlook the model’s generalization ability on new datasets. Introducing new datasets may affect the feature space of the original dataset, leading to catastrophic forgetting. Meanwhile, large model parameters can significantly impact training performance. To address these limitations, we introduce a novel task called *Text-Audio Incremental Learning (TAIL)* for text-audio retrieval, and propose a new method, *PTAT, Prompt Tuning for Audio-Text incremental learning*. This method utilizes prompt tuning to optimize the model parameters while incorporating an audio-text similarity and feature distillation module to effectively mitigate catastrophic forgetting. We benchmark our method and previous incremental learning methods on *AudioCaps*, *Clotho*, *BBC Sound Effects* and *Audioset* datasets, and our method outperforms previous methods significantly, particularly demonstrating stronger resistance to forgetting on older datasets. Compared to the full-parameters *Finetune (Sequential)* method, our model only requires 2.42% of its parameters, achieving 4.46% higher performance.

1. Introduction

Multimodal interaction has always been a key mode of communication in the human world, particularly with the rise of language assistants (e.g. ChatGPT [40]). Understanding the modalities between text and audio has become a prominent area of research. Among these, the text-audio retrieval task is widely applied, aiming to search an audio clip or caption within a dataset based on a query (text or audio clip) from a different modality.

Inspired by advancements in Large Language Models (LLM), pre-trained models on multimodal data have achieved remarkable capabilities in multimodal understanding. However, with the rapid growth of data scale and the diversity of datasets, text-audio retrieval tasks still encounter two challenges in real-world applications, shown

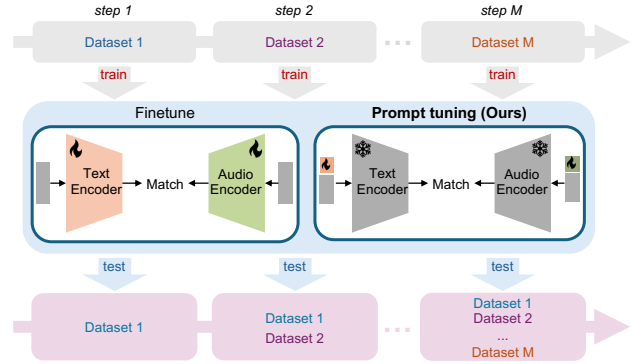


Figure 1. Comparison of finetuning (left) and our proposed prompt tuning method (right) for incremental learning. In incremental learning, finetuning updates all parameters, while we train only a subset.

in Fig. 1. (1) **Resource-Intensive Training.** Training with large-scale datasets increases the model’s parameter requirements, thereby consuming substantial computational resources. (2) **Catastrophic Forgetting.** The introduction of new datasets (e.g. *Dataset M*) often disrupts the model’s previously learned distributions from previous old datasets (e.g. *Dataset 1, ..., M-1*), resulting in catastrophic forgetting.

There are many research works focusing on these challenges. (1) To address the problem of parameter efficiency. In recent years, prompt tuning methods, initially emerging in the field of parameter-efficient transfer learning, have also proven effective in incremental learning. In the image domain, methods such as those in [11, 12, 27, 34, 45, 48, 53, 57–59, 65] train only a small set of parameters, specifically prompts, to guide a pretrained model in incremental learning tasks without requiring storage of past examples. In the video domain, approaches such as [42, 52, 69] utilize local and global prompts to focus on temporal and spatial features. Prompt tuning demonstrates strong potential for mitigating catastrophic forgetting, as it keeps the backbone fixed and learns only prompts, significantly reducing training costs and improving learning efficiency. Despite its success in visual domains, this new paradigm remains largely unexplored in the text-audio learning domain. (2) To address the problem of catastrophic forgetting, various incremental learning approaches have been developed, including knowledge distillation based [1, 16, 73], exemplar-

*These authors contributed equally to this work.

†Corresponding author.

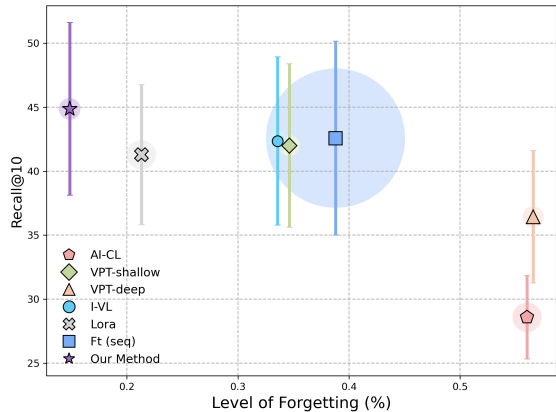


Figure 2. Comparison of our method with previous methods in terms of forgetting degree (x-axis), performance (y-axis), and parameter scale (circular shadow). Finetuning suffers from severe forgetting issues, which our approach successfully addresses in a parameter-efficient way.

based [24, 44], representation-based [18, 32, 37, 67] and regularization-based [4, 19, 21, 31, 46] methods. These approaches primarily target tasks in continual or incremental video classification [41, 43, 73], image classification [14, 49], language or joint-vision-language tasks [26, 47], and self-supervised representation learning and pre-training [4, 13, 32]. However, these methods often encounter limitations: some achieve suboptimal performance due to restricted buffer sizes, while others require retraining all model parameters, resulting in increased training costs and substantial resource demands. Furthermore, these methods rarely conduct research specifically focused on text-audio learning.

In this paper, we introduce a novel task called **Text-Audio Incremental Learning (TAIL)**. TAIL is aimed at training models to perform text-audio retrieval continuously across new datasets without forgetting knowledge from previous ones. For this task, we propose a parameter-efficient method **Prompt Tuning for Audio-Text Incremental Learning** (coined as **PTAT**) as a starting point to benchmark the TAIL task. In PTAT, we propose two key modules. For the resource-intensive training challenge, we proposed a parameter-efficient Audio-Text Prompt Generation (ATPG) module to efficiently bridge the gap between the audio and text features and learn new knowledge. Moreover, for the catastrophic forgetting challenge, to preserve and leverage the previously learned knowledge, we design an Audio-Text Similarity and Feature Distillation (ATSFD) module to distill the learned audio feature, text feature, and their similarity into new incremental steps, which enables the model to preserve previously learned cross-modal audio-text correlations in new datasets. As shown in Fig. 2, we calculate the forgetting level based on the percentage drop in average $R@10$. Compared to other methods, our proposed PTAT model achieves superior retrieval performance

with fewer parameters and retains the lowest model forgetting level in text-audio incremental learning across all datasets.

Our contributions are summarized as follows:

- We introduce a novel Text-Audio Incremental Learning (TAIL) task with the goal of retrieving a text/audio clip from an audio clip/text database, an area previously unexplored in incremental learning research, and build a concise and parameter-efficient benchmark.
- We developed the Prompt Tuning for Audio-Text incremental learning (PTAT) method that achieves efficient performance with a minimal number of parameters, effectively alleviating the issue of catastrophic forgetting on previous datasets as new datasets are incrementally added.
- We experimentally demonstrate that PTAT outperforms the state-of-the-art on four audio-text datasets including AudioCaps, Clotho, BBC Sound Effects, and Audioset.

2. Related work

2.1. Text-to-Audio Retrieval

The Text-to-Audio retrieval task [39, 62, 63], which aims to retrieve relevant text from a text database based on a given audio input, has garnered considerable attention. DiffATR [62] introduces a diffusion-based generative framework for Audio-Text Retrieval, modeling the joint probability distribution between text and audio, and demonstrating effective retrieval performance and adaptability to out-of-domain samples on the AudioCaps and Clotho datasets. In contrast, recent work [39] addresses the under-explored issue of temporal order comprehension in audio, evaluating this capability using the AudioCaps and Clotho datasets, introducing a synthetic dataset named SynCaps, and proposing a text-text contrastive loss to enhance retrieval accuracy. Additionally, LGMM [55] presents a local-to-global multiscale matching method that refines multiscale alignment by leveraging intrinsic relative correlations within each modality, thus effectively addressing challenges associated with binary cross-modal matching labels. However, these works have ignored the generalizability of audio/text retrieval tasks to new datasets. Our proposed method can maintain the retrieval ability of the model itself while adapting to new datasets.

2.2. Audio Incremental Learning

Incremental or continual learning [36, 54, 70, 71] is defined as training a learner for several tasks sequentially, without forgetting knowledge obtained from the preceding tasks. The data from the old tasks is no longer available when training new tasks. Various methods have been

proposed to prevent catastrophic forgetting in continual learning. DFWF [30] uses a knowledge distillation loss to preserve memory from the original model, and static memory networks [25] introduce static memory to reduce memory usage and model complexity. Few-shot CL [56] enables fast and interactive model updates in a few-shot learning framework to expand the audio classifier to recognize novel classes, while AI-CL [38] uses a combination of the parameter-efficient Convolutional Adapter and the compute-efficient Frequency-Time factorized Attention to efficiently learn new tasks and prevents catastrophic forgetting. IODFD [36] propose a cosine similarity-based distillation loss and use it along with a Kullback-Leibler divergence-based distillation loss to preserve knowledge about the old classes. Currently, there has been no work focused on Audio-Text incremental learning. In this paper, we introduce a text-audio incremental learning task to address this missing task in practical applications.

2.3. Prompt-based Transfer Learning

Many recent works have focused on efficient transfer learning and fine-tuning techniques for downstream tasks, especially using the prompt tuning method, a highly lightweight and effective method for enabling model transfer across different tasks or datasets. These methods achieve efficient fine-tuning by inserting learnable prompt vectors at different locations inside a transformer encoder while freezing other parameters during training. [17, 20] proposed an effective and efficient visual prompt tuning approach for large-scale transformer-based model adaptation. PETL-AST [3] presents a detailed investigation of common parameter-efficient methods including prompt tuning, adapters, and LoRA on Audio Spectrogram Transformer. For cross-modal learning, I-VL [23] uses text prompts to bridge the gap between static images and videos. [5, 29, 50, 60] added learnable prompts to the input of the text encoder to enhance the model’s learning capacity on new tasks. [66, 69] used interactive prompts across different modalities to fine-tune both uni-modal and multi-modal features. [2, 7, 64, 68] achieved a significant accuracy improvement when adapting CLIP to unseen domains with only training a lightweight prompt generator. Our approach PTAT is based on the state-of-the-art model [66] to perform parameter optimization.

3. Method

We proposed PTAT, a parameter-efficient framework for text-audio retrieval in incremental learning. We first introduce the task definition for parameter-efficient incremental Text-Audio retrieval in Sec. 3.1, and then we provide a comprehensive overview of the proposed PTAT framework in Sec. 3.2. Finally, we present the PATA model’s training objectives in Sec. 3.3.

3.1. Task Definition

Text-Audio Incremental Learning (TAIL) task for text-audio retrieval aims to iteratively train a model \mathcal{F}_Θ on a sequence of M datasets $\{\mathcal{D}_1, \mathcal{D}_2, \dots, \mathcal{D}_M\}$ with specified parameters Θ , enhancing feature mapping between audio and text representations. At incremental step m , dataset \mathcal{D}_m corresponding training set can be denoted as $\mathcal{D}_m = \{(X_{m,i}^a, X_{m,i}^t)\}_{i=1}^N$, where $X_{m,i}^a$ and $X_{m,i}^t$ denote the i -th input sample’s audio and text pair respectively in \mathcal{D}_m . The objective is to input text X_m^t (or audio clip X_m^a) to retrieve the most relevant audio clip X_m^a (or text X_m^t) from the counterpart database.

3.2. Overall Framework

Fig. 3 illustrates our **Prompt Tuning Audio Text (PTAT)** model architecture, which is a compact and parameter-efficient framework to solve the TAIL task. The model consists of an audio encoder to generate audio embeddings and a text encoder to get text embeddings, as well as two key modules: an Audio-Text Prompt Generation module and an Audio-Text Similarity and Feature Distillation module. We present the details of the two modules below.

Audio-Text Prompt Generation (ATPG). Inspired by the prompt-based incremental learning paradigm in the vision domain [66] to propose an effective audio-text joint prompting approach. Mel spectrogram can retain the original audio sequence characteristics by splitting it into patches and adding position encoding.

As shown in Fig. 3, for audio, we design a set of global prefix audio prompts (purple), denoted as $\mathcal{A} = \{\mathcal{A}^j \in \mathbb{R}^d \mid j \in \mathbb{N}, 1 \leq j \leq n_{pre}^a\}$, which are prepended to the audio query prior to audio embedding. d represents the prompt vector dimension, and n_{pre}^a indicates the number of audio prompts. The generated audio prompts can be input to any layer of the audio encoder, concatenated with the audio embeddings at that specific layer.

For text, inspired by [22], we implement a set of deep text prompts to enhance text representation, consisting of prefix text prompts (light blue) $\mathcal{T}_{pre} = \{\mathcal{T}_{pre}^j \in \mathbb{R}^d \mid j \in \mathbb{N}, 1 \leq j \leq n_{pre}^t\}$ and postfix text prompts (dark blue) $\mathcal{T}_{post} = \{\mathcal{T}_{post}^j \in \mathbb{R}^d \mid j \in \mathbb{N}, 1 \leq j \leq n_{post}^t\}$. The prefix text prompts are prepended to the text query before word embedding, while the postfix text prompts are appended afterward. Here, d is the dimensionality of the prompt vectors, and n_{pre}^t and n_{post}^t represent the numbers of prefix and postfix prompts, respectively. The generated text prompts are input to the first layer of the text encoder, where they are append/prepend to the text embeddings.

The audio and text prompts mentioned above are interconnected. As shown in Fig. 3 ATPG module, we design a simple and efficient prompt that can effectively connect two modalities. Inspired by [66], we consider using two simple

process of the current audio-text similarity. This process can be expressed as follows:

$$\begin{aligned} Dist_{sim}^{a2t} &= \mathbb{E}_{(X^a, X^t) \sim \mathcal{D}_k} [KL(C_k^{a2t} \| C_{m-1}^{a2t})], \\ Dist_{sim}^{t2a} &= \mathbb{E}_{(X^a, X^t) \sim \mathcal{D}_k} [KL(C_k^{t2a} \| C_{m-1}^{t2a})] \end{aligned} \quad (4)$$

where $Dist_{sim}^{a2t}$ is the audio to text similarity distillation and $Dist_{sim}^{t2a}$ is the text to audio similarity distillation. The similarity distillation loss \mathcal{L}_{SD} can be formulated as:

$$\mathcal{L}_{SD} = Dist_{sim}^{t2a} + Dist_{sim}^{a2t} \quad (5)$$

3.3. Training Objectives

We train our model by increasing the similarity and feature distribution alignment between positive pairs of text and audio features.

Given the audio features and text features output by the audio encoder and text encoder, a symmetric cross-entropy loss is used for contrastive learning to maximize the alignment between these features and effectively minimize the distance between similar text-audio pairs while pushing apart dissimilar pairs. The symmetric cross-entropy loss along the text and audio axis respectively are as follows:

$$\begin{aligned} \ell_{t2a} &= \frac{1}{N} \sum_{i=0}^N \log \text{diag}(\text{softmax}(C_{t2a})), \\ \ell_{a2t} &= \frac{1}{N} \sum_{i=0}^N \log \text{diag}(\text{softmax}(C_{a2t})) \end{aligned} \quad (6)$$

The contrastive learning loss is as follows:

$$\mathcal{L}_{\text{contrast}} = \ell_{t2a} + \ell_{a2t} \quad (7)$$

Furthermore, we apply KL divergence to align the feature distributions of the output from the audio encoder and text encoder, enhancing the accuracy of audio-text retrieval. This is expressed as:

$$\mathcal{L}_{\text{kl}} = \mathbb{E}_{(X^a, X^t) \sim \mathcal{D}_k} [KL(E_a \| E_t) + KL(E_t \| E_a)] \quad (8)$$

We propose two additional losses to address incremental learning tasks. To mitigate the forgetting issue in incremental learning and ensure consistency and alignment of the model across different feature spaces, we apply the losses \mathcal{L}_{FD} and \mathcal{L}_{SD} defined in Equ. 3 and Equ. 5.

The overall training objective is a weighted combination of losses for the audio-text retrieval task and the incremental learning tasks:

$$\mathcal{L} = \mathcal{L}_{\text{kl}} + \lambda \mathcal{L}_{\text{contrast}} + \mathcal{L}_{\text{FD}} + \alpha \mathcal{L}_{\text{SD}} \quad (9)$$

where λ and α are temperature parameters.

4. Experiments

4.1. Experimental Setup

Datasets. We conduct experiments with our PTAT framework, comparing it to baselines on the AudioCaps [28], Clotho [8], AudioSet SL, and BBC Sound Effects subsets within the WavCaps [33] dataset. AudioCaps [28] contains approximately 50,000 audio clips sourced from AudioSet [15], the largest audio event dataset, and is annotated by human listeners. Clotho [8] comprises around 6,000 audio clips from the FreeSound2 platform, each clip accompanied by five human-annotated captions. The AudioSet SL and BBC Sound Effects subsets are part of the WavCaps [33] dataset.

Since neither AudioSet SL nor BBC Sound Effects provides predefined training and test splits, we manually divided the data for these datasets. The AudioSet SL subset contains 58,000 audio clips (after excluding portions overlapping with AudioCaps from the original AudioSet SL), which we randomly split into a training set of 55,000 samples and a test set of 3,000 samples. The BBC Sound Effects dataset consists of more than 30,000 audio clips recorded worldwide over the past century, which we randomly divided into a training set of 28,000 samples and a test set of 2,000 samples.

For our incremental learning setup, we define four incremental steps: AudioCaps as the first step, Clotho as the second, BBC Sound Effects as the third, and AudioSet SL as the fourth.

Evaluation Metrics. We evaluate the audio-text cross-modal retrieval performance of all methods in our experiments using $Recall@1$, $Recall@5$, and $Recall@10$. For a given query, $Recall@k$ is 1 if the positive item appears within the top k retrieved items, and 0 otherwise. In the context of incremental learning, we also consider the average performance across all seen datasets. The $AverageRecall@k$ of a model is the mean of $Recall@k$ values across each dataset, and is defined as:

$$AverageRecall@k = \frac{1}{m} \sum_{m=1}^M Recall@k_m \quad (10)$$

where $Recall@k_m$ denotes the $Recall@k$ on the m -th dataset after completing training on the m -th dataset (incremental step m).

Implementation Details. We select HT-SAT [6] as the audio encoder and ROBERTA [72] as the text encoder, given their widespread use in previous work [9, 61] and proven effectiveness in audio-text learning. For the HT-SAT audio encoder, all audio clips are randomly cropped or padded to 10 seconds to meet HT-SAT’s fixed-size input requirement.

We use the Adam optimizer to train the model with a learning rate of 5×10^{-5} and a weight decay of 1×10^{-4} .

Table 1. Comparison with Baselines: Results on Each Dataset After Sequential Training Across Four Datasets(AudioCaps, Clotho, BBC Sound Effects, and Audioset). The results present the model’s performance at the Current Step of the experiment.

Method	Parameters	AudioCaps (Trained on Step 1)						Clotho (Trained on Step 2)					
		Audio-to-Text			Text-to-Audio			Audio-to-Text			Text-to-Audio		
		R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
AI-CL [38]	6.96M	14.28	41.13	56.19	17.58	45.50	58.66	5.13	15.31	23.35	4.20	14.35	23.64
VPT (shallow) [20]	3.69M	26.85	63.65	78.23	37.45	70.34	82.68	9.53	26.18	37.07	9.67	25.84	38.18
VPT (deep) [20]	3.69M	20.35	51.38	67.52	25.23	54.63	70.34	7.00	21.21	31.29	6.12	18.28	29.57
I-VL [23]	3.68M	28.64	64.19	78.87	36.24	69.26	84.03	10.51	26.10	36.86	10.62	25.55	36.36
LoRA [10]	4.75 M	28.00	62.77	76.97	35.97	66.85	79.73	9.80	26.26	37.97	8.33	24.69	35.89
Finetune (Sequential)	<u>157.97M</u>	29.40	62.85	76.81	40.00	69.66	82.42	9.82	25.82	35.04	10.72	24.88	35.89
Finetune (Joint)	<u>157.97M</u>	20.67	51.60	66.28	26.17	57.45	71.54	10.35	29.49	41.55	13.01	31.39	43.92
PTAT	3.82M	30.12	65.96	80.03	40.27	72.62	85.37	12.23	31.25	44.02	13.59	32.34	43.83
Upper Bound	-	<u>31.95</u>	<u>67.09</u>	<u>79.84</u>	<u>42.01</u>	<u>73.29</u>	<u>86.31</u>	<u>13.88</u>	<u>35.77</u>	<u>49.49</u>	<u>18.37</u>	<u>40.96</u>	<u>54.64</u>

Method	Parameters	BBC Sound Effects (Trained on Step 3)						Audioset (Current Step)					
		Audio-to-Text			Text-to-Audio			Audio-to-Text			Text-to-Audio		
		R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
AI-CL [38]	6.96M	2.50	5.85	8.90	2.25	9.50	15.75	3.90	9.40	12.87	7.00	20.67	29.33
VPT (shallow) [20]	3.69M	2.75	7.55	10.95	3.00	16.00	24.50	6.80	13.27	16.23	15.00	35.67	48.17
VPT (deep) [20]	3.69M	2.65	7.80	10.70	3.25	13.25	23.00	5.57	12.33	15.53	11.50	31.33	43.50
I-VL [23]	3.68M	2.50	8.05	10.95	3.75	17.00	25.00	6.90	13.53	16.43	16.83	39.50	50.33
LoRA [10]	4.75M	3.00	8.05	11.25	4.50	15.75	23.25	6.63	13.73	17.07	17.17	36.67	48.17
Finetune (Sequential)	<u>157.97M</u>	2.65	6.55	10.70	3.25	14.25	21.75	8.70	15.13	17.50	22.67	48.83	60.50
Finetune (Joint)	<u>157.97M</u>	3.60	9.20	12.60	7.25	21.00	31.50	4.57	11.40	14.87	10.33	26.67	40.00
PTAT	3.82M	3.75	8.40	12.10	5.75	22.00	30.00	6.30	13.13	16.30	17.33	37.67	49.50
Upper Bound	-	<u>8.65</u>	<u>14.95</u>	<u>17.45</u>	<u>24.25</u>	<u>47.25</u>	<u>58.50</u>	<u>8.90</u>	<u>15.57</u>	<u>18.43</u>	<u>25.00</u>	<u>50.83</u>	<u>63.17</u>

Table 2. Results of Average Retrieval across Four datasets. (Here Ft means Finetune).

Method	Audio-to-Text			Text-to-Audio		
	R@1	R@5	R@10	R@1	R@5	R@10
AI-CL [38]	6.45	17.92	25.33	7.76	22.50	31.85
VPT (shallow) [20]	11.48	27.66	35.62	16.28	36.96	48.38
VPT (deep) [20]	8.89	23.18	31.26	11.53	29.37	41.60
I-VL [23]	12.14	27.97	35.78	16.86	37.83	48.93
LoRA [10]	11.86	27.70	35.81	16.49	35.99	46.76
Ft (Sequential)	12.64	27.59	35.01	19.16	39.41	50.14
Ft (Joint)	9.80	25.42	33.83	14.19	34.13	46.74
PTAT	13.10	29.69	38.11	19.30	40.35	51.61


Across all four datasets, the maximum number of training epochs for each incremental step is set to 60, with a batch size of 128. The temperature hyperparameter τ is set to 0.07, α to 0.1, and λ to 0.5. For prompt generation, the length of the audio prompt is set to 12, which is also the length for both prefix text prompts and postfix text prompts. In each training step, we initialize the model with weights from the trained model in the last step. We then train the model with the new dataset for the current step and evaluate its performance on all previously encountered datasets.

4.2. Baselines


As we are the first to introduce the task of Text-Audio Incremental Learning and there is no prior related work, we selected the state-of-the-art method in the field of audio incremental learning AI-CL [38] and several effective prompt tuning approaches, VPT [20] and I-VL [22], to build a benchmark. We also selected another popular parameter-efficient transfer learning approach LoRA [10], which learns low-rank matrices to approximate parameter updates and reduce the number of trainable parameters. These methods have been shown to be effective in fine-tuning models and enabling efficient transfer across various tasks. Meanwhile, we also compare our method with the fine-tuning method.

The following are the baseline details:

- **AI-CL [38]**. We use the Audio Spectrogram Transformer with Frequency-Time factorized Attention, as proposed in their method, as our audio encoder. In step 1, we fully train both the audio encoder and the text encoder; in subsequent steps, we follow their approach. Specifically, we utilize the proposed adapter, training only the adapter while freezing the rest of the structure. The model’s input and training setup are the same as in our method.
- **VPT [20]**. We compared the two types of prompts dis-

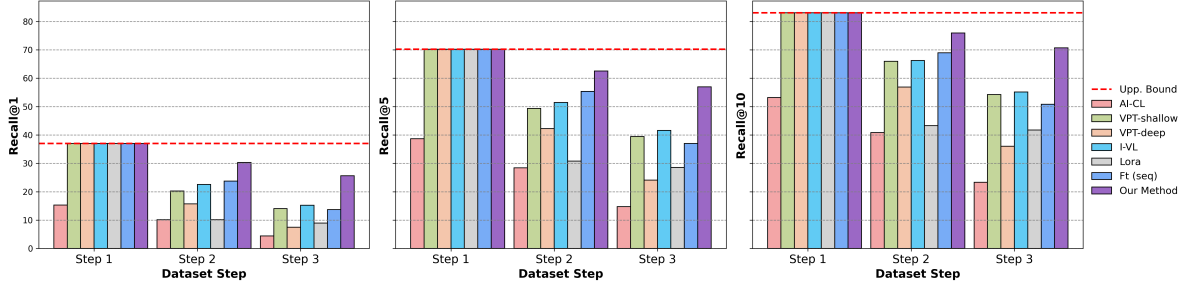

(a) Step Results for AudioCaps. (AudioCaps is trained in step 1.)

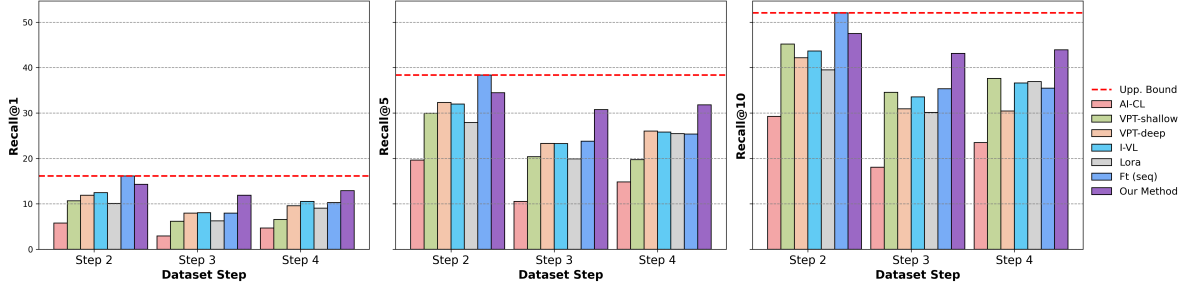

(b) Step Results for Clotho. (Clotho is trained in step 2.)

Figure 4. Incremental step evaluation on AudioCaps dataset (step 1) and Clotho dataset (step 2).

cussed in the paper: (1) *VPT (shallow)* prompts and (2) *VPT (deep)* prompts. For the shallow prompt approach, we add an audio prompt before the input to the audio encoder. In contrast, for the deep prompt approach, we add a learnable prompt at each layer of the audio encoder. During training, we only train the prompts and projection layers while freezing the rest of the model.

- **I-VL** [22]. We incorporate a text prompt into our text embeddings, while the audio embeddings remain the same. Similar to VPT, we freeze the audio and text encoder, only training the text prompts and projection layers.
- **LoRA** [10]. To apply LoRA, we applies trainable low-rank updates to W_q and W_v in Multi-Head Self Attention, and we’ve integrated this into the audio encoder, freezing its other parameters and the text encoder.
- **Finetuning approach.** We designed two variations: (1) *Finetune (Sequential)*. Follows a sequential finetuning process on each dataset, aligning with incremental learning. (2) *Finetune (Joint)*. Employs a joint training approach, combining all datasets. In the two finetuning methods, all parameters are trained without additional prompts or knowledge distillation, effectively using the basic contrastive audio-text learning approach from [9].
- **Upper Bound.** To evaluate the upper bound, we define the results from fine-tuning on each dataset’s test dataset independently as the upper bound. This method utilizes full parameter updates without any forgetting or performance gaps between datasets.

4.3. Main Results

We present our main experimental results after sequential training on four datasets, with the training order being AudioCaps(step 1), Clotho (step 2), BBC Sound Effects (step 3), and Audioset (current step). As shown in Tab. 1, Our method PTAT significantly outperforms AI-CL, VPT (shallow), VPT (deep), and I-VL in the 1-3 steps, specifically AudioCaps (step 1) and Clotho (step 2). In the current step, we maintain a comparable level with these four methods in both the Audio-to-Text and Text-to-Audio subtasks across $R@1$, $R@5$, and $R@10$ metrics. This demonstrates that our method more effectively prevents catastrophic forgetting and exhibits superior model generalization capabilities.

Finetune (sequential), as the upper bound for the current step on Audioset, achieves the highest values in both audio-to-text and text-to-audio retrieval tasks at the current step. However, it demonstrates a certain degree of forgetting over steps 1-3, performing less effectively than our proposed PTAT method. This indicates that our PTAT method possesses a stronger resistance to forgetting, even with fewer parameters. At the same time, the Finetune (Joint) method, which applies full-parameter fine-tuning with joint training across datasets, effectively prevents catastrophic forgetting. However, it still performs worse than the Finetune (sequential) method in audio-to-text and text-to-audio retrieval tasks on the AudioCaps (step 1) and Audioset (current step) datasets. This indicates that, unlike other class-incremental learning tasks, there exists a domain gap be-

Table 3. Ablation study on the effect of adding audio prompts at different layers of the audio encoder.

Layer index	Parameters	AudioCaps			Clotho			BBC Sound Effects			Audioset		
		R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
Layer 1	3.82M	35.20	69.29	82.70	12.91	31.80	43.93	4.88	13.58	19.93	11.82	25.40	32.90
Layer 2	3.97M	33.96	67.97	80.98	12.44	31.72	43.83	4.45	13.73	20.80	10.98	25.15	31.83
Layer 3	4.27M	34.66	68.29	82.05	12.56	31.49	43.29	5.93	14.18	20.43	11.92	25.58	33.68

Table 4. Ablation study on different feature and similarity distillation loss items in our method.

Loss term	Audio-to-Text			Text-to-Audio		
	R@1	R@5	R@10	R@1	R@5	R@10
Base	11.52	27.10	35.15	16.33	36.74	47.53
+ \mathcal{L}_{FD}	12.42 \pm 0.90	28.78 \pm 1.68	37.02 \pm 1.87	18.19 \pm 1.86	38.24 \pm 1.50	50.50 \pm 2.97
+ \mathcal{L}_{SD}	13.02 \pm 1.50	29.33 \pm 2.23	38.15 \pm 3.00	18.14 \pm 1.81	39.24 \pm 2.50	51.11 \pm 3.58
+ $\mathcal{L}_{SD}, \mathcal{L}_{FD}$	13.10 \pm 1.58	29.69 \pm 2.59	38.11 \pm 2.96	19.30 \pm 2.97	40.35 \pm 3.61	50.61 \pm 3.08

Table 5. Ablation study on different dataset training sequence.

Method	Audio-to-Text			Text-to-Audio		
	R@1	R@5	R@10	R@1	R@5	R@10
VPT(shallow)	9.77	24.77	32.89	13.70	32.44	43.07
LoRA	10.75	25.46	33.59	14.66	33.40	44.22
Ft.(Sequential)	11.77	27.07	34.70	15.64	35.71	44.54
PTAT	12.55	28.20	35.95	18.53	37.95	49.29

tween these four datasets, and thus, the joint full-parameter training approach does not represent the upper bound for this task.

To provide a more comprehensive comparison of model performance, we use the average recall across these four datasets as the final evaluation metric for each method. As shown in Tab. 2, in the Text-to-Audio and Audio-to-Text retrieval tasks, our method outperforms other methods on $R@1$, $R@5$, and $R@10$ metrics. Among methods with similar parameter sizes, including VPT (shallow), VPT (deep), and I-VL, I-VL achieves the best results. Compared to the I-VL method with a similar parameter scale, our method achieves an average improvement of 7% on average. Due to the domain gaps across datasets, the Finetune (Joint) method, despite using a larger parameter size, performs significantly worse than the Finetune (Sequential) method. Compared to the large-scale Finetune (Sequential) method, our method only requires 2.42% of its parameters, while still achieving 4.46% higher performance.

To more intuitively demonstrate the model’s resistance to forgetting, as shown in Fig. 4, we focus on the model’s memory performance on the first two datasets. Fig. 4a illustrates the incremental learning performance on AudioCaps (starting training at step 1), while Fig. 4b shows the test accuracy of Clotho (starting training at step 2) at each incremental step. It is evident that our PTAT method experiences the smallest accuracy drop in each incremental step and consistently maintains the highest accuracy, demonstrating strong resistance to forgetting and stable accuracy throughout the training process. Additionally, we observed that VPT (deep) exhibits more severe forgetting compared

to VPT (shallow), suggesting that due to the relatively simple structure of the audio encoder, excessive prompts may lead to more pronounced forgetting.

In summary, our method demonstrates clear superiority in audio-text incremental learning, outperforming both fine-tuning and other baseline approaches in terms of effectiveness and efficiency.

4.4. Ablation Studies

Prompts Adding Layer. To analyze the different effects of adding prompts at various layers within the encoder, we conducted experiments on different transformer layers of the audio encoder, with the results shown in Tab. 3. Since HTSAT only has 4 layers, we conducted experiments on the first, second, and third layers. We have found that adding prompts at Layer 1 significantly enhances the model’s resistance to forgetting, particularly achieving great performance on the AudioCaps and Clotho datasets. It also requires fewer parameters than adding prompts at Layer 2 and Layer 3. In contrast, adding prompts at Layer 3 helps the model learn new datasets, as evidenced by improved results on the last two datasets, BBC Sound Effects and Audioset. However, it reduces the model’s ability to retain information from previously trained datasets.

Similarity and Feature Distillation. We analyze the effectiveness of our proposed Audio-Text Similarity and Feature Distillation module by removing single or both parts from our PTAT model. As shown in Tab. 4, using Similarity and Feature Distillation (Full (\mathcal{L})) achieves the best performance compared to no distillation or using only individual Similarity/Feature Distillation. This demonstrates the effectiveness of our proposed Similarity and Feature Distillation module. Among them, the combination of removing both Similarity Distillation (\mathcal{L}_{SD}) and Feature Distillation (\mathcal{L}_{FD}) performs the worst. Compared to adding only Feature Distillation, adding only Similarity Distillation results in a more significant improvement.

Different Dataset training sequence. To reflect real-world data dynamics, we tested our model’s performance by varying the sequence of dataset additions (AudioCaps trained in step 1, Clotho trained in step 2, BBC Sound Effects trained in step 3, AudioSet trained in step 4). As shown in Fig. 5, the results confirm the effectiveness of our method, regardless of the order of the data set. This will provide insights into how the model can adapt to more flexible data updates.

5. Conclusion

This work introduces TAIL, a novel text-audio incremental learning task. Its challenges focused on achieving continuous text-audio retrieval tasks across sequentially expanding datasets, which is previously unexplored. To benchmark the TAIL task, we propose a parameter-efficient method named PTAT, which tackles the task by learning cross-modal prompts tuning and incorporating an audio-text similarity and feature distillation module. PTAT primarily comprises two components: Audio-Text Prompt Generation (ATPG) and Audio-Text Similarity and Feature Distillation (ATSFD). ATPG generates a series of interconnected audio and text prompts, leveraging prompt tuning to optimize parameters efficiently. ATSFDF mitigates catastrophic forgetting by constraining the output of the new model based on the output of the previous model. We benchmark our method and previous incremental learning or prompt tuning methods on AudioCaps, Clotho, BBC Sound Effects and Audioset datasets, and our method outperforms previous methods significantly, particularly demonstrating stronger resistance to forgetting on older datasets.

References

- [1] Matteo Boschini, Lorenzo Bonicelli, Pietro Buzzega, Angelo Porrello, and Simone Calderara. Class-incremental continual learning into the extended der-verse. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2022. 1
- [2] Yunkang Cao, Jiangning Zhang, Luca Frittoli, Yuqi Cheng, Weiming Shen, and Giacomo Boracchi. Adaclip: Adapting clip with hybrid learnable prompts for zero-shot anomaly detection. In *European Conference on Computer Vision*, pages 55–72. Springer, 2025. 3
- [3] Umberto Cappellazzo, Daniele Falavigna, Alessio Brutti, and Mirco Ravanelli. Parameter-efficient transfer learning of audio spectrogram transformers. In *2024 IEEE 34th International Workshop on Machine Learning for Signal Processing (MLSP)*, pages 1–6. IEEE, 2024. 3
- [4] Sungmin Cha, Kyunghyun Cho, and Taesup Moon. Regularizing with pseudo-negatives for continual self-supervised learning. In *Proceedings of the 41st International Conference on Machine Learning*, 2024. 2
- [5] Guangyi Chen, Weiran Yao, Xiangchen Song, Xinyue Li, Yongming Rao, and Kun Zhang. Plot: Prompt learning with optimal transport for vision-language models. In *The Eleventh International Conference on Learning Representations*. 3
- [6] Ke Chen, Xingjian Du, Bilei Zhu, Zejun Ma, Taylor Berg-Kirkpatrick, and Shlomo Dubnov. Hts-at: A hierarchical token-semantic audio transformer for sound classification and detection. In *ICASSP 2022 - 2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 646–650, 2022. 5
- [7] Chaorui Deng, Qi Chen, Pengda Qin, Da Chen, and Qi Wu. Prompt switch: Efficient clip adaptation for text-video retrieval. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 15648–15658, 2023. 3
- [8] Konstantinos Drossos, Samuel Lipping, and Tuomas Virtanen. Clotho: An audio captioning dataset. In *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 736–740. IEEE, 2020. 5
- [9] Benjamin Elizalde, Soham Deshmukh, Mahmoud Al Ismail, and Huaming Wang. Clap: Learning audio concepts from natural language supervision. *ICASSP 2023 - 2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1–5, 2023. 5, 7
- [10] Edward J Hu et al. LoRA: Low-rank adaptation of large language models. In *ICLR*, 2022. 6, 7
- [11] Qian Feng, Hanbin Zhao, Chao Zhang, Jiahua Dong, Henghui Ding, Yu-Gang Jiang, and Hui Qian. Pectp: Parameter-efficient cross-task prompts for incremental vision transformer. *arXiv preprint arXiv:2407.03813*, 2024. 1
- [12] Qian Feng, Dawei Zhou, Hanbin Zhao, Chao Zhang, and Hui Qian. Lw2g: Learning whether to grow for prompt-based continual learning. *arXiv preprint arXiv:2409.18860*, 2024. 1
- [13] Enrico Fini, Victor Costa, Xavier Alameda-Pineda, Elisa Ricci, Alahari Karteek, and Julien Mairal. Self-supervised models are continual learners. *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 9611–9620, 2021. 2
- [14] Feifei Fu, Yizhao Gao, and Zhiwu Lu. Enhancing class-incremental learning for image classification via bidirectional transport and selective momentum. In *Proceedings of the 2024 International Conference on Multimedia Retrieval*, page 175–183, New York, NY, USA, 2024. Association for Computing Machinery. 2
- [15] Jort F Gemmeke, Daniel PW Ellis, Dylan Freedman, Aren Jansen, Wade Lawrence, R Channing Moore, Manoj Plakal, and Marvin Ritter. Audio set: An ontology and human-labeled dataset for audio events. In *2017 IEEE international conference on acoustics, speech and signal processing (ICASSP)*, pages 776–780. IEEE, 2017. 5
- [16] Mengqi Guo, Chen Li, Hanlin Chen, and Gim Hee Lee. Unikd: Uncertainty-filtered incremental knowledge distillation for neural implicit representation. *European Conference on Computer Vision (ECCV)*, 2024. 1
- [17] Cheng Han, Qifan Wang, Yiming Cui, Zhiwen Cao, Wenguan Wang, Siyuan Qi, and Dongfang Liu. E 2 vpt: An effective and efficient approach for visual prompt tuning. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 17445–17456. IEEE, 2023. 3
- [18] Linlan Huang, Xusheng Cao, Haori Lu, and Xialei Liu. Class-incremental learning with clip: Adaptive representation adjustment and parameter fusion. In *European Conference on Computer Vision*, pages 214–231. Springer, 2025. 2
- [19] Wei-Cheng Huang, Chun-Fu Chen, and Hsiang Hsu. Ovor: Oneprompt with virtual outlier regularization for rehearsal-free class-incremental learning. In *The Twelfth International Conference on Learning Representations*. 2

- [20] Menglin Jia, Luming Tang, Bor-Chun Chen, Claire Cardie, Serge Belongie, Bharath Hariharan, and Ser-Nam Lim. Visual prompt tuning. In *European Conference on Computer Vision*, pages 709–727. Springer, 2022. 3, 6
- [21] KJ Joseph, Salman Khan, Fahad Shahbaz Khan, Rao Muhammad Anwer, and Vineeth N Balasubramanian. Energy-based latent aligner for incremental learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7452–7461, 2022. 2
- [22] Chen Ju, Tengda Han, Kunhao Zheng, Ya Zhang, and Weidi Xie. Prompting visual-language models for efficient video understanding. In *European Conference on Computer Vision*, pages 105–124. Springer, 2022. 3, 6, 7
- [23] Chen Ju, Tengda Han, Kunhao Zheng, Ya Zhang, and Weidi Xie. Prompting visual-language models for efficient video understanding. In *European Conference on Computer Vision*, pages 105–124. Springer, 2022. 3, 6
- [24] Minsoo Kang, Jaeyoo Park, and Bohyung Han. Class-incremental learning by knowledge distillation with adaptive feature consolidation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16071–16080, 2022. 2
- [25] Said Karam, Shanq-Jang Ruan, and Qazi Mazhar ul Haq. Task incremental learning with static memory for audio classification without catastrophic interference. *IEEE Consumer Electronics Magazine*, 11(5):101–108, 2022. 3
- [26] Zixuan Ke, Yijia Shao, Haowei Lin, Tatsuya Konishi, Gyuhak Kim, and Bing Liu. Continual pre-training of language models. In *The Eleventh International Conference on Learning Representations*, 2023. 2
- [27] Muhammad Gul Zain Ali Khan, Muhammad Ferjad Naeem, Luc Van Gool, Didier Stricker, Federico Tombari, and Muhammad Zeshan Afzal. Introducing language guidance in prompt-based continual learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 11463–11473, 2023. 1
- [28] Chris Dongjoo Kim, Byeongchang Kim, Hyunmin Lee, and Gunhee Kim. Audiocaps: Generating captions for audios in the wild. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 119–132, 2019. 5
- [29] Yiming Li, Xiangdong Wang, and Hong Liu. Audio-free prompt tuning for language-audio models. In *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 491–495. IEEE, 2024. 3
- [30] Haoxin Ma, Jiangyan Yi, Jianhua Tao, Ye Bai, Zhengkun Tian, and Chenglong Wang. Continual learning for fake audio detection. In *Interspeech 2021*. ISCA, 2021. 3
- [31] Shijie Ma, Fei Zhu, Zhun Zhong, Wenzhuo Liu, Xu-Yao Zhang, and Cheng-Lin Liu. Happy: A debiased learning framework for continual generalized category discovery. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024. 2
- [32] Daniel Marczak, Sebastian Cygert, Tomasz Trzcinski, and Bartłomiej Twardowski. Revisiting supervision for continual representation learning. page 181–197, Berlin, Heidelberg, 2024. Springer-Verlag. 2
- [33] Xinhao Mei, Chutong Meng, Haohe Liu, Qiuqiang Kong, Tom Ko, Chengqi Zhao, Mark D Plumbley, Yuexian Zou, and Wenwu Wang. Wavcaps: A chatgpt-assisted weakly-labelled audio captioning dataset for audio-language multimodal research. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2024. 5
- [34] Martin Menabue, Emanuele Frascaro, Matteo Boschini, Enver Sangineto, Lorenzo Bonicelli, Angelo Porrello, and Simone Calderara. Semantic residual prompts for continual learning. In *European Conference on Computer Vision*, 2024. 1
- [35] Shentong Mo and Yapeng Tian. Multi-modal grouping network for weakly-supervised audio-visual video parsing. *Advances in Neural Information Processing Systems*, 35: 34722–34733, 2022. 4
- [36] Manjunath Mulimani and Annamaria Mesaros. Class-incremental learning for multi-label audio classification. In *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 916–920. IEEE, 2024. 2, 3
- [37] Erum Mushtaq, Duygu Nur Yaldiz, Yavuz Faruk Bakman, Jie Ding, Chenyang Tao, Dimitrios Dimitriadis, and Salman Avestimehr. Cromo-mixup: Augmenting cross-model representations for continual self-supervised learning. In *European Conference on Computer Vision*. Springer, 2024. 2
- [38] Nithish Muthuchamy Selvaraj, Xiaobao Guo, Adams Kong, Bingquan Shen, and Alex Kot. Adapter incremental continual learning of efficient audio spectrogram transformers. In *Interspeech 2023*, pages 909–913, 2023. 3, 6
- [39] Andreea-Maria Oncescu, Joao F Henriques, and A Sophia Koepke. Dissecting temporal understanding in text-to-audio retrieval. In *ACM Multimedia 2024*. 2
- [40] OpenAI. Chatgpt: Optimizing language models for dialogue. *OpenAI*, 2022. <https://openai.com/research/chatgpt>. 1
- [41] Yixuan Pei, Zhiwu Qing, Shiwei Zhang, Xiang Wang, Yingya Zhang, Deli Zhao, and Xueming Qian. Space-time prompting for video class-incremental learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 11932–11942, 2023. 2
- [42] Yixuan Pei, Zhiwu Qing, Shiwei Zhang, Xiang Wang, Yingya Zhang, Deli Zhao, and Xueming Qian. Space-time prompting for video class-incremental learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 11932–11942, 2023. 1
- [43] Weiguo Pian, Shentong Mo, Yunhui Guo, and Yapeng Tian. Audio-visual class-incremental learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7799–7811, 2023. 2
- [44] Sylvestre-Alvise Rebuffi, Alexander Kolesnikov, Georg Sperl, and Christoph H Lampert. icarl: Incremental classifier and representation learning. In *Proceedings of the IEEE conference on Computer Vision and Pattern Recognition*, pages 2001–2010, 2017. 2
- [45] James Seale Smith, Leonid Karlinsky, Vyshnavi Gutta, Paola Cascante-Bonilla, Donghyun Kim, Assaf Arbelle, Rameswar

- Panda, Rogerio Feris, and Zsolt Kira. Coda-prompt: Continual decomposed attention-based prompting for rehearsal-free continual learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11909–11919, 2023. 1
- [46] Jun S. Song, Jungsoo Lee, In-So Kweon, and Sungha Choi. Ecotta: Memory-efficient continual test-time adaptation via self-distilled regularization. *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11920–11929, 2023. 2
- [47] Tejas Srinivasan, Ting-Yun Chang, Leticia Pinto Alva, Georgios Chochlakis, Mohammad Rostami, and Jesse Thomason. Climb: A continual learning benchmark for vision-and-language tasks. *Advances in Neural Information Processing Systems*, 35:29440–29453, 2022. 2
- [48] Yu-Ming Tang, Yi-Xing Peng, and Wei-Shi Zheng. When prompt-based incremental learning does not meet strong pre-training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1706–1716, 2023. 1
- [49] Yu-Ming Tang, Yi-Xing Peng, and Wei-Shi Zheng. When prompt-based incremental learning does not meet strong pre-training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1706–1716, 2023. 2
- [50] Xinyu Tian, Shu Zou, Zhaoyuan Yang, and Jing Zhang. Argue: Attribute-guided prompt tuning for vision-language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 28578–28587, 2024. 3
- [51] Yapeng Tian and Chenliang Xu. Can audio-visual integration strengthen robustness under multimodal attacks? In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5601–5611, 2021. 4
- [52] Andrés Villa, Juan León Alcázar, Motasem Alfarra, Kumail Alhamoud, Julio Hurtado, Fabian Caba Heilbron, Alvaro Soto, and Bernard Ghanem. Pivot: Prompting for video continual learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 24214–24223, 2023. 1
- [53] Liyuan Wang, Jingyi Xie, Xingxing Zhang, Mingyi Huang, Hang Su, and Jun Zhu. Hierarchical decomposition of prompt-based continual learning: Rethinking obscured sub-optimality. *Advances in Neural Information Processing Systems*, 36, 2024. 1
- [54] Liyuan Wang, Xingxing Zhang, Hang Su, and Jun Zhu. A comprehensive survey of continual learning: theory, method and application. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024. 2
- [55] Qian Wang, Jia-Chen Gu, and Zhen-Hua Ling. Multiscale matching driven by cross-modal similarity consistency for audio-text retrieval. In *ICASSP 2024 - 2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 11581–11585, 2024. 2
- [56] Yu Wang, Nicholas J. Bryan, Mark Cartwright, Juan Pablo Bello, and Justin Salamon. Few-shot continual learning for audio classification. In *ICASSP 2021 - 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 321–325, 2021. 3
- [57] Yabin Wang, Zhiwu Huang, and Xiaopeng Hong. S-prompts learning with pre-trained transformers: An occam’s razor for domain incremental learning. *Advances in Neural Information Processing Systems*, 35:5682–5695, 2022. 1
- [58] Zifeng Wang, Zizhao Zhang, Sayna Ebrahimi, Ruoxi Sun, Han Zhang, Chen-Yu Lee, Xiaoqi Ren, Guolong Su, Vincent Perot, Jennifer Dy, et al. Dualprompt: Complementary prompting for rehearsal-free continual learning. In *European Conference on Computer Vision*, pages 631–648. Springer, 2022.
- [59] Zifeng Wang, Zizhao Zhang, Chen-Yu Lee, Han Zhang, Ruoxi Sun, Xiaoqi Ren, Guolong Su, Vincent Perot, Jennifer Dy, and Tomas Pfister. Learning to prompt for continual learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 139–149, 2022. 1
- [60] Dongming Wu, Wencheng Han, Tiancai Wang, Xingping Dong, Xiangyu Zhang, and Jianbing Shen. Referring multi-object tracking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023. 3
- [61] Yusong Wu, Ke Chen, Tianyu Zhang, Yuchen Hui, Taylor Berg-Kirkpatrick, and Shlomo Dubnov. Large-scale contrastive language-audio pretraining with feature fusion and keyword-to-caption augmentation. In *ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1–5. IEEE, 2023. 5
- [62] Yifei Xin, Xuxin Cheng, Zhihong Zhu, Xusheng Yang, and Yuexian Zou. Diffatr: Diffusion-based generative modeling for audio-text retrieval. In *Proc. Interspeech 2024*, pages 1670–1674, 2024. 2
- [63] Yifei Xin, Zhihong Zhu, Xuxin Cheng, Xusheng Yang, and Yuexian Zou. Audio-text retrieval with transformer-based hierarchical alignment and disentangled cross-modal representation. In *Proc. Interspeech 2024*, pages 1140–1144, 2024. 2
- [64] Hongwei Xue, Yuchong Sun, Bei Liu, Jianlong Fu, Ruihua Song, Houqiang Li, and Jiebo Luo. Clip-vip: Adapting pre-trained image-text model to video-language alignment. In *The Eleventh International Conference on Learning Representations*, 2023. 3
- [65] Longrong Yang, Hanbin Zhao, Yunlong Yu, Xiaodong Zeng, and Xi Li. Rcs-prompt: Learning prompt to rearrange class space for prompt-based continual learning. In *European Conference on Computer Vision (ECCV)*, 2024. 1
- [66] Xiangpeng Yang, Linchao Zhu, Xiaohan Wang, and Yi Yang. Dgl: Dynamic global-local prompt tuning for text-video retrieval. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 6540–6548, 2024. 3
- [67] Gengwei Zhang, Liyuan Wang, Guoliang Kang, Ling Chen, and Yunchao Wei. Slca: Slow learner with classifier alignment for continual learning on a pre-trained model. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023. 2
- [68] Xin Zhang, Shixiang Shane Gu, Yutaka Matsuo, and Yusuke Iwasawa. Domain prompt learning for efficiently adapting clip to unseen domains. *Transactions of the Japanese Society for Artificial Intelligence*, 38(6):B–MC2_1, 2023. 3

- [69] Yihan Zhao, Wei Xi, Yuhang Cui, Gairui Bai, Xinhui Liu, and Jizhong Zhao. Copl: Parameter-efficient collaborative prompt learning for audio-visual tasks. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 4455–4464, 2024. [1](#), [3](#)
- [70] Da-Wei Zhou, Hai-Long Sun, Jingyi Ning, Han-Jia Ye, and De-Chuan Zhan. Continual learning with pre-trained models: A survey. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24*, pages 8363–8371. International Joint Conferences on Artificial Intelligence Organization, 2024. Survey Track. [2](#)
- [71] Da-Wei Zhou, Qi-Wei Wang, Zhi-Hong Qi, Han-Jia Ye, De-Chuan Zhan, and Ziwei Liu. Class-incremental learning: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024. [2](#)
- [72] Liu Zhuang, Lin Wayne, Shi Ya, and Zhao Jun. A robustly optimized BERT pre-training approach with post-training. In *Proceedings of the 20th Chinese National Conference on Computational Linguistics*, pages 1218–1227, Huhhot, China, 2021. Chinese Information Processing Society of China. [5](#)
- [73] Yukun Zuo, Hantao Yao, Liansheng Zhuang, and Changsheng Xu. Hierarchical augmentation and distillation for class incremental audio-visual video recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024. [1](#), [2](#)