AudioX: Diffusion Transformer for Anything-to-Audio Generation

Zeyue Tian¹, Yizhu Jin¹, Zhaoyang Liu¹, Ruibin Yuan¹, Xu Tan², Qifeng Chen¹, Wei Xue^{†1}, Yike Guo^{†1}

¹Hong Kong University of Science and Technology ²Moonshot AI

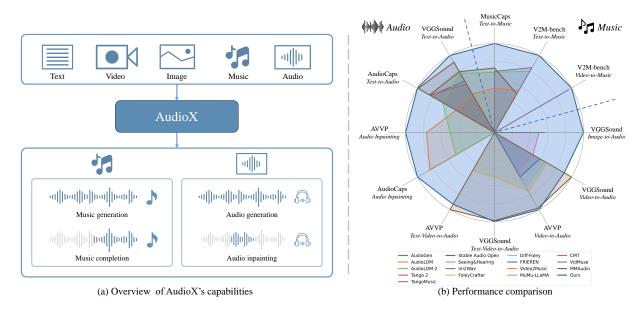


Figure 1. (a) Overview of AudioX, illustrating its capabilities across various tasks. (b) Radar chart comparing the performance of different methods across multiple benchmarks. AudioX demonstrates superior Inception Scores (IS) across a diverse set of datasets in audio and music generation tasks.

Abstract

Audio and music generation have emerged as crucial tasks in many applications, yet existing approaches face significant limitations: they operate in isolation without unified capabilities across modalities, suffer from scarce high-quality, multi-modal training data, and struggle to effectively integrate diverse inputs. In this work, we propose AudioX¹, a unified Diffusion Transformer model for Anything-to-Audio and Music Generation. Unlike previous domain-specific models, AudioX can generate both general audio and music with high quality, while offering flexible natural language control and seamless processing of various

modalities including text, video, image, music, and audio. Its key innovation is a multi-modal masked training strategy that masks inputs across modalities and forces the model to learn from masked inputs, yielding robust and unified cross-modal representations. To address data scarcity, we curate two comprehensive datasets: vggsound-caps with 190K audio captions based on the VGGSound dataset, and V2M-caps with 6 million music captions derived from the V2M dataset. Extensive experiments demonstrate that AudioX not only matches or outperforms state-of-the-art specialized models, but also offers remarkable versatility in handling diverse input modalities and generation tasks within a unified architecture. The code and datasets will be available at https://zeyuet.github.io/AudioX/.

¹Work in progress

1. Introduction

In recent years, audio generation, especially for sound effects and music, has emerged as crucial elements in multimedia creation, showing practical values in enhancing user experiences across a wide range of applications. For example, in social media, film production, and video games, sound effects and music significantly intensify emotional resonance and engagement with the audience. The ability to create high-quality audio not only enriches multimedia content but also opens up new avenues for creative expression.

However, the manual production of audio is time-consuming and needs specialized skills. This presents a compelling research opportunity to automate audio generation. As such, some notable advancements [11, 34, 40, 46, 59] have been made in audio generation. Lots of works are able to generate audio only from single-modal conditions *e.g.*, text [34, 40, 42], video [45, 65], *etc.*, while some pioneers [50, 70] manage to accommodate multi-modal conditions in audio generation, which, however, lacks the flexibility to arbitrarily combine different modalities of input. In addition, some of expert models [7, 11, 12, 59, 68] solely focus on generating sound effects or music and fail to meet diverse demands in generation. Generally, these works either limit their input or output domains, significantly posing a negative impact on practical values.

One major factor behind these limitations is the scarcity of high-quality multi-modal data. Existing datasets tend to focus on a single modality paired with audio: for instance, WavCaps [47] and AudioCaps [32] offer only text conditions, while VGGSound [5], AudioSet [18], and V2M [59] provide primarily video conditions. This narrow focus limits the diversity of training data and hinders the development of models that seamlessly integrate multiple modalities.

To this end, we propose a unified framework termed AudioX for anything-to-audio generation, complemented by two extensive multi-modal datasets: vggsound-caps, which contains 190K audio captions derived from the VG-GSound [5] dataset, and V2M-caps, comprising 6 million music captions based on the V2M [59] dataset. These datasets serve as a rich foundation for our approach. On the one hand, our framework is able to accommodate multimodal conditions, i.e., text, video, image and audio. These conditions can be flexibly combined to generate audio and support a variety of tasks. On the other hand, our framework is trained on a large-scale dataset collected across various audio domains, which aims to generate different genres of audio including sound effects, music, etc. Consequently, AudioX enables a wide range of tasks as shown in Fig. 1, including text-to-audio generation, video-to-audio generation, text-guided audio inpainting, text-guided music completion, etc.

We observe that Transformer-based works [38, 41, 63,

69] have effectively tackled multi-modal alignment, and we build on this success by incorporating Transformer-based methods into our framework for multi-modal condition handling. Furthermore, diffusion models have increasingly become leading-edge techniques in the field of high-quality audio and music generation [15, 16, 40, 46], outperforming next-token prediction in terms of audio fidelity [15, 46]. Therefore, we mainly build on Diffusion Transformer (DiT) to unify multi-modal conditions and generate high-fidelity audio, which are expected to integrate both advantages of transformers and diffusion models. To further enhance multi-modal representation learning and alignment, we explore a multi-modal masking strategy to force the model to learn from masked input conditions, which evidently boost the performance for multi-modal audio generation.

In summary, the main contributions of this work are as follows:

- We propose AudioX, a unified DiT framework accompanied by two comprehensive caption datasets, to overcome the limitations of constrained inputs and outputs. The proposed framework supports audio and music generation from varied multi-modal conditions, contributing to a new insight of studying generalist models for audio generation.
- We explore the impacts of different masking strategies in multi-modal audio generation. We find directly masking on the inputs instead of feature embeddings can enhance model's capability of cross-modal presentation learning and boost the performance on various metrics.
- We categorize task types based on inputs and systematically benchmark various state-of-the-art methods on different tasks. Our extensive experiments demonstrate the effectiveness of our approach, achieving state-of-the-art results.

2. Related Work

2.1. Diffusion models

Denoising diffusion models [27, 57] perturb data with Gaussian noise and reverse the process to recover the original data, establishing a powerful framework for generative modeling. These models have achieved remarkable success across various domains, including image generation [3, 54, 55], video generation [6, 21, 23, 28], and audio generation [15, 30, 40, 42, 43, 51]. Despite these advancements, existing diffusion-based approaches have primarily focused on tasks such as text-to-audio or video-to-audio generation [40, 43], where the input modality is often constrained to a single condition. While these works highlight the adaptability of diffusion models, they fall short in addressing more generalized any-to-audio or any-to-music generation scenarios, where the input can originate from multiple modalities, such as text, image, or video. To bridge

this gap, our approach leverages diffusion models for multicondition any-to-audio and music generation. Unlike prior works that often target specific modalities or tasks, our framework is designed to handle diverse input types, offering a more flexible and universal solution.

2.2. Audio and music generation

Recent advances in deep generative models have greatly broadened the scope of audio and music synthesis. However, most existing methods remain confined to a single modality or support only limited types of conditioning. For instance, text-to-audio approaches [15, 16, 19, 34, 40, 46] focus on generating diverse soundscapes from textual prompts, while text-to-music systems [11, 19, 40, 42, 66, 72] specialize in composing coherent musical pieces. Separate lines of work tackle tasks like audio inpainting [40, 42], primarily with text conditioning. Meanwhile, video-toaudio methods [45, 62, 65, 70] typically generate foley or environmental sounds synchronized to visual cues. Some of these also incorporate text for additional context, thereby bridging visual and textual modalities. Beyond sound effects, video-to-music approaches [14, 31, 35–37, 39, 44, 59] align musical compositions with the visual content to enhance narrative depth in multimedia applications. Despite these advances, current frameworks often specialize in only one modality or rely on a limited set of input conditions, hindering multi-task adaptation and restricting the ability to scale or transfer knowledge across related tasks. In contrast, our unified approach supports both audio and music generation for a broad range of input conditions—including text, image, video, and audio—all within a single framework.

2.3. Mask strategy in different modalities

Masking strategies, first popularized in language modeling with BERT [13], have shown promise across diverse modalities. In vision, masked autoencoders [22] use patchbased masking to learn robust representations, while AudioMAE [29] focuses on masked spectrogram reconstruction in audio. Similarly, VideoMAE [61] extends this idea to video by masking spatiotemporal patches. Meanwhile, approaches like [4, 10, 17, 67] have explored masked strategies in video, image, audio, and music. Although some recent works in cross-modal audio generation [7, 49] adopt masking strategies, they typically use feature masking, which risks information leakage as bidirectional encoders may access global context. In contrast, input masking removes parts of the original signal entirely, increasing task difficulty and leading to more robust generative models. Building on these insights, our framework employs input masking across multiple modalities for improved alignment and generation performance.




Figure 2. Overview of the automated caption generation pipeline. For each video-audio clip (top), Qwen2-Audio uses dataset-provided keywords to produce an audio caption. For each video-music pair (bottom), it describes key attributes (e.g. genre, instruments, mood, tempo) to form a music caption.

3. Dataset

3.1. Dataset sources

To train and evaluate our unified model, we have constructed a diverse set of datasets tailored for various tasks. An overview of the datasets we utilize is provided in Table A1 in the Appendix. Specifically, for audio generation, we collect datasets including AudioCaps [32], Wav-Caps [47], VGGSound [5], AudioSet Strong [25], Greatest Hits [48], and AVVP [58]. For music generation, we collect V2M [59], MusicCaps [1], and additionally utilize some of our proprietary text-music pair data.

3.2. Dataset process

One limitation with the collected datasets is that they primarily consist of single-modality pairs with audio. For instance, datasets like VGGSound, AudioSet Strong, Greatest Hits, and V2M contain only video-audio or video-music pairs, while AudioCaps, Wavcaps, and MUCaps are limited to text-audio pairs. This limitation hinders the training and evaluation of our multi-condition model. To augment the existing datasets with additional modalities and enable the training of our unified model, we annotate the audio in video datasets to generate text descriptions. Specifically, we employ Qwen2-Audio [9] to generate captions for the audio and music in these video-pair datasets.

For each 10-second video-audio clip from datasets [5, 25, 48, 58], we combine keywords from the original datasets, prompting the caption model to generate audio captions. For each video-music pair in V2M [59], Qwen2-Audio is used to describe the genre, instruments, mood, and tempo of each 10-second music segment, which are essential attributes for music description. The prompt templates are provided in Fig. 2.

Ultimately, we generate comprehensive audio and mu-

sic captions for around 260K and 5.7M 10-second videoaudio and video-music pairs, respectively. The details of the dataset are presented in Table A2 in the Appendix. We will open-source all the caption data.

4. Method

4.1. Overview

As illustrated in Fig. 3, AudioX integrates specialized encoders for video, text, and audio with a DiT model to generate high-quality audio or music. Given video \mathbf{X}_{v} , text \mathbf{X}_{t} , and audio \mathbf{X}_{a} , the process starts by randomly masking each modality—specifically, a subset of image patches from video frames, textual tokens, and audio segments. This strategy aims to encourage robust cross-modal interactions and enhance representation learning. For images, we treat them as static video sequences by padding frames, ensuring consistent handling of visual data.

Next, each modality is passed through its corresponding encoder and a dedicated projection module to extract domain-specific features. The visual projection leverages a temporal transformer followed by a linear layer to capture temporal patterns, while both text and audio projections use linear transformations for dimensional alignment. This process produces three embeddings, \mathbf{H}_{v} , \mathbf{H}_{t} , and \mathbf{H}_{a} , which are concatenated to form a multi-modal condition embedding:

$$\mathbf{H}_{c} = \text{Concat}(\mathbf{H}_{v}, \mathbf{H}_{t}, \mathbf{H}_{a}).$$
 (1)

Along with a diffusion timestep t, this condition embedding is fed into a latent-based DiT model for audio and music synthesis. The diffusion process is detailed in Sec. 4.2. By jointly leveraging visual, textual, and audio cues, AudioX achieves flexible and high-fidelity anything-to-audio and music generation.

4.2. Training

The objective of the training process is to effectively integrate multi-modal inputs and optimize the DiT model for generating high-quality audio or music through a robust diffusion and denoising framework. The details of the training data are provided in Table A1 in the Appendix. During training, for each pair $(\mathbf{X}_{v}, \mathbf{X}_{t}, \mathbf{X}_{a} \mid \mathbf{A})$, where \mathbf{A} is the ground truth we aim to generate, if the pair lacks video or audio modality input, we use zero-padding to fill the missing modality. If it lacks text modality input, we substitute with natural language descriptions, such as "Generate music for the video." for the video-to-music generation task. For the tasks of audio inpainting and music completion, where the audio modality input is required, X_a equals A for audio inpainting, where the model uses the masked audio input to inpaint the masked sections. For music completion, X_a is the preceding music segment of A, and the model aims to generate the subsequent music segment of X_a .

Diffusion process. The DiT model processes the multimodal embedding \mathbf{H}_{c} in the latent space through a denoising diffusion process. Initially, the ground truth \mathbf{A} is encoded using an encoder \mathcal{E} , which projects \mathbf{A} into the latent space, yielding the latent representation $\mathbf{z} = \mathcal{E}(\mathbf{A})$. The data then undergoes a forward diffusion process, producing noisy latent states at each timestep t.

The forward diffusion is defined as a Markov process over T timesteps, where the latent state at timestep t is produced based on the latent state at t-1:

$$q(\mathbf{z}_t|\mathbf{z}_{t-1}) = \mathcal{N}(\mathbf{z}_t; \sqrt{1-\beta_t}\mathbf{z}_{t-1}, \beta_t\mathbf{I}),$$
 (2)

where β_t represents the predefined variance at timestep t, and $\mathcal N$ denotes a Gaussian distribution. The forward diffusion process gradually adds noise to the latent state.

The reverse denoising process involves training a transformer network ϵ_{θ} to gradually remove noise at each timestep and reconstruct the clean data. The reverse process is modeled as follows:

$$p_{\theta}\left(\mathbf{z}_{t-1}|\mathbf{z}_{t}\right) = \mathcal{N}\left(\mathbf{z}_{t-1}; \mu_{\theta}\left(\mathbf{z}_{t}, t, \mathbf{H}_{c}\right), \mathbf{\Sigma}_{\theta}\left(\mathbf{z}_{t}, t, \mathbf{H}_{c}\right)\right),$$
(3)

where μ_{θ} and Σ_{θ} are the predicted mean and covariance of the reverse diffusion, conditioned on \mathbf{z}_t , t, and \mathbf{H}_{c} . These parameters define the Gaussian distribution from which \mathbf{z}_{t-1} is sampled.

The denoiser network ϵ_{θ} takes as input the noisy latent state \mathbf{z}_t , timestep t, and the multi-modal condition embedding \mathbf{H}_{c} . The goal is to minimize the noise estimation error at each timestep, which is formulated as:

$$\min_{\theta} \mathbb{E}_{t,\mathbf{z}_{t},\epsilon} \left\| \epsilon - \epsilon_{\theta} \left(\mathbf{z}_{t}, t, \mathbf{H}_{c} \right) \right\|_{2}^{2}, \tag{4}$$

where ϵ is the simulated noise at timestep t, and $\epsilon_{\theta}(\mathbf{z}_t, t, \mathbf{H}_{c})$ is the predicted noise from the model. The training objective is to minimize the mean squared error between the simulated and predicted noise across all timesteps.

By training the DiT model in this manner, we effectively unify multi-modal inputs into a latent space, enabling the generation of high-quality audio or music that is coherent and aligned with the input conditions.

5. Experiments

In this section, we provide the implementation details of our experiments and conduct extensive evaluations. These assessments comprehensively measure the effectiveness of our proposed method from both subjective and objective viewpoints. The evaluations aim to offer valuable insights into the generation of audio and music from various inputs.

5.1. Implementation details

We train our model to generate 10-second audio or music outputs conditioned on multi-modal inputs. For encoding

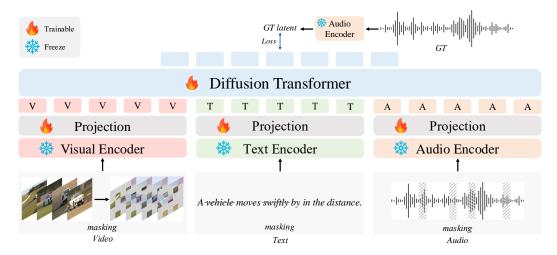


Figure 3. The AudioX Framework. This figure depicts the AudioX framework, which employs specialized encoders and a DiT-based approach with input masking to generate high-quality audio, unifying diverse input modalities for comprehensive audio and music creation.

the visual features, we use CLIP-ViT-B/32 [52], extracting video frame features at a rate of 5 frames per second. The text inputs are encoded using T5-base [53], while the audio is encoded and decoded using an audio Autoencoder [16]. The model has a total of 2.4B parameters (1.1B trainable). The DiT model, consisting of 24 layers, uses a pretrained model from [16].

The training process uses the AdamW optimizer with a base learning rate of 1e-5, weight decay of 0.001, and a learning rate scheduler incorporating exponential ramp-up and decay phases. To improve inference stability, we maintain an exponential moving average of the model weights. Mask ratios are set to 0.6 for video, 0.2 for text, and 0.6 for audio. Training is conducted on three clusters of NVIDIA H800 GPUs, each with 80GB of memory, requiring approximately 3.2k GPU hours in total. The batch size is set to 96. During inference, we perform 250 steps using classifier-free guidance with a scale of 7.0.

5.2. Evaluation metrics

To quantitatively evaluate our model, we use several metrics: Kullback-Leibler Divergence (KL) for acoustic similarity, Inception Score (IS) for evaluating both the quality and diversity of the generated audio, Frechet Distance (FD) using PANNs [33] and Frechet Audio Distance (FAD) [26] using VGGish [24] for assessing audio quality and similarity, Production Complexity (PC) and Production Quality (PQ) [60] for audio aesthetics assessment, and Alignment (Align.) for evaluating semantic alignment between input and generated audio. For Align., we use CLAP [64] score when the input is text and Imagebind AV score (IB) [20] when the input is video, both calculated using cosine similarity. For subjective evaluation, we hire 10 professional users to rate the quality of the generated audio and music.

Following [34, 40], we use overall quality score (OVL) and relevance to the input (REL) between 1 and 100.

5.3. Main results

Our model supports a wide range of tasks, generating audio or music from any combination of video, text, and audio inputs. The main results of our method, compared with other state-of-the-art (SOTA) methods [8, 11, 14, 16, 19, 31, 34, 40, 42, 44–46, 56, 59, 62, 65, 70, 71], are presented in Tables 1, 2, 3, and 4. It is evident from the tables that our model achieves SOTA performance across most metrics in all supported tasks.

Audio generation. The results of our audio generation are shown in Table 1, which includes the outcomes of generating audio or music from any combination of video and text modalities. The upper part of the table presents the audio generation tasks, while the lower part displays the music generation tasks.

For text-to-audio generation, we evaluate on the Audio-Caps [32] and VGGSound [5] datasets. On AudioCaps, our model achieves SOTA performance, while on VGGSound, the advantage is even more pronounced. This demonstrates that our model is a powerful text-to-audio generator. Furthermore, both our model and baseline results on VGGSound confirm the effectiveness of our curated caption data. For video-to-audio generation, we experiment on VGGSound and AVVP [58], AVVP is an out-of-domain test dataset for all methods. Our model achieves results comparable to SOTA on both VGGSound and AVVP, proving that it is not only a strong video-to-audio generator but also exhibits excellent generalization on out-of-domain datasets. For audio generation conditioned on both text and video, we benchmark against the strong baselines FoleyCrafter [70] and MMAudio [8], achieving results that are comparable to

| Dataset | Method | Task | KL↓ | IS ↑ | FD ↓ | FAD ↓ | PC ↑ | PQ ↑ | Align.↑ |
|-----------|--|---|--|---|--|---|---|--|--|
| AudioCaps | AudioGen [34] AudioLDM-L-Full [40] AudioLDM-2-Large [42] Tango 2 [46] Stable Audio Open [16] MAGNET-large [71] MMAudio [8] AudioX | T2A T2A T2A T2A T2A T2A T2A T2A T2A | 1.39 2.00 1.49 1.11 2.01 1.62 1.35 <u>1.34</u> | 10.22 6.51 8.46 10.37 10.37 7.46 12.03 | 13.29 37.27 26.34 12.22 29.01 24.88 12.63 11.83 | 1.72 8.37 1.97 3.20 3.15 2.99 4.71 1.86 | 3.26 2.82 2.86 3.63 2.77 3.25 3.06 3.37 | 5.25 5.67 5.77 5.82 6.16 5.15 5.64 5.73 | 0.27 0.20 0.22 0.36 0.21 0.15 <u>0.30</u> 0.28 |
| | AudioGen [34] AudioLDM-L-Full [40] AudioLDM-2-Large [42] Tango 2 [46] Stable Audio Open [16] MAGNET-large [71] MMAudio [8] AudioX | T2A T2A T2A T2A T2A T2A T2A T2A T2A | 2.16 2.41 2.10 2.31 2.36 2.03 2.17 1.79 | 11.09 6.52 13.86 10.00 14.45 8.53 17.83 20.27 | 15.94 31.15 16.32 22.96 26.00 22.17 11.52 9.84 | 2.48 7.05 2.05 3.47 2.60 2.74 2.50 1.31 | 3.30 2.93 2.95 3.93 2.64 3.65 3.02 3.33 | 5.45 5.99 6.35 5.99 <u>6.53</u> 5.25 6.12 6.24 | 0.29 0.27 0.30 0.29 0.33 0.26 0.32 0.33 |
| VGGSound | Seeing&Hearing [65] FoleyCrafter [70] Diff-Foley [45] FRIEREN [62] MMAudio [8] AudioX | V2A V2A V2A V2A V2A V2A | 2.58 2.39 3.01 2.58 1.97 2.57 | 5.15 8.70 8.35 6.91 14.95 12.16 | 27.21 17.68 56.54 50.88 6.18 8.83 | 5.23 2.23 5.89 3.13 2.04 1.13 | 3.42 3.31 2.57 2.98 3.38 3.51 | 5.33 5.99 5.85 6.06 5.91 6.11 | 0.36 0.27 0.20 0.20 0.35 0.26 |
| | FoleyCrafter [70] MMAudio [8] AudioX | TV2A TV2A TV2A | 1.94 1.51 <u>1.56</u> | 11.32 17.79 17.89 | 19.16 6.60 <u>7.58</u> | 2.13 2.20 1.10 | 3.38 3.31 3.46 | 6.06 5.99 6.21 | 0.26 0.33 <u>0.26</u> |
| AVVP | Seeing&Hearing [65] FoleyCrafter [70] Diff-Foley [45] FRIEREN [62] MMAudio [8] AudioX | V2A V2A V2A V2A V2A V2A | 2.30 2.13 3.14 2.73 1.22 2.20 | 4.02 6.46 5.97 4.71 8.40 8.58 | 40.38 28.68 76.96 66.46 13.51 18.75 | 8.66 3.77 10.95 6.49 3.25 2.47 | 3.64 3.25 2.55 3.08 3.55 3.62 | 5.16 5.87 5.71 5.88 5.89 6.00 | 0.35 0.28 0.16 0.17 0.34 0.28 |
| | FoleyCrafter [70] MMAudio [8] AudioX | TV2A TV2A TV2A | 1.81 1.74 2.14 | 6.22 9.52 9.05 | 26.76 14.18 18.04 | 2.85 2.74 2.36 | 3.62 3.64 3.66 | 5.60 5.81 6.03 | 0.27 0.34 <u>0.28</u> |
| MusicCaps | MusicGen [11] AudioLDM-L-Full [40] AudioLDM-2-Large [42] TangoMusic [19] Stable Audio Open [16] MAGNET-large [71] AudioX | T2M T2M T2M T2M T2M T2M T2M | 1.43 1.45 1.26 <u>1.13</u> 1.51 1.32 1.02 | 2.24 2.49 2.84 2.86 2.94 1.98 3.54 | 25.40 34.44 15.61 15.00 36.33 23.88 10.63 | 4.55 6.34 2.80 1.88 3.23 4.24 1.53 | 5.19 4.72 5.22 5.57 3.91 5.84 5.17 | 7.16 6.10 6.70 7.06 7.18 6.71 6.70 | 0.18 0.22 0.23 0.23 0.23 0.19 0.23 |
| V2M-bench | MusicGen [11] AudioLDM-L-Full [40] AudioLDM-2-Large [42] TangoMusic [19] Stable Audio Open [16] MAGNET-large [71] AudioX | T2M T2M T2M T2M T2M T2M T2M | 0.76 0.72 0.62 0.72 0.72 0.60 0.49 | 1.31 1.37 <u>1.46</u> <u>1.46</u> 1.34 1.26 1.48 | 40.59 36.63 25.80 38.19 42.02 34.24 20.07 | 3.25 2.97 1.63 2.43 2.72 3.15 <u>1.69</u> | 5.57 5.08 5.57 5.78 4.36 5.89 5.92 | 7.43 7.01 6.90 7.46 7.72 7.04 6.93 | 0.14 0.16 0.14 0.14 0.17 0.17 0.13 |
| | Video2Music [31] MuMu-LLaMA [44] CMT [14] VidMuse [59] AudioX | V2M V2M V2M V2M V2M | 1.78 1.00 1.22 0.73 0.69 | 1.01 1.25 1.24 1.32 1.34 | 144.88 52.25 85.70 29.95 23.96 | 18.72 5.10 8.64 2.46 2.12 | 3.34 5.60 4.98 5.88 5.31 | 8.14 7.97 8.20 6.89 6.91 | 0.14 0.18 0.12 0.20 0.23 |
| | AudioX | TV2M | 0.47 | 1.51 | 18.92 | 1.51 | 5.40 | 7.04 | 0.22 |

Table 1. **Performance Evaluation Across Various Datasets and Methods.** This table presents the evaluation metrics for different methods applied to various datasets. The tasks are abbreviated as follows: T2A (Text-to-Audio), V2A (Video-to-Audio), TV2A (Text-and-Video-to-Audio), T2M (Text-to-Music), V2M (Video-to-Music), and TV2M (Text-and-Video-to-Music). For the alignment metric (Align.), we use the CLAP score when the input is text and the Imagebind AV score (IB) when the input is video.

them. We find that when both text and video inputs are pro-

vided, the model effectively integrates the information from

both modalities to generate better results.

The down part of Table 1 shows the results of music generation tasks. We evaluate text-to-music generation on MusicCaps [11], video-to-music and video-and-text-to-music generation on V2M [59]. Our model achieves SOTA performance across these tasks, demonstrating its effectiveness in generating high-quality music conditioned on diverse inputs.

Audio inpainting. As shown in Table 2, we conducted experiments on audio inpainting tasks, where our model outperformed the baselines [40, 42] on the AudioCaps [32] and AVVP [58] test datasets. Additionally, to explore audio inpainting with various input modalities, we performed experiments on unconditioned audio inpainting, as well as video-guided and text-and-video-guided audio inpainting tasks (on AVVP). The results indicate that both text and video can effectively guide the audio inpainting task, with text providing better guidance than video. When both text and video are conditioned, the model can integrate the two modalities to achieve superior results.

| Made d | C 4141 | Dataset | | |
|----------------------------|-----------|------------|------------|--|
| Method | Condition | AudioCaps | AVVP | |
| Unprocessed | - | 6.51/11.34 | 4.94/6.70 | |
| AudioLDM-L-Full [42] | A+T | 8.06/2.64 | 5.11/3.30 | |
| AudioLDM-2-Full-Large [42] | A+T | 4.24/10.17 | 3.99/11.58 | |
| AudioX | A | 4.63/5.35 | 3.94/5.44 | |
| AudioX | A+T | 9.84/2.25 | 6.12/2.05 | |
| AudioX | A+V | N/A | 5.63/2.16 | |
| AudioX | A+T+V | N/A | 6.25/1.99 | |

Table 2. **Inpainting Performance Comparison.** This table shows the performance comparison for audio inpainting on the Audio-Caps and AVVP datasets. The values before and after the slash represent the IS and FAD metrics, respectively. A, V, and T represent Audio, Video, and Text conditions. The baseline methods are all under audio and text conditions.

Music Completion. Music completion is a task where the model generates music based on a given music clip. We evaluate our model on the V2M-bench [59] dataset. The results are shown in Table 3. We find that our model can generate music that extends the input music clip. As the number of input modalities increases, the model's performance improves, demonstrating its strong inter-modal learning capability and ability to leverage multi-modal information to generate better music.

Image-to-audio generation. To evaluate our model's performance on zero-shot image-to-audio generation task, we conducted experiments using the same settings as in [65]. We compared our model with Seeing&Hearing [65] and Im2Wav [56], and also constructed a baseline by combining an image caption model [2] with a text-to-audio model [46]. The results are shown in Table 4 in the Appendix. We find that our model demonstrates excellent per-

| Condition | KL↓ | IS↑ | FD↓ | FAD↓ |
|-----------|------|------|-------|-------------|
| M | 0.96 | 1.21 | 52.77 | 5.76 |
| T+M | 0.51 | 1.49 | 21.42 | <u>2.14</u> |
| V+M | 0.70 | 1.37 | 24.28 | 2.29 |
| T+V+M | 0.46 | 1.52 | 18.69 | 1.67 |

Table 3. **Performance for our method under different conditions in the music completion task.** M, T, and V represent Music, Text, and Video, respectively.

formance in image-to-audio generation task even without any specific training with image data.

| Method | KL↓ | IS ↑ | FD↓ | FAD ↓ | Align. ↑ |
|---------------------|------|-------|--------------|-------------|----------|
| Caption2Audio | 2.76 | 7.48 | 32.97 | <u>5.54</u> | 0.21 |
| Im2Wav [56] | 2.61 | 7.06 | <u>19.63</u> | 7.58 | 0.41 |
| Seeing&Hearing [65] | 2.69 | 6.15 | 20.96 | 6.87 | 0.29 |
| AudioX | 2.90 | 13.48 | 16.42 | 2.71 | 0.23 |

Table 4. Comparison of Methods for the Image2Audio Task.

User study. We conducted a user study to evaluate the quality of the generated audio and music. We randomly selected 25 samples for each audio generation task, including text-to-audio (T2A), text-to-music (T2M), video-to-audio (V2A), and video-to-music (V2M). 10 users are asked to rate the quality of the generated audio and music. The results are shown in Fig. 4. The evaluation shows that our model achieves subjective SOTA performance in terms of OVL and REL scores in most tasks, indicating high user satisfaction.




Figure 4. User study results of generated audio and music. The values represent the average OVL and REL scores across Text-to-Audio (on AudioCaps), Text-to-Music (on MusicCaps), Video-to-Audio (on VGGSound), Video-to-Music (on V2M-bench).

5.4. Ablation study

In this section, we investigate the effects of several design choices in our model, focusing on the mask ratio and mask strategy, as well as the impact of different modality conditioning. Mask ratio. To identify the optimal mask ratio for different modalities, we conduct a mask ablation study for each input modality, with results shown in Fig. 5. For each modality, we vary the mask ratio from 0 to 0.8. The text modality performs best with a mask ratio of 0.2, while both the video and audio modalities reach optimal performance at a mask ratio of 0.6. From the figure, we observe that masking the video modality results in the most significant performance improvement. We attribute this to the high redundancy in video data, which contains abundant frames and information. Masking video data enhances the model's ability to extract key features from the input, allowing it to effectively utilize the remaining information even at higher mask ratios. The results can demonstrates the effectiveness of our masking in improving model performance.




Figure 5. Ablation study of mask ratios for each modality, with mask ratios varying from 0.2, 0.4, 0.6 to 0.8. The values represent the average Inception Score (IS) across Text-to-Audio, Text-to-Music, Video-to-Audio, Video-to-Music, and Audio Inpainting tasks.

Mask strategy. To evaluate the effectiveness of our strategy of masking inputs for each modality, we compare different masking strategies, including no masking and feature masking, with results presented in Table A3 in the Appendix. From the results, it is evident that masking the input modality improves model performance, while masking features leads to a decline in performance. This aligns with our understanding that input masking prevents information leakage by removing parts of the original input signals, thereby increasing task difficulty and enhancing the model's ability to learn robust generative strategies. In contrast, feature masking can inadvertently reveal global context, reducing the effectiveness of the learning process. These findings validate the importance of our masking strategy.

Unified model performance. To investigate the performance of our unified model in both intra-modal and intermodal contexts, we conduct an ablation study, with results shown in Fig. 6. *For intra-modal performance*, we compare our unified model with models trained on individual modality conditions across tasks supported by single-modality models. As shown in the left figure, our unified model is compared with text-conditioned, video-conditioned, and

audio-conditioned models on text-to-audio, video-to-audio, and audio inpainting tasks, respectively. The results demonstrate that our unified model outperforms the single-modality models, highlighting its strong intra-modal capabilities and its ability to perform well across various single-modality tasks. For inter-modal performance, we evaluate the results of different modality combinations using our unified model, as illustrated in the right figure. In music generation tasks, adding each additional modality input consistently improves performance over single-modality inputs, with the best results achieved when all three modalities are combined. This experiment confirms our model's robust inter-modal learning ability, effectively integrating information from different modalities to enhance performance.

Overall, our DiT-based model with input masking successfully unifies different input modalities, enhancing performance both intra-modally and inter-modally to generate high-quality audio and music.




Figure 6. Ablation study comparing intra-modal and inter-modal performance of the unified model. The left compares single-modality models on text-to-audio, video-to-audio, and audio in-painting tasks. The right shows the effect of adding modalities on music generation, with performance improvements noted for each added modality. Results are based on the Inception Score (IS) metric.

6. Conclusion

In this work, we introduce AudioX, a unified framework that addresses the challenges of multi-modal integration in audio and music generation, overcoming the input-modality and output-domain constraints prevalent in existing approaches. By adopting a DiT-based approach and incorporating an input masking strategy, our model effectively unifies text, video, and audio inputs to produce high-quality audio outputs. We also curate and utilize comprehensive multi-modal datasets, providing a robust foundation for training and evaluation. Extensive experimental results show that AudioX not only excels in intra-modal tasks but also significantly improves inter-modal performance, highlighting its potential to advance the field of multi-modal audio generation.

References

- [1] Andrea Agostinelli, Timo I Denk, Zalán Borsos, Jesse Engel, Mauro Verzetti, Antoine Caillon, Qingqing Huang, Aren Jansen, Adam Roberts, Marco Tagliasacchi, et al. Musiclm: Generating music from text. *arXiv preprint arXiv:2301.11325*, 2023. 3
- [2] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*, 2023. 7
- [3] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 18392–18402, 2023.
- [4] Huiwen Chang, Han Zhang, Lu Jiang, Ce Liu, and William T Freeman. Maskgit: Masked generative image transformer. In Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pages 11315–11325, 2022. 3
- [5] Honglie Chen, Weidi Xie, Andrea Vedaldi, and Andrew Zisserman. Vggsound: A large-scale audio-visual dataset. In ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), pages 721–725. IEEE, 2020. 2, 3, 5
- [6] Haoxin Chen, Menghan Xia, Yingqing He, Yong Zhang, Xiaodong Cun, Shaoshu Yang, Jinbo Xing, Yaofang Liu, Qifeng Chen, Xintao Wang, et al. Videocrafter1: Open diffusion models for high-quality video generation. arXiv preprint arXiv:2310.19512, 2023. 2
- [7] Ziyang Chen, Prem Seetharaman, Bryan Russell, Oriol Nieto, David Bourgin, Andrew Owens, and Justin Salamon. Video-guided foley sound generation with multimodal controls. arXiv preprint arXiv:2411.17698, 2024. 2, 3
- [8] Ho Kei Cheng, Masato Ishii, Akio Hayakawa, Takashi Shibuya, Alexander Schwing, and Yuki Mitsufuji. Taming multimodal joint training for high-quality video-to-audio synthesis. arXiv preprint arXiv:2412.15322, 2024. 5, 6
- [9] Yunfei Chu, Jin Xu, Qian Yang, Haojie Wei, Xipin Wei, Zhi-fang Guo, Yichong Leng, Yuanjun Lv, Jinzheng He, Junyang Lin, et al. Qwen2-audio technical report. arXiv preprint arXiv:2407.10759, 2024. 3
- [10] Marco Comunità, Zhi Zhong, Akira Takahashi, Shiqi Yang, Mengjie Zhao, Koichi Saito, Yukara Ikemiya, Takashi Shibuya, Shusuke Takahashi, and Yuki Mitsufuji. Specmaskgit: Masked generative modeling of audio spectrograms for efficient audio synthesis and beyond. arXiv preprint arXiv:2406.17672, 2024. 3
- [11] Jade Copet, Felix Kreuk, Itai Gat, Tal Remez, David Kant, Gabriel Synnaeve, Yossi Adi, and Alexandre Défossez. Simple and controllable music generation. *Advances in Neural Information Processing Systems*, 36, 2024. 2, 3, 5, 6, 7
- [12] Qixin Deng, Qikai Yang, Ruibin Yuan, Yipeng Huang, Yi Wang, Xubo Liu, Zeyue Tian, Jiahao Pan, Ge Zhang, Hanfeng Lin, et al. Composerx: Multi-agent symbolic music composition with llms. *arXiv preprint arXiv:2404.18081*, 2024. 2

- [13] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: pre-training of deep bidirectional transformers for language understanding. *CoRR*, abs/1810.04805, 2018. 3
- [14] Shangzhe Di, Zeren Jiang, Si Liu, Zhaokai Wang, Leyan Zhu, Zexin He, Hongming Liu, and Shuicheng Yan. Video background music generation with controllable music transformer. In *Proceedings of the 29th ACM International Conference on Multimedia*, pages 2037–2045, 2021. 3, 5, 6
- [15] Zach Evans, Julian D Parker, CJ Carr, Zack Zukowski, Josiah Taylor, and Jordi Pons. Long-form music generation with latent diffusion. arXiv preprint arXiv:2404.10301, 2024. 2, 3
- [16] Zach Evans, Julian D Parker, CJ Carr, Zack Zukowski, Josiah Taylor, and Jordi Pons. Stable audio open. arXiv preprint arXiv:2407.14358, 2024. 2, 3, 5, 6
- [17] Hugo Flores Garcia, Prem Seetharaman, Rithesh Kumar, and Bryan Pardo. Vampnet: Music generation via masked acoustic token modeling. arXiv preprint arXiv:2307.04686, 2023.
- [18] Jort F Gemmeke, Daniel PW Ellis, Dylan Freedman, Aren Jansen, Wade Lawrence, R Channing Moore, Manoj Plakal, and Marvin Ritter. Audio set: An ontology and humanlabeled dataset for audio events. In 2017 IEEE international conference on acoustics, speech and signal processing (ICASSP), pages 776–780. IEEE, 2017. 2
- [19] Deepanway Ghosal, Navonil Majumder, Ambuj Mehrish, and Soujanya Poria. Text-to-audio generation using instruction-tuned llm and latent diffusion model. *arXiv* preprint arXiv:2304.13731, 2023. 3, 5, 6
- [20] Rohit Girdhar, Alaaeldin El-Nouby, Zhuang Liu, Mannat Singh, Kalyan Vasudev Alwala, Armand Joulin, and Ishan Misra. Imagebind: One embedding space to bind them all. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 15180–15190, 2023.
- [21] Yuwei Guo, Ceyuan Yang, Anyi Rao, Zhengyang Liang, Yaohui Wang, Yu Qiao, Maneesh Agrawala, Dahua Lin, and Bo Dai. Animatediff: Animate your personalized text-to-image diffusion models without specific tuning. *arXiv* preprint arXiv:2307.04725, 2023. 2
- [22] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF conference* on computer vision and pattern recognition, pages 16000– 16009, 2022. 3
- [23] Yingqing He, Zhaoyang Liu, Jingye Chen, Zeyue Tian, Hongyu Liu, Xiaowei Chi, Runtao Liu, Ruibin Yuan, Yazhou Xing, Wenhai Wang, et al. Llms meet multimodal generation and editing: A survey. arXiv preprint arXiv:2405.19334, 2024. 2
- [24] Shawn Hershey, Sourish Chaudhuri, Daniel PW Ellis, Jort F Gemmeke, Aren Jansen, R Channing Moore, Manoj Plakal, Devin Platt, Rif A Saurous, Bryan Seybold, et al. Cnn architectures for large-scale audio classification. In 2017 ieee international conference on acoustics, speech and signal processing (icassp), pages 131–135. IEEE, 2017. 5

- [25] Shawn Hershey, Daniel PW Ellis, Eduardo Fonseca, Aren Jansen, Caroline Liu, R Channing Moore, and Manoj Plakal. The benefit of temporally-strong labels in audio event classification. In ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), pages 366–370. IEEE, 2021. 3
- [26] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. Advances in neural information processing systems, 30, 2017. 5
- [27] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. Advances in neural information processing systems, 33:6840–6851, 2020. 2
- [28] Jonathan Ho, Tim Salimans, Alexey Gritsenko, William Chan, Mohammad Norouzi, and David J Fleet. Video diffusion models. Advances in Neural Information Processing Systems, 35:8633–8646, 2022. 2
- [29] Po-Yao Huang, Hu Xu, Juncheng Li, Alexei Baevski, Michael Auli, Wojciech Galuba, Florian Metze, and Christoph Feichtenhofer. Masked autoencoders that listen. Advances in Neural Information Processing Systems, 35: 28708–28720, 2022. 3
- [30] Myeonghun Jeong, Hyeongju Kim, Sung Jun Cheon, Byoung Jin Choi, and Nam Soo Kim. Diff-tts: A denoising diffusion model for text-to-speech. arXiv preprint arXiv:2104.01409, 2021. 2
- [31] Jaeyong Kang, Soujanya Poria, and Dorien Herremans. Video2music: Suitable music generation from videos using an affective multimodal transformer model. *Expert Systems with Applications*, 249:123640, 2024. 3, 5, 6
- [32] Chris Dongjoo Kim, Byeongchang Kim, Hyunmin Lee, and Gunhee Kim. Audiocaps: Generating captions for audios in the wild. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 119–132, 2019. 2, 3, 5, 7
- [33] Qiuqiang Kong, Yin Cao, Turab Iqbal, Yuxuan Wang, Wenwu Wang, and Mark D Plumbley. Panns: Large-scale pretrained audio neural networks for audio pattern recognition. *IEEE/ACM Transactions on Audio, Speech, and Lan*guage Processing, 28:2880–2894, 2020. 5
- [34] Felix Kreuk, Gabriel Synnaeve, Adam Polyak, Uriel Singer, Alexandre Défossez, Jade Copet, Devi Parikh, Yaniv Taigman, and Yossi Adi. Audiogen: Textually guided audio generation. arXiv preprint arXiv:2209.15352, 2022. 2, 3, 5, 6
- [35] Ruiqi Li, Siqi Zheng, Xize Cheng, Ziang Zhang, Shengpeng Ji, and Zhou Zhao. Muvi: Video-to-music generation with semantic alignment and rhythmic synchronization. *arXiv* preprint arXiv:2410.12957, 2024. 3
- [36] Sizhe Li, Yiming Qin, Minghang Zheng, Xin Jin, and Yang Liu. Diff-bgm: A diffusion model for video background music generation. In *Proceedings of the IEEE/CVF Conference* on Computer Vision and Pattern Recognition, pages 27348– 27357, 2024.
- [37] Sifei Li, Binxin Yang, Chunji Yin, Chong Sun, Yuxin Zhang, Weiming Dong, and Chen Li. Vidmusician: Video-to-music

- generation with semantic-rhythmic alignment via hierarchical visual features. *arXiv preprint arXiv:2412.06296*, 2024.
- [38] Bin Lin, Yang Ye, Bin Zhu, Jiaxi Cui, Munan Ning, Peng Jin, and Li Yuan. Video-llava: Learning united visual representation by alignment before projection. arXiv preprint arXiv:2311.10122, 2023. 2
- [39] Yan-Bo Lin, Yu Tian, Linjie Yang, Gedas Bertasius, and Heng Wang. Vmas: Video-to-music generation via semantic alignment in web music videos. arXiv preprint arXiv:2409.07450, 2024. 3
- [40] Haohe Liu, Zehua Chen, Yi Yuan, Xinhao Mei, Xubo Liu, Danilo Mandic, Wenwu Wang, and Mark D Plumbley. Audioldm: Text-to-audio generation with latent diffusion models. arXiv preprint arXiv:2301.12503, 2023. 2, 3, 5, 6, 7
- [41] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. Advances in neural information processing systems, 36, 2024. 2
- [42] Haohe Liu, Yi Yuan, Xubo Liu, Xinhao Mei, Qiuqiang Kong, Qiao Tian, Yuping Wang, Wenwu Wang, Yuxuan Wang, and Mark D Plumbley. Audioldm 2: Learning holistic audio generation with self-supervised pretraining. *IEEE/ACM Trans*actions on Audio, Speech, and Language Processing, 2024. 2, 3, 5, 6, 7
- [43] Jinglin Liu, Chengxi Li, Yi Ren, Feiyang Chen, and Zhou Zhao. Diffsinger: Singing voice synthesis via shallow diffusion mechanism. In *Proceedings of the AAAI conference on artificial intelligence*, pages 11020–11028, 2022. 2
- [44] Shansong Liu, Atin Sakkeer Hussain, Qilong Wu, Chenshuo Sun, and Ying Shan. Mumu-llama: Multi-modal music understanding and generation via large language models. *arXiv* preprint arXiv:2412.06660, 2024. 3, 5, 6
- [45] Simian Luo, Chuanhao Yan, Chenxu Hu, and Hang Zhao. Diff-foley: Synchronized video-to-audio synthesis with latent diffusion models. Advances in Neural Information Processing Systems, 36, 2024. 2, 3, 6
- [46] Navonil Majumder, Chia-Yu Hung, Deepanway Ghosal, Wei-Ning Hsu, Rada Mihalcea, and Soujanya Poria. Tango 2: Aligning diffusion-based text-to-audio generations through direct preference optimization. In *Proceedings of the* 32nd ACM International Conference on Multimedia, pages 564–572, 2024. 2, 3, 5, 6, 7
- [47] Xinhao Mei, Chutong Meng, Haohe Liu, Qiuqiang Kong, Tom Ko, Chengqi Zhao, Mark D Plumbley, Yuexian Zou, and Wenwu Wang. Wavcaps: A chatgpt-assisted weaklylabelled audio captioning dataset for audio-language multimodal research. *IEEE/ACM Transactions on Audio, Speech,* and Language Processing, 2024. 2, 3
- [48] Andrew Owens, Phillip Isola, Josh McDermott, Antonio Torralba, Edward H Adelson, and William T Freeman. Visually indicated sounds. In Proceedings of the IEEE conference on computer vision and pattern recognition, pages 2405–2413, 2016. 3
- [49] Trung X Pham, Tri Ton, and Chang D Yoo. Mdsgen: Fast and efficient masked diffusion temporal-aware transformers for open-domain sound generation. *arXiv preprint arXiv:2410.02130*, 2024. 3

- [50] Adam Polyak, Amit Zohar, Andrew Brown, Andros Tjandra, Animesh Sinha, Ann Lee, Apoorv Vyas, Bowen Shi, Chih-Yao Ma, Ching-Yao Chuang, et al. Movie gen: A cast of media foundation models. arXiv preprint arXiv:2410.13720, 2024. 2
- [51] Vadim Popov, Ivan Vovk, Vladimir Gogoryan, Tasnima Sadekova, and Mikhail Kudinov. Grad-tts: A diffusion probabilistic model for text-to-speech. In *International Conference on Machine Learning*, pages 8599–8608. PMLR, 2021.
- [52] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021. 5
- [53] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of machine learning* research, 21(140):1–67, 2020. 5
- [54] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. arXiv preprint arXiv:2204.06125, 1 (2):3, 2022. 2
- [55] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of* the IEEE/CVF conference on computer vision and pattern recognition, pages 10684–10695, 2022. 2
- [56] Roy Sheffer and Yossi Adi. I hear your true colors: Image guided audio generation. In ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), pages 1–5. IEEE, 2023. 5, 7
- [57] Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. *arXiv* preprint arXiv:2011.13456, 2020. 2
- [58] Yapeng Tian, Dingzeyu Li, and Chenliang Xu. Unified multisensory perception: Weakly-supervised audio-visual video parsing. In Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part III 16, pages 436–454. Springer, 2020. 3, 5, 7
- [59] Zeyue Tian, Zhaoyang Liu, Ruibin Yuan, Jiahao Pan, Qifeng Liu, Xu Tan, Qifeng Chen, Wei Xue, and Yike Guo. Vidmuse: A simple video-to-music generation framework with long-short-term modeling. arXiv preprint arXiv:2406.04321, 2024. 2, 3, 5, 6, 7
- [60] Andros Tjandra, Yi-Chiao Wu, Baishan Guo, John Hoffman, Brian Ellis, Apoorv Vyas, Bowen Shi, Sanyuan Chen, Matt Le, Nick Zacharov, et al. Meta audiobox aesthetics: Unified automatic quality assessment for speech, music, and sound. arXiv preprint arXiv:2502.05139, 2025. 5
- [61] Zhan Tong, Yibing Song, Jue Wang, and Limin Wang. Videomae: Masked autoencoders are data-efficient learners for self-supervised video pre-training. Advances in neural information processing systems, 35:10078–10093, 2022. 3

- [62] Yongqi Wang, Wenxiang Guo, Rongjie Huang, Jiawei Huang, Zehan Wang, Fuming You, Ruiqi Li, and Zhou Zhao. Frieren: Efficient video-to-audio generation with rectified flow matching. arXiv preprint arXiv:2406.00320, 2024. 3, 5, 6
- [63] Shengqiong Wu, Hao Fei, Leigang Qu, Wei Ji, and Tat-Seng Chua. Next-gpt: Any-to-any multimodal llm. arXiv preprint arXiv:2309.05519, 2023. 2
- [64] Yusong Wu, Ke Chen, Tianyu Zhang, Yuchen Hui, Taylor Berg-Kirkpatrick, and Shlomo Dubnov. Large-scale contrastive language-audio pretraining with feature fusion and keyword-to-caption augmentation. In ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), pages 1–5. IEEE, 2023. 5
- [65] Yazhou Xing, Yingqing He, Zeyue Tian, Xintao Wang, and Qifeng Chen. Seeing and hearing: Open-domain visual-audio generation with diffusion latent aligners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7151–7161, 2024. 2, 3, 5, 6, 7
- [66] M Yinghao, Ø Anders, R Anton, S Bleiz MacSen Del, S Charalampos, and D Chris. Foundation models for music: A survey. *arXiv preprint arXiv:2408.14340*, 2024. 3
- [67] Lijun Yu, Yong Cheng, Kihyuk Sohn, José Lezama, Han Zhang, Huiwen Chang, Alexander G Hauptmann, Ming-Hsuan Yang, Yuan Hao, Irfan Essa, et al. Magvit: Masked generative video transformer. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 10459–10469, 2023. 3
- [68] Ruibin Yuan, Hanfeng Lin, Yi Wang, Zeyue Tian, Shangda Wu, Tianhao Shen, Ge Zhang, Yuhang Wu, Cong Liu, Ziya Zhou, et al. Chatmusician: Understanding and generating music intrinsically with llm. arXiv preprint arXiv:2402.16153, 2024.
- [69] Jun Zhan, Junqi Dai, Jiasheng Ye, Yunhua Zhou, Dong Zhang, Zhigeng Liu, Xin Zhang, Ruibin Yuan, Ge Zhang, Linyang Li, et al. Anygpt: Unified multimodal llm with discrete sequence modeling. arXiv preprint arXiv:2402.12226, 2024. 2
- [70] Yiming Zhang, Yicheng Gu, Yanhong Zeng, Zhening Xing, Yuancheng Wang, Zhizheng Wu, and Kai Chen. Foleycrafter: Bring silent videos to life with lifelike and synchronized sounds. arXiv preprint arXiv:2407.01494, 2024. 2, 3,
- [71] Alon Ziv, Itai Gat, Gaël Le Lan, Tal Remez, Felix Kreuk, Jade Copet, Alexandre Défossez, Gabriel Synnaeve, and Yossi Adi. Masked audio generation using a single nonautoregressive transformer. In The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024. OpenReview.net, 2024. 5, 6
- [72] Alon Ziv, Itai Gat, Gael Le Lan, Tal Remez, Felix Kreuk, Alexandre Défossez, Jade Copet, Gabriel Synnaeve, and Yossi Adi. Masked audio generation using a single non-autoregressive transformer. *arXiv preprint arXiv:2401.04577*, 2024. 3

7. Appendix

This appendix provides additional details regarding our datasets, ablation studies, and further qualitative evaluations. Section 7.1 describes the datasets and our newly curated captions. Section 7.2 presents the mask strategy ablation. Finally, Section 7.3 showcases comprehensive qualitative results, including additional figures and comparisons.

7.1. Datasets

Table A1 provides an overview of all datasets used in this work. Table A2 outlines the new captions we annotated for training and testing our unified model. We will open-source these caption datasets to facilitate further research.

| Split | Task | Dataset | # Clips | Dur./Clip (s) | Dur. (h) |
|-------|------------------|-----------------|---------|---------------|----------|
| | | AudioCaps | 45.0k | 10 | 125.1 |
| | T2A | WavCaps | 108.3k | 10 | 300.8 |
| | | VGGSound | 176.9k | 10 | 491.4 |
| | | VGGSound | 176.9k | 10 | 491.4 |
| | V2A | AudioSet Strong | 67.3k | 10 | 187.14 |
| | | Greatest Hits | 1.0k | 10 | 2.71 |
| Train | | VGGSound | 176.9k | 10 | 491.4 |
| | TV2A | AudioSet Strong | 67.3k | 10 | 187.14 |
| | | Greatest Hits | 1.0k | 10 | 2.71 |
| | | Private | 175.2k | 240 | 11679.3 |
| | T2M | V2M | 5685.7k | 10 | 15793.58 |
| | | MUCaps | 22.0k | 208 | 1273.6 |
| | V2M | V2M | 5685.7k | 10 | 15793.58 |
| | TV2M | V2M | 5685.7k | 10 | 15793.58 |
| | Audio Inpainting | All audio data | 398.5k | 10 | 1107.15 |
| | Music Completion | All music data | 5882.9k | 17.6 | 28746.48 |
| | T2A | AudioCaps | 4,875 | 10 | 13.54 |
| | 12A | VGGSound | 14,931 | 10 | 41.475 |
| | V2A | VGGSound | 14,931 | 10 | 41.475 |
| | V ZA | AVVP | 1,120 | 10 | 3.11 |
| Test | TV2A | VGGSound | 14,931 | 10 | 41.475 |
| rest | T2M | MusicCaps | 5,526 | 10 | 15.35 |
| | I ZIVI | V2M | 3105 | 10 | 9.01 |
| | V2M | V2M | 300 | 108 | 9.01 |
| | TV2M | V2M | 300 | 108 | 9.01 |
| | A di T | AudioCaps | 4,875 | 10 | 13.54 |
| | Audio Inpainting | AVVP | 1,120 | 10 | 3.11 |
| | Music Completion | V2M | 300 | 108 | 9.01 |

Table A1. Comprehensive overview of training and test datasets, detailing the number of clips (# Clips), average duration per clip (Dur./Clip in seconds), and total duration (Dur. in hours) for each task and split. T2A: Text-to-Audio, V2A: Video-to-Audio, TV2A: Text-and-Video-to-Audio, T2M: Text-to-Music, V2M: Video-to-Music, TV2M: Text-and-Video-to-Music.

7.2. Mask Strategy Ablation

Table A3 reports the results of our ablation study on different mask strategies. These findings confirm that our input masking approach yields superior performance compared to feature masking and no masking strategy.

7.3. Qualitative Results

Figures A1 and A2 present comprehensive qualitative results.

| Source Dataset | Data Type | # Clips | Dur./Clip (s) | Dur. (h) |
|-----------------|-----------|---------|---------------|----------|
| VGGSound | Audio | 191.8K | 10 | 532.81 |
| AudioSet Strong | Audio | 67.3K | 10 | 187.14 |
| AVVP Test Split | Audio | 1.1K | 10 | 3.11 |
| Greatest Hits | Audio | 1.0K | 10 | 2.71 |
| V2M | Music | 5.7M | 10 | 15793.58 |

Table A2. Overview of our labeled captions, detailing the number of clips, average duration per clip, and total duration for each source dataset.

| Mask Strategy | $KL\downarrow$ | IS ↑ | FD↓ | FAD ↓ |
|---------------|----------------|-------------|--------------|-------|
| No Mask | <u>1.90</u> | <u>5.26</u> | <u>22.70</u> | 2.98 |
| Mask Feature | 2.08 | 4.64 | 32.93 | 3.68 |
| Mask Input | 1.87 | 5.44 | 21.78 | 2.81 |

Table A3. Ablation study results comparing different mask strategies.


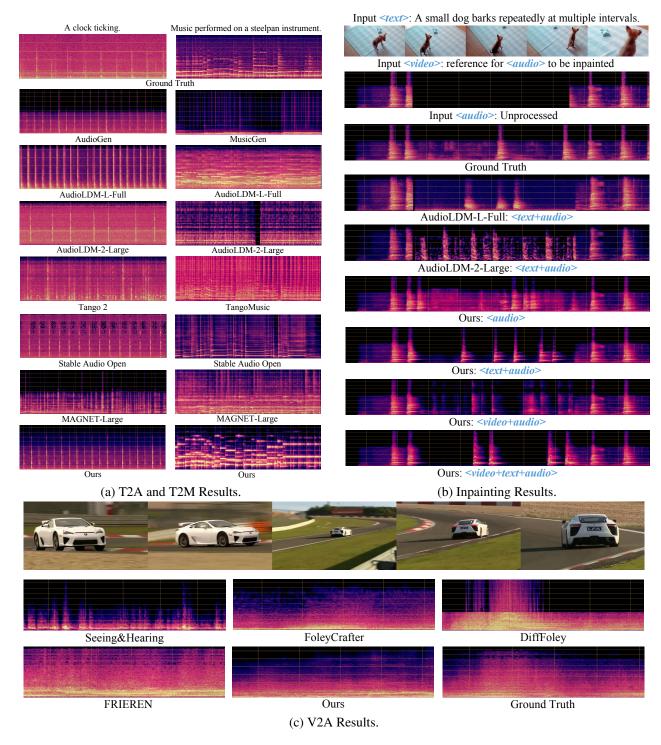



Figure A1. Qualitative comparison across various tasks: (a) In Text-to-Audio (T2A) and Text-to-Music (T2M) tasks, our model uniquely excels by consistently generating the "ticking" sound of a clock and accurately following the prompt "Music performed on a steelpan instrument," outperforming baselines in both rhythmic precision and genre fidelity. (b) Audio inpainting results demonstrate our model's strong context-aware capabilities and its ability to effectively integrate different input modalities. (c) Video-to-Audio (V2A) results show our model's proficiency in capturing dynamic motion sounds, such as the immersive "drifting" of a car, providing a richer auditory experience compared to baselines.





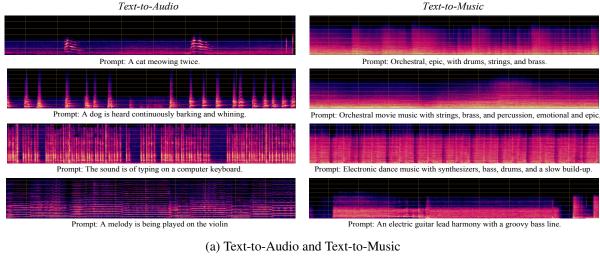

(b) Video-to-Audio and Video-to-Music

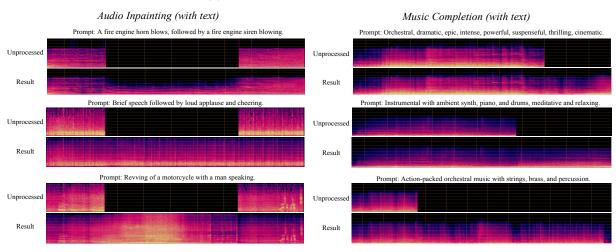

(c) Audio Inpainting and Music Completion

Figure A2. Comprehensive qualitative analysis of our model's performance across various tasks: (a) Text-to-Audio and Text-to-Music synthesis, (b) Video-to-Audio and Video-to-Music generation, and (c) Audio Inpainting and Music Completion.