Time and Memory Trade-off of KV-Cache Compression in Tensor Transformer Decoding

Yifang Chen* Xiaoyu Li[†] Yingyu Liang[‡] Zhenmei Shi[§] Zhao Song[¶] Yu Tian[∥]

Abstract

The key-value (KV) cache in the tensor version of transformers presents a significant bottleneck during inference. While previous work analyzes the fundamental space complexity barriers in standard attention mechanisms [Haris and Onak, 2025], our work generalizes the space complexity barriers result to tensor attention version. Our theoretical contributions rely on a reduction from communication complexity and deduce the memory lower bound for tensor-structured attention mechanisms when $d = \Omega(\log n)$. Furthermore, we introduce two types of tensor attention cache and present a trade-off between time and memory for two scenarios. Overall, our work provides a theoretical foundation for us to understand the time-memory tradeoff of KV-Cache compression in tensor attention decoding and offers more perspectives in developing more memory-efficient tensor attention Transformer architectures.

^{*} yifangc@uchicago.edu. The University of Chicago.

[†] xli216@stevens.edu. Stevens Institute of Technology.

[‡] yingyul@hku.hk. The University of Hong Kong. yliang@cs.wisc.edu. University of Wisconsin-Madison.

[§] zhmeishi@cs.wisc.edu. University of Wisconsin-Madison.

 $^{^{\}P}$ magic.linuxkde@gmail.com. The Simons Institute for the Theory of Computing at UC Berkeley.

kingyutian01@gmail.com. Independent Researcher.

Contents

1	Introduction	2
2	Related Work	3
3	Preliminary3.1 Notations	44 44 55 66 77 8
4		8 9 9 10 10
5		
6	6.1 Lower Bound in the Low-Dimensional Regime for Four Cache Matrices 6.2 Lower Bound in the Low-Dimensional Regime for Two Cache Matrices 6.3 Optimality of SubGen4Cache in the Low-Dimensional Regime	12 12 12 13
7	Conclusion	14
\mathbf{A}	More Related Work	15
В	B.1 Memory Lower Bound for Four Cache Matrices Case	16 20 23 23 23 23 24 24

1 Introduction

Transformers [VSP⁺17] have emerged as the dominant architecture in modern deep learning systems, revolutionizing performance across natural language processing, computer vision, and multimodal tasks [BMR⁺20, DBK⁺21]. Many popular large language models including GPT-o3 [Ope24], Llama 3.3 [LT24, AI24], and Claude 3.7 [Ant24] have demonstrated unprecedented reasoning abilities. At the core of these architectures is the self-attention mechanism, which dynamically weights different parts of the input sequence, enabling models to capture long-range dependencies and contextual relationships [VSP⁺17, BMR⁺20].

Autoregressive transformers represent a particularly influential variant that has dominated text generation tasks [KVPF20, SGS⁺24]. These models generate sequences one token at a time, with each prediction conditioned on all previously generated tokens [YDY⁺19]. During inference decoding, transformers utilize a masked self-attention mechanism that prevents the model from attending to future tokens, maintaining the causal structure necessary for proper text generation. While this approach has proven remarkably effective, it introduces unique computational challenges, particularly regarding memory usage and inference speed for long-context generation.

To resolve the significant memory challenges during inference, the concept of key-value (KV) cache is introduced in [PDC⁺23]. This KV cache, while essential for efficient inference by avoiding redundant computation, demands memory that scales linearly with sequence length. For large language models (LLMs) processing extensive contexts of tens or hundreds of thousands of tokens, this memory requirement still becomes prohibitively expensive.

Since the current KV cache grows linearly with sequence length, a range of work has been devoted to addressing this challenge [CDW⁺21, LWD⁺23, LDL⁺23, ZSZ⁺23, JLZM24, ZDH24, XTC⁺24, ZHMK24, LLP⁺25] by compressing the KV cache and aiming for sublinear space complexity. However, these methods often rely on certain assumptions regarding the structure of key-value embeddings [HO25]. For example, the sliding window attention mechanism [DYL⁺24] only preserves key-value embeddings within a narrow range of preceding tokens and ignores embeddings lying outside this small window. Minicache [LLP⁺25] proposes a method to merge two caches into a single one.

A recent study [HO25] has illuminated fundamental space complexity barriers of $\Omega(nd)$ for the KV cache compression of standard attention-based transformer. [SHT23, AS24b, LLS+24a, LSSZ24b, ZLY+25] introduce a novel tensor attention-based transformer that can efficiently capture high-order correlations. Thus, it is natural to ask a question:

What is the space complexity and running time for the KV cache in tensor-attention transformer decoding?

In this work, we provide a theoretical foundation for understanding the compression, expressivity trade-off in tensor attention mechanisms, providing new perspectives into developing memory-efficient Transformer architectures. In particular, we introduce two kinds of KV cache for the tensor-attention transformer. We show that two-cache-matrix (Definition 3.8) require less computation time, while four-cache-matrix (Definition 3.7) require less memory.

Our contribution can be described as follows:

- We introduce two formulations of KV Cache for tensor Attention-based Autoregressive Transformers (see Definition 3.7 and 3.8).
- We derive the running time and memory trade-off between two cache scenarios under $d = \Omega(\log n)$. The four-cache-matrix case requires a space lower bound of $\Omega(nd)$ and the two-

cache-matrix case requires $\Omega(n^2d)$ (Theorems 4.1 and 4.2), while the two-cache-matrix case computation is faster by $\Omega(n^2d)$ compared to the four-cache-matrix case (Theorem 4.3).

• We prove the optimality of SubGen4Cache and SubGen2Cache in the low dimensional regime $d = o(\log n)$ (see Theorem 6.3 and 6.4).

Our derived theoretical bounds illuminate the fundamental space limitations of tensor attentionbased Transformers and reveal an inherent trade-off between time and memory.

Roadmap. In Section 2, we review relevant literature related to our study. In Section 3, we provide the necessary background. In Section 4, we present our main theoretical lower bound results for memory usage when $d = \Omega(\log n)$. In Section 5, we introduce key algorithms and mathematical foundations enabling efficient memory usage. In Section 6, we explore the space complexity of tensor attention in the low-dimensional regime where $d = o(\log n)$. In Section 7, we conclude the paper.

2 Related Work

Tensor Computation for High-order Representation. Tensors offer a superior framework over matrices for modeling multi-dimensional relationships inherent in data. The process of deriving low-rank factorizations or approximations of tensors is vital across a multitude of computer science domains, including natural language processing [CYYM14, LXZ⁺14, LZM⁺15, BNR⁺15], computer vision [AFdLGTL09, PLY10, LFC⁺16, CLZ17], computer graphics [VT04, WWS⁺05, Vas09], security [ACKY05, ACY06, KB06], and data mining [KABO10, RST10, KS08, Mør11]. Moreover, tensors play an essential role in numerous machine learning applications [PBLJ15, JO14, HK13, ALB13, ZSJ⁺17, YSST19, SSL⁺22] as well as in several other diverse fields [RTP16, CMDL⁺15, ZCZJ16, YCS16, RNSS18].

Transformers and Autoregressive Models in Computer Vision. Recent advancements in computer vision have been driven by the integration of Transformers and autoregressive models, significantly enhancing both discriminative and generative tasks. Initially designed for natural language processing, Transformers have been adapted for vision, with Vision Transformer (ViT) pioneering the treatment of images as patch sequences [DBK+21]. Subsequent works, such as Swin Transformer, leverage hierarchical designs and shifted-window self-attention to improve efficiency [LLC⁺21], while DETR reframes object detection as a set prediction task [CMS⁺20]. In multimodal learning, CLIP employs natural language supervision to learn transferable visual representations, enabling zero-shot classification [RKH⁺21]. Similarly, DeiT and BEiT enhance training efficiency through knowledge distillation and self-supervised pre-training, respectively [TCD+21, BDPW22]. On the generative front, Image Transformer and DALL-E extend Transformer architectures to autoregressive image synthesis [PVU+18, RBHP21], while Visual Autoregressive Modeling (VAR) redefines autoregressive learning as next-scale prediction, achieving superior performance over traditional autoregressive and diffusion models [TJY⁺24]. Building on this, FlowAR and ARFlow integrate flow-based techniques with attention mechanisms to advance high-resolution generation [RYH⁺24, HZY⁺25]. These developments highlight the complementary strengths of Transformers and autoregressive models in visual understanding and generation.

Fast Attention Computation. The attention mechanism is widely noted for having a computational cost that scales quadratically with the context length, a limitation that grows increasingly

significant for contemporary LLMs [AAA⁺23, Ope24, LT24, AI24, Ant24]. Nevertheless, polynomial kernel approximation methods [AA22] offer a viable solution by enabling low-rank approximations of the attention matrix. This approach can substantially accelerate computations, allowing a single attention layer to train and infer at speeds approaching linear time [AS23, AS25]. Our work further generalizes this efficiency across multiple transformer layers for both training and inference. Moreover, these kernel-based techniques naturally extend to more sophisticated attention variants, such as tensor attention, maintaining near-linear complexity in both training and evaluation [AS24b, LSSZ24c]. Beyond these methods, alternative theoretical approaches also exist, with the conv-basis technique in [LLS⁺24b] presenting another strategy for expediting attention computations.

3 Preliminary

In this section, we provide the necessary preliminaries. In Section 3.1, we present our notation. In Section 3.2, we introduce the column-wise Kronecker product and the softmax function. In Section 3.3, we present the Johnson-Lindenstrauss (JL) random projection. In Section 3.4, we formalize the attention mechanism and outline the KV cache compression problem. In Section 3.5, we define the INDEX problem. In Section 3.6, we establish the communication complexity lower bound for the INDEX problem. In Section 3.7, we introduce the concept of clusterability for key embeddings.

3.1 Notations

For $n \in \mathbb{Z}^+$, where \mathbb{Z}^+ denotes positive integers, we use [n] to denote set $\{1,2,\cdots,n\}$. We use $\mathbb{E}[\cdot]$ to denote the expectation. We use $\operatorname{Var}[\cdot]$ to represent the variance. We use $\operatorname{Pr}[\cdot]$ to denote the probability. We use $\mathbb{E}[\cdot]$ to represent an indicator variable that takes the value 1 when condition C holds and 0 otherwise. B^{\top} is defined as $(B^{\top})_{i,j} := B_{j,i}$. We use $x_{i,j}$ to denote the j-th coordinate of $x_i \in \mathbb{R}^n$. We use $\|x\|_p$ to denote the ℓ_p norm of a vector $x \in \mathbb{R}^n$, i.e., $\|x\|_1 := \sum_{i=1}^n |x_i|$, $\|x\|_2 := (\sum_{i=1}^n x_i^2)^{1/2}$. Suppose there are two vectors c,d of the same length, we denote the entrywise multiplication using the notation $c \odot d$; that is, the i-th entry in that vector is $c_i d_i$. We use $\mathbf{0}_d$ to represent the vector of all zeros in dimension d. We use |M| to denote the length of a sequence M. For two vectors $x \in \mathbb{R}^n$ and $y \in \mathbb{R}^n$, we use $\langle x, y \rangle$ to denote the inner product between x, y, i.e., $\langle x, y \rangle = \sum_{i=1}^n x_i y_i$.

3.2 Useful Definitions

We state a standard notation which is called column-wise kronecker product. Such notation has been used in previous [AS24b] (see Section 2).

Definition 3.1 (\oslash Column-wise Kronecker Product). Given matrices $K_1 \in \mathbb{R}^{n_1 \times d}$, $K_2 \in \mathbb{R}^{n_2 \times d}$, we define matrix $K := K_1 \oslash K_2 \in \mathbb{R}^{n_1 n_2 \times d}$ as follows

$$K_{i_1+(i_2-1)n_1,j} := (K_1)_{i_1,j} \cdot (K_2)_{i_2,j},$$

 $\forall i_1 \in [n_1], i_2 \in [n_2], j \in [d].$

This operation constructs K by combining elements of K_1 and K_2 in a column-wise manner, yielding a matrix with n_1n_2 rows while preserving the column dimension d. It provides a compact and computationally efficient framework for subsequent tensor-based operations.

Next, we introduce the Softmax function, which is a fundamental unit in transformer architecture [VSP+17].

Definition 3.2 (Softmax). The function $\sigma_{i^2}: \mathbb{R}^{i^2} \to \mathbb{R}^{i^2}$ is the softmax function, defined for any vector $z \in \mathbb{R}^{i^2}$ as:

$$\sigma_{i^2}(z)_j = \frac{\exp(z_j)}{\sum_{k=1}^{i^2} \exp(z_k)} \quad \forall j \in [i^2]$$

3.3 Johnson-Linderstrauss (JL) Random Projections

In this section, we introduce a fundamental tool from random projection theory, the Johnson-Lindenstrauss (JL) Random Projection, which enables dimensionality reduction while approximately preserving inner products. We begin by defining the JL-transform [JL84] and its properties following the framework established in [Woo14].

Definition 3.3 (JL-tranform [JL84], see Definition 3 in [Woo14] as an example). For a random matrix $S \in \mathbb{R}^{k \times n}$ forms a Johnson-Lindenstrauss transform with parameters ϵ, δ, f or JLT (ϵ, δ, f) for short, if with probability at least $1 - \delta$, then for any f-element subset $V \subset \mathbb{R}^n$, for all $v, v' \in V$ it holds that

$$|\langle Sv, Sv' \rangle - \langle v, v' \rangle| \le \epsilon ||v||_2 ||v'||_2$$

The next lemma establishes when a random Gaussian matrix satisfies the JL-transform property.

Lemma 3.4 (Theorem 4 in [Woo14]). If the following conditions hold:

- Let $\epsilon, \delta \in (0, 0.1)$.
- Let $S = \frac{1}{\sqrt{k}}R \in \mathbb{R}^{k \times n}$ where the entries $R_{i,j}$ of R are independent standard normal random variables.

Then if $k = \Omega(\epsilon^{-2} \log(f/\delta))$, we have:

• S is a JLT (ϵ, δ, f) .

By simple algebra, it is obvious that Lemma 3.4 will imply the following Lemma. For more examples of the following Lemma, we refer the readers to see Theorem 13 in [Woo14], Lemma A.2 in [SXZ22], and Lemma 22 in [HO25].

Lemma 3.5 (Johnson-Lindenstrauss (JL) Random Projections, an immediate application of Lemma 3.4, [Woo14]). *If the following conditions hold:*

- Let $\epsilon \in (0, 0.1)$.
- Let $V = \{v_1, ..., v_n\} \subset \mathbb{R}^n$ such that $||v_i||_2 \leq 1$ for all $i \in [n]$.
- Let $S = \frac{1}{\sqrt{d}}R \in \mathbb{R}^{d \times n}$ where the entries $R_{i,j}$ of R are independent standard normal random variables

Then if $d = \Omega(\epsilon^{-2} \log(n))$, we have:

• With probability at least $1 - 1/\operatorname{poly}(n)$, for all $v_i, v_i \in V$, it holds that:

$$|v_i^{\top} v_j - (Sv_i)^{\top} (Sv_j)| \le \epsilon.$$

For the completeness of the paper, we still provide a proof.

Proof. Setting parameters k = d, f = n and $\delta = \frac{1}{n}$ in Lemma 3.4, we have if $d = \Omega(\epsilon^{-2}\log(n))$, then with probability $1 - 1/\operatorname{poly}(n)$, for all $v_i, v_i \in V$, we have

$$|v_i^\top v_j - (Sv_i)^\top (Sv_j)| \le \epsilon ||v_i||_2 ||v_j||_2$$

$$\le \epsilon$$

where the first step follows from Definition 3.3, and the second step follows from that $||v_i||_2 \le 1$ for all $i \in [n]$.

3.4 Attention Mechanism with KV Cache

We restate a definition from previous work [AS24b].

Definition 3.6 (Tensor Attention, a variation of [AS24b]). Let $d, i \in \mathbb{R}$ where d is the embedding dimension and i is the current sequence length. Let $\odot : \mathbb{R}^d \times \mathbb{R}^d \to \mathbb{R}^d$ denotes the Hadamard product and σ_{i^2} is the Softmax function from Definition 3.2. Given a query vector $q_i \in \mathbb{R}^d$ and four matrices $K_{1,i}, K_{2,i}, V_{1,i}, V_{2,i} \in \mathbb{R}^{i \times d}$

$$K_{1,i} = \begin{bmatrix} k_{1,1}^{\top} \\ k_{1,2}^{\top} \\ \vdots \\ k_{1,i}^{\top} \end{bmatrix}, \quad K_{2,i} = \begin{bmatrix} k_{2,1}^{\top} \\ k_{2,2}^{\top} \\ \vdots \\ k_{2,i}^{\top} \end{bmatrix}, \quad V_{1,i} = \begin{bmatrix} v_{1,1}^{\top} \\ v_{1,2}^{\top} \\ \vdots \\ v_{1,i}^{\top} \end{bmatrix}, \quad V_{2,i} = \begin{bmatrix} v_{2,1}^{\top} \\ v_{2,2}^{\top} \\ \vdots \\ v_{2,i}^{\top} \end{bmatrix}$$

are four $i \times d$ matrices containing the historical key and value vectors.

Then we are able to define the tensor attention function as:

$$\mathsf{Attn}(q_i, K_{1,i}, K_{2,i}, V_{1,i}, V_{2,i}) := \underbrace{(V_{1,i} \oslash V_{2,i})^{\top}}_{d \times i^2} \cdot \sigma_{i^2} \underbrace{(K_{1,i} \oslash K_{2,i})}_{i^2 \times d} \cdot \underbrace{q_i}_{d \times 1} \in \mathbb{R}^d,$$

and $\oslash: \mathbb{R}^{i \times d} \times \mathbb{R}^{i \times d} \to \mathbb{R}^{i^2 \times d}$ denotes the column-wise Kronecker product from Definition 3.1, which for any row indices $a, b \in [i]$ with corresponding flattened index $\ell = (a-1)i + b \in [i^2]$, gives:

$$(K_{1,i} \oslash K_{2,i})_{\ell} = k_{1,a} \odot k_{2,b}$$

 $(V_{1,i} \oslash V_{2,i})_{\ell} = v_{1,a} \odot v_{2,b}$

Then we are able to present the definition of key-value cache in tensor attention.

Definition 3.7. For a list of indices $1, \dots, i$, we say matrices $K_{1,i}, K_{2,i}, V_{1,i}$ and $V_{2,i}$ (be defined as Definition 3.6) are collectively called the key-value (KV) cache. Specifically, $K_{1,i}, K_{2,i}$ store key representations and $V_{1,i}, V_{2,i}$ store value representations, facilitating efficient tensorized attention computations.

Next, we define the attention mechanism that consolidates the four KV cache matrices into two, leveraging the column-wise Kronecker product.

Definition 3.8 (Tensor Attention with KV Cache, Two Cache Matrices Case). Let $d, i \in \mathbb{R}$ where d is the embedding dimension and i is the current sequence length. Given a query vector $q_i \in \mathbb{R}^d$ and two matrices $\widetilde{K}_i, \widetilde{V}_i \in \mathbb{R}^{i^2 \times d}$, we define the tensor attention function as:

$$\mathsf{Attn}(q_i, \widetilde{K}_i, \widetilde{V}_i) := \widetilde{V}_i^\top \cdot \sigma_{i^2}(\widetilde{K}_i \cdot q_i) \in \mathbb{R}^d,$$

and the two cache matrices \widetilde{K}_i and \widetilde{V}_i are derived from the column-wise Kronecker product (see Definition 3.1) of the original key and value matrices:

$$\widetilde{K}_i := K_{1,i} \oslash K_{2,i} \in \mathbb{R}^{i^2 \times d}$$
$$\widetilde{V}_i := V_{1,i} \oslash V_{2,i} \in \mathbb{R}^{i^2 \times d}$$

where $K_{1,i}, K_{2,i}, V_{1,i}, V_{2,i} \in \mathbb{R}^{i \times d}$ are the four original cache matrices from Definition 3.7, and σ_{i^2} is the Softmax function from Definition 3.2.

This definition converts the original four KV cache matrices into two matrices, \widetilde{K}_i and \widetilde{V}_i , each of size $i^2 \times d$, by precomputing the column-wise Kronecker products. This approach reflects the trade-off between preprocessing and space complexity, as discussed in Remark 3.9.

Remark 3.9 (Memory-Speed Trade-off Between Two and Four Cache Matrices). The two formulations of tensor attention KV Caches present a trade-off between memory efficiency and computational speed during inference:

- Four Cache Matrices Case: This approach stores $K_{1,i}, K_{2,i}, V_{1,i}, V_{2,i} \in \mathbb{R}^{i \times d}$, requiring O(id) memory. However, during inference, it must compute the column-wise Kronecker products $K_{1,i} \oslash K_{2,i}$ and $V_{1,i} \oslash V_{2,i}$ on-the-fly, resulting in $O(i^2d)$ computational complexity for each attention operation.
- Two Cache Matrices Case: This approach directly stores the precomputed Kronecker products $\widetilde{K}_i = K_{1,i} \oslash K_{2,i}$ and $\widetilde{V}_i = V_{1,i} \oslash V_{2,i}$, requiring $O(i^2d)$ memory. While this uses significantly more memory (quadratic in i rather than linear), it enables faster inference as the expensive Kronecker product computation is eliminated.

This illustrates a fundamental space-time trade-off in attention mechanisms: the four cache matrices formulation is memory-efficient but computationally expensive during inference, while the two cache matrices formulation uses more memory but achieves faster inference times (see Figure 1). Our lower bound proof in Theorem 4.2 demonstrates that the memory requirement of $\Omega(n^2d)$ for the two cache matrices case is unavoidable, highlighting the inherent cost of optimizing for inference speed in this setting.

3.5 The Index Communication Problem


We use the same communication proof framework as [HO25] to prove our lower bound. We state a well-known definition in the area of communication complexity.

Definition 3.10 (The INDEX Problem [Kus97, AB09]). In the INDEX problem, Alice holds a bit string $x \in \{0,1\}^n$, and Bob holds an index $i \in [n]$. Alice sends a single message (one-way) $M \in \{0,1\}^*$ to Bob, whose goal is to output x_i with probability at least 2/3.

3.6 Lower Bound on the Index Problem

We state a well-known tool in the area of communication complexity.

Lemma 3.11 (Complexity of the INDEX Problem [Kus97, AB09]). The complexity of randomized one-way communication of INDEX is $\Omega(n)$.



Two Cache Matrices

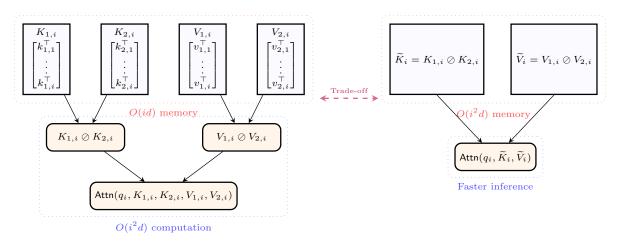


Figure 1: Comparison of memory and computational requirements between four-cache and two-cache matrix formulations in tensor attention. The four-cache approach $(K_{1,i}, K_{2,i}, V_{1,i}, V_{2,i})$ uses linear memory O(id) but incurs $O(i^2d)$ computational cost for Kronecker products during inference. The two-cache approach $(\widetilde{K}_i, \widetilde{V}_i)$ pre-computes these products, requiring $O(i^2d)$ memory but enabling faster inference.

3.7 Clusterability of Key Embeddings

We state a definition about Clusterability from recent work [ZHMK24, HO25].

Definition 3.12 (Clusterability Definition 1 on Page 5 in [ZHMK24], see Definition 10 from [HO25] on Page 8 as an example). For a positive integer m and real-valued $\delta > 0$, a dataset of points $x_1, \ldots, x_n \in \mathbb{R}^d$ is said to be (m, δ) -clusterable if there exists a partition of the dataset into m clusters C_1, \ldots, C_m such that for all $i \in [m]$ and $x, y \in C_i$ it holds that $||x - y||_2 \le \delta$.

4 Space Complexity Barriers for $d = \Omega(\log n)$

In this section, we present our lower bound results for memory usage when computing or approximating the tensor attention function when $d = \Omega(\log n)$. In Section 4.1, we establish the memory lower bound for four cache matrices. In Section 4.2, we establish the memory lower bound for two cache matrices. In Section 4.3, we present the time complexity difference between the two cache matrices case and the four cache matrices case. In Section 4.4, we extend our memory lower bound to approximation algorithms for four cache matrices. In Section 4.5, we extend our memory lower bound to approximation algorithms for two cache matrices.

4.1 Memory Lower Bound for Four Cache Matrices

Now we present our main theorem for the memory lower bound for computing the tensor attention function with four cache matrices, which is a variation of Theorem 6 in [HO25]. The difference is that we extend the proof from regular attention in [HO25] to tensor attention with four cache matrices from Definition 3.7 using similar proof structure in [HO25].

Theorem 4.1 (Memory Lower Bound for Four Cache Matrices, Informal Version of Theorem B.1). *If the following conditions hold:*

- Let $C_u > 1$ be a universal constant.
- Let $d \geq C_n \log n$.
- Let the output of any algorithm produces $o_n \in \mathbb{R}^d$ where $o_n = \mathsf{Attn}(q_n, K_{1,n}, K_{2,n}, V_{1,n}, V_{2,n})$.

Then we have:

• Any algorithm producing o_n with probability at least 0.99 use $\Omega(nd)$ bits of memory.

4.2 Memory Lower Bound for Two Cache Matrices

Now we present our main theorem for the memory lower bound for computing the tensor attention function with two cache matrices, which is a variation of Theorem 6 in [HO25]. The difference is that we extend the proof from regular attention in [HO25] to tensor attention with two cache matrices from Definition 3.8 using similar proof structure in [HO25].

Theorem 4.2 (Memory Lower Bound for Two Cache Matrices, Informal Version of Theorem B.2). *If the following conditions hold:*

- Let $C_u > 1$ be a universal constant.
- Let $d \geq C_u \log n$.
- Let the output of any algorithm produces $o_n \in \mathbb{R}^d$ where $o_n = \mathsf{Attn}(q_n, \widetilde{K}_n, \widetilde{V}_n)$, where $\widetilde{K}_n = K_{1,n} \oslash K_{2,n}$ and $\widetilde{V}_n = V_{1,n} \oslash V_{2,n}$.

Then we have:

• Any algorithm producing o_n with probability at least 0.99 must use at least $\Omega(n^2d)$ bits of memory.

4.3 Time Complexity Difference

In this section, we present the running complexity statements, where the two-cache-matrix case is running faster than the four-cache-matrix case during Tensor Transformer decoding.

Theorem 4.3. Let the four-cache-matrix and two-cache-matrix computations be illustrated in Figure 1. We show that the two-cache-matrix case computation is faster by $\Omega(n^2d)$ compared to the four-cache-matrix case computation.

Proof. Following from Definition 3.7 and Definition 3.8, this proof simply follows from the computation of $\mathsf{Attn}(q_n, K_{1,n}, K_{2,n}, V_{1,n}, V_{2,n})$ and $\mathsf{Attn}(q_n, \widetilde{K}_n, \widetilde{V}_n)$ and the time complexity of computation $\widetilde{K}_n = K_{1,n} \oslash K_{2,n}$ and $\widetilde{V}_n = V_{1,n} \oslash V_{2,n}$ is $\Omega(n^2d)$.

4.4 Lower Bound on Approximation Algorithms for Four Cache Matrices

Having established memory lower bounds for exact computation of tensor attention, we now proceed to consider the case of approximation computation of the tensor attention.

Corollary 4.4 (Approximation Algorithm Lower Bound for Four Cache Matrices, Informal Version of Corollary B.3). *If the following conditions hold:*

- Let $Z_n := \mathsf{Attn}(q_n, K_{1,n}, K_{2,n}, V_{1,n}, V_{2,n})$ as in Definition 3.7.
- Let $d = \Omega(\log n)$.

Then we have:

• Any algorithm that can, with probability at least 0.99, produce an output $\mathcal{O} \in \mathbb{R}^d$ that is a $(1 \pm \eta)$ -approximation of Z_n for $\eta \in (0,1)$ must use at least $\Omega(nd)$ bits of memory.

4.5 Lower Bound on Approximation Algorithms for Two Cache Matrices

We now extend our investigation to approximation algorithms for the two cache matrices formulation. This case is particularly important for practical implementations that optimize for inference speed by precomputing the column-wise Kronecker products. The following theorem establishes that the quadratic memory requirement persists even for approximation algorithms:

Corollary 4.5 (Approximation Algorithm Lower Bound for Two Cache Matrices, Informal Version of Corollary B.4). *If the following conditions hold:*

- Let $Z_n := \mathsf{Attn}(q_n, \widetilde{K}_n, \widetilde{V}_n)$ as in Definition 3.8.
- Let $d = \Omega(\log n)$.

Then we have:

• Any algorithm that can, with probability at least 9/10, produce an output $\mathcal{O} \in \mathbb{R}^d$ that is a $(1 \pm \eta)$ -approximation of Z_n for $\eta \in (0,1)$ must use at least $\Omega(n^2d)$ bits of memory.

5 Main Algorithm for SubGen Clustering

This section introduces key algorithms and mathematical foundations that enable efficient memory usage in tensor attention mechanisms. In Section 5.1, we present the SubGen4Cache and SubGen2Cache algorithms for four and two cache matrices. In Section 5.2, we provide an upper bound on the covering number of the unit sphere. In Section 5.3, we establish the inherent clusterability of the SubGen4Cache and SubGen2Cache algorithms.

5.1 The SubGen4Cache and SubGen2Cache Algorithms

Following the same framework as [HO25], we also use the tool SubGen4Cache algorithm which is from [ZHMK24] We present the SubGen4Cache (which can be viewed as a variation from previous work [ZHMK24, HO25]).

Lemma 5.1 (Subgen4Cache Algorithm for Four Cache Matrices, [ZHMK24, HO25]). If the following conditions hold:

- Let the input be a sequence of quintuples $\{(q_i, k_{1,i}, k_{2,i}, v_{1,i}, v_{2,i})\}_{i=1}^n$ in $(\mathbb{R}^d)^5$.
- Assume that the key embeddings $k_{1,i}$ and $k_{2,i}$ are (m, δ) -clusterable.
- Let $||q_i||_2 \le r$ for all $i \in [n]$.

Then there exists

• An algorithm that uses $O(d\epsilon^{-2} \cdot (d + me^{2\delta r} \log n))$ bits of space and outputs an estimate \widehat{O}_n such that with probability at least 0.99 it holds that:

$$\begin{split} \|\widehat{O}_{n} - \mathsf{Attn}(q_{n}, K_{1,n}, K_{2,n}, V_{1,n}, V_{2,n})\|_{2} \\ &\leq \epsilon \cdot \|\mathsf{Softmax}((K_{1,n} \oslash K_{2,n}) \cdot q_{n})\|_{2} \cdot \|V_{1,n} \oslash V_{2,n}\|_{2} \end{split}$$

We extend Theorem 11 of [HO25] and introduce the SubGen2Cache algorithm with two cache matrices, as defined in Definition 3.8.

Lemma 5.2 (SubGen2Cache Algorithm for Two Cache Matrices, [ZHMK24, HO25]). If the following conditions hold:

- Let the input be a sequence of triples $\{(q_i, \widetilde{k}_i, \widetilde{v}_i)\}_{i=1}^{n^2}$ in $(\mathbb{R}^d)^3$.
- Assume that the key embeddings \widetilde{k}_i are (m, δ) -clusterable.
- Let $||q_i||_2 \le r$ for all $i \in [n]$.

Then there exists

• An algorithm that uses $O(d\epsilon^{-2} \cdot (d + me^{2\delta r} \log n))$ bits of space and outputs an estimate \widehat{O}_n such that with probability at least 0.99 it holds that:

$$\begin{split} \|\widehat{O}_n - \mathsf{Attn}(q_n, \widetilde{K}_n, \widetilde{V}_n)\|_2 \\ &\leq \epsilon \cdot \|\mathsf{Softmax}(\widetilde{K}_n \cdot q_n)\|_2 \cdot \|\widetilde{V}_n\|_2 \end{split}$$

5.2 Upper Bound on the Covering Number

We state a standard tool from previous work [Wu17].

Lemma 5.3 (Covering Number of the Unit Sphere, [Wu17]). If the following conditions hold:

• Let $B_2(1)$ be the unit sphere in \mathbb{R}^d with respect to the ℓ_2 norm.

Then we have:

• The covering number of $B_2(1)$ with respect to the ℓ_2 norm and radius $\delta \in (0,1)$ is bounded by:

$$N(B_2(1), \|\cdot\|_2, \delta) \le (3/\delta)^d$$

5.3 Clusterability of SubGen4Cache and SubGen2Cache Algorithms

We extend Lemma 14 of [HO25] and present the following lemma showing the clusterability of SubGen4Cache and SubGen2Cache Algorithms.

Lemma 5.4 (Clusterability of SubGen4Cache and SubGen2Cache Algorithms, Informal Version of Lemma B.8). If the following conditions hold:

• Let $x_1, \ldots, x_n \in \mathbb{R}^d$ be a set of n points in d-dimensional space such that $||x_i||_2 \leq 1$ for all $i \in [n]$.

Then:

• This set is (m, δ) clusterable for $m = \lceil e^d \rceil$ and $\delta = e/3$.

6 Space Complexity in Low-Dimensional Regime where $d = o(\log n)$

Following the similar ideas in [HO25], we also provide several results for $d = o(\log n)$. In Section 6.1, we establish the memory lower bound for four cache matrices when $d = o(\log n)$. In Section 6.2, we establish the memory lower bound for two cache matrices when $d = o(\log n)$. In Section 6.3, we prove the optimality of the SubGen4Cache algorithm. In Section 6.4, we prove the optimality of the SubGen2Cache algorithm.

6.1 Lower Bound in the Low-Dimensional Regime for Four Cache Matrices

If $d = o(\log n)$, our preceding proof breaks down because the JL projection is not able to preserve the inner products of all pairs of key vectors with high probability. Our technique, however, still yields the following lower bound with four cache matrices:

Corollary 6.1. *If the following conditions hold:*

- Let $Z_n := \mathsf{Attn}(q_n, K_{1,n}, K_{2,n}, V_{1,n}, V_{2,n})$ as in Definition 3.7.
- Let $d \ge 2$ with $d = o(\log n)$.
- Let $p \ge 9/10$ denote the probability.

Then, there exists

• Any algorithm that can, with probability p, produce a $(1 \pm \eta)$ -approximation $\mathcal{O} \in \mathbb{R}^d$ of Z_n for $\eta \in (0,1)$ must use at least $\Omega(e^d \cdot d)$ bits of memory.

6.2 Lower Bound in the Low-Dimensional Regime for Two Cache Matrices

Similarly, our technique still provides the following lower bound with two cache matrices when $d = o(\log n)$.

Corollary 6.2. If the following conditions hold:

- Let $Z_n := \mathsf{Attn}(q_n, \widetilde{K}_n, \widetilde{V}_n)$ as in Definition 3.8.
- Let d > 2 with $d = o(\log n)$,
- Let $p \ge 9/10$ denote the probability.

Then, there exists

• Any algorithm that can, with probability p, produce a $(1 \pm \eta)$ -approximation $\mathcal{O} \in \mathbb{R}^d$ of Z_n for $\eta \in (0,1)$ must use at least $\Omega(e^d \cdot d)$ bits of memory.

6.3 Optimality of SubGen4Cache in the Low-Dimensional Regime

The Subgeneral algorithm explores the inherent geometric structure of embeddings in low-dimensional spaces, where data naturally clusters into a limited number of groups. This key insight allows the algorithm to achieve exponentially better space complexity than would be possible in higher dimensions, while still maintaining strong approximation guarantees.

Theorem 6.3 (Optimality of SubGen4Cache). If the following conditions hold:

- Let $2 \le d = o(\log n)$.
- Define $\delta := e/3$.
- Define $r := O(\log \log n)$.
- Assume $||k_{1,i}||_2 \le 1$ and $||k_{2,i}||_2 \le 1$ for all $i \in [n]$, where $k_{1,i}$ and $k_{2,i}$ are key embeddings in $\mathsf{Attn}(q_n, K_{1,n}, K_{2,n}, V_{1,n}, V_{2,n})$.

Then:

• The Subgen4Cache algorithm of Lemma 5.1 approximates the attention function with space complexity $\widetilde{O}(de^d)$.

Proof. By Lemma 5.4, the key embeddings $k_{1,i}$ and $k_{2,i}$ are $(e^d, e/3)$ -clusterable, and so we can apply Lemma 5.1, the space complexity of the SUBGEN4CACHE algorithm is:

$$O(d\epsilon^{-2} \cdot (d + e^{d + 2\frac{e}{3}\log\log n}\log n)) = \widetilde{O}(de^d)$$

The approximation guarantees are as in Lemma 5.1, though with some algebra, they could be extended to arbitrary absolute error approximation. Combining this with Corollary 6.1, we see that Subgen4Cache is essentially optimal in the low-dimensional regime for the four cache matrices case.

6.4 Optimality of SubGen2Cache in the Low-Dimensional Regime

We now demonstrate that the SubGen2Cache algorithm is essentially optimal in the low-dimensional case.

Theorem 6.4 (Optimality of SubGen2Cache). If the following conditions hold:

- Let $2 \le d = o(\log n)$.
- Define $\delta := e/3$.
- Define $r := O(\log \log n)$.
- Assume $||k_{1,i}||_2 \le 1$ and $||k_{2,i}||_2 \le 1$ for all $i \in [n]$, where $k_{1,i}$ and $k_{2,i}$ are key embeddings underlying $\widetilde{K}_n = K_{1,n} \oslash K_{2,n}$ in $\mathsf{Attn}(q_n, \widetilde{K}_n, \widetilde{V}_n)$.

Then:

• The Subgen2Cache algorithm of Lemma 5.2 approximates the attention function with space complexity $\widetilde{O}(de^d)$.

Proof. By Lemma 5.4, the key embeddings $k_{1,i}$ and $k_{2,i}$ are $(e^d, e/3)$ -clusterable, and so we can apply Lemma 5.2, the space complexity of the SubGen2Cache algorithm is:

$$O(d\epsilon^{-2} \cdot (d + e^{d + 2\frac{e}{3}\log\log n}\log n)) = \widetilde{O}(de^d).$$

The approximation guarantees are as in Lemma 5.2, though with some algebra, they could be extended to arbitrary absolute error approximation. Combining this with Corollary 6.2, we see that Subgen2Cache is essentially optimal in the low-dimensional regime for the two cache matrices case.

7 Conclusion

In this paper, we have addressed the critical memory challenges posed by the key-value (KV) cache in the tensor version of Transformers, expanding the foundational space complexity barriers from standard attention to tensor attention. Through a reduction from communication complexity, we derived information-theoretic bounds that reveal how memory consumption scales under higher-order token correlations. Our results demonstrate that when $d = \Omega(\log n)$, there exists a running time and memory trade-off between two cache scenarios. The four-cache-matrix case requires a space lower bound of $\Omega(nd)$ and the two-cache-matrix case requires $\Omega(n^2d)$, while the two-cache-matrix case computation is faster by $\Omega(n^2d)$ compared to the four-cache-matrix case. By underscoring these theoretical and algorithmic insights, we aim to guide the development of more memory-efficient tensor attention Transformer architectures.

Appendix

A More Related Work

Large Language Models. Transformer architectures have quickly established themselves as the prevailing approach for addressing numerous natural language processing (NLP) challenges, owing to their expandability, adaptability, and capacity to identify intricate linguistic structures [VSP+17]. When these models expand to contain billions or trillions of parameters and undergo training on extensive, heterogeneous datasets, they are designated as large language models (LLMs) or foundation models [BHA⁺21]. These LLMs are crafted to broadly apply across various downstream tasks, exhibiting remarkable versatility and effectiveness. Notable examples include BERT, which transformed contextual language comprehension [DCLT19], PaLM, which demonstrates excellence in multilingual and multitask functionalities [CND⁺23], Llama, which is enhanced for more efficient implementation in academic and commercial settings [TLI+23], along with widely-utilized systems such as ChatGPT and GPT-4, both of which have advanced the capabilities of conversational AI [Ope22, Ope23]. These expansive models have shown exceptional transferability across an extensive range of downstream applications, spanning from machine translation and question-answering to summarization, text generation, and more sophisticated reasoning challenges [BCE⁺23]. As LLMs continue to develop, various strategies have emerged to improve their adaptability and tailor them for particular use cases. A prevalent method involves incorporating adapter modules, which permit fine-tuning for new tasks without altering the entire model [HysW⁺22, ZHZ⁺23, GHZ⁺23].

Calibration approaches have also been introduced to refine model predictions for enhanced reliability across diverse inputs and environments [ZWF⁺21, ZLX⁺23]. To further enhance the effectiveness of LLMs in practical applications, multitask fine-tuning has gained significance, allowing models to be trained simultaneously on multiple related tasks, improving their performance across these domains [GFC21, VONR⁺23]. Complementing this are prompt-tuning techniques, where the input prompt is strategically designed to direct the model's response, enabling adaptation without extensive retraining [GFC21, LARC21].

Theoretical Machine Learning. Our research is also informed by the following Machine Learning Theory work. Several studies examine neural network expressiveness through circuit complexity theory [LLS⁺25b, KLL⁺25b, LLS⁺24a, CLL⁺24c, CLL⁺24a, GKL⁺25]. Various works focus on optimizing algorithms that can enhance neural network training speed [LLSZ24, KLSZ24, DLMS24, DSWY22, ZPT⁺22, ZLP⁺23, DMS23, CLL⁺25a, SY23, SWYY25, LSS⁺22, LSX⁺22, HST⁺22, HSW⁺22, HST⁺20, BSY23, DSY23, SYYZ25, GSY23, GSY25, GSYZ24, GSWY23, SYZZ24, LSW⁺24, LSXY24, HSK⁺24, HLSL24, CLL⁺25b, CCL⁺25, CGL⁺25]. Additional research analyzes neural networks through regression frameworks [CLL⁺24b, GMS23, LSZ23, GSX23, SSZ23, CSS⁺23, SYYZ23, SYZ23, SWY23, SYZ23, LLS⁺25a]. Some researchers employ reinforcement learning to enhance neural networks [ZCY23, ZCZ⁺25, LWCY23, LY24, LLWY24, LLWY24, LSWY23]. Other works focus specifically on optimizing attention mechanisms [SXY23, LLS⁺24b].

Accelerating Attention Mechanisms. The attention mechanism encounters considerable computational hurdles due to its quadratic complexity relative to context length as sequence lengths increase in contemporary large language models [Ope24, AI24, Ant24]. To address this limitation, researchers have created polynomial kernel approximation methods [AA22] that utilize low-rank approximations to efficiently compute the attention matrix. These approaches significantly enhance computational efficiency, enabling attention layers to function with nearly linear

time complexity during both training and inference [AS23, AS25]. Such techniques have been successfully extended to more intricate attention variants, like tensor attention, while preserving almost linear computational efficiency [AS24b]. [KLL+25a] shows an almost linear time algorithm for enhancing VAR Transformer inference. Additional innovations in this area include RoPE-based attention mechanisms[AS24a, CHL+24] and privacy-preserving cross-attention techniques [LSSZ24a]. The conv-basis approach presented in [LLS+24b] provides another method to improve attention computation speed, offering complementary solutions to this performance constraint. Researchers have also explored various pruning-based strategies to optimize attention mechanisms [LLS+24c, CLS+24, LLSS24, SSZ+25b, SSZ+25a, HYW+24, WHL+24, XHH+24, SSZ+25b].

Gradient Approximation. Low-rank approximation represents a widely adopted approach for enhancing transformer training by decreasing computational complexity [LSS+24a, LSSZ24b, AS25, HWSL24, CLS+24, LSS+24b]. Expanding on the low-rank framework introduced in [AS23], which initially concentrated on forward attention computation, [AS25] extends this method to approximate attention gradients, effectively reducing the computational cost of gradient calculations. The research in [LSS+24a] further develops this low-rank gradient approximation for multi-layer transformers, demonstrating that backward computations in such architectures can achieve nearly linear time complexity. Additionally, [LSSZ24b] generalizes the approach of [AS25] to tensor-based attention models, utilizing forward computation results from [AS24b] to enable efficient training of tensorized attention mechanisms. Finally, [HWSL24] implements low-rank approximation techniques during the training of Diffusion Transformers (DiTs), illustrating the adaptability of these methods across various transformer-based architectures.

B Space Lower Bound

In this section, we present our lower bound results for memory usage when computing or approximating the attention function. Section B.1 and B.2 establish memory lower bounds for computing the tensor attention function with four cache matrices and two cache matrices respectively. Sections B.3 and B.4 extend these bounds to approximate algorithms. Sections B.5 and B.6 analyze the lower bound in the low-dimensional regime $(d = o(\log n))$. Section B.7 defines the covering number. Section B.8 establishes the inherent clusterability of SubGen4Cache and SubGen2Cache algorithms.

B.1 Memory Lower Bound for Four Cache Matrices Case

We now establish a memory lower bound for computing the tensor attention function with four cache matrices. This result demonstrates that any algorithm achieving high-probability correctness requires linear memory in both the sequence length and embedding dimension.

Theorem B.1 (Memory Lower bound for Four Cache Matrices case, Formal Version of Theorem 4.1). If the following conditions hold:

- Let $C_u > 1$ be a universal constant.
- Let $d \ge C_u \log n$.
- Let the output of any algorithm produces $o_n \in \mathbb{R}^d$ where $o_n = \mathsf{Attn}(q_n, K_{1,n}, K_{2,n}, V_{1,n}, V_{2,n})$.

Then we have:

• Any algorithm producing o_n with probability at least $\frac{9}{10}$ use $\Omega(nd)$ bits of memory.

Proof. We construct a reduction from INDEX, in which Alice holds a bit string $x \in \{0,1\}^{n \times d}$ and Bob holds an index $(i,j) \in [n] \times [d]$. Alice sends a single message to Bob, whose goal is to output x_{ij} with probability at least 2/3.

We know by Lemma 3.11 that the one-way, randomized communication complexity of this problem is $\Omega(nd)$. Our goal is to design a protocol for INDEX by using a supposed algorithm \mathcal{A} for calculating the attention function that uses S bits of memory. Having that reduction in place, Alice simply communicates these S bits of the algorithm's memory tape to Bob, allowing us to show that $S = \Omega(nd)$, and thus proving the theorem.

Alice Alice begins by inserting the following n quintuples $\{(q_t, k_{1,t}, k_{2,t}, v_{1,t}, v_{2,t})\}_{t=1}^n$ of vectors in \mathbb{R}^d to \mathcal{A} :

- q_1, \ldots, q_n are all the zero vector in \mathbb{R}^d .
- $k_{1,1}, \ldots, k_{1,n} \in \mathbb{R}^d$ are calculated as d-dimensional projections of the orthonormal basis e_1, \ldots, e_n of \mathbb{R}^n that approximately preserve orthonormality. Specifically, using Lemma 3.5, we produce vectors such that with probability at least $1 \frac{1}{n}$ it holds for all $t \neq s$ that:

$$|k_{1,t}^{\top}k_{1,s}| \le \epsilon$$

and for all $t \in [n]$ that:

$$|k_{1,t}^{\top}k_{1,t}-1| \leq \epsilon$$

- $k_{2,1}, \ldots, k_{2,n} \in \mathbb{R}^d$ are all set to the all-ones vector $\mathbf{1}_d$.
- $v_{1,1}, \ldots, v_{1,n} \in \mathbb{R}^d$ contain the rows of $x \in \{0,1\}^{n \times d}$, i.e., $v_{1,t} = x_t$ for all $t \in [n]$.
- $v_{2,1}, \ldots, v_{2,n} \in \mathbb{R}^d$ are all set to the all-ones vector $\mathbf{1}_d$.

After inserting these n quintuples into \mathcal{A} , Alice sends \mathcal{A} 's memory state of S bits to Bob.

Bob Recall that Bob's input is an index (i, j) into x.

Bob enters a single quintuple $(q, k_{1,n+1}, k_{2,n+1}, v_{1,n+1}, v_{2,n+1})$ into \mathcal{A} , where:

$$q := C \cdot k_{1,i} \in \mathbb{R}^d$$
 $k_{1,n+1} := \mathbf{0}_d$
 $k_{2,n+1} := \mathbf{0}_d$
 $v_{1,n+1} := \mathbf{0}_d$
 $v_{2,n+1} := \mathbf{0}_d$

where C is a positive value to be determined later.

Now, we claim that Bob can recover the value of x_{ij} from the output o_{n+1} that \mathcal{A} produces. We analyze how the softmax distribution concentrates mass in the tensor attention calculation.

$$\begin{split} o_{n+1} &= \mathsf{Attn}(q_{n+1}, K_{1,n+1}, K_{2,n+1}, V_{1,n+1}, V_{2,n+1}) \\ &= (V_{1,n+1} \oslash V_{2,n+1})^\top \cdot \sigma_i((K_{1,n+1} \oslash K_{2,n+1}) \cdot q_{n+1}) \end{split}$$

Let $s := (K_{1,n+1} \oslash K_{2,n+1}) \cdot q \in \mathbb{R}^{(n+1)^2}$. For each pair $(a,b) \in [n+1] \times [n+1]$ with flattened index $\ell = (a-1)(n+1) + b$, we have

$$s_{\ell} = (k_{1,a} \odot k_{2,b})^{\top} q$$

= $C \cdot (k_{1,a} \odot k_{2,b})^{\top} \cdot (k_{1,i})$ (1)

where the first step follows from Definition 3.1, and the second step follows from the definition of $q = C \cdot k_{1,i}$

Then, we have

$$s_{\ell} = s_{(a-1)(n+1)+b}$$

$$= C \cdot (k_{1,a} \odot k_{2,b})^{\top} \cdot (k_{1,i})$$

$$= C \cdot \sum_{t=1}^{d} (k_{1,a} \odot \mathbf{1}_{d})_{t} \cdot (k_{1,i})_{t}$$

$$= \begin{cases} C(1-\epsilon), & \text{if } a=i\\ C\epsilon, & \text{if } a \neq i \end{cases}$$

$$(2)$$

where the first step follows from the definition of ℓ , the second step follows Eq. (1), and the third step follows from $a, b \in [n]$ and $k_{2,b} = \mathbf{1}_d$, and the fourth step follows from Lemma 3.5.

Let $\xi := \sigma_{(n+1)^2}(s) \in \mathbb{R}^{(n+1)^2}$. Then our attention becomes

$$(V_{1,n+1} \otimes V_{2,n+1})^{\top} \cdot \xi = \sum_{\ell=1}^{(n+1)^2} \xi_{\ell} \cdot (V_{1,n+1} \otimes V_{2,n+1})_{\ell}$$

$$= \sum_{a=1}^{n+1} \sum_{b=1}^{n+1} \xi_{(a-1)(n+1)+b} \cdot (v_{1,a} \odot v_{2,b})$$
(3)

We will focus on the j-th component of the vector. Then we have,

$$((V_{1,n+1} \oslash V_{2,n+1})^{\top} \cdot \xi)_{j} = \sum_{a=1}^{n+1} \sum_{b=1}^{n+1} \xi_{(a-1)(n+1)+b} \cdot (v_{1,a} \odot v_{2,b})_{j}$$

$$= \sum_{a=1}^{n} \sum_{b=1}^{n} \xi_{(a-1)(n+1)+b} \cdot (x_{a,j} \cdot 1)$$

$$= \sum_{a=1}^{n} \sum_{b=1}^{n} \xi_{(a-1)(n+1)+b} \cdot x_{a,j}$$

$$= \sum_{a=1}^{n} x_{a,j} \cdot \sum_{b=1}^{n} \xi_{(a-1)(n+1)+b}$$

$$= \sum_{a=1}^{n} x_{a,j} \cdot (\sum_{b=1}^{n} \frac{e^{(k_{1,a} \odot k_{2,b})^{\top} \cdot q}}{\sum_{a'=1}^{n} \sum_{b'=1}^{n} e^{(k_{1,a'} \odot k_{2,b'})^{\top} \cdot q}})$$

$$(4)$$

where the first step follows from Eq. (3), the second step follows from $v_{1,a} = x_{a,*}$ for $a \in [n]$ and $v_{2,b} = \mathbf{1}_d$ for $b \in [n]$, the third step follows from basic algebra, the fourths step follows from basic algebra, the fifth step follows from Definition 3.7.

By Eq. (2), we have

$$\sum_{b=1}^{n} \xi_{(a-1)(n+1)+b} = \begin{cases} \frac{n \cdot e^{C(1-\epsilon)}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}}, & \text{if } a = i\\ \frac{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}}, & \text{if } a \neq i \end{cases}$$

$$(5)$$

Thus, we have

$$((V_{1,n+1} \oslash V_{2,n+1})^{\top} \cdot \xi)_{j} = x_{i,j} \cdot \sum_{b=1}^{n} \xi_{(i-1)(n+1)+b} + \sum_{a \in [n] \setminus \{i\}} x_{a,j} \cdot \sum_{b=1}^{n} \xi_{(a-1)(n+1)+b}$$

$$= x_{i,j} \cdot \frac{n \cdot e^{C(1-\epsilon)}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}} + \sum_{a \in [n] \setminus \{i\}} x_{a,j} \cdot \frac{n \cdot e^{C\epsilon}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}}$$

where the first step follows from Eq. (4), and the second step follows from Eq. (5).

Now we consider two cases, $x_{i,j} = 0$ and $x_{i,j} = 1$.

Case One $x_{i,j} = 0$:

$$((V_{1,n+1} \otimes V_{2,n+1})^{\top} \cdot \xi)_{j} = 0 \cdot \frac{n \cdot e^{C(1-\epsilon)}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}} + \sum_{a \in [n] \setminus \{i\}} x_{a,j} \cdot \frac{n \cdot e^{C\epsilon}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}}$$

$$= \sum_{a \in [n] \setminus \{i\}} x_{a,j} \cdot \frac{n \cdot e^{C\epsilon}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}}$$

$$\leq n \cdot \frac{n \cdot e^{C\epsilon}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}}$$

$$= \frac{n^{2} \cdot e^{C\epsilon}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}} := \delta$$

where the first step follows from basic algebra, the second step follows from basic algebra, the third step follows from $\sum_{a \in [n] \setminus \{i\}} x_{a,j} \leq (n-1)$, and the fourth step follows from basic algebra.

Case Two $x_{i,j} = 1$:

$$((V_{1,n+1} \otimes V_{2,n+1})^{\top} \cdot \xi)_j = 1 \cdot \frac{n \cdot e^{C(1-\epsilon)}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}} + \sum_{a \in [n] \setminus \{i\}} x_{a,j} \cdot \frac{n \cdot e^{C\epsilon}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}}$$
$$\geq \frac{n \cdot e^{C(1-\epsilon)}}{n \cdot e^{C(1-\epsilon)} + n(n-1) \cdot e^{C\epsilon}} := \Delta$$

where the first step follows from basic algebra, the second step follows from the basic lower bound definition.

For Bob to distinguish two cases, we need to compare the upper bound of case one with the lower bound of case two.

Since both δ and Δ have the same denominator, they both have an n factor in the numerator. Thus, if the final goal is to show $\delta < \Delta$, it is sufficient to show

$$n \cdot e^{C\epsilon} < e^{C(1-\epsilon)}$$

The above equation is equivalent to

$$n < e^{C(1-2\epsilon)}$$

which is further equivalent to

$$C > \frac{\ln n}{1 - 2\epsilon} \tag{6}$$

When $n \geq 3$ and $\epsilon \in (0, 0.1)$, we choose $C = 2 \ln n$, which we automatically satisfy Eq. (6), allowing Bob to correctly determine the j-th component of the attention output.

Then we conclude the overall bits communicated is equal to the memory of \mathcal{A} , which is $\Omega(nd)$ bits.

Thus, we complete the proof.

B.2 Memory Lower Bound for Two Cache Matrices Case

The goal of this section is to prove Theorem B.2.

Theorem B.2 (Memory Lower Bound for Two Cache Matrices case, Formal Version of Theorem 4.2). If the following conditions hold:

- Let $C_u > 1$ be a universal constant.
- Let $d \geq C_u \log n$.
- Let the output of any algorithm produces $o_n \in \mathbb{R}^d$ where $o_n = \mathsf{Attn}(q_n, \widetilde{K}_n, \widetilde{V}_n)$, where $\widetilde{K}_n = K_{1,n} \oslash K_{2,n}$ and $\widetilde{V}_n = V_{1,n} \oslash V_{2,n}$.

Then we have:

• Any algorithm producing o_n with probability at least $\frac{9}{10}$ must use at least $\Omega(n^2d)$ bits of memory.

Proof. We construct a reduction from the INDEX communication problem. In this context, Alice holds a bit string $x \in \{0,1\}^{n^2 \times d}$ (which can be viewed as an $n^2 \times d$ matrix), and Bob holds an index pair $(i,j) \in [n^2] \times [d]$. Alice sends a single message to Bob, whose goal is to output $x_{i,j}$ with probability at least 2/3. The communication complexity of this problem is $\Omega(n^2d)$.

Let \mathcal{A} be a streaming algorithm for calculating the tensor attention function using S bits of memory. We will show that $S = \Omega(n^2 d)$ by constructing a protocol for the INDEX problem using \mathcal{A} .

Alice: Alice inserts the following n^2 triples $\{(q_t, \widetilde{k}_t, \widetilde{v}_t)\}_{t=1}^{n^2}$ into the streaming algorithm \mathcal{A} :

- q_1, \ldots, q_{n^2} are all the zero vector in \mathbb{R}^d .
- $\widetilde{k}_1, \ldots, \widetilde{k}_{n^2} \in \mathbb{R}^d$ are calculated before the protocol starts using the JL lemma to produce vectors such that with probability at least $1 \frac{1}{n^2}$ it holds for all $i \neq j$ that:

$$|\widetilde{k}_i^T \widetilde{k}_j| \le \epsilon$$

and for all $i \in [n^2]$ that:

$$|\widetilde{k}_i^T \widetilde{k}_i - 1| \le \epsilon$$

• $\widetilde{v}_1, \dots, \widetilde{v}_{n^2} \in \mathbb{R}^d$ contain the rows of $x \in \{0, 1\}^{n^2 \times d}$. In other words:

$$\widetilde{V}_{n^2} := x$$

After inserting these n^2 triples into \mathcal{A} , Alice sends its memory state (S bits) to Bob. **Bob:** With the index $(i,j) \in [n^2] \times [d]$, Bob enters a single triple $(q, \widetilde{k}_{n^2+1}, \widetilde{v}_{n^2+1})$ into \mathcal{A} :

$$q := C \cdot \widetilde{k}$$

$$\widetilde{k}_{n^2+1} := \mathbf{0}_d$$

$$\widetilde{v}_{n^2+1} := \mathbf{0}_d$$

where C is a positive value to be determined later.

Now, Bob can recover the value of $x_{i,j}$ from the output o_{n^2+1} that \mathcal{A} produces:

$$o_{n^2+1} = \mathsf{Attn}(q, \widetilde{K}_{n^2+1}, \widetilde{V}_{n^2+1}) = \widetilde{V}_{n^2+1}^\top \cdot \sigma_{n^2+1}(\widetilde{K}_{n^2+1} \cdot q)$$

Starting with $s := \widetilde{K}_{n^2+1} \cdot q \in \mathbb{R}^{n^2+1}$, we know with probability at least $1 - \frac{1}{n^2}$ that:

$$s_{\ell} \leq C\epsilon$$
 for $\ell \neq i$ and $s_i \geq C(1-\epsilon)$

Let $\xi := \sigma_{n^2+1}(s) \in \mathbb{R}^{n^2+1}$. The softmax vector ξ "spikes" at index i, which allows Bob to extract $x_{i,j}$ via the value matrix. The j-th entry is as follows with $\widetilde{v}_{n^2+1} = \mathbf{0}_d$.

$$(\widetilde{V}_{n^2+1}^{\top} \cdot \xi)_j = \sum_{\ell=1}^{n^2+1} \xi_{\ell} \cdot (\widetilde{v}_{\ell})_j = \sum_{\ell=1}^{n^2} \xi_{\ell} \cdot x_{\ell,j}$$

Then, we have two cases: $x_{i,j} = 0$ and $x_{i,j} = 1$.

Case One $x_{i,j} = 0$:

$$\sum_{\ell=1}^{n^2} \xi_{\ell} \cdot x_{\ell,j} = 0 \cdot \xi_i + \sum_{\ell \in [n^2] \setminus \{i\}} \xi_{\ell} \cdot x_{\ell,j}$$

$$= \sum_{\ell \in [n^2] \setminus \{i\}} \xi_{\ell} \cdot x_{\ell,j}$$

$$\leq \sum_{\ell \in [n^2] \setminus \{i\}} \xi_{\ell}$$

where the first step follows from substitution, the second step follows from basic algebra, and the third step follows from $x_{\ell,j} \leq 1$.

Then, we can further show that

$$\sum_{\ell \in [n^2] \setminus \{i\}} \xi_{\ell} = 1 - \xi_{i}$$

$$= 1 - \frac{e^{s_{i}}}{\sum_{\ell=1}^{n^2} e^{s_{\ell}}}$$

$$= \frac{\sum_{\ell=1}^{n^2} e^{s_{\ell}} - e^{s_{i}}}{\sum_{\ell=1}^{n^2} e^{s_{\ell}}}$$

$$= \frac{\sum_{\ell \in [n^2] \setminus \{i\}} e^{s_{\ell}}}{\sum_{\ell=1}^{n^2} e^{s_{\ell}}}$$

where the first step follows from basic algebra, the second step follows from the definition of ξ_i , the third step follows from basic algebra, and the fourth step follows from basic summation rules.

Given that $s_{\ell} \leq C\epsilon$ for $\ell \neq i$ and $s_i \geq C(1 - \epsilon)$, we can bound this as:

$$\frac{\sum_{\ell \in [n^2] \setminus \{i\}} e^{s_\ell}}{\sum_{\ell=1}^{n^2} e^{s_\ell}} \le \frac{n^2 \cdot e^{C\epsilon}}{e^{C(1-\epsilon)} + n^2 \cdot e^{C\epsilon}} := \delta$$

Case Two $x_{i,j} = 1$: By substituting $x_{i,j} = 1$, we can have

$$\sum_{\ell=1}^{n^2} \xi_{\ell} \cdot x_{\ell,j} = \xi_i + \sum_{\ell \in [n^2] \setminus \{i\}} \xi_{\ell} \cdot x_{\ell,j}$$

Since $\xi_i = \frac{e^{s_i}}{\sum_{\ell=1}^{n^2} e^{s_\ell}}$, we can establish a lower bound:

$$\sum_{\ell=1}^{n^2} \xi_{\ell} \cdot x_{\ell,j} \ge \xi_i$$

$$= \frac{e^{s_i}}{\sum_{\ell=1}^{n^2} e^{s_{\ell}}}$$

$$\ge \frac{e^{C(1-\epsilon)}}{e^{C(1-\epsilon)} + n^2 \cdot e^{C\epsilon}} := \Delta$$

where the first step follows from basic inequality, the second step follows from the definition of ξ_i , the third step follows from $s_i \geq C(1 - \epsilon)$.

For Bob to distinguish two cases, we need to compare the upper bound of case one with the lower bound of case two.

Since both δ and Δ have the same denominator, if the final goal is to show $\delta < \Delta$, it is sufficient to show

$$n^2 \cdot e^{C\epsilon} < e^{C(1-\epsilon)}$$

The above equation is equivalent to

$$n^2 < e^{C(1-2\epsilon)}$$

which is further equivalent to

$$C > \frac{2\ln n}{1 - 2\epsilon} \tag{7}$$

When $n \geq 3$ and $\epsilon \in (0, 0.1)$, we choose $C = 4 \ln n$, which we automatically satisfy Eq. (7), allowing Bob to determine the j-th component of the attention output correctly.

Then we conclude the overall bits communicated is equal to the memory of \mathcal{A} , which is $\Omega(n^2d)$ bits.

Thus, we complete the proof.

This theorem demonstrates that precomputing the tensor structure in two cache matrices incurs a memory cost of $\Omega(n^2d)$, a quadratic increase over the four-matrix case, highlighting the trade-off between preprocessing and space complexity in attention-based computations.

B.3 Lower Bound on Approximation Algorithms for Four Cache Matrices Case

We now extend the result to the approximate computation of the attention function with four cache matrices. Using the similar idea as Theorem 8 in [HO25], we can show the following result.

Corollary B.3 (Approximation Algorithm Lower bound for Four Cache Matrices, Formal Version of Corollary 4.4). *If the following conditions hold:*

- Let $Z_n := Attn(q_n, K_{1,n}, K_{2,n}, V_{1,n}, V_{2,n})$ as in Definition 3.7.
- Let $d = \Omega(\log n)$.

Then we have:

• Any algorithm that can, with probability at least 9/10, produce an output $\mathcal{O} \in \mathbb{R}^d$ that is a $(1 \pm \eta)$ -approximation of Z_n for $\eta \in (0,1)$ must use at least $\Omega(nd)$ bits of memory.

B.4 Lower Bound on Approximation Algorithms for Two Cache Matrices Case

Next, we consider the approximate computation of the attention function with two cache matrices. Using the similar idea as Theorem 8 in [HO25], we can show the following result.

Corollary B.4 (Approximation Algorithm Lower bound for Two Cache Matrices, Formal Version of Corollary 4.5). *If the following conditions hold:*

- Let $Z_n := \mathsf{Attn}(q_n, \widetilde{K}_n, \widetilde{V}_n)$ as in Definition 3.8.
- Let $d = \Omega(\log n)$.

Then we have:

• Any algorithm that can, with probability at least 9/10, produce an output $\mathcal{O} \in \mathbb{R}^d$ that is a $(1 \pm \eta)$ -approximation of Z_n for $\eta \in (0,1)$ must use at least $\Omega(nd)$ bits of memory.

B.5 Lower Bound in the Low-Dimensional Regime for Four Cache Matrices Case

Using the similar idea as Corollary 9 in [HO25], we can provide the following lower bound with two cache matrices when $d = o(\log n)$.

Corollary B.5. Let $Z_n := \text{Attn}(q_n, K_{1,n}, K_{2,n}, V_{1,n}, V_{2,n})$ as in Definition 3.7, and $d \geq 2$ with $d = o(\log n)$. Any algorithm that can, with probability at least 9/10, produce a $(1\pm \eta)$ -approximation $\mathcal{O} \in \mathbb{R}^d$ of Z_n for $\eta \in (0,1)$ must use at least $\Omega(e^d \cdot d)$ bits of memory.

This corollary establishes a fundamental limit on memory efficiency in the low-dimensional regime, showing an exponential dependence on d. It suggests that sublinear space complexity in n may be achievable, prompting exploration of algorithms tailored to this setting.

B.6 Lower Bound in the Low-Dimensional Regime for Two Cache Matrices Case

Using the similar idea as Corollary 9 in [HO25], we can provide the following lower bound with two cache matrices when $d = o(\log n)$.

Corollary B.6. Let $Z_n := \text{Attn}(q_n, \widetilde{K}_n, \widetilde{V}_n)$ as in Definition 3.8, and $d \geq 2$ with $d = o(\log n)$. Any algorithm that can, with probability at least 9/10, produce a $(1 \pm \eta)$ -approximation $\mathcal{O} \in \mathbb{R}^d$ of Z_n for $\eta \in (0,1)$ must use at least $\Omega(e^d \cdot d)$ bits of memory.

B.7 Definition of Covering Number

To analyze clusterability in low-dimensional spaces, we introduce the covering number, a geometric concept that quantifies the complexity of covering a set with balls of a given radius. This definition, adapted from [Wu17], supports our subsequent bounds.

Definition B.7 (Covering Number, [Wu17]). Define the covering number $N(\Theta, \|\cdot\|, \delta)$ of a set Θ with respect to a norm $\|\cdot\|$ and a radius δ as the minimum number of $\|\cdot\|$ -balls of radius δ needed to cover Θ .

The covering number provides a tool to estimate the number of clusters required for a dataset, linking geometric properties to algorithmic efficiency in low-dimensional settings.

B.8 Clusterability of SubGen4Cache and SubGen2Cache Algorithm

Similarly [HO25], we use the covering number, we establish the inherent clusterability of points in low-dimensional spaces.

Lemma B.8 (Clusterability of SubGen4Cache and SubGen2Cache Algorithms, Formal Version of Lemma 5.4). *If the following conditions hold:*

• Let $x_1, \ldots, x_n \in \mathbb{R}^d$ be a set of n points in d-dimensional space such that $||x_i||_2 \leq 1$ for all $i \in [n]$.

Then:

• This set is (m, δ) clusterable for $m = \lceil e^d \rceil$ and $\delta = e/3$.

Proof. Lemma 5.3 states that we can cover the unit-ball with at most $(\frac{3}{\delta})^d = e^d$ balls of radius δ . We then partition the unit ball into m clusters by assigning each point to a ball that contains it.

References

- [AA22] Amol Aggarwal and Josh Alman. Optimal-degree polynomial approximations for exponentials and gaussian kernel density estimation. In *Proceedings of the 37th Computational Complexity Conference*, pages 1–23, 2022.
- [AAA⁺23] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. arXiv preprint arXiv:2303.08774, 2023.
 - [AB09] Sanjeev Arora and Boaz Barak. Computational complexity: a modern approach. Cambridge University Press, 2009.
- [ACKY05] Evrim Acar, Seyit A Camtepe, Mukkai S Krishnamoorthy, and Bülent Yener. Modeling and multiway analysis of chatroom tensors. In *Intelligence and Security Informatics: IEEE International Conference on Intelligence and Security Informatics, ISI 2005, Atlanta, GA, USA, May 19-20, 2005. Proceedings 3*, pages 256–268. Springer, 2005.

- [ACY06] Evrim Acar, Seyit A Camtepe, and Bülent Yener. Collective sampling and analysis of high order tensors for chatroom communications. In *International Conference on Intelligence and Security Informatics*, pages 213–224. Springer, 2006.
- [AFdLGTL09] Santiago Aja-Fernández, Rodrigo de Luis Garcia, Dacheng Tao, and Xuelong Li. Tensors in image processing and computer vision. Springer Science & Business Media, 2009.
 - [AI24] Meta AI. Introducing meta llama 3: The most capable openly available llm to date, 2024. https://ai.meta.com/blog/meta-llama-3/.
 - [ALB13] Mohammad Gheshlaghi Azar, Alessandro Lazaric, and Emma Brunskill. Sequential transfer in multi-armed bandit with finite set of models. *Advances in Neural Information Processing Systems*, 26, 2013.
 - [Ant24] Anthropic. The claude 3 model family: Opus, sonnet, haiku, 2024. https://www-cdn.anthropic.com/de8ba9b01c9ab7cbabf5c33b80b7bbc618857627/Model_Card_Claude_3.pdf.
 - [AS23] Josh Alman and Zhao Song. Fast attention requires bounded entries. Advances in Neural Information Processing Systems, 36, 2023.
 - [AS24a] Josh Alman and Zhao Song. Fast rope attention: Combining the polynomial method and fast fourier transform. *manuscript*, 2024.
 - [AS24b] Josh Alman and Zhao Song. How to capture higher-order correlations? generalizing matrix softmax attention to kronecker computation. In *The Twelfth International Conference on Learning Representations*, 2024.
 - [AS25] Josh Alman and Zhao Song. The fine-grained complexity of gradient computation for training large language models. Advances in Neural Information Processing Systems, 37:61419–61454, 2025.
 - [BCE⁺23] Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrke, Eric Horvitz, Ece Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, et al. Sparks of artificial general intelligence: Early experiments with gpt-4. arXiv preprint arXiv:2303.12712, 2023.
 - [BDPW22] Hangbo Bao, Li Dong, Songhao Piao, and Furu Wei. Beit: Bert pre-training of image transformers. In *International Conference on Learning Representations*, 2022.
 - [BHA+21] Rishi Bommasani, Drew A Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S Bernstein, Jeannette Bohg, Antoine Bosselut, Emma Brunskill, et al. On the opportunities and risks of foundation models. arXiv preprint arXiv:2108.07258, 2021.
 - [BMR⁺20] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.

- [BNR⁺15] Guillaume Bouchard, Jason Naradowsky, Sebastian Riedel, Tim Rocktäschel, and Andreas Vlachos. Matrix and tensor factorization methods for natural language processing. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing: Tutorial Abstracts*, pages 16–18, 2015.
 - [BSY23] Song Bian, Zhao Song, and Junze Yin. Federated empirical risk minimization via second-order method. arXiv preprint arXiv:2305.17482, 2023.
- [CCL+25] Yang Cao, Bo Chen, Xiaoyu Li, Yingyu Liang, Zhizhou Sha, Zhenmei Shi, Zhao Song, and Mingda Wan. Force matching with relativistic constraints: A physics-inspired approach to stable and efficient generative modeling. arXiv preprint arXiv:2502.08150, 2025.
- [CDW+21] Beidi Chen, Tri Dao, Eric Winsor, Zhao Song, Atri Rudra, and Christopher Ré. Scatterbrain: Unifying sparse and low-rank attention. Advances in Neural Information Processing Systems, 34:17413-17426, 2021.
- [CGL⁺25] Yifang Chen, Xuyang Guo, Xiaoyu Li, Yingyu Liang, Zhenmei Shi, and Zhao Song. Scaling law phenomena across regression paradigms: Multiple and kernel approaches. arXiv preprint arXiv:2503.01314, 2025.
- [CHL⁺24] Yifang Chen, Jiayan Huo, Xiaoyu Li, Yingyu Liang, Zhenmei Shi, and Zhao Song. Fast gradient computation for rope attention in almost linear time. arXiv preprint arXiv:2412.17316, 2024.
- [CLL+24a] Bo Chen, Xiaoyu Li, Yingyu Liang, Jiangxuan Long, Zhenmei Shi, and Zhao Song. Circuit complexity bounds for rope-based transformer architecture. arXiv preprint arXiv:2411.07602, 2024.
- [CLL⁺24b] Bo Chen, Xiaoyu Li, Yingyu Liang, Zhenmei Shi, and Zhao Song. Bypassing the exponential dependency: Looped transformers efficiently learn in-context by multistep gradient descent. arXiv preprint arXiv:2410.11268, 2024.
- [CLL⁺24c] Yifang Chen, Xiaoyu Li, Yingyu Liang, Zhenmei Shi, and Zhao Song. The computational limits of state-space models and mamba via the lens of circuit complexity. arXiv preprint arXiv:2412.06148, 2024.
- [CLL+25a] Yuefan Cao, Xiaoyu Li, Yingyu Liang, Zhizhou Sha, Zhenmei Shi, Zhao Song, and Jiahao Zhang. Dissecting submission limit in desk-rejections: A mathematical analysis of fairness in ai conference policies. arXiv preprint arXiv:2502.00690, 2025.
- [CLL⁺25b] Yifang Chen, Xiaoyu Li, Yingyu Liang, Zhenmei Shi, and Zhao Song. Universal approximation of visual autoregressive transformers. arXiv preprint arXiv:2502.06167, 2025.
 - [CLS⁺24] Bo Chen, Yingyu Liang, Zhizhou Sha, Zhenmei Shi, and Zhao Song. Hsr-enhanced sparse attention acceleration. arXiv preprint arXiv:2410.10165, 2024.
 - [CLZ17] Longxi Chen, Yipeng Liu, and Ce Zhu. Iterative block tensor singular value thresholding for extraction of lowrank component of image data. In 2017 IEEE International conference on acoustics, speech and signal processing (ICASSP), pages 1862–1866. IEEE, 2017.

- [CMDL+15] Andrzej Cichocki, Danilo Mandic, Lieven De Lathauwer, Guoxu Zhou, Qibin Zhao, Cesar Caiafa, and Huy Anh Phan. Tensor decompositions for signal processing applications: From two-way to multiway component analysis. *IEEE signal processing* magazine, 32(2):145–163, 2015.
 - [CMS+20] Nicolas Carion, Francisco Massa, Gabriel Synnaeve, Nicolas Usunier, Alexander Kirillov, and Sergey Zagoruyko. End-to-end object detection with transformers. In European conference on computer vision, pages 213-229. Springer, 2020.
 - [CND+23] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. Palm: Scaling language modeling with pathways. *Journal of Machine Learning Research*, 24(240):1–113, 2023.
 - [CSS⁺23] Xiang Chen, Zhao Song, Baocheng Sun, Junze Yin, and Danyang Zhuo. Query complexity of active learning for function family with nearly orthogonal basis. arXiv preprint arXiv:2306.03356, 2023.
- [CYYM14] Kai-Wei Chang, Wen-tau Yih, Bishan Yang, and Christopher Meek. Typed tensor decomposition of knowledge bases for relation extraction. In *Proceedings of the 2014* conference on empirical methods in natural language processing (EMNLP), pages 1568–1579, 2014.
- [DBK⁺21] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. In *International Conference on Learning Representations*, 2021.
- [DCLT19] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pretraining of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*. Association for Computational Linguistics, 2019.
- [DLMS24] Yichuan Deng, Zhihang Li, Sridhar Mahadevan, and Zhao Song. Zero-th order algorithm for softmax attention optimization. In 2024 IEEE International Conference on Big Data (BigData), pages 24–33. IEEE, 2024.
- [DMS23] Yichuan Deng, Sridhar Mahadevan, and Zhao Song. Randomized and deterministic attention sparsification algorithms for over-parameterized feature dimension. arXiv preprint arXiv:2304.04397, 2023.
- [DSWY22] Yichuan Deng, Zhao Song, Yitan Wang, and Yuanyuan Yang. A nearly optimal size coreset algorithm with nearly linear time. arXiv preprint arXiv:2210.08361, 2022.
 - [DSY23] Yichuan Deng, Zhao Song, and Junze Yin. Faster robust tensor power method for arbitrary order. arXiv preprint arXiv:2306.00406, 2023.
- [DYL⁺24] Haojie Duanmu, Zhihang Yuan, Xiuhong Li, Jiangfei Duan, Xingcheng ZHANG, and Dahua Lin. Skvq: Sliding-window key and value cache quantization for large language models. In *First Conference on Language Modeling*, 2024.

- [GFC21] Tianyu Gao, Adam Fisch, and Danqi Chen. Making pre-trained language models better few-shot learners. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, 2021.
- [GHZ⁺23] Peng Gao, Jiaming Han, Renrui Zhang, Ziyi Lin, Shijie Geng, Aojun Zhou, Wei Zhang, Pan Lu, Conghui He, Xiangyu Yue, et al. Llama-adapter v2: Parameter-efficient visual instruction model. arXiv preprint arXiv:2304.15010, 2023.
- [GKL⁺25] Chengyue Gong, Yekun Ke, Xiaoyu Li, Yingyu Liang, Zhizhou Sha, Zhenmei Shi, and Zhao Song. On computational limits of flowar models: Expressivity and efficiency. arXiv preprint arXiv:2502.16490, 2025.
- [GMS23] Yeqi Gao, Sridhar Mahadevan, and Zhao Song. An over-parameterized exponential regression. arXiv preprint arXiv:2303.16504, 2023.
- [GSWY23] Yeqi Gao, Zhao Song, Weixin Wang, and Junze Yin. A fast optimization view: Reformulating single layer attention in llm based on tensor and svm trick, and solving it in matrix multiplication time. arXiv preprint arXiv:2309.07418, 2023.
 - [GSX23] Yeqi Gao, Zhao Song, and Shenghao Xie. In-context learning for attention scheme: from single softmax regression to multiple softmax regression via a tensor trick. arXiv preprint arXiv:2307.02419, 2023.
 - [GSY23] Yeqi Gao, Zhao Song, and Junze Yin. Gradientcoin: A peer-to-peer decentralized large language models. arXiv preprint arXiv:2308.10502, 2023.
 - [GSY25] Yeqi Gao, Zhao Song, and Junze Yin. An iterative algorithm for rescaled hyperbolic functions regression. In *The 28th International Conference on Artificial Intelligence and Statistics*, 2025.
- [GSYZ24] Yuzhou Gu, Zhao Song, Junze Yin, and Lichen Zhang. Low rank matrix completion via robust alternating minimization in nearly linear time. In *The Twelfth International Conference on Learning Representations*, 2024.
 - [HK13] Daniel Hsu and Sham M Kakade. Learning mixtures of spherical gaussians: moment methods and spectral decompositions. In *Proceedings of the 4th conference on Innovations in Theoretical Computer Science*, pages 11–20, 2013.
- [HLSL24] Jerry Yao-Chieh Hu, Thomas Lin, Zhao Song, and Han Liu. On computational limits of modern hopfield models: A fine-grained complexity analysis. In Forty-first International Conference on Machine Learning (ICML), 2024.
 - [HO25] Themistoklis Haris and Krzysztof Onak. Compression barriers for autoregressive transformers. $arXiv\ preprint\ arXiv:2502.15955,\ 2025.$
- [HSK⁺24] Jerry Yao-Chieh Hu, Maojiang Su, En-Jui Kuo, Zhao Song, and Han Liu. Computational limits of low-rank adaptation (lora) for transformer-based models. arXiv preprint arXiv:2406.03136, 2024.
- [HST⁺20] Baihe Huang, Zhao Song, Runzhou Tao, Junze Yin, Ruizhe Zhang, and Danyang Zhuo. Instahide's sample complexity when mixing two private images. arXiv preprint arXiv:2011.11877, 2020.

- [HST+22] Hang Hu, Zhao Song, Runzhou Tao, Zhaozhuo Xu, Junze Yin, and Danyang Zhuo. Sublinear time algorithm for online weighted bipartite matching. arXiv preprint arXiv:2208.03367, 2022.
- [HSW⁺22] Baihe Huang, Zhao Song, Omri Weinstein, Junze Yin, Hengjie Zhang, and Ruizhe Zhang. A dynamic fast gaussian transform. arXiv preprint arXiv:2202.12329, 2022.
- [HWSL24] Jerry Yao-Chieh Hu, Weimin Wu, Zhao Song, and Han Liu. On statistical rates and provably efficient criteria of latent diffusion transformers (dits). arXiv preprint arXiv:2407.01079, 2024.
- [HysW⁺22] Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022.
- [HYW⁺24] Jerry Yao-Chieh Hu, Donglin Yang, Dennis Wu, Chenwei Xu, Bo-Yu Chen, and Han Liu. On sparse modern hopfield model. *Advances in Neural Information Processing Systems*, 36, 2024.
- [HZY+25] Mude Hui, Rui-Jie Zhu, Songlin Yang, Yu Zhang, Zirui Wang, Yuyin Zhou, Jason Eshraghian, and Cihang Xie. Arflow: Autogressive flow with hybrid linear attention. arXiv preprint arXiv:2501.16085, 2025.
 - [JL84] William B Johnson and Joram Lindenstrauss. Extensions of lipschitz mappings into a hilbert space. *Contemporary mathematics*, 26(189-206):1, 1984.
- [JLZM24] Shuowei Jin, Xueshen Liu, Qingzhao Zhang, and Z Morley Mao. Compute or load kv cache? why not both? arXiv preprint arXiv:2410.03065, 2024.
 - [JO14] Prateek Jain and Sewoong Oh. Learning mixtures of discrete product distributions using spectral decompositions. In *Conference on Learning Theory*, pages 824–856. PMLR, 2014.
- [KABO10] Alexandros Karatzoglou, Xavier Amatriain, Linas Baltrunas, and Nuria Oliver. Multiverse recommendation: n-dimensional tensor factorization for context-aware collaborative filtering. In Proceedings of the fourth ACM conference on Recommender systems, pages 79–86, 2010.
 - [KB06] Tamara Kolda and Brett Bader. The tophits model for higher-order web link analysis. In Workshop on Link Analysis, Counterterrorism and Security, volume 7, pages 26–29, 2006.
- [KLL+25a] Yekun Ke, Xiaoyu Li, Yingyu Liang, Zhizhou Sha, Zhenmei Shi, and Zhao Song. On computational limits and provably efficient criteria of visual autoregressive models: A fine grained complexity analysis. arXiv preprint arXiv:2501.04377, 2025.
- [KLL⁺25b] Yekun Ke, Xiaoyu Li, Yingyu Liang, Zhenmei Shi, and Zhao Song. Circuit complexity bounds for visual autoregressive model. arXiv preprint arXiv:2501.04299, 2025.
 - [KLSZ24] Yekun Ke, Xiaoyu Li, Zhao Song, and Tianyi Zhou. Faster sampling algorithms for polytopes with small treewidth. In 2024 IEEE International Conference on Big Data (BigData), pages 44–53. IEEE, 2024.

- [KS08] Tamara G Kolda and Jimeng Sun. Scalable tensor decompositions for multi-aspect data mining. In 2008 Eighth IEEE international conference on data mining, pages 363–372. IEEE, 2008.
- [Kus97] Eyal Kushilevitz. Communication complexity. In *Advances in Computers*, volume 44, pages 331–360. Elsevier, 1997.
- [KVPF20] Angelos Katharopoulos, Apoorv Vyas, Nikolaos Pappas, and François Fleuret. Transformers are rnns: Fast autoregressive transformers with linear attention. In *International conference on machine learning*, pages 5156–5165. PMLR, 2020.
- [LARC21] Brian Lester, Rami Al-Rfou, and Noah Constant. The power of scale for parameter-efficient prompt tuning. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics, 2021.
- [LDL⁺23] Zichang Liu, Aditya Desai, Fangshuo Liao, Weitao Wang, Victor Xie, Zhaozhuo Xu, Anastasios Kyrillidis, and Anshumali Shrivastava. Scissorhands: Exploiting the persistence of importance hypothesis for llm kv cache compression at test time. Advances in Neural Information Processing Systems, 36:52342–52364, 2023.
- [LFC⁺16] Canyi Lu, Jiashi Feng, Yudong Chen, Wei Liu, Zhouchen Lin, and Shuicheng Yan. Tensor robust principal component analysis: Exact recovery of corrupted low-rank tensors via convex optimization. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 5249–5257, 2016.
- [LLC+21] Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 10012–10022, 2021.
- [LLP+25] Akide Liu, Jing Liu, Zizheng Pan, Yefei He, Reza Haffari, and Bohan Zhuang. Minicache: Kv cache compression in depth dimension for large language models. Advances in Neural Information Processing Systems, 37:139997–140031, 2025.
- [LLS⁺24a] Xiaoyu Li, Yingyu Liang, Zhenmei Shi, Zhao Song, and Mingda Wan. Theoretical constraints on the expressive power of rope-based tensor attention transformers. arXiv preprint arXiv:2412.18040, 2024.
- [LLS $^+$ 24b] Yingyu Liang, Heshan Liu, Zhenmei Shi, Zhao Song, and Junze Yin. Conv-basis: A new paradigm for efficient attention inference and gradient computation in transformers. $arXiv\ preprint\ arXiv:2405.05219,\ 2024.$
- [LLS⁺24c] Yingyu Liang, Jiangxuan Long, Zhenmei Shi, Zhao Song, and Yufa Zhou. Beyond linear approximations: A novel pruning approach for attention matrix. arXiv preprint arXiv:2410.11261, 2024.
- [LLS⁺25a] Chenyang Li, Yingyu Liang, Zhenmei Shi, Zhao Song, and Tianyi Zhou. Fourier circuits in neural networks and transformers: A case study of modular arithmetic with multiple inputs. In *International Conference on Artificial Intelligence and Statistics*, 2025.

- [LLS⁺25b] Xiaoyu Li, Yingyu Liang, Zhenmei Shi, Zhao Song, Wei Wang, and Jiahao Zhang. On the computational capability of graph neural networks: A circuit complexity bound perspective. arXiv preprint arXiv:2501.06444, 2025.
 - [LLSS24] Xiaoyu Li, Yingyu Liang, Zhenmei Shi, and Zhao Song. A tighter complexity analysis of sparsegpt. arXiv preprint arXiv:2408.12151, 2024.
 - [LLSZ24] Xiaoyu Li, Jiangxuan Long, Zhao Song, and Tianyi Zhou. Fast second-order method for neural networks under small treewidth setting. In 2024 IEEE International Conference on Big Data (BigData), pages 1029–1038. IEEE, 2024.
- [LLWY24] Junyan Liu, Yunfan Li, Ruosong Wang, and Lin Yang. Uniform last-iterate guarantee for bandits and reinforcement learning. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
 - [LLY24] Junyan Liu, Yunfan Li, and Lin Yang. Achieving near-optimal regret for bandit algorithms with uniform last-iterate guarantee. arXiv preprint arXiv:2402.12711, 2024.
- [LSS⁺22] Jiehao Liang, Somdeb Sarkhel, Zhao Song, Chenbo Yin, Junze Yin, and Danyang Zhuo. A faster k-means++ algorithm. arXiv preprint arXiv:2211.15118, 2022.
- [LSS⁺24a] Yingyu Liang, Zhizhou Sha, Zhenmei Shi, Zhao Song, and Yufa Zhou. Looped relumlps may be all you need as practical programmable computers. arXiv preprint arXiv:2410.09375, 2024.
- [LSS+24b] Yingyu Liang, Zhizhou Sha, Zhenmei Shi, Zhao Song, and Yufa Zhou. Multi-layer transformers gradient can be approximated in almost linear time. arXiv preprint arXiv:2408.13233, 2024.
- [LSSZ24a] Yingyu Liang, Zhenmei Shi, Zhao Song, and Yufa Zhou. Differential privacy of cross-attention with provable guarantee. arXiv preprint arXiv:2407.14717, 2024.
- [LSSZ24b] Yingyu Liang, Zhenmei Shi, Zhao Song, and Yufa Zhou. Tensor attention training: Provably efficient learning of higher-order transformers. arXiv preprint arXiv:2405.16411, 2024.
- [LSSZ24c] Yingyu Liang, Zhenmei Shi, Zhao Song, and Yufa Zhou. Tensor attention training: Provably efficient learning of higher-order transformers. arXiv preprint arXiv:2405.16411, 2024.
- [LSW⁺24] Zhihang Li, Zhao Song, Weixin Wang, Junze Yin, and Zheng Yu. How to inverting the leverage score distribution? arXiv preprint arXiv:2404.13785, 2024.
- [LSWY23] Zhihang Li, Zhao Song, Zifan Wang, and Junze Yin. Local convergence of approximate newton method for two layer nonlinear regression. arXiv preprint arXiv:2311.15390, 2023.
- [LSX⁺22] Jiehao Liang, Zhao Song, Zhaozhuo Xu, Junze Yin, and Danyang Zhuo. Dynamic maintenance of kernel density estimation data structure: From practice to theory. arXiv preprint arXiv:2208.03915, 2022.

- [LSXY24] Chenyang Li, Zhao Song, Zhaoxing Xu, and Junze Yin. Inverting the leverage score gradient: An efficient approximate newton method. arXiv preprint arXiv:2408.11267, 2024.
 - [LSZ23] Zhihang Li, Zhao Song, and Tianyi Zhou. Solving regularized exp, cosh and sinh regression problems. arXiv preprint arXiv:2303.15725, 2023.
 - [LT24] AI @ Meta Llama Team. The llama 3 herd of models. arXiv preprint arXiv:2407.21783, 2024.
- [LWCY23] Yunfan Li, Yiran Wang, Yu Cheng, and Lin Yang. Low-switching policy gradient with exploration via online sensitivity sampling. In *International Conference on Machine Learning*, pages 19995–20034. PMLR, 2023.
- [LWD+23] Zichang Liu, Jue Wang, Tri Dao, Tianyi Zhou, Binhang Yuan, Zhao Song, Anshumali Shrivastava, Ce Zhang, Yuandong Tian, Christopher Re, and Beidi Chen. Deja vu: Contextual sparsity for efficient llms at inference time. In *International Conference on Machine Learning*, pages 22137–22176. PMLR, 2023.
- [LXZ⁺14] Tao Lei, Yu Xin, Yuan Zhang, Regina Barzilay, and Tommi Jaakkola. Low-rank tensors for scoring dependency structures. In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1381–1391, 2014.
 - [LY24] Yunfan Li and Lin Yang. On the model-misspecification in reinforcement learning. In *International Conference on Artificial Intelligence and Statistics*, pages 2764–2772. PMLR, 2024.
- [LZM+15] Tao Lei, Yuan Zhang, Lluis Marquez, Alessandro Moschitti, and Regina Barzilay. High-order low-rank tensors for semantic role labeling. In Proceedings of the 2015 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, pages 1150–1160, 2015.
 - [Mør11] Morten Mørup. Applications of tensor (multiway array) factorizations and decompositions in data mining. Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery, 1(1):24–40, 2011.
 - [Ope22] OpenAI. Introducing ChatGPT. https://openai.com/blog/chatgpt, 2022. Accessed: 2023-09-10.
 - [Ope23] OpenAI. Gpt-4 technical report, 2023.
 - [Ope24] OpenAI. Introducing openai o1-preview. https://openai.com/index/introducing-openai-o1-preview/, 2024. Accessed: September 12.
- [PBLJ15] Anastasia Podosinnikova, Francis Bach, and Simon Lacoste-Julien. Rethinking lda: moment matching for discrete ica. Advances in Neural Information Processing Systems, 28, 2015.
- [PDC⁺23] Reiner Pope, Sholto Douglas, Aakanksha Chowdhery, Jacob Devlin, James Bradbury, Jonathan Heek, Kefan Xiao, Shivani Agrawal, and Jeff Dean. Efficiently scaling transformer inference. *Proceedings of Machine Learning and Systems*, 5:606–624, 2023.

- [PLY10] Yanwei Pang, Xuelong Li, and Yuan Yuan. Robust tensor analysis with l1-norm. *IEEE Transactions on Circuits and Systems For Video Technology*, 20(2):172–178, 2010.
- [PVU+18] Niki Parmar, Ashish Vaswani, Jakob Uszkoreit, Lukasz Kaiser, Noam Shazeer, Alexander Ku, and Dustin Tran. Image transformer. In *International conference* on machine learning, pages 4055–4064. PMLR, 2018.
- [RBHP21] Mr D Murahari Reddy, Mr Sk Masthan Basha, Mr M Chinnaiahgari Hari, and Mr N Penchalaiah. Dall-e: Creating images from text. UGC Care Group I Journal, 8(14):71–75, 2021.
- [RKH+21] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PmLR, 2021.
- [RNSS18] Avik Ray, Joe Neeman, Sujay Sanghavi, and Sanjay Shakkottai. The search problem in mixture models. *Journal of Machine Learning Research*, 18(206):1–61, 2018.
- [RST10] Steffen Rendle and Lars Schmidt-Thieme. Pairwise interaction tensor factorization for personalized tag recommendation. In *Proceedings of the third ACM international conference on Web search and data mining*, pages 81–90, 2010.
- [RTP16] Thomas Reps, Emma Turetsky, and Prathmesh Prabhu. Newtonian program analysis via tensor product. In *Proceedings of the 43rd Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages*, pages 663–677, 2016.
- [RYH⁺24] Sucheng Ren, Qihang Yu, Ju He, Xiaohui Shen, Alan Yuille, and Liang-Chieh Chen. Flowar: Scale-wise autoregressive image generation meets flow matching. arXiv preprint arXiv:2412.15205, 2024.
- [SGS⁺24] Michael E Sander, Raja Giryes, Taiji Suzuki, Mathieu Blondel, and Gabriel Peyré. How do transformers perform in-context autoregressive learning? arXiv preprint arXiv:2402.05787, 2024.
 - [SHT23] Clayton Sanford, Daniel J Hsu, and Matus Telgarsky. Representational strengths and limitations of transformers. Advances in Neural Information Processing Systems, 36:36677–36707, 2023.
- [SSL⁺22] Zhenmei Shi, Fuhao Shi, Wei-Sheng Lai, Chia-Kai Liang, and Yingyu Liang. Deep online fused video stabilization. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, pages 1250–1258, 2022.
- [SSZ23] Ritwik Sinha, Zhao Song, and Tianyi Zhou. A mathematical abstraction for balancing the trade-off between creativity and reality in large language models. arXiv preprint arXiv:2306.02295, 2023.
- [SSZ⁺25a] Xuan Shen, Zhao Song, Yufa Zhou, Bo Chen, Yanyu Li, Yifan Gong, Kai Zhang, Hao Tan, Jason Kuen, Henghui Ding, Zhihao Shu, Wei Niu, Pu Zhao, Yanzhi Wang, and Jiuxiang Gu. Lazydit: Lazy learning for the acceleration of diffusion

- transformers. In Proceedings of the AAAI Conference on Artificial Intelligence, 2025.
- [SSZ+25b] Xuan Shen, Zhao Song, Yufa Zhou, Bo Chen, Jing Liu, Ruiyi Zhang, Ryan A. Rossi, Hao Tan, Tong Yu, Xiang Chen, Yufan Zhou, Tong Sun, Pu Zhao, Yanzhi Wang, and Jiuxiang Gu. Numerical pruning for efficient autoregressive models. In Proceedings of the AAAI Conference on Artificial Intelligence, 2025.
- [SWY23] Zhao Song, Weixin Wang, and Junze Yin. A unified scheme of resnet and softmax. arXiv preprint arXiv:2309.13482, 2023.
- [SWYY25] Zhao Song, Weixin Wang, Chenbo Yin, and Junze Yin. Fast and efficient matching algorithm with deadline instances. In *The Second Conference on Parsimony and Learning (Proceedings Track)*, 2025.
 - [SXY23] Zhao Song, Guangyi Xu, and Junze Yin. The expressibility of polynomial based attention scheme. arXiv preprint arXiv:2310.20051, 2023.
 - [SXZ22] Zhao Song, Zhaozhuo Xu, and Lichen Zhang. Speeding up sparsification using inner product search data structures. arXiv preprint arXiv:2204.03209, 2022.
 - [SY23] Zhao Song and Chiwun Yang. An automatic learning rate schedule algorithm for achieving faster convergence and steeper descent. arXiv preprint arXiv:2310.11291, 2023.
- [SYYZ23] Zhao Song, Mingquan Ye, Junze Yin, and Lichen Zhang. A nearly-optimal bound for fast regression with ℓ_{∞} guarantee. In *International Conference on Machine Learning*, pages 32463–32482. PMLR, 2023.
- [SYYZ25] Zhao Song, Mingquan Ye, Junze Yin, and Lichen Zhang. Efficient alternating minimization with applications to weighted low rank approximation. In *The Thirteenth International Conference on Learning Representations*, 2025.
 - [SYZ23] Zhao Song, Junze Yin, and Ruizhe Zhang. Revisiting quantum algorithms for linear regressions: Quadratic speedups without data-dependent parameters. arXiv preprint arXiv:2311.14823, 2023.
- [SYZZ24] Zhao Song, Junze Yin, Lichen Zhang, and Ruizhe Zhang. Fast dynamic sampling for determinantal point processes. In *International Conference on Artificial Intelligence and Statistics*, pages 244–252. PMLR, 2024.
- [TCD+21] Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. In *International conference on machine learning*, pages 10347–10357. PMLR, 2021.
- [TJY⁺24] Keyu Tian, Yi Jiang, Zehuan Yuan, Bingyue Peng, and Liwei Wang. Visual autore-gressive modeling: Scalable image generation via next-scale prediction. *Advances in neural information processing systems*, 37:84839–84865, 2024.
- [TLI⁺23] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal

- Azhar, et al. Llama: Open and efficient foundation language models. arXiv preprint arXiv:2302.13971, 2023.
- [Vas09] M Alex O Vasilescu. A multilinear (tensor) algebraic framework for computer graphics, computer vision and machine learning. PhD thesis, 2009.
- [VONR⁺23] Johannes Von Oswald, Eyvind Niklasson, Ettore Randazzo, João Sacramento, Alexander Mordvintsev, Andrey Zhmoginov, and Max Vladymyrov. Transformers learn in-context by gradient descent. In *International Conference on Machine Learning*. PMLR, 2023.
 - [VSP⁺17] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
 - [VT04] M Alex O Vasilescu and Demetri Terzopoulos. Tensortextures: Multilinear image-based rendering. In *ACM SIGGRAPH 2004 Papers*, pages 336–342. 2004.
- [WHL⁺24] Dennis Wu, Jerry Yao-Chieh Hu, Weijian Li, Bo-Yu Chen, and Han Liu. STanhop: Sparse tandem hopfield model for memory-enhanced time series prediction. In *The Twelfth International Conference on Learning Representations (ICLR)*, 2024.
 - [Woo14] David P Woodruff. Sketching as a tool for numerical linear algebra. Foundations and Trends® in Theoretical Computer Science, 10(1–2):1–157, 2014.
 - [Wu17] Yihong Wu. Lecture notes on information-theoretic methods for high-dimensional statistics. Lecture Notes for ECE598YW (UIUC), 16:15, 2017.
- [WWS⁺05] Hongcheng Wang, Qing Wu, Lin Shi, Yizhou Yu, and Narendra Ahuja. Out-of-core tensor approximation of multi-dimensional matrices of visual data. *ACM Transactions on Graphics (TOG)*, 24(3):527–535, 2005.
- [XHH⁺24] Chenwei Xu, Yu-Chao Huang, Jerry Yao-Chieh Hu, Weijian Li, Ammar Gilani, Hsi-Sheng Goan, and Han Liu. Bishop: Bi-directional cellular learning for tabular data with generalized sparse modern hopfield model. In *Forty-first International Conference on Machine Learning*, 2024.
- [XTC⁺24] Guangxuan Xiao, Yuandong Tian, Beidi Chen, Song Han, and Mike Lewis. Efficient streaming language models with attention sinks. In *The Twelfth International Conference on Learning Representations*, 2024.
 - [YCS16] Xinyang Yi, Constantine Caramanis, and Sujay Sanghavi. Solving a mixture of many random linear equations by tensor decomposition and alternating minimization. arXiv preprint arXiv:1608.05749, 2016.
- [YDY⁺19] Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le. Xlnet: Generalized autoregressive pretraining for language understanding. Advances in neural information processing systems, 32, 2019.
- [YSST19] Zhaoyang Yang, Zhenmei Shi, Xiaoyong Shen, and Yu-Wing Tai. Sf-net: Structured feature network for continuous sign language recognition. arXiv preprint arXiv:1908.01341, 2019.

- [ZCY23] Haochen Zhang, Xi Chen, and Lin F Yang. Adaptive liquidity provision in uniswap v3 with deep reinforcement learning. arXiv preprint arXiv:2309.10129, 2023.
- [ZCZ⁺25] Zhi Zhang, Chris Chow, Yasi Zhang, Yanchao Sun, Haochen Zhang, Eric Hanchen Jiang, Han Liu, Furong Huang, Yuchen Cui, and Oscar Hernan Madrid Padilla. Statistical guarantees for lifelong reinforcement learning using pac-bayesian theory. In *International Conference on Artificial Intelligence and Statistics*, 2025.
- [ZCZJ16] Yuchen Zhang, Xi Chen, Dengyong Zhou, and Michael I Jordan. Spectral methods meet em: A provably optimal algorithm for crowdsourcing. *Journal of Machine Learning Research*, 17(102):1–44, 2016.
- [ZDH24] Amir Zandieh, Majid Daliri, and Insu Han. Qjl: 1-bit quantized jl transform for kv cache quantization with zero overhead. arXiv preprint arXiv:2406.03482, 2024.
- [ZHMK24] Amir Zandieh, Insu Han, Vahab Mirrokni, and Amin Karbasi. Subgen: Token generation in sublinear time and memory. arXiv preprint arXiv:2402.06082, 2024.
- [ZHZ⁺23] Renrui Zhang, Jiaming Han, Aojun Zhou, Xiangfei Hu, Shilin Yan, Pan Lu, Hongsheng Li, Peng Gao, and Yu Qiao. Llama-adapter: Efficient fine-tuning of language models with zero-init attention. arXiv preprint arXiv:2303.16199, 2023.
- [ZLP+23] Haochen Zhang, Xingyu Lin, Sui Peng, Junjie Tang, Antonello Monti, et al. Surrogate-model-based sequential algorithm for weather-dependent probabilistic power flow with high calculation efficiency. *Authorea Preprints*, 2023.
- [ZLX+23] Chunting Zhou, Pengfei Liu, Puxin Xu, Srini Iyer, Jiao Sun, Yuning Mao, Xuezhe Ma, Avia Efrat, Ping Yu, LILI YU, Susan Zhang, Gargi Ghosh, Mike Lewis, Luke Zettlemoyer, and Omer Levy. LIMA: Less is more for alignment. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- [ZLY⁺25] Yifan Zhang, Yifeng Liu, Huizhuo Yuan, Zhen Qin, Yang Yuan, Quanquan Gu, and Andrew Chi-Chih Yao. Tensor product attention is all you need. arXiv preprint arXiv:2501.06425, 2025.
- [ZPT⁺22] Haochen Zhang, Zhiyun Peng, Junjie Tang, Ming Dong, Ke Wang, and Wenyuan Li. A multi-layer extreme learning machine refined by sparrow search algorithm and weighted mean filter for short-term multi-step wind speed forecasting. Sustainable Energy Technologies and Assessments, 50:101698, 2022.
- [ZSJ⁺17] Kai Zhong, Zhao Song, Prateek Jain, Peter L Bartlett, and Inderjit S Dhillon. Recovery guarantees for one-hidden-layer neural networks. In *International conference on machine learning*, pages 4140–4149. PMLR, 2017.
- [ZSZ+23] Zhenyu Zhang, Ying Sheng, Tianyi Zhou, Tianlong Chen, Lianmin Zheng, Ruisi Cai, Zhao Song, Yuandong Tian, Christopher Ré, Clark Barrett, et al. H2o: heavy-hitter oracle for efficient generative inference of large language models. In Proceedings of the 37th International Conference on Neural Information Processing Systems, pages 34661–34710, 2023.
- [ZWF⁺21] Zihao Zhao, Eric Wallace, Shi Feng, Dan Klein, and Sameer Singh. Calibrate before use: Improving few-shot performance of language models. In *International Conference on Machine Learning*. PMLR, 2021.