

Zero-Knowledge Federated Learning: A New Trustworthy and Privacy-Preserving Distributed Learning Paradigm

Yuxin Jin, Taotao Wang, Qing Yang, Long Shi, and Shengli Zhang

Abstract—Federated Learning (FL) has emerged as a promising paradigm in distributed machine learning, enabling collaborative model training while preserving data privacy. However, despite its many advantages, FL still contends with significant challenges—most notably regarding security and trust. Zero-Knowledge Proofs (ZKPs) offer a potential solution by establishing trust and enhancing system integrity throughout the FL process. Although several studies have explored ZKP-based FL (ZK-FL), a systematic framework and comprehensive analysis are still lacking. This article makes two key contributions. First, we propose a structured ZK-FL framework that categorizes and analyzes the technical roles of ZKPs across various FL stages and tasks. Second, we introduce a novel algorithm, Verifiable Client Selection FL (Veri-CS-FL), which employs ZKPs to refine the client selection process. In Veri-CS-FL, participating clients generate verifiable proofs for the performance metrics of their local models and submit these concise proofs to the server for efficient verification. The server then selects clients with high-quality local models for uploading, subsequently aggregating the contributions from these selected clients. By integrating ZKPs, Veri-CS-FL not only ensures the accuracy of performance metrics but also fortifies trust among participants while enhancing the overall efficiency and security of FL systems.

Index Terms—Federated Learning, Zero-Knowledge Proof, Trust and Security, Privacy-Preserving.

I. INTRODUCTION

MACHINE Learning (ML), as the cornerstone of modern AI, has evolved into a pivotal force that drives transformative innovations across various domains. As the demand for superior ML model performance grows, collaborative efforts pooling data from multiple entities have gained considerable traction. However, sharing raw data among these entities can lead to potential privacy breaches. To address this challenge, Federated Learning (FL) [1] was introduced as a privacy-preserving framework for distributed ML. Unlike traditional distributed ML, which involves sharing sample data across entities, FL transmits only model parameters, thereby safeguarding sensitive information within data. This characteristic renders FL particularly suitable for cross-institutional data collaborations in privacy-critical domains such as healthcare and finance. Furthermore, with ongoing technological advancements, FL is poised to become an

essential paradigm in Internet of Things (IoT) and edge computing scenarios, facilitating more efficient and secure model training.

Despite its significant advantages, FL still faces several pressing security and trust challenges that require careful attention. For example, clients might engage in dishonest practices—such as performing fake training to free-ride on the contributions of honest participants or submitting malicious local models designed to poison the server’s aggregation process. On the other hand, the server itself might behave maliciously during aggregation, potentially disrupting FL’s normal operations. For instance, a rogue server could employ inference attack strategies to extract sensitive information from the clients’ submitted models [2]. Another critical issue concerns the efficiency of model communication and aggregation in FL. In conventional FL frameworks, every client transmits its locally trained model to the central server, which aggregates these models into a global model during each communication round. This approach can inadvertently incorporate subpar local models, thereby degrading overall performance. Although client selection mechanisms—where the server evaluates and filters out underperforming models—offer a potential solution, they still necessitate each client transmitting its model for evaluation, leading to increased communication overhead and reduced system efficiency.

Zero-Knowledge Proof (ZKP) [3] is a cryptographic technique that can be integrated into FL to bolster trust among participants—a paradigm known as Zero-Knowledge Federated Learning (ZK-FL). However, research on ZK-FL is still in its early stages, and there is a lack of a systematic classification and comprehensive summary of the related work. In this paper, we introduce a structured ZK-FL framework that categorizes the technical roles of ZKP within each module of FL, and we classify, analyze, and summarize existing ZK-FL studies accordingly. At the same time, we propose a novel FL algorithm that applies ZKP during the client selection process, named the Verifiable Client Selection FL (Veri-CS-FL) algorithm. In this approach, while local models are trained across various participating clients, cosine similarity metrics between these models and a benchmark model are used for evaluation. The benchmark model is derived by training on the central server using its proprietary data. During metric generation, ZKP is employed to produce proofs that verify the accuracy of the metric calculation. The server then only selects and aggregates the local models with higher-ranking, validated metrics. Lower-ranking, poorly performing

Y. Jin, T. Wang, Q. Yang and S. Zhang are with the College of Electronics and Information Engineering, Shenzhen University, Shenzhen, Guangdong Province, PRC, e-mail: jinyuxin2022@email.szu.edu.cn, ttwang@szu.edu.cn, yang.qing@szu.edu.cn, zsl@szu.edu.cn. L. Shi is with the School of Electronic and Optical Engineering, Nanjing University of Science and Technology, Nanjing 210094, China, e-mail: slong1007@gmail.com.

local models no longer need to be uploaded to the server. By incorporating ZKP, our approach not only enhances the evaluation and communication efficiencies of local models through transparent evidence of their quality but also fosters increased trust among clients.

The rest of this article is organized as follows. Section II provides the background knowledge of FL and ZKP. Section III summarizes ZK-FL. Section IV gives the model system and the overall framework for the proposed algorithm. Section V discusses the system tests and the conclusion is presented in Section VI.

II. BACKGROUND

This section presents the technical background related to ZK-FL, summarizing the foundational principles of FL and ZKP.

A. Federated Learning

In a FL system, there are K participating clients, with each client C_k maintaining a local training dataset D_k , $k \in 1, 2, \dots, K$, alongside a central server S that functions as an aggregator to facilitate the distributed and collaborative training of a ML model using the local data from these clients. The entire model training process in FL is divided into multiple iterative rounds, conducted sequentially.

In the t -th round of FL, the server S first distributes the latest parameters of the global model w^{t-1} to all clients. Then, each client C_k trains a local model w_k^t based on the global model w^{t-1} using their own local dataset D_k . After that, all clients transmit their trained local models $\{w_k^t, k = 1, 2, \dots, K\}$ to the server S . Finally, the server S obtains a new global model w^t updated in the t -th round by aggregating the clients' local models according to some predefined aggregation rule. This process repeats until the global model converges or a predetermined number of iterations is reached.

Existing FL algorithms often operate under the assumption that both clients and the server are inherently trustworthy, an assumption that may not hold in practical distributed scenarios. Addressing the challenges of safeguarding data privacy and mitigating the impact of Byzantine nodes during the FL process is therefore critical. This article focuses on the zero-knowledge proof based strategies proposed to prevent malicious behaviors from both servers and clients.

B. Zero-Knowledge Proof

ZKP is a cryptographic technique that proves a statement's validity without revealing any private information about the statement. There are several types of ZKP algorithms [4]. Among them, zero-knowledge succinct non-interactive argument of knowledge (zk-SNARK) is considered to be the most practical. A zk-SNARK algorithm is usually represented by an arithmetic circuit that consists of the basic arithmetic operations of addition, subtraction, multiplication, and division. The three algorithmic components of a zk-SNARK algorithm are given:

- $(PK, VK) \leftarrow KEYGEN(1^\lambda, R)$ is the key generation algorithm that generates the proving key PK and the verification key VK by using a predefined security parameter λ and an arithmetic circuit representation R .
- $\pi \leftarrow PROVE(PK, x, W)$ is the proof generation algorithm that generates a proof π based on the proving key PK , the input x and the witness W .
- $1/0 \leftarrow VERIFY(VK, x, \pi)$ is the proof verification algorithm that outputs a decision to accept or reject π using VK , x and π as the input.

The proving key PK and the verification key VK generated by the $KEYGEN$ algorithm are treated as the public parameters pregenerated by an authority. The $PROVE$ algorithm is executed by the prover, and the $VERIFY$ algorithm is executed by the verifier. Witness W is the secret owned by the prover that he/she does not want to reveal to others and yet wants to prove that he/she knows the secret. The technical advantages of zk-SNARK includes its short proof size, fast proof verification, non-interactive proving [4]. In this article, we consider use zk-SNARK to generate zero-knowledge proofs to provide trusts for our Veri-CS-FL algorithm.

III. ZK-FL FRAMEWORK

In this section, we analyze the potential trust issues that may arise at various stages of the FL process and categorize them into five distinct types. For each trust issue, we provide corresponding ZKP solutions, combining the analysis of trust issues and ZKP solutions into a unified structured framework. Our structured framework reflects the current state of ZK-FL research and provides guidance for future advancements. The structured framework of ZK-FL is depicted in Fig. 1 and will be further elaborated upon in the following discussions.

Trust in FL refers to the expectation that participating entities (clients and servers) will act as intended regarding data, models, and computational processes. Trust issues arise when this expectation is violated, leading to attacks that compromise the system's security. These issues occur at two key stages: local model training and global model aggregation, as demonstrated in Fig. 1. Below, we analyze these trust issues and discuss how ZKP can solve them.

A. Local Model Training Stage

During local model training, trust must be established to ensure the authenticity of participating clients, the quality of their local data, and the integrity of their training processes. ZKP can be employed to address the following trust issues:

1) Client Identity Trust:

- **Trust Issue:** Untrusted clients may gain access to the FL system and disrupt the training process by submitting harmful or fake models.
- **ZKP Solution:** ZKP can verify client identities without exposing sensitive information. For instance, [5] introduces a lightweight authentication framework for blockchain-based FL, using ZKP to verify client identities. Similarly, [6] applies ZKP to protect client identity privacy in vehicular edge computing.

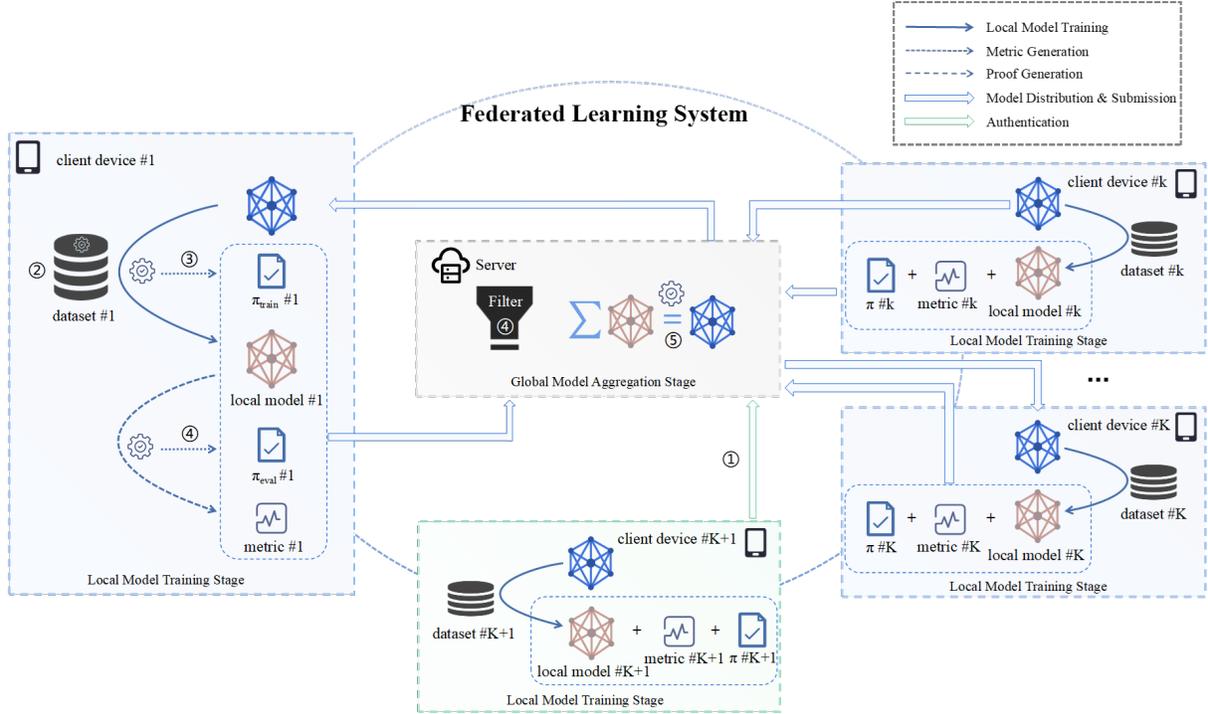


Fig. 1: The structured framework of ZK-FL demonstrating that ZKP can be integrated at various stages of FL to address different trust issues in FL: Local Model Training Stage: ① client identity trust, ② local data trust, and ③ local training trust; Global Model Aggregation Stage: ④ model evaluation trust, and ⑤ model aggregation trust.

2) Local Data Trust:

- **Trust Issue:** Clients may use fake or low-quality data for training, deceiving the server and other clients.
- **ZKP Solution:** ZKP can ensure the authenticity and integrity of local training data by requiring clients to create cryptographic commitments to their data and generate proofs that the committed data was used for training. This approach preserves data confidentiality while ensuring reliability.

3) Local Training Trust:

- **Trust Issue:** Even with authenticated clients and high-quality data, some clients may bypass predefined training protocols, submit low-quality models, or even introduce malicious models to disrupt the system.
- **ZKP Solution:** ZKP can verify that local training processes adhere to predefined protocols. Works such as [7]–[11] utilize ZKP to ensure the integrity of local training computations, preventing low-quality or malicious models from contaminating the global model.

B. Global Model Aggregation Stage

At the global model aggregation stage, trust issues arise in the evaluated performances of local models and the aggregation process itself. ZKP can address these challenges as follows:

1) Model Evaluation Trust:

- **Trust Issue:** The server must use the evaluated performances of local models to filter out submitted low-quality local models. However, self-reported performance

evaluation results from clients may be inaccurate or misleading. A malicious server also may intentionally provide biased or inaccurate evaluations of local models to serve its own agenda, undermining the fairness and reliability of the FL process.

- **ZKP Solution:** ZKP can prove the correctness of performance metrics evaluated on the client side. For example, [11] employs ZKP to ensure reliable performance evaluations. Our proposed approach (discussed in the next section) also leverages ZKP to prove and verify client-reported performance metrics, enabling the selection of high-performing models for aggregation while filtering out poorly performing ones.

2) Model Aggregation Trust:

- **Trust Issue:** The server may deviate from predefined aggregation protocols, introduce biases, or unfairly weigh client contributions. From the clients' perspective, there is often a lack of transparency in the aggregation process.
- **ZKP Solution:** ZKP can ensure trustworthy aggregation by generating verifiable proofs that the server adheres to agreed-upon protocols. Works such as [7], [12] demonstrate how ZKP can validate the correctness and fairness of the aggregation process, ensuring that client contributions are fairly incorporated into the global model.

Based on the locations where trust issues occur at different stages of the FL process, we have marked them with the corresponding numbers in Fig. 1. By integrating ZKP into FL, these key trust issues can be solved, ensuring the reliability of various FL operations. ZKP techniques facilitate verifiable

Stage	Trust Issue	Solution	Reference
Local Model Training Stage	Client Identity Trust	Ensuring the Authenticity of Client Identities	[5], [6]
	Local Data Trust	Ensuring the Integrity and Accuracy of the Training Data	—
	Local Training Trust	Ensuring the Integrity and Accuracy of the Model Updates	[7], [8], [9], [10], [11]
Global Model Aggregation Stage	Model Evaluation Trust	Ensuring Integrity of Performance Metric Evaluations	[11] and this work
	Model Aggregation Trust	Ensuring Trustworthy Model Aggregation	[7], [12]

TABLE I: Summary of the existing ZK-FL solutions

and transparent processes, thereby enhancing the overall trustworthiness of FL systems. Table I summarizes the existing ZK-FL solutions, highlighting their respective contributions according to this proposed ZK-FL framework.

IV. OUR ZK-FL SOLUTION

The previous section provides a systematic review of potential threats in FL and corresponding ZKP-based solutions. This section focuses on trust issues in model performance evaluation, describing the system threats and presenting our ZK-FL solution to that.

A. Threat and Trust Model

We consider a threat and trust model for FL with the following setup:

- There is no inherent trust between the server and the participating clients.
- The server, which is responsible for model aggregation, is assumed to be trustworthy and reliable, while the clients may exhibit malicious behavior.
- Malicious clients may launch poisoning attacks by submitting falsified performance metrics of their local models, with the intent of disrupting the overall learning process.

Under this threat and trust model, updating the global model with poorly performing local models uploaded from malicious clients could severely compromise FL system performance. To mitigate this risk, the server must access each uploaded model’s performance and select those local models that meet predefined performance standards to aggregate. This process is referred to as **client selection**. While a straightforward method for client selection is to have clients report their model performance metrics and then to select, this self-reporting is unreliable due to the inherent mistrust between the server and clients, as well as the risk of malicious behavior. Consequently, the server should independently evaluate each client’s local model before selection. However, this approach introduces two significant drawbacks:

1. It places an additional computational burden on the server. When the model being trained is large and the number of clients is substantial, this additional computation overhead when evaluating multiple local model at the server may become unacceptable.
2. It leads to inefficient use of communication bandwidth between the server and the clients. If certain local models are found to exhibit poor performance and are subsequently excluded from aggregation, the communication bandwidth consumed during the transmission of

these models is effectively wasted. This issue becomes even more pronounced when the model size is large and communication takes place over wireless channels, resulting in high costs.

In the following, we propose a novel ZK-FL solution that leverages ZKP to implement model evaluation and client selection in FL (Veri-CS-FL) that does not have the above drawbacks.

B. Veri-CS-FL

In this section, we propose our ZK-FL algorithm, i.e., the Veri-CS-FL algorithm, to achieve the trusted model evaluation at the client-side and client selection at the server-side without re-evaluating the local models submitted by the clients for verifications. Veri-CS-FL is also based on the FedAvg algorithm framework, and it leverages local models’ performance metrics as the criterion to select the clients’ local models with satisfied performances for aggregation. Other than re-running all the clients’ local models to compute their performance metrics at the server side, Veri-CS-FL integrates ZKP to validate the accuracy of the computed performance metrics in a communication-and-computation-efficient and privacy-preserving way. The specific processes of Veri-CS-FL are described as follows.

On the server side, Veri-CS-FL designates a small and clean dataset D_s as the root dataset, enabling the server S to train a benchmark model to evaluate the performances of the clients’ local models. At the start of the FL training process, the key generation algorithm of zk-SNARK is executed at a trusted third party to generate the proving key (PK) for all clients, who act as provers, and the verification key (VK) for the server, who acts as the verifier: $(PK, VK) \leftarrow KEYGEN(1^\lambda, R)$, where R denotes the circuit that models the computation process for evaluating model performance. At the start of the t -th FL training round, all entities, including the server and the clients, access the global model, w^{t-1} , trained in the previous FL training round. Then, the following training steps are conducted between the server and the clients in the t -th FL training round:

1. The server S utilizes the root dataset D_s to train a benchmark model w_s^t from the latest global model w^{t-1} . The server S broadcasts w_s^t to all the participating clients to provide a model benchmark.
2. Each client C_k trains an updated local model w_k^t from the last round global model w^{t-1} utilizing its local

dataset D_k , $k \in 1, 2, \dots, K$.¹ Subsequently, each client computes a performance metric of the updated local model w_k^t by comparing the updated local model w_k^t with the benchmark model w_s^t , and employs the proof generation algorithm of zk-SNARK to generate a zero-knowledge proof π_k for the performance metric of w_k^t : $\pi_k \leftarrow \text{PROVE}(PK, x, W)$, where the public input x is the benchmark model of the server w_s^t together with the hash of the updated local model $h_k^t = \text{hash}(w_k^t)$: $x = \{w_s^t, h_k^t\}$, and the witness W is the updated local model w_k^t : $W = w_k^t$.

3. Each client C_k transmits the proof π_k for the updated local model's performance metric, the hash of their updated local model h_k^t , and the corresponding performance metric to the server S , other than transmitting the updated local model w_k^t to the server at this stage.
4. The server S collects the performance metrics of the clients' local models and their corresponding proofs, π_k , $k \in 1, 2, \dots, K$. The server first verifies all the proofs using the proof verification algorithm of zk-SNARK: $1/0 \leftarrow \text{VERIFY}(VK, x, \pi)$ with $x = \{w_s^t, h_k^t\}$ and $\pi = \pi_k$, and proceeds to rank the corresponding performance metrics whose proofs have been successfully verified. The performance metrics whose proofs cannot pass the verification are not used and ranked. The server S then selects the top N clients based on their ranked performance metrics into the candidate set \mathcal{C} and notifies the respective clients in this set to upload their updated local models.
5. The selected N clients in the candidate set \mathcal{C} transmit their updated local models, w_k^t , $C_k \in \mathcal{C}$, to the server S .
6. The server S collects the updated local models sent from the N clients in the candidate set \mathcal{C} . The server first computes the hash of the updated local model sent by each selected client in step 5: $\tilde{h}_k^t = \text{hash}(w_k^t)$, and compares the computed hash with the hash, h_k^t , sent by the client in step 3. If the two hashes match, the server S will label this client as a valid candidate; if the two hashes differs, the server S will remove this client C_k from the candidate set \mathcal{C} . After this hash verification operation for each client $C_k \in \mathcal{C}$, the server S aggregates these updated local models of the clients still in the candidate set \mathcal{C} according to the predetermined rule to derive the updated global model w^t for the t -th round and then distribute w^t to all the clients.

The above processes of Veri-CS-FL iterate continuously until the final global model converges or the predetermined number of epochs reaches. Some remarks about Veri-CS-FL are given below.

1. In Veri-CS-FL, each client needs to submit the performance metric of their local model to the server. The server then uses the performance metrics to select local models with satisfied performances, and uses the training sample sizes as the weights in the weighted aggregation method

¹We assume that the local model training stage is conducted honestly by all clients, which is further guaranteed through a ZKP algorithm, as demonstrated in [7]–[11]. We only consider the model evaluation trust in the design of Veri-CS-FL.

Algorithm 1: Verified Client Selection Federated Learning (Veri-CS-FL)

Input: Each client C_k possesses the proving key PK of zk-SNARK and the local dataset D_k , $\forall k \in \{1, 2, \dots, K\}$ while the server S holds the verifying key VK of zk-SNARK and the small and clean dataset D_s .

Output: Global model w^T .

- 1: Server S sends w^0 to initialize the global model on client C_k , $\forall k \in \{1, 2, \dots, K\}$.
 - 2: **for** iteration $t = 1, 2, \dots, T$ **do**
 - 3: **Server S:**
 - 4: uses D_s to train the benchmark w_s^t from w^{t-1} ;
 - 5: broadcasts w_s^t to all the participating clients.
 - 6: **for all Client** C_k , $\forall k \in \{1, 2, \dots, K\}$ **in parallel do**
 - 7: trains the local model w_k^t from w^{t-1} based on D_k ;
 - 8: computes cost_k^t by comparing w_k^t and w_s^t ;
 - 9: generates π_k^t of w_k^t : $\pi_k^t \leftarrow \text{PROVE}(PK, x, W)$ with $h_k^t = \text{hash}(w_k^t)$, $x = \{w_s^t, h_k^t\}$ and $W = w_k^t$;
 - 10: transmits π_k^t , h_k^t and cost_k^t to the server S .
 - 11: **end for**
 - 12: **Server S:**
 - 13: sorts cost_k^t , $\forall k \in \{1, 2, \dots, K\}$;
 - 14: verifies all the proofs: $1/0 \leftarrow \text{VERIFY}(VK, x, \pi)$ with $x = \{w_s^t, h_k^t\}$ and $\pi = \pi_k$;
 - 15: if the proof π_k^t is verified, the corresponding cost_k^t will be ranked, and the top N will be selected;
 - 16: if cost_k^t is selected, the corresponding client will be put in the candidate set \mathcal{C} and notified.
 - 17: **for all Client** C_k , $\forall k \in \{1, 2, \dots, N\}$, **in** \mathcal{C} **do**
 - 18: transmits w_k^t to the server S .
 - 19: **end for**
 - 20: **Server S:**
 - 21: computes $\tilde{h}_k^t = \text{hash}(w_k^t)$;
 - 22: compares \tilde{h}_k^t with h_k^t (line 9): if $\tilde{h}_k^t \neq h_k^t$, removes the corresponding C_k from \mathcal{C} , $\forall k \in \{1, 2, \dots, N\}$.
 - 23: aggregates all the w_k^t of clients in \mathcal{C} to obtain w^t .
 - 24: derives w^t to all the clients.
 - 25: **end for**
 - 26: **return** w^T
-

of global models. There are many different performance metrics that can be used to characterize the performance of a local model. For example, the loss function of the model on the test dataset, the KL divergence of the output predicted by the model on the test dataset. In Veri-CS-FL, we propose to adopt the cosine similarity between the benchmark model and the local model [13] as the performance metric:

$$\text{cost}_k^t \triangleq \cos(w_k^t, w_s^t) = \frac{w_k^t \cdot w_s^t}{\|w_k^t\| \|w_s^t\|} \quad (1)$$

When utilizing the benchmark model as a reference, the larger the cosine similarity between the local model and the benchmark model, the better the performance of the

local model. The computation of cosine similarity can also be easily translated to the arithmetic circuit of zk-SNARK, enabling the computation of the zero-knowledge proof for it.

2. By generating the zero-knowledge proofs for the performance metrics of local models at the client-sides, and validating the proofs at the server side, Veri-CS-FL can achieve the following advantages: i) Communication-efficient: the local models with poor performances will not be communicated between the clients and the server. This can save much uplink communication bandwidth, particularly when the models are large. ii) Computation-efficient: the server has no need to re-run all the local models to evaluate their performances. The verification of zero-knowledge proofs in zk-SNARK is very efficient, e.g., the zk-SNARK algorithm of Groth16 [14] has a fixed verification complexity and fixed proof size regardless of the sizes of public inputs and private witness. iii) Trusted collaboration: The client transmits the performance metrics and its zero-knowledge proofs to the server, and if the server feels that its updated local model has satisfactory performance, it asks the client for the updated local model. As a result, the client and server can agree on the model training contribution. It avoids that after the client passes the updated local model to the server in advance, the server refuses to admit that the client provided a local model with satisfactory performance in this round of training, and maliciously devalues the actual contribution of the client.

Algorithm 1 provides the pseudo-codes of Veri-CS-FL. In the next section, we will experimentally evaluate Veri-CS-FL.

V. EXPERIMENTAL INVESTIGATION

In this section, we conduct numerical experiments on the Veri-CS-FL algorithm that we proposed in Section IV to investigate the use of ZKP for the model evaluation and client selection in FL.

A. Simulation Settings

We conduct numerical experiments based on the MNIST image dataset, with an FL process involving 20 clients, in which each client has 3000 sample data injected with Gaussian noise, at 4 different levels. Meanwhile, the server S possesses a clean and small dataset of 400 sample data as its root dataset. During training, the used loss function is the symmetric cross entropy, which combines cross-entropy and inverse cross-entropy to address the over-fitting problem. As discussed in last section, the top N local models are selected for aggregation after their performances' ZKP is verified. Therefore, for the aggregation process, we set N as 4, 8, 12, 16, and 20 respectively.

To investigate the computation complexity of ZKP generation and verification, and the size of proof, we set the model size (the length of the vectors w_k^t) to values from the set $\{8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096\}$. The zk-SNARK algorithm of Groth16 [14] is used to generate and verify ZKP in Veri-CS-FL. We implement the Groth16 program for Veri-CS-FL using the library of Zokrates [15].

B. Results Analysis

We investigate the impact of model size on the proof size, proof generation time and proof verification time. As illustrated in Fig. 2(a), the sizes of the proving and verification keys increase linearly with the model size. This is because these keys encapsulate the circuit constraints required for the proof problem, and the size of these constraints grows proportionally with the model size. Notably, the proof size remains constant at 128 bytes, a characteristic feature of Groth16. In Fig. 2(b), it is evident that the verification time remains constant across varying model sizes, owing to the inherent verification efficiency of Groth16. In contrast, the proof generation time increases significantly with larger model sizes. However, for moderate model sizes, this increase remains within a practical and acceptable range.

We then investigate the performance of client selection in FL by training a model with 10^3 parameters. In Fig. 2(c), we illustrate the accuracies of the global models aggregated in Veri-CS-FL under varying numbers of selected clients. The results demonstrate that as the number of selected clients decreases from 20 to 4, the global model's performance consistently improves, peaking at over 90%. This improvement is likely due to the noise present in individual clients' models—aggregating a larger number of noisy models can degrade overall performance. To benchmark the client selection performance of Veri-CS-FL, we also simulate an alternative FL scheme, Rand-CS-FL, where the server randomly selects N clients from all the client to submit their local models, rather than selecting clients based on their models' performance. In Fig. 2(d), we compare the performances of Veri-CS-FL and Rand-CS-FL with $N = 4$. The results show that Veri-CS-FL outperforms Rand-CS-FL by effectively identifying clients with high-performing local models for aggregation, thereby improving the global model's overall performance.

VI. CONCLUSION

In this article, we construct a systematic ZK-FL framework that classifies and examines the technical roles of ZKP across various FL modules. Through this framework, we provide a structured analysis of current ZK-FL approaches, identifying key areas where ZKP enhances both trust and efficiency in FL systems. Additionally, we propose the Verifiable Client Selection FL (Veri-CS-FL) algorithm, a novel approach that leverages ZKP to verify local model metrics based on their similarity to a benchmark model. By integrating ZKP, Veri-CS-FL ensures the reliable selection of high-quality models, improves model aggregation, and fosters trust among participants.

REFERENCES

- [1] Q. Yang, Y. Liu, T. Chen, and Y. Tong, "Federated machine learning: Concept and applications," *ACM Transactions on Intelligent Systems and Technology*, vol. 10, no. 2, pp. 1–19, 2019.
- [2] D. Pasquini, D. Francati, and G. Ateniese, "Eluding secure aggregation in federated learning via model inconsistency," in *Proceedings of the 2022 ACM SIGSAC Conference on Computer and Communications Security*, 2022, pp. 2429–2443.

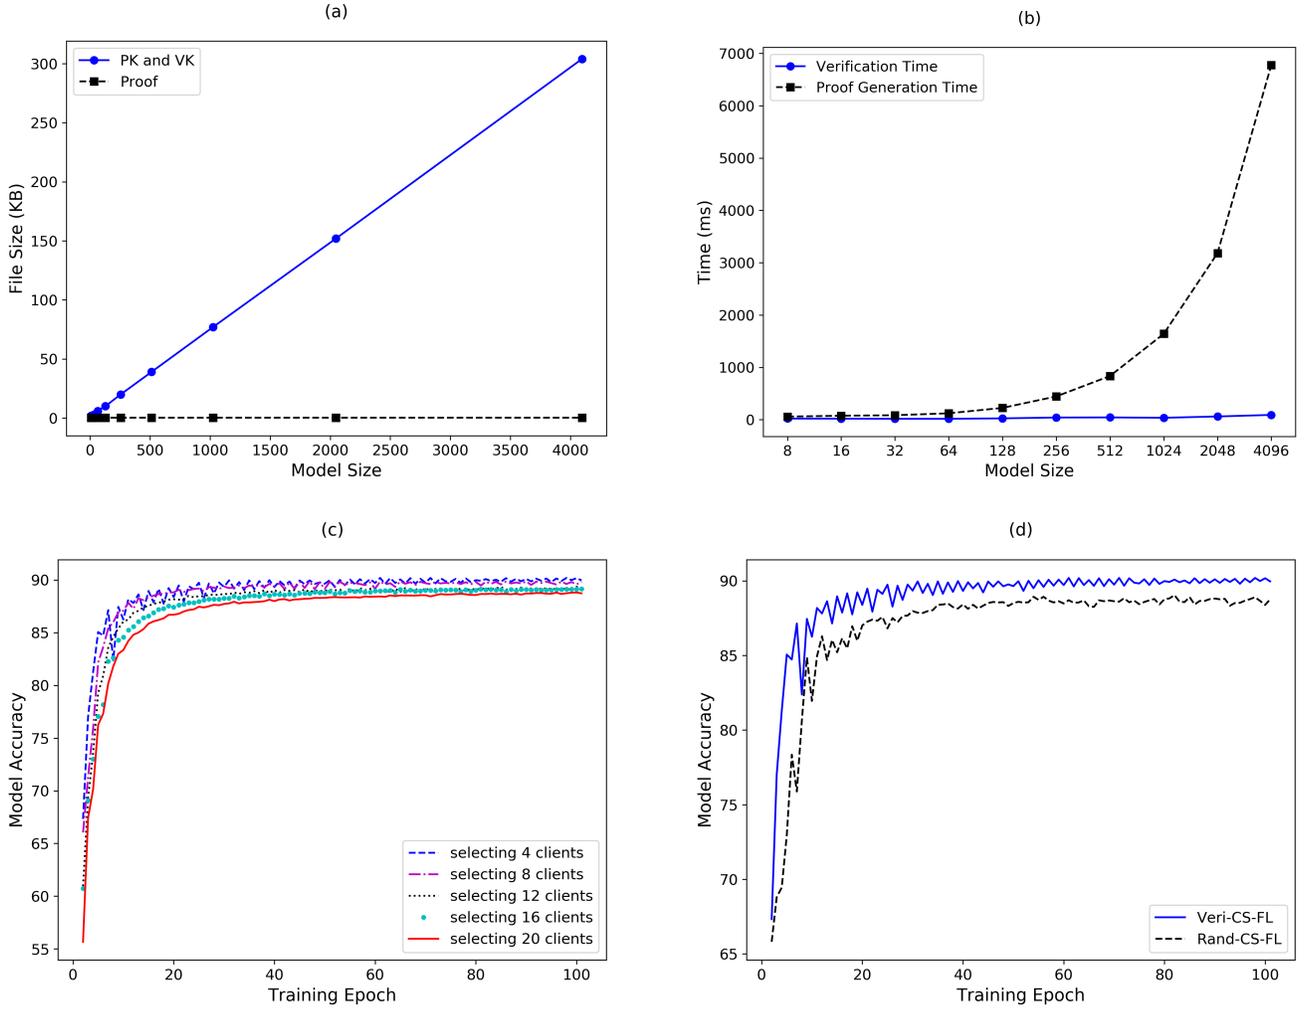


Fig. 2: Experimental results of Veri-CS-FL: (a) Proof size with respect to model size; (b) Verification time and proof generation time with respect to model size; (c) Global model accuracy when aggregating local models from different numbers of clients; (d) Global model accuracy when using performance-based client selection (Veri-CS-FL) and random client selection (Rand-CS-FL).

- [3] S. Goldwasser, S. Micali, and C. Rackoff, "The knowledge complexity of interactive proof-systems," in *Providing sound foundations for cryptography: On the work of shafi goldwasser and silvio micali*. ACM, 2019, pp. 203–225.
- [4] X. Sun, F. R. Yu, P. Zhang, Z. Sun, W. Xie, and X. Peng, "A survey on zero-knowledge proof in blockchain," *IEEE Network*, vol. 35, no. 4, pp. 198–205, 2021.
- [5] S. Ji, J. Zhang, Y. Zhang, Z. Han, and C. Ma, "LAFED: A lightweight authentication mechanism for blockchain-enabled federated learning system," *Future Generation Computer Systems*, vol. 145, pp. 56–67, 2023.
- [6] Y. Li, X. Tao, X. Zhang, J. Liu, and J. Xu, "Privacy-preserved federated learning for autonomous driving," *IEEE Transactions on Intelligent Transportation Systems*, vol. 23, no. 7, pp. 8423–8434, 2021.
- [7] Z. Xing, Z. Zhang, M. Li, J. Liu, L. Zhu, G. Russello, and M. R. Asghar, "Zero-knowledge proof-based practical federated learning on blockchain," *arXiv preprint*, vol. arXiv:2304.05590, 2023.
- [8] J. Heiss, E. Grünewald, S. Tai, N. Haimerl, and S. Schulte, "Advancing blockchain-based federated learning through verifiable off-chain computations," in *2022 IEEE International Conference on Blockchain (Blockchain)*. IEEE, 2022, pp. 194–201.
- [9] L. Wang, X. Zhao, Z. Lu, L. Wang, and S. Zhang, "Enhancing privacy preservation and trustworthiness for decentralized federated learning," *Information Sciences*, vol. 628, pp. 449–468, 2023.
- [10] A. Smahi, H. Li, Y. Yang, X. Yang, P. Lu, Y. Zhong, and C. Liu, "BV-ICVs: A privacy-preserving and verifiable federated learning framework for v2x environments using blockchain and zkSNARKs," *Journal of King Saud University - Computer and Information Sciences*, vol. 35, no. 6, p. 101542, 2023.
- [11] T. Rückel, J. Sedlmeir, and P. Hofmann, "Fairness, integrity, and privacy in a scalable blockchain-based federated learning system," *Computer Networks*, vol. 202, p. 108621, 2022.
- [12] Z. Wang, N. Dong, J. Sun, W. Knottenbelt, and Y. Guo, "zkFL: Zero-knowledge proof-based gradient aggregation for federated learning," *IEEE Transactions on Big Data*, pp. 1–14, 2024.
- [13] Y. Liang, Y. Li, and B.-S. Shin, "Auditable federated learning with byzantine robustness," *IEEE Transactions on Computational Social Systems*, vol. 11, no. 6, pp. 8191–8203, 2023.
- [14] J. Groth, "On the size of pairing-based non-interactive arguments," in *Annual International Conference on the Theory and Applications of Cryptographic Techniques (EUROCRYPT)*, ser. Lecture Notes in Computer Science, vol. 9665. Springer, 2016, pp. 305–326.
- [15] J. Eberhardt and S. Tal, "ZoKrates: Scalable privacy-preserving off-chain computations," in *Proceedings of the 2018 IEEE International Conference on Internet of Things (iThings), Green Computing and Communications (GreenCom), Cyber, Physical and Social Computing (CPSCom), and Smart Data (SmartData)*. IEEE, 2018, pp. 1084–1091.