

Adoption of Watermarking for Generative AI Systems in Practice and Implications under the new EU AI Act

Bram Rijsbosch, Gijs van Dijck, Konrad Kollnig
Maastricht University
The Netherlands
firstname.lastname@maastrichtuniversity.nl

Abstract

Note that this work has not been published in a peer reviewed venue yet¹. While we have made our best effort to ensure the validity of our findings, it is therefore still work in progress and potentially subject to change.

AI-generated images have become so good in recent years that individuals cannot distinguish them any more from “real” images. This development creates a series of societal risks, and challenges our perception of what is true and what is not, particularly with the emergence of “deep fakes” that impersonate real individuals. Watermarking, a technique that involves embedding identifying information within images to indicate their AI-generated nature, has emerged as a primary mechanism to address the risks posed by AI-generated images. The implementation of watermarking techniques is now becoming a legal requirement in many jurisdictions, including under the new 2024 EU AI Act. Despite the widespread use of AI image generation systems, the current status of watermarking implementation remains largely unexamined. Moreover, the practical implications of the AI Act’s watermarking requirements have not previously been studied. The present paper therefore both provides an empirical analysis of 50 of the most widely used AI systems for image generation, and embeds this empirical analysis into a legal analysis of the AI Act. We identify four categories of generative AI image systems relevant under the AI Act, outline the legal obligations for each category, and find that only a minority number of providers currently implement adequate watermarking practices.

Keywords

Generative AI, watermarking, synthetic content, deep fakes, AI Act, compliance, image generation

1 Introduction

The rapid advancements in generative AI technologies have made it increasingly difficult to distinguish AI-generated content from human-generated content. This poses significant risks to the integrity of our information ecosystem, democratic processes and societal trust, especially when AI is used to create realistic images, such as deep fakes [7, 9, 54]. In response to these challenges, jurisdictions around the world, including the European Union, are introducing legal provisions to improve transparency around AI-generated content [9, 20]. While technical solutions for marking-, labelling- and detecting AI-generated images are well advanced [9, 39], it is unclear to what extent such solutions are yet used in practice and thereby provide important protections for citizens in

the age of AI. Such a study is especially important to study because laws like the 2024 EU AI Act require adequate (water)marking and labelling of AI-generated content. This paper aims to address this gap.

Even though, from a societal perspective, the implementation of watermarking and labelling techniques is important to reduce risks from AI-generated content and the primary mechanism to do so, the providers of generative AI systems can have conflicting incentives. They, after all, often want to provide their customers with the ability to create content without any visible or invisible signs of being artificially generated. This poses additional challenges for larger companies in the AI space who not only deploy AI systems but also develop the models behind them. Here, there is a risk of model collapse, meaning the quality of AI models has been shown to degrade when trained on AI-generated content [49]. Plus, Social media companies like Meta may face liability for the distribution of content that poses societal risks under laws like the 2022 EU Digital Services Act, further providing an incentive for large providers to mark AI-generated content. Therefore, this article tries to survey the status quo in the adoption of watermarking and labelling in practice, focusing on generative text-to-image systems.

To align business and societal incentives better, companies face increasing legal requirements in the AI space. The 2024 EU AI Act mandates two key measures to mitigate the risks posed by AI-generated content: (1) the embedding of machine-readable markings in all AI-generated outputs to facilitate automated detection of synthetic content and (2) visibly disclosing the artificial origin of AI-generated deep fakes [20]. In case of non-compliance, companies face high potential fines, up to 15 million Euros or 3% of a global annual turnover. These rules will start to apply from August 1 2026, and their implementation could prove to be a foundational step towards ensuring trust and mitigating the risks of generative AI content. However, significant ambiguities exist around the practical application of these legal requirements, including the allocation of responsibility throughout the complex generative AI supply chain and the definitions used (e.g., the definition of a ‘deep fake’) [15, 18, 40]. Therefore, this article seeks to clarify the complex legal obligations under the AI Act in the context of labelling and watermarking.

Contributions. This paper makes two contributions:

- **Legal analysis and clarification of AI Act:** We clarify the applicability of the AI Act’s transparency requirements in different common deployment scenarios of generative AI text-to-image systems. These insights promise to contribute towards a successful implementation of the AI Act, and also inform the design of AI content transparency requirements in other jurisdictions.

¹This paper was accepted to the 2025 ACM CS & Law Work-in-Progress track

- **Empirical study and technical measurement of status quo:** Motivated by the legal analysis, we provide empirical evidence on the current status quo of the implementation of machine-readable marking and visible disclosure solutions for AI-generated images. Importantly, we will share our methodology and tooling to detect watermarking and labelling in images freely and openly, so that other researchers can further study the space.

Structure. The remainder of this paper is structured as follows. Section 2 provides background on the generative AI landscape and reviews relevant literature on existing technical solutions for marking and labelling AI-generated content, and images in particular. Section 3 presents a legal analysis of the AI Act’s transparency provisions, with a focus on how these requirements apply in common deployment scenarios of generative AI systems. Section 4 details the methodology used in the empirical analysis. Section 5 presents the results of this analysis. Finally, Section 6 discusses the implications of these findings for the (implementation of the) AI Act - and beyond.

2 Background: The Generative AI supply chain in text-to-image generation

This section introduces the primary concepts that underpin the legal analysis of Section 3 and the empirical study of Section 4.

2.1 Text-to-image generation

Generative AI covers a vast ecosystem of related technologies capable of creating content. The term includes generative AI *systems*, such as text-based chatbots (ChatGPT), image generation platforms (Adobe Firefly, Midjourney), coding assistants (GitHub Copilot, Amazon CodeWhisperer), or tools for generating audio, video, and other content [15]. It also includes the underlying base models of these systems, such as GPT-4, DALL-E-3 or Midjourney. These are often referred to as foundation models or, in the context of the AI Act also called general-purpose AI (GPAI) AI models [20]. These base models use vastly different architectures, model parameters and training algorithms, but what they share is that they aim to analyse patterns and similarities in training datasets to be able to generate new content with comparable characteristics [15, 37]. To perform this task, early generative models relied heavily on labelled datasets and supervised machine learning techniques. Recent breakthroughs in deep learning techniques, being able to learn from large-scale unlabeled datasets, combined with increasing computing power, have led to significant more progress in recent years [30].

Text-to-image (TTI) models are specifically designed to create images that represent the information included in textual prompts [9]. TTI systems typically combine natural language processing (NLP) techniques to extract relevant information from the text prompt, with computer vision techniques to generate an image based on this information [6, 9]. In recent years, text-to-image tools have been becoming increasingly powerful [6]: benchmarks illustrate the significant improvements in photorealistic images [47]. Individuals are now often unable to recognise AI-generated image content [27]. These developments underscore the transformative potential, while also amplifying concerns around its risks and misuse. These

advancements come at high cost of computation and data – models with most photorealistic capabilities often require enormous amounts of training data and computational resources [34]. Development is thus dominated by actors who have such capabilities and access, concentrated within a small groups of large tech companies and well-funded academic institutions [29].

2.2 The generative AI supply chain

Generative AI applications, including image generators, are the product of a complex and diverse supply chain, involving different interconnected steps and a large variety of different participants [15, 37]. A simplified version of the generative AI image supply chain can be defined consisting of four primary players performing different actions: 1) base model developers, 2) downstream developers, 3) system providers, 4) system deployers, as illustrated in Figure 1. Most generative AI image applications depend on large-scale pre-trained base models, which can subsequently be fine-tuned for specific tasks or domains. The process of training such a base model is costly, requiring time, expertise, data storage and computing power. Following the creation of a base model, a developer has the option to utilise the model themselves, thereby becoming the sole participant in all the steps outlined in Figure 1. A notable example is OpenAI’s development and use of the DALL-E-3 image model in their ChatGPT application. However, developers frequently (also) offer these models through paid services, such as by providing networked access to their base models through an Application Programming Interface (API) [15], thereby retaining control over the model even when integrated in clients’ services. An example is Adobe offering API access to their Firefly image generation model [1]. Alternatively, model developers may opt to distribute their model open-source, thereby making the model publicly available for everyone to reuse and fine-tune. A notable example is Stability AI offering open-source access to their Stable Diffusion image generation model [38]. GitHub and CivitAI are prominent repository’s for finding and downloading open-source image base models [15, 37].

Following the distribution of a base model, downstream developers can choose to fine-tune these base models to adapt them for specific applications, such as creating images in specific artistic styles [15]. As with base models, developers of fine-tuned models can subsequently use these models themselves, or distribute them to others, either for a fee or via open-source platforms. An example is the popular open-source photorealistic image model Juggernaut XL hosted on Hugging Face, which is a fine-tuned version of a model from Stability AI [46].

The subsequent stage in the supply chain involves the transformation of the model into a functioning system. As also written in the AI Act, “AI models, including General-Purpose AI models, require the addition of further components, such as for example a user interface, to become AI systems” [20]. This can be achieved through a web interface, a mobile application, or a desktop client. In the majority of cases of generative AI systems, the providers in charge of adding a user interface are also the ones responsible for offering access to the system to end-users (deployers). However, many different degrees of vertical integration, sharing and deploying again exist [15]. Examples of system (interface) providers include: Canva,

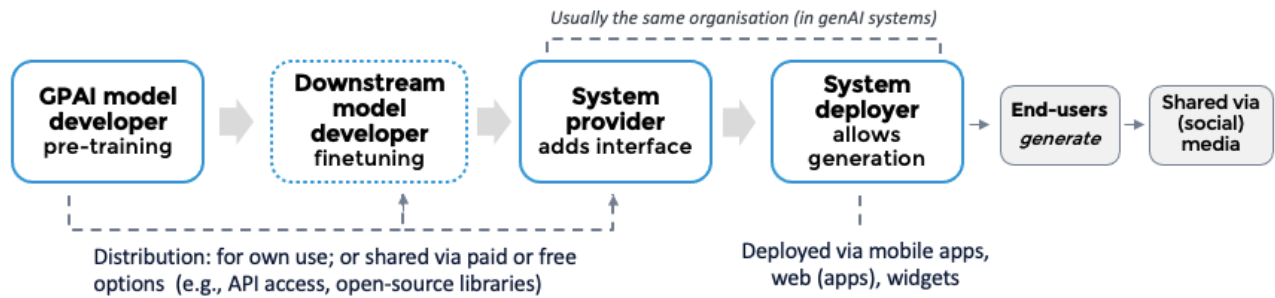


Figure 1: A simplified overview of the generative AI supply chain in the context of image generation systems

which for example allows end-users to generate images via their platform using OpenAI’s DALL-E or Google’s Imagen model [11], or Printing Press, which offers a freely available web interface via Hugging Face where end-users can choose an open-source image model, add a prompt and generate an image [56]. In the case of mobile apps, examples include the Davinci Mobile App, using an open-source Stable Diffusion model and the Dall-E model to let users generate images via their app [2], or the Wombo Dream App, which provides and deploys a system to generate images, though not indicating which model is behind their application [5].

2.3 Techniques for (water)marking AI-generated image content

Methods for marking AI-generated content can be classified into two broad categories: direct/visible and indirect/invisible methods [43]. Both approaches can be applied during the creation of AI-generated content, or using post-generation techniques.

2.3.1 Direct marking methods. Direct methods include visible watermarks (e.g., logos or icons within an image), content labels embedded in an image, or separate disclosure fields that can include disclaimers and warning statements about the content [43]. The primary goal of such visible markings is to inform citizens directly about the content, which is also often the end-goal of the indirect methods [43].

The design and implementation of effective visible disclosures remains a complex, multi-faceted challenge [17], where it is difficult to ensure that average users fully comprehend markings indicating the AI-generated nature of content. Additionally, visible markings embedded in an image face practical limitations, as they can be easily removed or can degrade the user experience of the content. Separate disclosure fields, such as warning statements that are automatically integrated into social platforms, could offer a more robust approach in that sense.

2.3.2 Indirect marking techniques. Indirect marking techniques embed machine-readable information into image content that is aimed to be interpretable by technical systems rather than humans. These include machine-readable watermarking solutions, metadata embeddings, and digital fingerprinting approaches [43]. There exist a range of techniques to do so.

Watermarking techniques: Machine-readable watermarking techniques create subtle perturbations into content that can be

detectable by specialised algorithms to identify the content as AI-generated. These techniques can be public or private, depending on whether the detection algorithm or key is publicly shared [43]. Common methods for images include: altering specific pixels in the spatial domain of an image (using for example the Least Significant Bit (LSB) watermarking technique [8]), or embedding information in a transform domain of an image (as done in image compression), which is a more robust technique, but also computationally more expensive [36]. Both those methods are applied post-generation [43, 55]. Watermarking can also be applied during the generation phase, such as in the case of image diffusion models, which have recently rose to prominence, where a watermark can be applied during generation through embedding a predefined noise pattern into the initial noise of the diffusionist model [55]. This technique however is computationally expensive and would also require access to a related detection algorithm [43, 55].

Several developers are starting to use invisible machine-based watermarking solutions in their image generation models. Meta states to use an invisible watermark (next to visible marking and metadata embeddings), which is applied using a deep learning model, but they do not share the corresponding model that can be used to detect this watermark [41]. Meta has also worked with other researchers on watermarking solutions that can be embedded during the image generation process, which could prove valuable for open-source models [23, 42]. Google adds an invisible watermark into the pixels of AI-generated images from their Imagen models [1], while also offering a related open-source detection tool [28]. The open-source model developers Stability AI and Black Forest Labs (together with their partners) also integrate invisible watermarking techniques in (some of) their models [3, 52?], using an open-source watermarking python library that includes both a watermarking encoding and decoder algorithm [10, 48, 51]. Additionally, several organisations are offering API-based solutions or open-source tools that allow others to embed post-generation hidden watermarks to their images [32, 33].

Metadata-based marking: The data of an image consists of several blocks of information, the most important being the block containing the pixels of an image. Other blocks can contain extra (textual) information, which is referred to as ‘image metadata’. There exist several formats for embedding metadata to images, the most used formats are those of the EXIF, XMP and IPTC standards. Information about the AI-origin of an image can be embedded in the image using the textual formats of these standards. In the case

of the IPTC standard, the 'creator' or 'contributor' field can for example be used to include the AI generation tool that was used [35]. Metadata information can also be cryptographically signed by adding a unique identifier to the metadata, so that when the image is shared, others can verify its authenticity using the signature [43]. The effectiveness of metadata for marking AI-generated images can be questioned, as metadata can be easily removed from a file, is often automatically stripped during sharing on social media platforms (to bandwidth and preserve privacy), can be easily manipulated, or can raise privacy concerns. Cryptographic approaches could prove more robust, especially when used to verify 'truth' instead of detecting 'fakes', but their success also depends on the participation of multiple parties in the digital ecosystem. A prominent example in that sense is the technical specification that was developed by an industry-led consortium called the Coalition on Content Provenance and Authenticity (C2PA) [25, 43] to track the origin and authenticity of digital content. This specification is an open-source interoperable framework that allows for the integration of metadata embeddings, (visible and invisible) watermarking techniques, cryptographic signing options and digital fingerprinting [43]. C2PA thereby offers an online open-source detection tool that uses trust list and cryptographic keys to store and detect the signed metadata and watermarks of images from trusted users of the C2PA standard [12]. In the context of metadata, this approach is again mainly relevant to verify truths, as metadata can easily be stripped from image files. If, however, combined with watermarking and digital fingerprinting techniques, this forms a more robust solution.

Digital fingerprinting: Digital fingerprints are unique identifiers that can be derived from the content of an image (such as patterns in pixel values) [43]. Fingerprinting therefore does not involve manipulating the image content, but instead uses algorithms to generate representations (also called hashing) of the image that can be matched against external databases [43]. An example of digital fingerprinting used in practice is Youtube's Content ID system, which scans for copyrighted materials used on Youtube, by linking it to an external database of verified content [53]. Similarly, the C2PA framework also allows for using digital fingerprinting techniques, as cryptographically signed hashes can be included in the metadata of an image and then stored and detected via the C2PA implementation tool, which is currently used by Adobe [45]. Plus, stripped image metadata of a generated image can also be recovered using a hash algorithm or embedded watermark [13, 16]. Another approach to digital fingerprinting is to embed fingerprints in the training data content, which is also shown to allow detection after generation [57].

3 Legal analysis: Watermarking obligations under the EU AI Act

This section analyses the EU AI Act's transparency provisions for generative AI content (Section 3.2) using four common deployment scenarios of generative AI systems to analyse the practical implementation (Section 3.3). Although other jurisdictions, such as South Korea [50], have also introduced transparency rules for generative AI, the EU AI Act is the most comprehensive and wide-ranging AI

regulatory framework to date and is therefore the reference for this paper.

3.1 Approach and Scope of the AI Act

The AI Act adopts a risk-based approach, whereby legal obligations depend on the risks and impact of the various AI risk categories [20]. There are five risk categories, namely: 1) A limited set of AI-systems with unacceptable risks, the use of which is forbidden in the EU; 2) A list of high-risk AI-systems, which must adhere to strict legal requirements before they can be sold, used or made available on the EU market; 3) AI-applications with specific transparency risks (which can also include high-risk systems). These include - amongst others - chatbots, generative AI systems and emotion recognition systems, which each have to adhere to certain specific transparency-related requirements; 4) In addition to AI-systems, the scope of the AI Act includes rules for general-purpose AI (GPAI) models. These are models that can be integrated into a large variety of downstream applications and thereby have a broad impact. The models behind generative AI applications are explicitly stated as a typical example of a GPAI model. The AI Act imposes obligations on providers of such models to provide documentation and information to downstream providers. A sub-category of GPAI models - those defined as GPAI models with systemic risks - is subject to additional obligations, which include the assessment and mitigation of possible systemic risks; 5) All other AI systems and/or models fall into the minimal- or no-risk category and do not face any obligations from the AI Act (other EU laws might still apply).

The AI Act's scope applies to public and private entities, including non-EU actors offering or using their AI-systems (or output of their systems) in the EU. Exceptions exist for research, military, and in some cases free/open-source AI-systems, though the transparency requirements still apply to the latter.

The AI Act distinguishes between providers (those developing and/or marketing AI-systems or GPAI models under their own name/trademark) and deployers (those deploying AI systems to end-users under their own authority). Most obligations fall onto providers, with deployers facing limited requirements in the case of deploying high-risk systems or certain AI-systems with transparency risks. End-users (individuals or organisations that interact with - or are affected by- an AI-system) do not face any legal obligations. The majority of the AI Act's provisions, including the transparency requirements, take effect on August 1, 2026, with penalties up to €15 million, or 3% of annual global turnover in case of non-compliance with the transparency requirements.

With the AI Act just having been adopted, there is a strong need to clarify how to translate its legal requirements into technical artefacts, as aimed at by this work.

3.2 The AI Act's rules for watermarking and disclosing AI-generated content

Article 50 outlines two specific transparency rules that apply to generative AI image systems: Firstly, article 50(2) states that providers of generative AI systems shall ensure that "the outputs of these systems are marked in a machine-readable format and detectable as artificially generated or manipulated" [20]. Hereby also stating that

“providers shall ensure their technical solutions are effective, interoperable, robust and reliable as far as this is technically feasible”, taking into account the type of content, costs of implementation and state of the art [20]. The recitals list different techniques and methods that can be used or combined to fulfil this requirement, these include “watermarks, metadata identifications, cryptographic methods for proving provenance and authenticity of content, logging methods, fingerprints or other techniques, as may be appropriate” [20].

Further to this technical marking requirement, article 50(4) mandates that deployers of generative AI systems that “generate or manipulate image, audio or video content constituting a deep fake have to disclose that the content has been artificially generated or manipulated” [20]. Article 3(60) thereby defines a deep fake as an “AI-generated or manipulated image, audio or video content that resembles existing persons, objects, places, entities or events and would falsely appear to a person to be authentic or truthful” [20]. In contrast to the rule for machine-readable marking, the different methods that can be used for implementing this disclosure are not specified. Article 50(5) however does state that the information referred to in both these transparency rules “shall be provided to the natural persons concerned in a clear and distinguishable manner at the latest at the time of the first interaction or exposure” [20]. For the purpose of this study, we interpret this as a requirement to include a watermark or label directly and visibly in the output of a generative AI system (e.g., a visible label included in a deep fake image), instead of in a separate disclosure message or label (e.g., a text label included in the interface of the system).

The transparency rules of article 50 apply only to AI-systems (e.g., apps or web tools), meaning that the developers and providers of the models behind generative AI applications are not required to implement any of the transparency requirements.

The requirements for the separate category of GPAI-models also do not include any measures aimed at AI-generated content. The second draft of the code of practice for GPAI models does, however, currently include a commitment for providers of GPAI models with systemic risks to use methods such as watermarks for identifying and reporting incidents related to the use of their model [19].

Important to note is that in contrast to some other AI Act requirements, providers of AI systems released under free and open-source licenses are not exempted from the transparency requirements of article 50 (article 2(12)). Plus, as most (English) generative AI apps can and are being used in the EU, the providers of these systems would also have to adhere to these requirements.

3.3 What the watermarking rules mean in practice

Figure 2 illustrates a simplified representation of the generative AI supply chain that was discussed in Section 2.2. In practice, the distinction between model developers, system providers, and deployers is less clear-cut and the implementation of the transparency requirements not strictly divided between these roles. To clarify the application of the AI Act’s transparency rules in practice, we identify four deployment scenarios of generative AI systems and analyse how the rules apply in each case. These scenarios serve as

the foundation for the measurement study in Section 4.

Category 1. End-to-end integrated systems.

Organisations that develop generative AI (GPAI) models often integrate them into their own applications or platforms, which are directly accessible to end-users. These organisations thereby act as both provider and deployer of the generative AI system under the AI Act, which will require compliance with both transparency requirements. The dual role of model and system developer would allow these organisations to implement robust watermarking techniques in the model development phase (such as embedding initial noise patterns in diffusion-based models).

Most organisations in this category also provide access to their GPAI models to other developers of generative AI tools. Access can be offered through controlled channels, such as API’s, where the model weights and source code remain restricted. Examples include OpenAI or Adobe offering API access to their image models [1, 44]. Or, organisations can adopt an (partly) open-source approach, making their models freely available for download and use by others, for example through the popular AI repository platform Hugging Face (see also category 3). An example is StabilityAI, which deploys a generative AI system via their own DreamStudio tool [4], while also offering open-source access to some of their models [38].

Some organisations in this end-to-end category also operate large (social) media or image platforms (e.g., Google, Meta, Adobe), which requires these providers to comply with the risk mitigation rules under the EU’s Digital Services Act as well. Furthermore, certain GPAI models integrated in these end-to-end systems may fall under the AI Act’s category of GPAI models with systemic risk, which would require the implementation of additional systemic risk mitigation measures.

Category 2. Systems using API model access.

Many generative AI image systems are built by leveraging (easy-to-use) API’s from large-scale GPAI model providers. These systems integrate the API’s into user-friendly interfaces, such as mobile apps or web tools, often with additional features, like the option to select between different models or tools to help users improve their prompts. This approach allows organisations to use high-quality models without needing the expertise or infrastructure to build and run them.

Organisations leveraging models via API’s are typically both the provider and deployer of the generative AI system and, thus, will need to comply with both transparency requirements. Compliance can be achieved by relying on features (such as invisible watermarks) that are already built into the model or offered by model providers as an API-parameter option. Otherwise organisations would need to implement their own measures after the images are created via the API. For example through the addition of post-processing watermarks, or the embedding of metadata. Applying visible disclosure measures solely to deep fake images could thereby provide a significant challenge for (especially smaller-scale) organisations, as this would require a separate (NLP-based) solution capable of specifically detecting deep fake prompts. A simpler approach could involve applying visible disclosures to all the generated images, although this may negatively impact the user experience and business model of a provider.

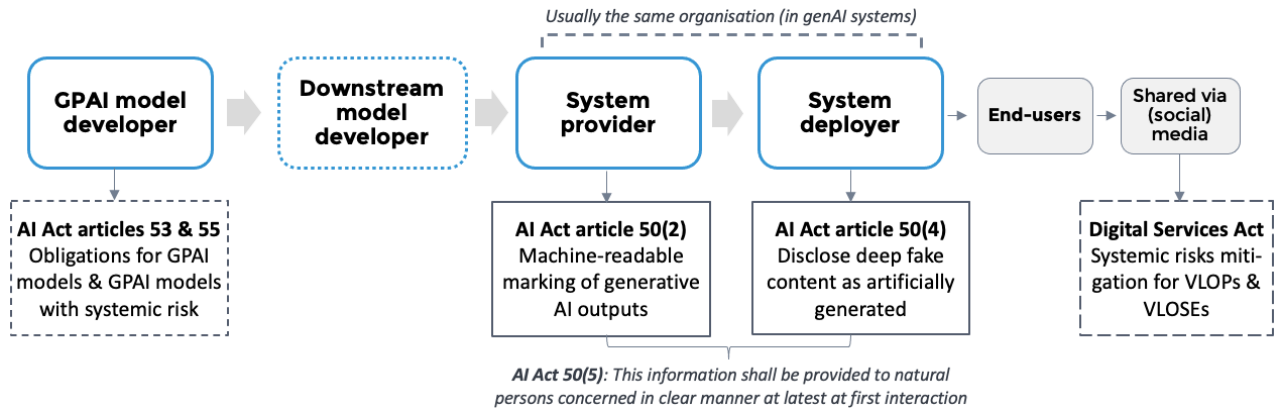


Figure 2: The applicability of the AI Act’s (water)marking and disclosure rules along the generative AI supply chain

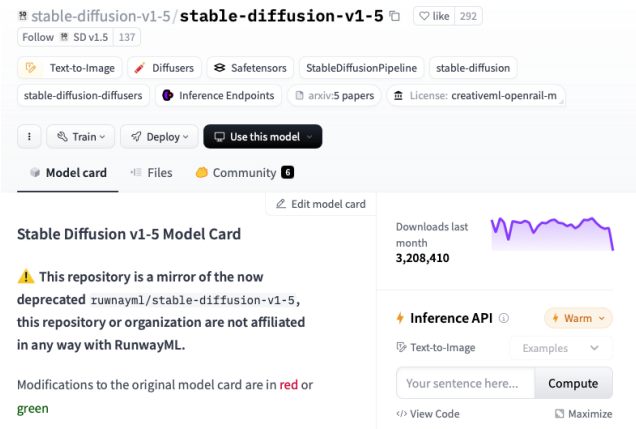


Figure 3: Hugging Face’s Inference API widget (bottom right), as found on the popular stable-diffusion model page

In some cases, API providers can also offer pre-built code or templates for creating a user interface alongside the API. These providers could then potentially be considered as system providers under the AI Act, thus bearing responsibility for the machine-readable marking requirement. However, as guidance is still to be expected on the distinction between providers and deployers and such situations are relatively rare in practice, we do not analyse this case in this study.

Category 3. (Open-source) Systems deployed on Hugging Face.

By providing a platform and tools for storing, testing, sharing and deploying AI models, The Hugging Face has an important role in the generative AI ecosystem. Many AI image model developers share their open-source models on Hugging Face and use the Hugging Face interactive API inference widget (a pre-configured interface added to the model’s page) to also directly allow end-users to use the model to generate images, as shown in Figure 3. Hugging Face provides the infrastructure for this tool, and by default, the widgets are enabled by Hugging Face for publicly available models. Model owners do retain full control of the model and can adjust the settings

of these widgets. Next to the API-widgets, Hugging Face also offers “Spaces”, which is an easy-to-use deployment tool on Hugging Face that allows providers to host and offer machine learning apps to end-users. Many (small-scale) developers use Hugging Face Spaces to deploy generative AI image systems based on open-source models hosted on Hugging Face.

We include this category because in terms of the AI Act, it is not trivial to highlight who would bear the responsibility for complying with the AI Act’s requirements in these cases. It could be argued that Hugging Face, which offers the user interface but has no control over the model, would be the provider and deployer in some of these cases. Plus, we include this category in our measurement study to analyse if popular open-source image models automatically include pre-baked watermarking solutions in their content when offered directly via such Hugging Face tools.

Category 4. Systems using other (open-source) models under their own trademark.

This category includes organisations that use AI models of other organisations in their own system, but deploy them under their own name and trademark, without disclosing the underlying models used. Organisations in this category thereby classify as both the provider and deployer of a generative AI system, requiring them to comply with both transparency obligations. Many of such organisations use downloaded versions of open-source models, which requires infrastructure to host and run these models. Organisations can thereby also fine-tune these models, and possibly share them further via API’s or open-source repository platforms.

This category can also encompass organisations that use API model access. While API license terms typically require crediting the model developer, exceptions exist, or organisations may disregard the license terms.

The next section explores whether and how watermarking solutions are currently being implemented in practice, using the four deployment scenarios outlined above as the basis for this analysis. In practice, distinguishing between these categories can however prove challenging, due to the many different ways in which generative AI models and systems are developed and shared.

4 Methodology: watermarking in practice

This section describes the methodology used to analyse the current status quo in the implementation of machine-readable marking and visible disclosure measures for AI-generated content transparency.

4.1 Selection of AI systems for analysis

For our study, we selected 50 of the most used generative AI systems. We selected these systems from a range of different business models and distribution channels in order to represent a diverse range of popular tools across the four different deployment categories of Section 3.3.

Category 1 systems (end-to-end integrated) were selected by filtering the Stanford Foundation Models ecosystem table [26] and selecting organisations that offer free image generation tools using their own foundational models. We selected 11 systems from this list.

Category 3 systems (open-source systems hosted on Hugging Face) were selected by filtering the Hugging Face 'model' section on the five most downloaded open-source text-to-image generation models that offered the Hugging Face API widget tool (Figure 3) for image generation on their respective model pages [21]. Additionally, five of the most 'trending' Hugging Face Spaces (environment to host AI apps) for image generation were included in the analysis [22].

The web and mobile app-based systems from categories 2 (using API model access) and 4 (using others' AI models under own trademark) were selected using the search query "AI image generation" in the Apple App Store and Google Search. The top 14 systems from each modality (28 in total) that offered free text-to-image generation (if needed: by using an account or by starting a free trial) were included. Duplicates from Category 1, such as ChatGPT, were excluded. The deployment characteristics - such as model or API mentions, or other attributions - were reviewed in documentation and interface environments to classify the systems as Category 2 or 4.

This resulted in a total of 50 systems, listed in Table 1. For each system, we also recorded general information, such as the modality, provider, model(s) used, number of reviews and the provider's country of listing (to be added in the Appendix).

4.2 Generation of images with selected systems

For each system, at least two images were generated using the standard settings. We used a neutral prompt: "A PhD student" and a potentially risky and clear deep fake prompt: "A beautiful deep fake photograph of Donald Trump in the McDonald's", to analyse if watermarks are added specifically to deep fake images.

For systems that allow choosing between different models in the interface, images were generated for several different available models (randomly selected). All generated images were stored using the "save" or "download" function added in the system's interface, or otherwise using the standard save function of the phone or laptop. The images are archived on GitHub for reference (to be shared upon publication).

4.3 Detection of watermarks and disclosures

To analyse the adoption of marking and disclosure measures in practice (in the context of the AI Act), we used the two evaluation metrics outlined in Table 1. Evaluating the implementation of the machine-readable marking requirement was done through a combination of documentation analysis, code analysis and a technical inspection of the generated images (hereby relying on the review of marking techniques from Section 2.3):

- **Documentation Analysis:** To meet the AI Act's machine-readable marking requirement, information on the use of such measures must also be clearly presented to users (as discussed in section Section 3.2). Therefore each system's documentation was reviewed to analyse if watermarking, metadata or digital fingerprinting practices are used. Sources included app or website descriptions, FAQs, terms of use, privacy policies, and ReadMe files.
- **Code Analysis:** For systems using open-source models (primarily category 2 and 3 systems), the model information pages and source code (if available on Hugging Face or GitHub) were inspected for mentions of watermarking (libraries), detection tools and/or metadata adaptations.
- **Image inspection:** Next, the following tools were used to analyse the generated images. *Note: code for running the technical tools on the image database will be shared on GitHub upon publication.*
 - *Metadata:* To analyse the metadata of each image, an online metadata inspection tool [14] that is based on the EXIF metadata extraction tool of Phil Harvey [31] was used. This tool retrieves all image metadata from the primary metadata standards (e.g., EXIF, IPTC, and XMP). The resulting metadata was then manually inspected for AI-generation related mentions, such as the use of the 'contributor' field from the IPTC metadata standard that can include the AI generation tool that was used.
 - *Watermarking:* Identifying the use of (hidden) watermarks required an iterative process. If mentions of watermarking solutions and related detection tools were found in either the documentation or code analysis of the systems, we applied the corresponding detection tool to all the 50 images. We found only two instances of watermarking solutions that included publicly shared tooling to also detect these watermarks. These are from Google [28] and the open-source watermark library that is used in models of Stability AI and Black Forest Labs [10, 48, 51]. We created an algorithm to run these public detection tools on all the generated images.
 - *Digital Fingerprinting:* Verifying the use of digital fingerprinting solutions was done in a similar, iterative, manner. In this case, we could only find the C2PA technical specification (discussed in Section 2.3) being openly shared as a digital fingerprinting solutions used in practice [25]. We used the C2PA detection tool hosted on the C2PA website [24] to verify the presence of a C2PA digital fingerprint, metadata embedding and/or watermark in each of the generated images.

Aspect	Description	AI Act requirement	Evaluation	Explanation
Machine-readable marking	Applied as metadata, invisible watermark, or digital fingerprinting solution	50(2)	✓	Machine-readable marking is detectable and/or stated in documentation or code.
			~	Documentation states use of marking, but not detected. Or marking is detectable, but not disclosed
			X	Not found: no info on marking in documentation & code. Use not found with detection tools.
Deepfake disclosure	A visible disclosure (label) is included in the output of a deep fake image	50(4)	✓	A visible disclosure is automatically applied when saving the generated (deep fake) image.
			~	A visible disclosure can be applied by the end-user (as choice), or is only added in the free version.
			X	Not found: A visible disclosure is not found in the generated image.

Table 1: Metrics used for evaluating the implementation of marking and disclosure measures in AI systems

Additionally, manual inspections were used to verify if the generated images included visible watermarks or other disclosure methods that could indicate that the content was AI-generated. This was done both for the neutral prompt images and the images generated with the clear deep fake prompt, as in the context of the AI Act, the requirement for visible markings only applies to deep fake images. We however did not evaluate whether these images would classify as deep fakes under the AI Act’s definition of a deep fake (‘falsely appearing to a person to be authentic or truthful’) [20].

5 Results

Our results are shown in Table 4, with the main findings detailed in the following paragraphs, hereby using the the four generative AI deployment scenarios of Section 3.3.

It is important to emphasise that the AI Act’s transparency requirements are only applicable from August 2026 onwards. Consequently, the purpose of these measurements are not to evaluate compliance, but rather to present and discuss the current status quo of the implementation of machine-readable (water)marking and disclosure solutions, and the challenges associated with implementing and enforcing legal requirements (such as in the AI Act) related to such solutions.

Limited implementation of machine-readable watermarking solutions, primarily in end-to-end systems (category 1).

Among the 50 systems analysed, we found that 18 of these included some form of a machine-readable watermark in the generated image. The most commonly used solution was the embedding of metadata that indicated the AI-generated origin of the data (10 systems), which is easily removable from the images. Hidden watermarking techniques were found in only a small subset of systems (6) systems, 3 of which belonged to the end-to-end system providers Google (DeepMind), Meta and StabilityAI. We also found 3 cases of hidden watermarks embedded in systems from category 2 and 4, by using the open-source python watermarking library that is used in the popular open-source models of Stability AI and Black Forest Labs. However, in many of the other systems that rely on the models (or APIs) from Stability AI or Black Forest Labs, we could not detect hidden watermarks. Machine-readable marking solutions are mainly used by end-to-end providers from category 1 (10/11 systems) and large-scale providers in category 2. Many of these providers also operate a social/digital media platform, or search engine (e.g., Meta, Google, Adobe, Canva, Microsoft).

Visible markings for deep fake images are rarely used in practice. Visible watermarks or other disclosure solutions that are embedded within the image and that indicate the AI-generated nature of the content were found in only 8 out of the 50 systems.

Figure 5 shows three examples of such disclosures in images generated with the neutral prompt. In all eight cases, these markings were not exclusively applied to deep fake images, but rather to all the images generated with the system. In half of the systems that used visible markings, there was an option for end-users to remove the visible markings, either through a checkbox or via signing-up to a paid plan the system, as illustrated in Figure 6. Interestingly, while end-to-end providers (category 1) have almost all implemented a form of machine-readable marking, visible disclosures (of deep fake images) were found to be used in only 2 of the 11 end-to-end systems. Some of these end-to-end systems, however, did restrict the use of clear deep fake prompts (e.g., Donald Trump), showing an alternative approach to tackling the risks of deep fakes.

Only a few different (open-source) GPAI models are used by non end-to-end providers. We found only a limited number of GPAI models being used by the non-end-to-end systems that indicate the use of another model (category 2 and 3 systems). Almost all of these models - or finetuned versions of these models - came from Stability AI (such as their Stable Diffusion or SDXL models), Black Forest Labs (Flux models) or OpenAI (DALL-E). For category 4 systems, those using models under their own trademark, model usage remains largely unclear, except for the one system where we found the hidden watermark that is also used by Stability AI and Black Forest Labs, which likely indicates the use of one of the models from these organisations.

Watermarking solutions used by end-to-end model providers are not automatically extended to API-based systems. Although some end-to-end operators, such as StabilityAI or OpenAI, implement machine-readable watermarks in their own models and/or systems, these features are not automatically extended to, or used by, the providers of systems that leverage those models via APIs. This is most clearly seen in the case of the models deployed on Hugging Face (category 3 systems). Here we could detect only a single system using a watermark solution, whereas the providers of the models that are deployed (either via the API widget or the Spaces platform) often do implement such solutions in their own platforms or models. The same however holds for systems in category 2, where in some of these systems the providers do embed metadata information or use the C2PA standard, but these embeddings do not indicate the use of another base model.

6 Limitations

It is essential to acknowledge several limitations and constraints in our analysis. First, there is a possibility that we failed to identify certain watermarking and digital fingerprinting techniques that are used in practice. We tried our best to find any disclosures of watermarking from the documentation of the providers of the systems,

System	Modality used	Provider & Deployer	Model(s) used	Machine-readable marking	Type of marking	Visible deep fake disclosure
<i>Category 1. End-to-end integrated systems</i>						
Firefly	Web	Adobe	Firefly Image 3	✓	Metadata, C2PA	X
DreamStudio	Web	Stability.ai	Multiple options	✓	Watermark (StabilityAI)	X
ChatGPT	Web	OpenAI	DALL-E-3	✓	C2PA	X
Gemini	Web	Google	Imagen 3	✓	Watermark	X
MidJourney	Web	MidJourney	MidJourney	✓	Metadata	X
Meta.ai	Web	Meta		✓	Watermark, Metadata	✓
Canva Dream Lab	Web	Canva	Magic Media	✓	Metadata	X
Mistral	Web	Runway	Pixtral	✓	Metadata (with C2PA)	X
xAI	Web	Craiyon	Grok-1.5V	✓	Metadata	✓
Claude	Web	Anthropic	Claude 3(.5)	X		X
Ideogram	Web	Ideogram	Ideogram 2.0	✓	Metadata	X
<i>Category 2. Systems Leveraging API model access</i>						
Photoleap	Mobile App	Lightricks	StableDiffusion	X		X
Artist.ai	Mobile App	QuantumBit AI	Finetuned SDXL	X		X
Collart AI	Mobile App	Collart Studio	Multiple options	X		X
DaVinci	Mobile App	DaVinci AI Art	StableDiffusion	X		~ (user choice)
ARTA	Mobile App	ARTA AI Art	Finetuned SDXL	X		✓
Bing Image Creator	Mobile App	Microsoft	Dall-E-3	✓	C2PA	X
Remaker.AI	Web	Remaker	Multiple Flux models	X		X
OpenArt.AI	Web	OpenArt	Multiple	X		X
StableDiffusionWeb	Web		Stable Diffusion	X		~ (in free version)
Canva App - Dall-E	Web	Canva	Dall-E	✓	Metadata	X
Shutterstock	Web	Shutterstock	Dall-E	✓	C2PA	X
Getty Images	Web	Getty	NVIDIA Picasso	✓	Metadata	~ (user choice)
CGDream AI Image Generator	Web	CGDream AI	Juggernaut XL (SDXL) / Flux	X		X
Hotpot	Web	Hotpot	Stable Diffusion models	~ ("we may use")	not detected	X
FreePIK AI Suite	Web	FreePIK	Flux models	X		X
Leonardo.AI	Web	Leonardo AI	Multiple (including Flux)	✓	Watermark	X
<i>Category 3. Systems deployed on HuggingFace</i>						
Stable-diffusion-v1-5	HF API widget	Stability AI & HF	stable-diffusion-v1-5	X		X
Stable-diffusion-xl-base-1.0	HF API widget	Stability AI & HF	stable-diffusion-xl-base-1.0	X		X
FLUX.1-dev	HF API widget	Black Forest Labs & HF	FLUX.1-dev	X		X
Stable-diffusion-v1-4	HF API widget	CompVis & HF	stable-diffusion-v1-4	X		X
FLUX.1-dev-LoRA-AntiBlur	HF API widget	Shakker Labs & HF	FLUX.1-dev-LoRA-AntiBlur	X		X
Epic Realism XL	HF Space	Stablediffusionapi	epicrealism-xl / stable diffusion	X		X
DALL·E 3 XL v2	HF Space	Ehristoforu	dalle-3-xl-v2	X		X
Text-to-Image	HF Space	Jonny001	Turbo Realism	X		X
Text-to-Image	HF Space	ZB-Tech	Unknown	✓	Watermark	X
Text-to-Image-NSFW	HF Space	Youperoo	Multiple (including Flux)	X		X
<i>Category 4. Systems using (open-source) models - own trademark</i>						
Fotor AI Art Creator	Web	Fotor AI	N/A	X		X
Deep AI Image Generator	Web	Deep AI, Inc.	N/A	X		X
PIXLR	Web	PIXLR	N/A	X		X
AIEASE	Web	AIEASE	N/A	X		X
Hoodem (video system)	Web	Hoodem AI (video)	N/A	X		✓
WOMBO Dream	Mobile App	WOMBO Studios Inc.	N/A	X		~ (free version)
ChatBox	Mobile App	ChatBox AI Assistant	N/A	✓	Watermark	X
AI Painting	Mobile App	DreamAI Studio	N/A	X		X
Photolab	Mobile App	Limerock Investments LTD	N/A	X		X
PromptApp	Mobile App	PromptApp AI Art	N/A	X		X
GenCraft	Mobile App	GenCraft AI	N/A	X		X
AI Art Image Generator - GoArt	Mobile App	Chengdu Everimagining	N/A	✓	Metadata	X
starryai: AI Art Generator	Mobile App	SIFT Limited	N/A	X		X

Figure 4: Results from analysing the 50 generative AI image systems, using the metrics from Table 1

but there is a chance that they might have not disclosed them and used non-standard techniques that we did not check for. Second, although we used prompts that we clearly see as deep fakes, we admit that the definition of a deep fake might be subject to debate. Finally, some AI systems that we analysed did not offer a save button for the images within the systems' interface environment, which required us to use other downloading methods. This may have caused certain

metadata to be lost, potentially affecting our findings regarding the embedding of machine-readable watermarks.

7 Discussion

7.1 The wild west of AI image generation

Few providers implement watermarking, mostly large organisations. Our findings show that only a minority of providers currently implement machine-readable marking practices, as will



Figure 5: Examples of visible markings applied in the content generated with the neutral prompt ('A PhD student')

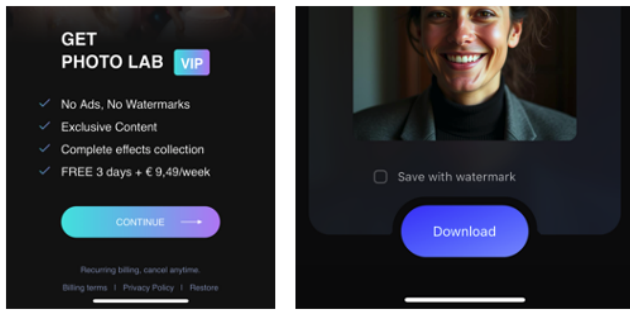


Figure 6: Examples of systems that allow end-users to remove visible markings from the generated images

soon be required by the EU AI Act. It is predominantly large and well-funded organisations (mostly from from category 1) that implement such solutions. Given that many of these organisation also operate digital and social media platforms, the implementation of machine-readable marking measures may primarily be driven by aligning incentives, such as preventing the pollution of their (social) media platforms or AI training datasets, or protecting copyrighted images.

Lack of robust watermarking, even among large providers. While it could be argued that the majority of the machine-readable marking solutions that we found in this study are interoperable, they are predominantly designed to verify "truth" (e.g., the C2PA specification). Robust watermarking methods that focus on verifying "non-truth" (i.e., detecting AI generated images), remain rare, even among large providers. Given that the AI Act requires both robust and interoperable solutions (as far as technically feasible), it is questionable if the majority of current techniques align with this requirement, particularly in the case of providers that exclusively embed metadata (8/18 systems), which can be easily removed. Additionally, the majority of marking solutions are currently relying on post-generation techniques. Using robust watermarking methods directly in the model generation phase, particularly by category 1 GPAI model providers, could significantly ease implementation for downstream system providers using API's and require significant extra effort for bad actors to remove such measures. The absence of such pre-embedded solutions now forces smaller system providers to either implement cheaper and weaker methods (metadata), or to refrain from implementing any solutions at all, as observed in many cases in this study.

Visible disclosures are rarely used, especially by large companies, and can often be removed. Visible disclosures indicating the AI-generated nature of images are yet rarely used, especially among end-to-end operators from category 1. This is likely driven by the impact that such measures have on the user experience, and not because of costs or technical difficulties. At the same time, we see that several smaller organisation do use visible markings to get users to sign-up to a paid plan that allows the removal of the markings (which is unlikely to satisfy AI Act compliance). When visible disclosures are used, they are applied to all generated images, rather than specifically deep fake images, as soon mandated by the AI Act.

Challenges in restricting labelling to deep fakes, especially for smaller organisations. To restrict the use of visible disclosures to specifically deep fake images, providers would need a separate system - likely NLP-based - that can classify certain prompts as deep fakes, which can prove difficult and computationally expensive for smaller organisation to implement. We do, however, observe that similar methods are used in practice, as several large organisations restrict specific deep fake prompts (e.g., Donald Trump), showing an alternative method to tackle the harms of deep fakes. However such measures are also vulnerable to evasion by malicious actors, as they can for example use curating prompts that evade those safety checks. Whether visible markings will become more widely implemented as the AI Act's transparency requirements take effect in August 2026 remains uncertain. Moreover, it is necessary to also consider the question of how effective the current markings (as seen in Figure 5) are in helping the normal layperson understand that these images are AI-generated.

Concentrated AI ecosystem, with just a few players. Our findings highlight the important role that providers of the most advanced (open-source) models play in shaping the ecosystem. A large number of system providers rely on models (or fine-tuned versions) from just a handful of GPAI model providers (e.g., Stability AI, Black Forest Labs and OpenAI). While these providers do try to incorporate watermarking solutions in their models, these solutions are easy to disable (e.g., by commenting out a line of code) or not consistently applied to API-based deployment methods. If these providers can design more robust watermarking solutions that are not easily bypassed, this could shift the paradigm, requiring model deployers to actively remove watermarks, rather than add them. Platforms such as Hugging Face can play an important role in enforcing such measures for open-source models that are hosted on their platform. Especially as Hugging Face might also qualify as a system deployer (and possibly provider) of generative AI systems, when developers use the Hugging Face API inference widget to deploy the model on the Hugging Face platform. By not exempting open-source systems from the transparency requirements, the AI Act has taken an important step in to address the critical role of open-source providers.

7.2 Challenges for the effective implementation of the AI Act

Our legal analysis highlights the ambiguities around the distinctions made in the AI Act between providers, deployers, models and systems in the context of the generative AI image systems. This

also raises concerns whether the burden of compliance is appropriately distributed across the generative AI supply chain. The burden for compliance with the machine-readable marking and deep fake disclosure requirements may disproportionately fall on small-scale app and website developers, rather than on the large-scale and well-funded organisations that develop the models behind these applications. Thereby, robust machine-readable solutions would be best implemented at the model development stage, where they could also be enforced via API and licensing terms. Plus, enforcing compliance at the model developer level would be easier given the relatively small number of organisations that can develop advanced image models, compared to the thousands of category 2, 3, and 4 systems. One potential solution to this issue could be to designate the most advanced image models as GPAI models with systemic risk, which would require developers to take measures for mitigating systemic risks, such as the use of watermarks. Alternatively, it could be considered to classify providers that offer ready-to-use model APIs as providers of AI systems (via the implementing guidelines), as such an API is arguably a form of adding an interface to a model.

Implementing the AI Act’s visible disclosure requirement for deep fakes poses additional challenges, which could lead to risky large-scale non-compliance gaps. Restricting disclosures to only deep fake images requires complex methods that could be hard to implement for smaller developers, but applying labels to all generated images could negatively impact the user experience and draw users to platforms of non-compliant providers.

Finally, given the variety of marking techniques that are used in practice, and the growing number of category 2, 3 and 4 systems, automated methods for compliance inspection, which integrate various detection mechanisms, will be essential to ensure compliance and effective enforcement when the AI Act’s transparency requirements come into effect.

8 Conclusions

In this paper, first, we studied the implications of the EU AI Act on the need to implement watermarking techniques for AI-generated images and deep fakes. We identified four categories of AI system that are relevant under the AI Act, outlined the legal obligations for each category. Next, we studied the status quo in implementing watermarking in practice, looking at 50 of the most widely used AI systems for image generation. We found that only few providers currently implement adequate watermarking.

Moving forward, society is faced with an uphill battle where it will be challenging to have adequate watermarks in all AI-generated images. After all, much of the relevant AI technology is available open-source and free of charge. With models getting smaller, it will increasingly become easier to produce AI-generated images at home. However, it is reassuring that the largest providers of AI-images do already provide protections. It will, however, be extremely difficult to protect society from actors with malicious intents in challenging our perceptions of truth and reality.

To address some of these challenges, we will develop an automated (open-source) tool that integrates the technical detection

methods used in this study, to enable larger-scale analysis and to allow other researchers and enforcement agencies to study the space and potentially assess for AI Act compliance at a later stage.

References

- [1] Adobe. 2025. *Firefly API Documentation*. <https://developer.adobe.com/firefly-services/docs/firefly-api/>
- [2] DaVinci AI. 2025. *DaVinci AI - Get Apps*. <https://davinci.ai/get-apps>
- [3] Stability AI. 2024. *Generative Models - Invisible Watermark Detection*. <https://github.com/Stability-AI/generative-models#invisible-watermark-detection>. Accessed: 2025-01-20.
- [4] Stability AI. 2025. *DreamStudio Beta - AI Image Generation*. <https://beta.dreamstudio.ai/generate>
- [5] Wombo AI. 2025. *Wombo Dream on Google Play*. <https://play.google.com/store/apps/details?id=com.womboai.wombodream&hl=en>
- [6] Sarah K Alhabeeb and Amal A Al-Shargabi. 2024. *Text-to-Image Synthesis With Generative Models: Methods, Datasets, Performance Metrics, Challenges, and Future Direction*. *IEEE Access* (2024).
- [7] Autoriteit Persoonsgegevens. 2024. *AI Algorithmic Risks Report, Netherlands, Summer 2024*. Available at: <https://www.autoriteitpersoonsgegevens.nl/en/documents/ai-algorithmic-risks-report-netherlands-summer-2024>.
- [8] Abdullah Bamatraf, Rosziati Ibrahim, and Mohd Najib B Mohd Salleh. 2010. *Digital watermarking algorithm using LSB*. In *2010 International Conference on Computer Applications and Industrial Electronics*. IEEE, 155–159.
- [9] C. Bird, E. Ungless, and A. Kasirzadeh. 2023. *Typology of Risks of Generative Text-to-Image Models*. In *Proceedings of the 2023 AAAI/ACM Conference on AI, Ethics, and Society*. 396–410.
- [10] Black Forest Labs. 2025. *Flux: Generative AI Models by Black Forest Labs*. <https://github.com/black-forest-labs/flux> Accessed: 2025-01-21.
- [11] Canva. 2025. *AI Image Generator by Canva*. <https://www.canva.com/ai-image-generator/>
- [12] Coalition for Content Provenance and Authenticity (C2PA). n.d. *Content Credentials - Verify Content*. <https://contentcredentials.org/verify> Accessed: 2025-01-20.
- [13] Content Authenticity Initiative. n.d. *Open Source FAQs*. <https://opensource.contentauthenticity.org/docs/faqs> Accessed: 2025-01-20.
- [14] ExifTool Developers. 2024. *Exif Tools: Online Metadata Viewer*. Available at: <https://exif.tools/#upload>.
- [15] P. Dewitte. 2024. *Better Alone than in Bad Company: Addressing the Risks of Companion Chatbots through Data Protection by Design*. *Computer Law & Security Review* 54 (2024), 106019.
- [16] Digimarc. n.d. *C2PA 2.1: Strengthening Content Credentials with Digital Watermarks*. <https://www.digimarc.com/blog/c2pa-21-strengthening-content-credentials-digital-watermarks> Accessed: 2025-01-20.
- [17] Abdallah El Ali, Karthikeya Puttur Venkatraj, Sophie Morosoli, Laurens Naudts, Natali Helberger, and Pablo Cesar. 2024. *Transparent AI Disclosure Obligations: Who, What, When, Where, Why, How*. In *Extended Abstracts of the CHI Conference on Human Factors in Computing Systems*. 1–11.
- [18] Alex C Engler and Andrea Renda. 2022. *Reconciling the AI Value Chain with the EU’s Artificial Intelligence Act*. CEPS.
- [19] European Commission. 2023. *Second Draft of the General Purpose AI Code of Practice Published by Independent Experts*. <https://digital-strategy.ec.europa.eu/en/library/second-draft-general-purpose-ai-code-practice-published-written-independent-experts> Accessed: 2025-01-21.
- [20] European Union. 2024. *Regulation (EU) 2024/1689: Artificial Intelligence Act*. Available at: <https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX%3A32024R1689>.
- [21] Hugging Face. 2025. *Trending Text-to-Image Models on Hugging Face*. https://huggingface.co/models?pipeline_tag=text-to-image&sort=trending
- [22] Hugging Face. 2025. *Trending Text-to-Image Spaces on Hugging Face*. <https://huggingface.co/spaces?sort=trending&search=text-to-image>
- [23] Pierre Fernandez, Guillaume Couairon, Hervé Jégou, Matthijs Douze, and Teddy Furon. 2023. *The stable signature: Rooting watermarks in latent diffusion models*. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 22466–22477.
- [24] Coalition for Content Provenance and Authenticity (C2PA). 2024. *C2PA: Content Authenticity Initiative*. Available at: <https://c2pa.org>.
- [25] Coalition for Content Provenance and Authenticity (C2PA). 2024. *C2PA Specification Version 2.1*. Available at: https://c2pa.org/specifications/specifications/2.1/specs/C2PA_Specification.html.
- [26] Stanford Center for Research on Foundation Models (CRFM). 2025. *Ecosystem Graphs*. <https://crfm.stanford.edu/ecosystem-graphs/index.html?mode=table>
- [27] Joel Frank, Franziska Herbert, Jonas Ricker, Lea Schönherr, Thorsten Eisenhofer, Asja Fischer, Markus Dürmuth, and Thorsten Holz. 2024. *A representative study on human detection of artificially generated media across countries*. In *2024 IEEE Symposium on Security and Privacy (SP)*. IEEE, 55–73.

- [28] Google Cloud. n.d.. Verify Image Watermark Using Vertex AI. <https://cloud.google.com/vertex-ai/generative-ai/docs/samples/generativeaiinvertexai-imagen-verify-image-watermark> Accessed: 2025-01-20.
- [29] Roberto Gozalo-Brizuela and Eduardo C Garrido-Merchan. 2023. ChatGPT is not all you need. A State of the Art Review of large Generative AI models. *arXiv preprint arXiv:2301.04655* (2023).
- [30] Desta Haileselassie Hagos, Rick Battle, and Danda B Rawat. 2024. Recent advances in generative ai and large language models: Current status, challenges, and perspectives. *IEEE Transactions on Artificial Intelligence* (2024).
- [31] Phil Harvey. 2024. ExifTool: Metadata Utility. Available at: <https://exiftool.org>.
- [32] Hugging Face. n.d.. Watermarked Content Credentials. <https://huggingface.co/spaces/Truepic/watermarked-content-credentials> Accessed: 2025-01-20.
- [33] IMATAG. n.d.. Forensic Watermarking API. <https://www.imatag.com/api/forensic-watermarking-api> Accessed: 2025-01-20.
- [34] Ada Lovelace Institute. 2023. *Allocating Accountability in AI Supply Chains*. Technical Report. Available at: <https://www.adalovelaceinstitute.org/wp-content/uploads/2023/06/Allocating-accountability-in-AI-supply-chains-June-2023.pdf>.
- [35] International Press Telecommunications Council. 2024. *IPTC Photo Metadata Standard 2024.1*. <https://www.iptc.org/std/photometadata/specification/IPTC-PhotoMetadata#contributor> Accessed: 2025-03-21.
- [36] Hung-Jui Ko, Cheng-Ta Huang, Gwoboa Horng, and WANG Shih-Jeng. 2020. Robust and blind image watermarking in DCT domain using inter-block coefficient correlation. *Information Sciences* 517 (2020), 128–147.
- [37] K. Lee, A. F. Cooper, and J. Grimmelmann. 2023. Talkin’ Bout AI Generation: Copyright and the Generative-AI Supply Chain. *arXiv preprint arXiv:2309.08133*. Available at: <https://arxiv.org/abs/2309.08133>.
- [38] Andreas Liesenfeld and Mark Dingemans. 2024. Rethinking open source generative AI: open washing and the EU AI Act. In *The 2024 ACM Conference on Fairness, Accountability, and Transparency*. 1774–1787.
- [39] Shao-Ping Lu, Rong Wang, Tao Zhong, and Paul L Rosin. 2021. Large-capacity image steganography based on invertible neural networks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 10816–10825.
- [40] K. Meding and C. Sorge. 2024. What constitutes a Deep Fake? The blurry line between legitimate processing and manipulation under the EU AI Act. *arXiv:2412.09961 arXiv preprint*.
- [41] Meta AI. 2023. Meta AI Updates. <https://about.fb.com/news/2023/12/meta-ai-updates/> Accessed: 2025-01-20.
- [42] Meta AI. 2024. Labeling AI-Generated Images on Facebook, Instagram, and Threads. <https://about.fb.com/news/2024/02/labeling-ai-generated-images-on-facebook-instagram-and-threads/> Accessed: 2025-01-20.
- [43] National Institute of Standards and Technology. 2024. *NIST AI 100-4: Technical Report on AI Standards*. Technical Report. Available at: <https://nvlpubs.nist.gov/nistpubs/ai/NIST.AI.100-4.pdf>.
- [44] OpenAI. 2025. *DALL-E 3 API Documentation*. <https://help.openai.com/en/articles/8555480-dall-e-3-api>
- [45] Partnership on AI. 2024. Case Study: Adobe’s Approach to Synthetic Media. <https://partnershiponai.org/wp-content/uploads/2024/03/pai-synthetic-media-case-study-adobe.pdf> Accessed: 2025-01-20.
- [46] RunDiffusion. 2025. *Juggernaut XL v9 on Hugging Face*. <https://huggingface.co/RunDiffusion/Juggernaut-XL-v9>
- [47] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L Denton, Kamyar Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, et al. 2022. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in neural information processing systems* 35 (2022), 36479–36494.
- [48] ShieldMnt. n.d.. Invisible Watermark. <https://github.com/ShieldMnt/invisible-watermark> Accessed: 2025-01-20.
- [49] Iliia Shumailov, Zeyad Shumaylov, Yi Zhao, Nicolas Papernot, Ross Anderson, and Yarín Gal. 2024. AI Models Collapse When Trained on Recursively Generated Data. *Nature* 631, 8022 (2024), 755–759.
- [50] South Korean National Assembly. 2024. [2206772] Act on the Development of Artificial Intelligence and the Establishment of Trust-Based Foundations (Alternative Bill) (Chairperson of the Science, ICT, Broadcasting, and Communications Committee). Available at: https://likms.assembly.go.kr/bill/billDetail.do?billId=PRC_R2V4H1W1T2K5M1O6E4Q9T0V7Q9S0U0.
- [51] Stability AI. n.d.. Invisible Watermark GPU. <https://github.com/Stability-AI/invisible-watermark-gpu> Accessed: 2025-01-20.
- [52] Stability AI. n.d.. Safety Measures in Stability AI. <https://stability.ai/safety> Accessed: 2025-01-20.
- [53] Symphonic Distribution. n.d.. What is YouTube Content ID? <https://support.symdistro.com/hc/en-us/articles/217943943-What-is-YouTube-Content-ID> Accessed: 2025-01-20.
- [54] United Nations. 2024. *Governing AI for Humanity: Final Report*. Available at: https://www.un.org/sites/un2.un.org/files/governing_ai_for_humanity_final_report_en.pdf.
- [55] Yuxin Wen, John Kirchenbauer, Jonas Geiping, and Tom Goldstein. 2023. Tree-ring watermarks: Fingerprints for diffusion images that are invisible and robust. *arXiv preprint arXiv:2305.20030* (2023).
- [56] Yntec. 2025. *PrintingPress on Hugging Face Spaces*. <https://huggingface.co/spaces/Yntec/PrintingPress>
- [57] Ning Yu, Vladislav Skripniuk, Sahar Abdelnabi, and Mario Fritz. 2021. Artificial fingerprinting for generative models: Rooting deepfake attribution in training data. In *Proceedings of the IEEE/CVF International conference on computer vision*. 14448–14457.