

PAD: Towards Efficient Data Generation for Transfer Learning Using Phrase Alignment

Jong Myoung Kim^{1,2} Young-Jun Lee² Ho-Jin Choi² Sangkeun Jung³

¹SK-telecom ²School of Computing, KAIST

³The Division of Computer Convergence, Chugnam National University

gray.apl@gmail.com {yj2961,hojinc}@kaist.ac.kr hugman@cnu.ac.kr

Abstract

Building training datasets for specific tasks is essential for service deployment, but it often requires significant time and cost. To address this issue, transfer learning using abundant English data has been widely adopted in non-English language model development. We propose a novel method, Phrase Aligned Data (PAD), to further improve the efficiency of transfer learning. PAD is created by applying phrase alignment, a core module of Statistical Machine Translation (SMT), to English data and leverages the syntactic flexibility of languages like Korean to maximize transfer learning effects. Our experiments show that PAD not only enhances transfer learning performance but also significantly reduces the cost and time of data construction, demonstrating its value for both academic research and industrial applications.

1 Introduction

The rapid advancements in large-scale language models have spurred the development of various services. Many companies build proprietary datasets to fine-tune their models and enhance service quality, but constructing such high-quality datasets is costly and time-consuming.

Non-English-speaking NLP engineers often address this challenge by leveraging the abundant English resources available. For instance, the Korean KLUE (Park et al., 2021) NLI dataset has only 24,000 entries, while the English GLUE (Wang et al., 2018) dataset has about 300,000 entries. Despite Korean being a relatively resource-rich language, there is still a significant gap in the size and diversity of data between English and non-English languages (Wang et al., 2022; Joshi et al., 2020). As a result, English resources are widely used to enhance non-English models through cross-lingual transfer learning, providing a cost-effective and time-efficient solution.

To improve the efficiency of using English data

for Korean models, we focus on two key aspects: (1) **Expression in the Target Language**: Models perform better when the data is expressed in the target language, even if it conveys the same meaning (Imani et al., 2023). This suggests that translating English data into Korean before fine-tuning can improve performance; (2) **Syntactic Flexibility of Korean**: Korean uses case markers to indicate the roles of sentence components, allowing for flexible word order. This means that even data with an incomplete word order can still be useful as training data (Kim et al., 2024).

Based on these insights, we propose PAD, a low-cost method that converts English data into a format suitable for training Korean models. PAD is generated using phrase alignment, a core component of SMT, which was widely used before the advent of Neural Machine Translation (NMT). Phrase alignment probabilistically aligns source language phrases with corresponding target language phrases. PAD uses this mechanism to create datasets that, while potentially having incomplete word order, preserve the meaning of each phrase and are expressed in the target language.

Our experiments show that PAD effectively transforms English data into a form suitable for Korean tasks and can be produced with minimal resources, time, and cost compared to direct data construction.

Our contributions are as follows:

- We introduce PAD, combining SMT’s phrase alignment technique with the syntactic characteristics of Korean.
- We demonstrate that PAD effectively adapts English data for transfer learning in Korean.
- PAD provides significant time and cost savings over direct dataset construction and serves as a baseline for new data creation, underscoring its industrial value.

2 Related Works

2.1 Cross-Lingual Transfer Learning

Cross-lingual transfer learning has been widely used to enhance non-English language models by leveraging pre-trained English models (Rafael et al., 2020). This method utilizes the abundant English data to fine-tune models for low-resource languages. However, performance often falls short compared to models trained on native target language data. Constructing high-quality target language datasets is expensive (Schuster et al., 2018), making translated English data a practical alternative. Although translated data underperforms compared to native data, it significantly improves performance over using untranslated English data (Gaim et al., 2023). Our approach harnesses the richness of English data to achieve results close to those obtained with translated data.

2.2 Word Order

Understanding word order is essential for cross-lingual tasks, as different languages exhibit distinct syntactic structures. Prior research has shown that language models can benefit from training on corpora with disrupted word orders, enhancing their robustness (Sinha et al., 2021). Korean, with its flexible word order, allows for training on sentences with incomplete word structures (Kim et al., 2024). This flexibility can be leveraged to extend the training dataset and improve model performance.

2.3 Statistical Machine Translation (SMT)

SMT uses statistical models for translation and is composed of alignment and reordering stages (Koehn, 2009). During alignment, source language phrases are mapped to their corresponding target language phrases using parallel corpora. Reordering adjusts the sentence structure to conform to the target language’s natural syntax, addressing structural differences like English (S-V-O) and Korean (S-O-V).

Reordering remains a major challenge in SMT, as language pairs with different word orders often result in unnatural translations (Koehn, 2009). While models such as distortion models attempt to resolve this, they struggle to handle complex reordering, affecting the overall fluency and coherence of the translated text.

3 Phrase Aligned Data: PAD

We propose a novel data processing method to maximize the performance of transfer learning while ensuring cost efficiency. Our approach is inspired by two key observations: (1) training data expressed in the target language tends to be more effective, even when it conveys the same meaning as the source language (Imani et al., 2023), and (2) data with incomplete word order can still be valuable for training, especially for languages like Korean (Kim et al., 2024). Based on these observations, we define PAD, a data processing method that transforms English data into a format optimized for training Korean models.

PAD is created by applying SMT procedures up to the phrase alignment stage, producing data that follows the word order of English but replaces each phrase with its corresponding Korean expression. We expect PAD to achieve the following effects:

- Show higher training efficiency compared to using raw English data.
- Demonstrate greater cost efficiency than constructing high-quality Korean datasets or manually translating English data.
- Improve stability and effectiveness by excluding the reorder stage, which is known to be a limitation of traditional SMT systems.

In this study, we used Moses (Koehn et al., 2007), the most widely known SMT system, to generate PAD. Table 1 provides an example of original English data, PAD data, and data generated through translation methods.

3.1 Moses and its Training

Moses uses GIZA++ for phrase alignment based on the IBM models and performs reordering with a distortion model (Casacuberta and Vidal, 2007). In this experiment, we used IBM Model 4 and trained Moses on 1.7 million parallel sentences from the AI-hub¹ corpus, which includes translated and verified data from sources such as news, government websites, legal documents, and various conversational contexts. The source English data was tokenized using the Moses tokenizer, and the target Korean data was tokenized at the word level, as the reordering stage was omitted.

¹A data platform operated by the Korea National Information Society Agency (NIA)

Data type	Word order	Example
English	Complete	I once met a physicist who held the strong AI position.
PAD	Incomplete	나는 ^(I) 한 번 ^(once) 만났다 ^(met) 물리학자들 ^(a physicist) 지지하는 ^(who held) 강한 인공지능 ^(the strong AI) 입장을 ^(position)
Translated Data	Complete	나는 ^(I) 한 번 ^(once) 강한 인공지능 ^(the strong AI) 입장을 ^(position) 지지하는 ^(who held) 물리학자들 ^(a physicist) 만났다 ^(met) .

Table 1: Examples of English data, PAD data, and translation-generated data. Korean phrase meanings are shown in parentheses and superscripts for clarity (annotations are excluded from the actual data).

4 Experiments

4.1 Experiment Design

We evaluated the effectiveness of PAD as a data construction and processing method for transfer learning by: (1) conducting experiments on benchmarks available in both English and Korean, (2) constructing datasets of varying sizes using different data construction methods, and (3) fine-tuning models on these datasets to measure performance. Since PAD aims to improve transfer learning using English data, we constructed datasets primarily from English data and evaluated performance on Korean test sets.

4.2 Baselines - Data Construction Methods

4.2.1 Human-Generated Data

English (English) Transfer learning with English data is the most basic alternative when target language data is not available. While this method incurs no additional construction cost, it tends to underperform compared to native target language data. This dataset was also used as the source for the machine-generated data described below.

Native Korean (Korean) Data created by native speakers of the target language is considered the highest quality training data. However, this method incurs the highest time and cost. We used a native Korean benchmark dataset for this experiment.

4.2.2 Machine-Generated Data

Translating English data into the target language is a common approach to improving transfer learning efficiency. High-quality translated data is known to perform between native data and English data (Imani et al., 2023). We used the English dataset from Section 4.2.1 to create the following machine-generated datasets.

High-Quality NMT (NMT_{GPT-4}) We used GPT-4 turbo to construct the translated dataset. Since GPT-4 is considered one of the highest-performing machine translation models currently available (Jiao et al., 2023), it serves as a realistic

Language	Korean		English		Criterion
	Publisher	Dataset name	Publisher	Dataset name	
SA	NLMC (Park, 2016)	SA	GLUE (Wang et al., 2018)	SA	F1 score
NLI	KLUE	NLI		MNLI	Accuracy
STS	(Park et al., 2021)	STS		STS	Pearson’s r

Table 2: Basic information of the benchmark datasets used in the experiments.

performance benchmark for PAD. The cost for this method was primarily due to API usage fees.

Local-Tuned NMT (NMT_{mT5}, NMT_{mGPT}) PAD requires parallel corpora for its creation. To test PAD’s performance against locally-tuned models, we used NMT models trained on the same parallel corpus. These models incur hardware and time costs for tuning. We used two backbone models: mT5-large and mGPT, as detailed in Section 4.4.

SMT (SMT_{Moses}) We excluded the ‘reorder’ stage of the SMT process to improve stability and efficiency. To verify this, we trained Moses on the parallel corpus used for PAD generation and performed the full SMT process to create the translated data. As this method reconstructs phrases into complete sentences, we tokenized the Korean data using KoNLPy (Park and Cho, 2014) and applied 3-gram kenLM with ‘msd-bidirectional-fe’ reordering.

4.3 Benchmark Tasks

We tested the utility of aligned data through three tasks. We combined the original datasets’ labeled training and validation sets to create our train, validation, and test datasets. The test set contained 2000 instances, and we incrementally increased the training data by 1000 instances for each experiment. The training and validation data were split in a 9:1 ratio. Basic information about the benchmark datasets used in this experiment is provided in Table 2, and detailed information can be found in Appendix A.

Sentiment Analysis (SA) SA detects and classifies the emotional tone of text, categorizing it into positive or negative sentiments. It is applied in movie reviews. Models predict sentiment based on linguistic features and contextual understanding.

	Architecture	Publisher	Model name	Parameter Size
Multilingual	GPT-3	AI-forever	mGPT (Shiiazhko et al., 2022)	580M
	T5	Google	mT5-base (Xue et al., 2021)	1.3B
Monolingual	GPT-3	SK telecom	GPT-trinity ²	1.2B
	T5	PAUST	pko-T5-base ³	220M

Table 3: Information of the models used in the experiments.

Natural Language Inference (NLI) NLI determines the logical relationship between two sentences: a premise and a hypothesis, classifying the relationship into entailment, contradiction, or neutral.

Semantic Textual Similarity (STS) STS measures the degree of semantic equivalence between two text segments, providing a similarity score. It is used in information retrieval and clustering.

4.4 Models

We used two architectures, T5 and GPT-3, and prepared both multilingual and monolingual language models for our experiments. The structure and characteristics of each model are summarized below, with additional details in Table 3 and Appendix B.

T5 Series The T5 (Text-to-Text Transfer Transformer) model by Google (Xue et al., 2020) unifies all NLP tasks into a text-to-text format, making it highly versatile. Tasks like translation, summarization, and question answering are handled by converting text inputs into outputs, enabling effective transfer learning across various NLP tasks.

GPT3 Series GPT-based models have shown strong performance across many NLP tasks. Due to hardware constraints, we selected a smaller GPT-3 variant suitable for our environment.

4.5 Implementation Details

We conducted fine-tuning and generation experiments for syntactic flexibility using an NVIDIA A100 40GB GPU. We employed the Adam optimizer with decoupled weight decay (Loshchilov and Hutter, 2017) and set a learning rate of $5e-5$ with a warm-up period spanning 3 epochs. Detailed information on the OS and library versions is provided in Appendix D.

²<https://huggingface.co/skt/ko-gpt-trinity-1.2B-v0.5>

³<https://huggingface.co/paust/pko-t5-base>

5 Experimental Results

Table 4 shows the results of three benchmark tests conducted using three different models. (The mT5 model was also evaluated, but due to training issues, it only produced a single label and value. More details are provided in Appendix E.) The rows in the table represent the data construction methods used, while the columns indicate the size of the generated and trained data. Although data construction was performed in 1K increments, the table is presented in 4K increments (2K for STS) for better readability. More detailed experimental results are provided in the Appendix F.

vs. English We compared the performance of models trained on English data using the mGPT model. In all cases, the models trained on PAD data outperformed those trained on English data.

vs. Korean & NMT_{GPT-4} The Korean and NMT_{GPT-4} datasets serve as high-quality reference data in the Korean data construction tasks. When trained with the same amount of data, the models trained on PAD data did not surpass those trained on these two datasets. However, despite being constructed using only publicly available resources and CPUs, the models trained on PAD data still showed performance similar to those trained on the reference datasets. In Table 4, the highest performance cases of the models trained on PAD data are highlighted in bold, and the results of the Korean and NMT_{GPT-4} models that showed lower performance than the best PAD results are shaded in gray. For example, in the Sentiment Analysis task with the mGPT model, the model trained on 20K PAD data outperformed the model trained on 16K NMT_{GPT-4} data.

vs. Local-Tuned NMT (NMT_{mT5}, NMT_{mGPT}) This section shows the results of using the parallel corpus used for PAD construction to train NMT models. Due to the limitations of the A100 40GB GPU, the range of models was restricted to mT5 and mGPT. Additionally, under the constraint of using a 1.7M parallel corpus, the models trained on PAD data showed 3.9% higher performance than NMT_{mGPT} and 0.6% higher performance than NMT_{mT5}. This difference was calculated as the average of the relative performance differences, using the formula: $\text{average} \left(\frac{\text{score}(\text{PAD}) - \text{score}(\text{NMT})}{\text{score}(\text{PAD})} \right)$. Furthermore, training for 5 epochs required over 70 hours, highlighting the high time cost of NMT

Task	SA (F1 score)					NLI (Accuracy)					STS (Pearson’s r)		
	Data Size	4K	8K	12K	16K	20K	4K	8K	12K	16K	20K	3K	5K
English	0.696	0.716	0.730	0.729	0.727	0.269	0.307	0.417	0.474	0.572	0.694	0.665	0.819
Korean	0.762	0.822	0.830	0.817	0.826	0.384	0.565	0.686	0.667	0.724	0.779	0.744	0.880
NMT _{GPT-4}	0.748	0.755	0.765	0.769	0.772	0.389	0.569	0.672	0.666	0.711	0.752	0.691	0.851
NMT _{mGPT}	0.705	0.725	0.755	0.750	0.756	0.329	0.410	0.514	0.578	0.61	0.745	0.671	0.841
NMT _{mT5}	0.719	0.728	0.736	0.747	0.757	0.407	0.497	0.593	0.670	0.679	0.762	0.704	0.840
SMT _{Moses}	0.735	0.750	0.749	0.753	0.742	0.360	0.495	0.555	0.612	0.663	0.736	0.671	0.821
PAD	0.735	0.737	0.752	0.762	0.770	0.352	0.509	0.639	0.665	0.681	0.735	0.677	0.844
Performance Evaluation with mGPT (Multilingual Model)													
Korean	0.871	0.893	0.892	0.895	0.902	0.777	0.779	0.811	0.816	0.834	0.834	0.842	0.844
NMT _{GPT-4}	0.839	0.851	0.859	0.863	0.866	0.731	0.761	0.773	0.766	0.782	0.824	0.830	0.831
NMT _{mGPT}	0.809	0.816	0.814	0.831	0.847	0.663	0.715	0.747	0.738	0.758	0.776	0.789	0.819
NMT _{mT5}	0.818	0.823	0.841	0.835	0.86	0.669	0.707	0.747	0.750	0.753	0.815	0.811	0.816
SMT _{Moses}	0.827	0.843	0.845	0.855	0.856	0.723	0.755	0.764	0.757	0.76	0.816	0.828	0.824
PAD	0.832	0.833	0.845	0.845	0.849	0.715	0.742	0.746	0.762	0.754	0.818	0.826	0.829
Performance Evaluation with GPT-Trinity (Monolingual Model)													
Korean	0.856	0.879	0.885	0.895	0.902	0.708	0.732	0.779	0.794	0.803	0.868	0.873	0.875
NMT _{GPT-4}	0.827	0.842	0.849	0.855	0.863	0.688	0.701	0.731	0.754	0.75	0.853	0.858	0.863
NMT _{mGPT}	0.777	0.811	0.824	0.827	0.839	0.579	0.657	0.682	0.711	0.723	0.754	0.811	0.844
NMT _{mT5}	0.780	0.829	0.845	0.852	0.852	0.579	0.695	0.719	0.746	0.734	0.795	0.836	0.817
SMT _{Moses}	0.804	0.827	0.829	0.831	0.839	0.6	0.711	0.732	0.730	0.726	0.843	0.851	0.852
PAD	0.795	0.821	0.830	0.832	0.841	0.597	0.706	0.726	0.728	0.732	0.835	0.854	0.855
Performance Evaluation with PKO-T5 (Monolingual Model)													

Table 4: The performance evaluation results compare the PAD model with various baselines across three tasks: SA, NLI, and STS. Among the models trained with PAD data, the **best-performing case** is highlighted in bold. Additionally, results for the Korean and NMT_{GPT-4} models are shaded in gray if their performance is lower than the best PAD model performance. For instance, in the Sentiment Analysis task using the mGPT model, the PAD model trained with 20K data outperforms the NMT_{GPT-4} model trained with 16K data.

	SA			NLI		
	30K	40K	50K	30K	40K	50K
mGPT-PAD	0.759	0.764	0.770	0.687	0.693	0.701
GPT Trinity-PAD	0.860	0.853	0.862	0.763	0.754	0.767
PKO-T5-PAD	0.843	0.846	0.845	0.739	0.741	0.741

Table 5: Results of experiments leveraging the abundance of English data. Performance improvements were achieved without incurring additional costs.

training.

vs. SMT_{Moses} Overall, the models trained on PAD data showed performance similar to SMT_{Moses}, with a difference within 0.5%. This result indicates that the impact of the two data generation methods on Korean language training is similar.

5.1 Utilizing the Abundance of English Data

As mentioned in Section 1, English language resources show a significant difference in quantity and diversity compared to other languages. By leveraging the abundance of English data, we were able to generate additional PAD data without incurring additional costs. Table 5 shows the perfor-

mance of models trained on the additional PAD data. Although the performance did not surpass that of NMT_{GPT-4} 20K, it was able to achieve a closer performance, indicating that the additional PAD data contributed to improving the model’s performance.

5.2 Mixed Korean-English Data

While examining the generated data, we identified mixed Korean-English sentences due to SMT’s policy of outputting the source language expression when encountering unknown inputs. (Figure 3 in Appendix C shows how SMT handles such expressions.) We investigated if the language model could learn from mixed Korean-English sentences and its impact on performance.

We generated mixed Korean-English sentences at various ratios (0%, 25%, 50%, 75%, and 100%) and trained models with these datasets. SMT produced mixed language sentences due to a lack of training data, but we did not create mixed sentences by reducing training data. This is because the reduction in training data does not directly reflect the language ratio in the mixed sentences. Instead, we

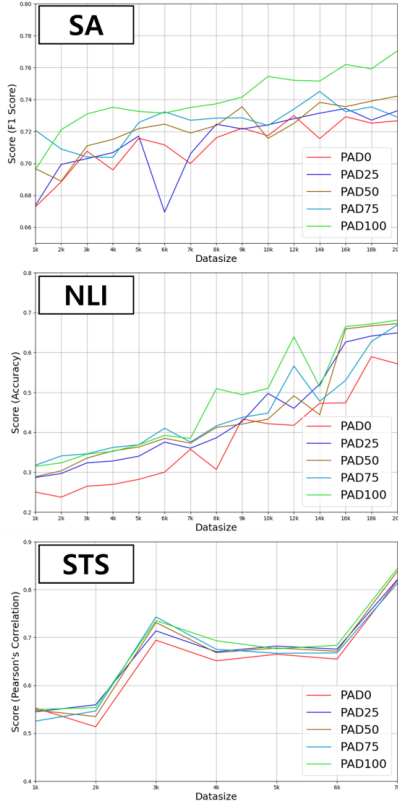


Figure 1: Benchmark performance comparison by Korean-English mixed sentence ratios.

analyzed the logs from PAD creation to determine the probability of phrase translation, generating data with stable ratios of mixed sentences.

Figure 1 shows the results. Models trained with mixed sentences outperformed those trained with only English data but did not match the performance of models trained with fully translated data. Models with a higher proportion of Korean (PAD 100) performed well due to the test set being in Korean, demonstrating better controllability compared to LLMs that output nonsense or repetitive tokens when undertrained. (Figure 2 in Appendix shows the looping phenomenon observed in translation data construction using mT5.)

6 Discussion

PAD data demonstrated its effectiveness as a data processing method for transfer learning by outperforming models trained on English data. In addition, PAD surpassed the performance of local-tuned NMT and SMT models but did not exceed the performance of models trained on the highest-quality Korean data or translation data (NMT_{GPT-4}). Nevertheless, PAD provides great value in terms of utility, as it incurs minimal costs, such as GPU require-

ments or API fees, and can achieve performance levels close to that of the NMT_{GPT-4} model when combined with the abundance of English data.

In situations where PAD training is insufficient, it has been observed that the output contains a mixture of Korean and English, rather than unexpected outputs from the LLM. This controllable behavior serves as an advantage. The occurrence of mixed-language outputs suggests that the model can be controlled to operate stably even when the training data is insufficient.

PAD offers significant advantages in terms of cost, time, and computational efficiency, and can also provide an approximate lower bound for performance when generating high-quality data, thereby demonstrating its industrial value.

However, this study was conducted only in Korean, which limits its generalizability to other languages. Additionally, we did not confirm the correlation between complex sentence structures and the effectiveness of PAD. Future research will explore the applicability of PAD to various languages and sentence structures.

7 Applications

We are applying this research in the following ways in real-world scenarios:

- During the planning phase of a service, where there is a lack of training data or budget, PAD is used as a method for generating demo data.
- In the early stages of service development, when there is insufficient training data, PAD is utilized as supplemental data to augment the existing training set. As internally generated training data becomes sufficient, the use of PAD data gradually fades out.

8 Conclusion

We propose PAD by combining the benefits of native language training data, Korean syntactic flexibility, and abundant English data. PAD reliably improves model performance, is cost-efficient, and offers controllability, suggesting significant industrial value in scenarios where cost and stability are critical. Future research should explore the applicability of PAD across various languages.

References

- Francisco Casacuberta and Enrique Vidal. 2007. Giza++: Training of statistical translation models. Retrieved October, 29:2019.
- Fitsum Gaim, Wonsuk Yang, Hancheol Park, and Jong C Park. 2023. Question-answering in a low-resourced language: Benchmark dataset and models for tigrinya. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 11857–11870.
- Ayyoob Imani, Peiqin Lin, Amir Hossein Kargaran, Silvia Severini, Masoud Jalili Sabet, Nora Kassner, Chunlan Ma, Helmut Schmid, André FT Martins, François Yvon, et al. 2023. Glot500: Scaling multilingual corpora and language models to 500 languages. *arXiv preprint arXiv:2305.12182*.
- Wenxiang Jiao, Wenxuan Wang, Jen-tse Huang, Xing Wang, Shuming Shi, and Zhaopeng Tu. 2023. Is chat-gpt a good translator? yes with gpt-4 as the engine. *arXiv preprint arXiv:2301.08745*.
- Pratik Joshi, Sebastin Santy, Amar Budhiraja, Kalika Bali, and Monojit Choudhury. 2020. The state and fate of linguistic diversity and inclusion in the nlp world. *arXiv preprint arXiv:2004.09095*.
- Jong Myoung Kim, Young-Jun Lee, Yong jin Han, Sangkeun Jung, and Ho-Jin Choi. 2024. Does incomplete syntax influence korean language model? focusing on word order and case markers. *Preprint, arXiv:2407.09184*.
- Philipp Koehn. 2009. *Statistical machine translation*. Cambridge University Press.
- Philipp Koehn, Hieu Hoang, Alexandra Birch, Chris Callison-Burch, Marcello Federico, Nicola Bertoldi, Brooke Cowan, Wade Shen, Christine Moran, Richard Zens, et al. 2007. Moses: Open source toolkit for statistical machine translation. In *Proceedings of the 45th annual meeting of the association for computational linguistics companion volume proceedings of the demo and poster sessions*, pages 177–180. Association for Computational Linguistics.
- Ilya Loshchilov and Frank Hutter. 2017. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*.
- Eunjeong L Park and Sungzoon Cho. 2014. Konlpy: Korean natural language processing in python. In *Annual Conference on Human and Language Technology*, pages 133–136. Human and Language Technology.
- Lucy Park. 2016. Naver sentiment movie corpus.
- Sungjoon Park, Jihyung Moon, Sungdong Kim, Won Ik Cho, Jiyeon Han, Jangwon Park, Chisung Song, Junseong Kim, Yongsook Song, Taehwan Oh, et al. 2021. Klue: Korean language understanding evaluation. *arXiv preprint arXiv:2105.09680*.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*.
- Sebastian Schuster, Sonal Gupta, Rushin Shah, and Mike Lewis. 2018. Cross-lingual transfer learning for multilingual task oriented dialog. *arXiv preprint arXiv:1810.13327*.
- Oleh Shliakhko, Alena Fenogenova, Maria Tikhonova, Vladislav Mikhailov, Anastasia Kozlova, and Tatiana Shavrina. 2022. [mgpt: Few-shot learners go multilingual](#). *arXiv preprint*.
- Koustuv Sinha, Robin Jia, Dieuwke Hupkes, Joelle Pineau, Adina Williams, and Douwe Kiela. 2021. Masked language modeling and the distributional hypothesis: Order word matters pre-training for little. *arXiv preprint arXiv:2104.06644*.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R Bowman. 2018. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv preprint arXiv:1804.07461*.
- Yizhong Wang, Swaroop Mishra, Pegah Alipoor-molabashi, Yeganeh Kordi, Amirreza Mirzaei, Anjana Arunkumar, Arjun Ashok, Arut Selvan Dhanasekaran, Atharva Naik, David Stap, et al. 2022. Super-naturalinstructions: Generalization via declarative instructions on 1600+ nlp tasks. *arXiv preprint arXiv:2204.07705*.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2020. mt5: A massively multilingual pre-trained text-to-text transformer. *arXiv preprint arXiv:2010.11934*.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2021. [mT5: A massively multilingual pre-trained text-to-text transformer](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 483–498, Online. Association for Computational Linguistics.

A Benchmark Dataset Information

B Detailed-Model Informations

B.1 T5 models

The T5 (Text-to-Text Transfer Transformer) model is a transformer-based architecture developed by Google. It converts all NLP tasks into a text-to-text format, making it highly versatile. Tasks such as translation, summarization, and question answering are approached by feeding the model text inputs and training it to generate the corresponding text

outputs. This unified approach allows the T5 model to leverage transfer learning effectively across various NLP tasks.

mT5 is a multilingual version of the T5 model developed by Google (Xue et al., 2021), trained on multilingual corpora covering 101 languages. mT5 handles various NLP tasks using a unified text-to-text format and includes models with up to 13 billion parameters. It utilizes the SentencePiece tokenizer for processing multilingual text.

Paust T5 is a Korean-optimized T5 model fine-tuned on Korean corpora⁴. The model comprises 220 million parameters and demonstrates excellent performance in Korean NLP tasks. It employs a SentencePiece tokenizer optimized for processing Korean text.

B.2 GPT based models

Recently, GPT-based models have demonstrated excellent performance across various NLP tasks. Due to the limitations of our development environment, we selected a model that follows the GPT-3 architecture but is of a manageable size for our capabilities.

ai-forever mGPT is a multilingual GPT model known for its strong performance across various NLP tasks (Shliazhko et al., 2022). This model has 130 million parameters and is trained on multilingual corpora. It is designed to process text in multiple languages and follows GPT-3 architecture using GPT-2 source.

skt ko-gpt-trinity-1.2B-v0.5 is a Korean-optimized GPT model developed by SKT, featuring 1.2 billion parameters⁵. Trained on Korean corpora, this model excels in Korean NLP tasks. It uses the BPE tokenizer, which is optimized for processing Korean text. Similarly, it follows the GPT-3 architecture.

C Supporting Material

Figure 2 shows mT5’s malfunction ‘looping’.

Figure 3 shows how SMT generate Korean-English mixed sentence.

⁴<https://huggingface.co/paust/pko-t5-base>

⁵<https://huggingface.co/skt/ko-gpt-trinity-1.2B-v0.5>

D Implementation Details

D.1 Development Environment

D.1.1 Hardware Specifications

- **GPU:** NVIDIA A100 40GB

D.1.2 Software Environment

- **Operating System:** Ubuntu 20.04.5
- **Programming Language:** Python 3.8.10

D.1.3 Key Libraries and Tools

Library/Tool	Version
PyTorch	2.1.2
Torchvision	0.16.2
Torchaudio	2.1.2
Transformers	4.38.2
Accelerate	0.27.2
OpenAI	0.27.7

D.2 Instruction Sets

Table 6 shows prompt set for this study.

E mT5 Experiment results

Tables 7, 8, and 9 show mT5’s experiment results.

F Detailed Experiment Results

F.1 SA

Tables 10, 11, 12, 13, 14, 15, 16, 17, and 18 shows full result of our experiments.

114.eng_398, 끊임없이 웃음, positive, Translate into Korean: a nonstop hoot
 115.eng_16139, 그것은 실제 작업보다 더 나은 것입니다., positive, Translate into Korean: the illusion of work is than actual work
 116.eng_7803, 그것은 예술적인 스타일에 의해 완전히 완전히 완전히 완전히 완전히 완전히 완전히 완전히 만들어진 것입니다., negative, "Translate into Korean: just a simple fable done in an artless style";
 117.eng_15393, 그는 그의 league에서 벗어났다, negative, Translate into Korean: is out of his league

Figure 2: Example of looping in translations using mT5. The word “완전히(totally or completely)” was repeated countless times.

model	task	prompt
MGPT/ko-GPT	SA	Sentiment Analysis:
	NLI	Inference relation between premise and hypothesis:
	STS	measure sementic similarity between sentence1 and sentence2 in 0.0-5.0:
	translation	Translate into Korean:
mT5/pko-T5	SA	Sentiment Analysis:
	NLI	NLI:
	STS	STS:
	translation	Translate into Korean:

Table 6: Prompt Set for Experiments

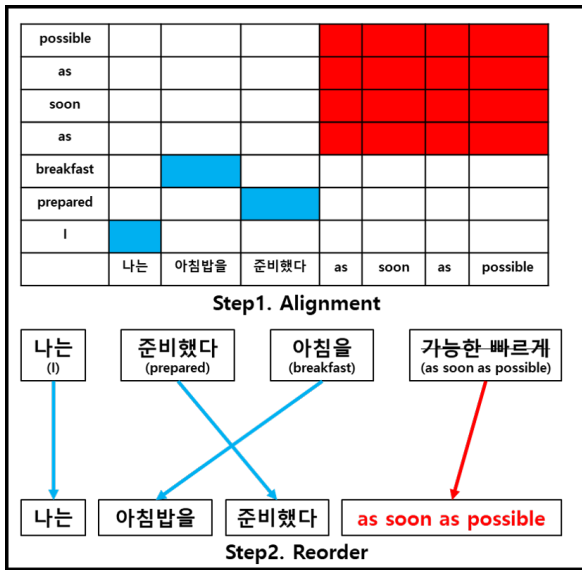


Figure 3: Example of a mixed Korean-English sentence: When an input that does not exist in the learned probability table is encountered, the SMT outputs the expression in the source language as it is. The illustration shows that the expression “as soon as possible” is displayed in English due to the lack of information about this phrase.

	1k	2k	3k	4k	5k	6k	7k	8k	9k	10k	12k	14k	16k	18k	20k	30k	40k	50k
MT5_EN	0	0.644045	0.644527	0.644746	0.643826	0.644286	0.642614	0.642614	0.645293	0.644195	0.650728	0.64363	0.647942	0.60883	0.601297			
MT5_TR-GPT	0	0.404482	0.644068	0.644527	0.644527	0.644527	0.644527	0.644746	0.644527	0.646018	0.646111	0.644007	0.585694	0.575898	0.551376			
MT5_PAG	0	0.632231	0.637	0.644527	0.644527	0.644527	0.645	0.644527	0.644527	0.644527	0.645	0.644527	0.643319	0.643255	0.658786	0.623162	0.640127	0.524161
MT5_PAG25	0	0.644022	0.645	0.644746	0.644527	0.644068	0.645	0.644068	0.643826	0.644527	0.645	0.644964	0.644527	0.645492	0.631311	0.596236	0.560427	0.656516
MT5_PAG50	0	0.644527	0.645	0.644527	0.644527	0.644527	0.645	0.644527	0.640763	0.644286	0.645	0.644964	0.643561	0.644527	0.642416	0.620624	0.66775	0.602317
MT5_PAG75	0	0.633793	0.628	0.625602	0.644527	0.644527	0.645	0.644527	0.644527	0.644746	0.645	0.644527	0.645798	0.644527	0.599804	0.647611	0.541966	0.66575
MT5_Moses	0	0.597122	0.628	0.643803	0.642445	0.644527	0.645	0.644746	0.644286	0.644527	0.645	0.644527	0.640057	0.647997	0.629205	0.631629	0.612291	0.590587
MT5_MGPT-TR	0	0	0.644527	0.644527	0.644527	0.644527	0.644723	0.644527	0.644527	0.644527	0.643916	0.62851	0.648444	0.60623	0.64496			
MT5_mT5-TR	0	0.001178	0.644527	0.643826	0.641766	0.644172	0.644527	0.644527	0.644527	0.644634	0.64492	0.636837	0.605634	0.636135	0.60039			
MT5_KO	0	0.560894	0.642857	0.642246	0.642784	0.644068	0.643803	0.645691	0.644437	0.646797	0.651685	0.653119	0.67061	0.580201	0.702138			

Table 7: SA experiment results using mT5. The model output a single label due to improper training.

	1k	2k	3k	4k	5k	6k	7k	8k	9k	10k	12k	14k	16k	18k	20k	30k	40k	50k
MT5_EN	0.332667	0.34	0.336	0.356	0.344	0.347333	0.346667	0.339333	0.337333	0.349333	0.351333	0.352	0.36	0.354667	0.339333			
MT5_TR-GPT	0.322667	0.338	0.333333	0.341333	0.346667	0.345333	0.335333	0.340667	0.324	0.338667	0.332	0.334667	0.347333	0.34	0.392			
MT5_PAG	0.202	0.309333	0.346	0.346	0.340667	0.34	0.34	0.338	0.371333	0.363	0.347333	0.350667	0.346667	0.342667	0.35	0.359333	0.368	0.397333
MT5_PAG25	0	0.341333	0.341333	0.353	0.366667	0.35	0.34	0.35	0.348667	0.331	0.330667	0.349333	0.335333	0.348	0.336	0.350667	0.356	
MT5_PAG50	0.33	0.324	0.342	0.338	0.336667	0.337	0.346667	0.332667	0.337333	0.339	0.339333	0.323333	0.341333	0.334667	0.346	0.354667	0.36	0.319333
MT5_PAG75	0.344	0.326667	0.337333	0.34	0.345333	0.352	0.362667	0.318	0.366667	0.328	0.326	0.334	0.336	0.337333	0.316667	0.338667	0.337333	0.384
MT5_Moses	0.329333	0.339333	0.36	0.346	0.34	0.34	0.340667	0.337333	0.347333	0.348	0.347333	0.366	0.337333	0.333333	0.350667	0.336667	0.31	0.344667
MT5_MGPT-TR	0	0.301333	0.336	0.339333	0.336	0.336667	0.344	0.344	0.344	0.348	0.336667	0.338	0.338667	0.342	0.341333			
MT5_mT5-TR	0	0.328	0.338667	0.34	0.346	0.347333	0.340667	0.337333	0.342	0.34	0.339333	0.334	0.35	0.344667	0.336			
MT5_KO	0.344	0.339333	0.35	0.348667	0.339333	0.336	0.344	0.338	0.355333	0.335333	0.345333	0.338	0.328667	0.338667	0.354667			

Table 8: NLI experiment results using mT5. The model output a single label due to improper training.

	1k	2k	3k	4k	5k	6k	7k
MT5_EN	-0.08886	-0.11688	0.112826	-0.08782	-0.01175	-0.05323	-0.00847
MT5_TR-GPT	-0.06812	-0.03022	-0.09011	-0.163	-0.10468	-0.08874	-0.07869
MT5_PAG	-0.04207	-0.162	-0.06356	0.002619	0.035457	0.004099	0.00316
MT5_PAG25	-0.14975	-0.04355	-0.06311	-0.06307	-0.06827	-0.07657	-0.08174
MT5_PAG50	-0.19666	-0.10183	-0.01563	-0.05113	-0.06781	-0.03932	-0.06619
MT5_PAG75	-0.04759	-0.1402	-0.09614	-0.07074	-0.07721	-0.12111	0.053848
MT5_Moses	-0.18494	-0.09123	-0.05138	-0.00623	0.02206	-0.06622	0.050311
MT5_MGPT-TR	-0.1	-0.10514	-0.08911	-0.13977	-0.02636	-0.05928	0.038272
MT5_mT5-TR	-0.1	-0.14966	-0.12913	-0.18045	0.057898	0.003696	0.03223
MT5_KO	-0.07757	-0.02777	-0.09689	-0.02668	-0.1	0.099926	-0.1

Table 9: STS experiment results using mT5. The model output a single label due to improper training.

	1k	2k	3k	4k	5k	6k	7k	8k	9k	10k	12k	14k	16k	18k	20k	30k	40k	50k
MGPT_EN	0.673	0.688	0.708	0.696	0.716	0.712	0.7	0.716	0.722	0.717	0.73	0.716	0.729	0.725	0.727			
MGPT_TR-GPT	0.723	0.741	0.745	0.748	0.748	0.758	0.758	0.755	0.755	0.752	0.765	0.765	0.769	0.766	0.772			
MGPT_PAD	0.696	0.721	0.731	0.735	0.732	0.732	0.735	0.737	0.742	0.754	0.752	0.752	0.762	0.759	0.77	0.759	0.764	0.77
MGPT_PAD25	0.674	0.699	0.703	0.707	0.717	0.67	0.706	0.725	0.722	0.724	0.728	0.731	0.734	0.727	0.733	0.729	0.745	0.738
MGPT_PAD50	0.697	0.689	0.711	0.715	0.722	0.725	0.719	0.724	0.735	0.716	0.725	0.738	0.736	0.739	0.742	0.734	0.739	0.738
MGPT_PAD75	0.721	0.709	0.704	0.704	0.726	0.732	0.727	0.728	0.729	0.724	0.734	0.745	0.732	0.735	0.729	0.745	0.741	0.742
MGPT_Moses	0.728	0.735	0.736	0.735	0.732	0.736	0.743	0.75	0.747	0.759	0.749	0.748	0.753	0.77	0.742	0.765	0.759	0.755
MGPT_MGPT-TR	0.643	0.667	0.639	0.705	0.714	0.749	0.719	0.725	0.742	0.734	0.755	0.751	0.75	0.732	0.756			
MGPT_mT5-TR	0.634	0.656	0.651	0.719	0.722	0.739	0.735	0.728	0.73	0.714	0.736	0.741	0.747	0.758	0.757			
MGPT_KO	0.728	0.755	0.758	0.762	0.777	0.769	0.792	0.822	0.803	0.821	0.83	0.821	0.817	0.821	0.826			

Table 10: SA experiment results using MGPT

	1k	2k	3k	4k	5k	6k	7k	8k	9k	10k	12k	14k	16k	18k	20k	30k	40k	50k
KGPT_TR-GPT	0.834	0.832	0.835	0.839	0.845	0.849	0.854	0.851	0.857	0.857	0.859	0.867	0.863	0.868	0.866			
KGPT_PAD	0.824	0.819	0.826	0.832	0.833	0.838	0.835	0.833	0.839	0.843	0.845	0.847	0.845	0.852	0.849	0.86	0.853	0.862
KGPT_Moses	0.823	0.819	0.823	0.827	0.83	0.816	0.822	0.843	0.849	0.834	0.845	0.849	0.855	0.864	0.856	0.855	0.859	0.863
KGPT_MGPT-TR	0.766	0.79	0.791	0.809	0.802	0.82	0.8	0.816	0.826	0.837	0.814	0.813	0.831	0.838	0.847			
KGPT_mT5-TR	0.816	0.819	0.819	0.818	0.826	0.832	0.827	0.823	0.831	0.832	0.841	0.847	0.835	0.853	0.86			
KGPT_KO	0.851	0.876	0.874	0.871	0.875	0.872	0.881	0.893	0.892	0.891	0.892	0.9	0.895	0.895	0.902			

Table 11: SA experiment results using koGPT

	1k	2k	3k	4k	5k	6k	7k	8k	9k	10k	12k	14k	16k	18k	20k	30k	40k	50k
KmT5_TR-GPT	0.723	0.793	0.817	0.827	0.828	0.828	0.842	0.842	0.852	0.848	0.849	0.855	0.855	0.86	0.863			
KmT5_PAD	0.747	0.778	0.784	0.795	0.804	0.816	0.819	0.821	0.832	0.828	0.83	0.831	0.832	0.842	0.841	0.843	0.846	0.845
KmT5_Moses	0.77	0.779	0.786	0.804	0.798	0.822	0.824	0.827	0.82	0.819	0.829	0.832	0.831	0.838	0.839	0.846	0.846	0.852
KmT5_MGPT-TR	0.642	0.727	0.784	0.777	0.797	0.803	0.814	0.811	0.814	0.826	0.824	0.814	0.827	0.834	0.839			
KmT5_mT5-TR	0.667	0.605	0.799	0.78	0.813	0.824	0.828	0.829	0.839	0.836	0.845	0.845	0.852	0.851	0.852			
KmT5_KO	0.816	0.832	0.838	0.856	0.863	0.861	0.873	0.879	0.881	0.885	0.885	0.892	0.895	0.907	0.902			

Table 12: SA experiment results using kT5

	1k	2k	3k	4k	5k	6k	7k	8k	9k	10k	12k	14k	16k	18k	20k	30k	40k	50k
MGPT_EN	0.25	0.237	0.265	0.269	0.282	0.3	0.357	0.307	0.433	0.421	0.417	0.473	0.474	0.589	0.572			
MGPT_TR-GPT	0.285	0.319	0.353	0.389	0.386	0.507	0.515	0.569	0.544	0.629	0.672	0.657	0.666	0.722	0.711			
MGPT_PAD	0.315	0.323	0.345	0.352	0.369	0.392	0.385	0.509	0.494	0.51	0.639	0.514	0.665	0.671	0.681	0.687	0.693	0.701
MGPT_PAD25	0.287	0.297	0.323	0.328	0.34	0.375	0.36	0.386	0.427	0.497	0.46	0.521	0.626	0.641	0.649	0.659	0.667	0.675
MGPT_PAD50	0.289	0.303	0.335	0.353	0.363	0.385	0.373	0.412	0.421	0.433	0.491	0.444	0.659	0.667	0.672	0.676	0.687	0.696
MGPT_PAD75	0.317	0.341	0.346	0.362	0.369	0.41	0.375	0.416	0.437	0.448	0.566	0.478	0.53	0.627	0.669	0.671	0.684	0.687
MGPT_Moses	0.312	0.321	0.343	0.36	0.367	0.439	0.382	0.495	0.505	0.515	0.555	0.531	0.612	0.635	0.663	0.671	0.674	0.682
MGPT_MGPT-TR	0.25	0.282	0.295	0.329	0.346	0.369	0.377	0.41	0.425	0.446	0.514	0.469	0.578	0.601	0.61			
MGPT_mT5-TR	0.337	0.369	0.393	0.407	0.441	0.476	0.455	0.497	0.551	0.557	0.593	0.579	0.67	0.673	0.679			
MGPT_KO	0.309	0.332	0.357	0.384	0.515	0.507	0.583	0.565	0.573	0.673	0.686	0.692	0.667	0.745	0.724			

Table 13: NLI experiment results using MGPT

	1k	2k	3k	4k	5k	6k	7k	8k	9k	10k	12k	14k	16k	18k	20k	30k	40k	50k
KGPT_TR-GPT	0.691	0.73	0.733	0.731	0.765	0.748	0.754	0.761	0.77	0.789	0.773	0.78	0.766	0.773	0.782			
KGPT_PAD	0.663	0.696	0.708	0.715	0.72	0.739	0.746	0.742	0.749	0.751	0.746	0.747	0.762	0.767	0.754	0.763	0.754	0.767
KGPT_Moses	0.689	0.701	0.716	0.723	0.728	0.733	0.735	0.755	0.757	0.74	0.764	0.767	0.757	0.769	0.76	0.747	0.771	0.766
KGPT_MGPT-TR	0.513	0.601	0.621	0.663	0.663	0.691	0.669	0.715	0.701	0.699	0.747	0.727	0.738	0.729	0.758			
KGPT_mT5-TR	0.555	0.639	0.672	0.669	0.689	0.708	0.695	0.707	0.733	0.73	0.747	0.731	0.75	0.758	0.753			
KGPT_KO	0.723	0.74	0.767	0.777	0.784	0.78	0.791	0.779	0.794	0.802	0.811	0.801	0.816	0.832	0.834			

Table 14: NLI experiment results using koGPT

	1k	2k	3k	4k	5k	6k	7k	8k	9k	10k	12k	14k	16k	18k	20k	30k	40k	50k
KmT5_TR-GPT	0.45	0.6	0.601	0.688	0.687	0.713	0.689	0.701	0.7	0.721	0.731	0.751	0.754	0.764	0.75			
KmT5_PAD	0.38	0.505	0.579	0.597	0.618	0.687	0.687	0.706	0.712	0.714	0.726	0.731	0.728	0.732	0.732	0.739	0.741	0.741
KmT5_Moses	0.437	0.551	0.569	0.6	0.666	0.677	0.689	0.711	0.703	0.685	0.732	0.709	0.73	0.729	0.726	0.733	0.747	0.741
KmT5_MGPT-TR	0.433	0.44	0.508	0.579	0.605	0.635	0.621	0.657	0.663	0.675	0.682	0.703	0.711	0.717	0.723			
KmT5_mT5-TR	0.359	0.439	0.497	0.579	0.613	0.65	0.667	0.695	0.695	0.719	0.719	0.741	0.746	0.743	0.734			
KmT5_KO	0.513	0.649	0.64	0.708	0.665	0.723	0.727	0.732	0.765	0.752	0.779	0.772	0.794	0.805	0.803			

Table 15: NLI experiment results using kT5

	1k	2k	3k	4k	5k	6k	7k
MGPT_EN	0.553	0.513	0.694	0.651	0.665	0.655	0.819
MGPT_TR-GPT	0.574	0.547	0.752	0.711	0.691	0.691	0.851
MGPT_PAD	0.55	0.553	0.735	0.693	0.677	0.684	0.844
MGPT_PAD25	0.545	0.559	0.714	0.67	0.682	0.676	0.82
MGPT_PAD50	0.548	0.535	0.731	0.668	0.678	0.671	0.838
MGPT_PAD75	0.525	0.546	0.743	0.675	0.667	0.668	0.813
MGPT_Moses	0.523	0.575	0.736	0.659	0.671	0.682	0.821
MGPT_MGPT-TR	0.53	0.59	0.745	0.688	0.671	0.692	0.841
MGPT_mT5-TR	0.529	0.58	0.762	0.698	0.704	0.685	0.84
MGPT_KO	0.548	0.64	0.779	0.748	0.744	0.745	0.88

Table 16: STS experiment results using MGPT

	1k	2k	3k	4k	5k	6k	7k
KGPT_TR-GPT	0.811	0.818	0.824	0.828	0.83	0.833	0.831
KGPT_PAD	0.803	0.814	0.818	0.821	0.826	0.824	0.829
KGPT_Moses	0.804	0.818	0.816	0.824	0.828	0.83	0.824
KGPT_MGPT-TR	0.53	0.777	0.776	0.772	0.789	0.798	0.819
KGPT_mT5-TR	0.776	0.799	0.815	0.817	0.811	0.821	0.816
KGPT_KO	0.819	0.827	0.834	0.838	0.842	0.843	0.844

Table 17: STS experiment results using koGPT

	1k	2k	3k	4k	5k	6k	7k
KmT5_TR-GPT	0.834	0.853	0.853	0.853	0.858	0.856	0.863
KmT5_PAD	0.822	0.831	0.835	0.84	0.854	0.855	0.855
KmT5_Moses	0.834	0.841	0.843	0.834	0.851	0.853	0.852
KmT5_MGPT-TR	0.045	0.769	0.754	0.822	0.811	0.852	0.844
KmT5_mT5-TR	0.352	0.762	0.795	0.815	0.836	0.827	0.817
KmT5_KO	0.848	0.862	0.868	0.869	0.873	0.873	0.875

Table 18: STS experiment results using kT5