

---

# On the Perception Bottleneck of VLMs for Chart Understanding

---

Junteng Liu<sup>1</sup> Weihao Zeng<sup>1</sup> Xiwen Zhang<sup>2</sup> Yijun Wang<sup>3</sup> Zifei Shan<sup>3</sup> Junxian He<sup>1</sup>

## Abstract

Chart understanding requires models to effectively analyze and reason about numerical data, textual elements, and complex visual components. Our observations reveal that the perception capabilities of existing large vision-language models (LVLMs) constitute a critical bottleneck in this process. In this study, we delve into this perception bottleneck by decomposing it into two components: the vision encoder bottleneck, where the visual representation may fail to encapsulate the correct information, and the extraction bottleneck, where the language model struggles to extract the necessary information from the provided visual representations. Through comprehensive experiments, we find that (1) the information embedded within visual representations is substantially richer than what is typically captured by linear extractors, such as the widely used retrieval accuracy metric; (2) While instruction tuning effectively enhances the extraction capability of LVLMs, the vision encoder remains a critical bottleneck, demanding focused attention and improvement. Therefore, we further enhance the visual encoder to mitigate the vision encoder bottleneck under a contrastive learning framework. Empirical results demonstrate that our approach significantly mitigates the perception bottleneck and improves the ability of LVLMs to comprehend charts. Code is publicly available at <https://github.com/hkust-nlp/Vision4Chart>.

## 1. Introduction

Charts are essential for representing and analyzing data, commonly appearing in scientific papers, financial reports, and news articles. Unlike natural images, where semantic content is often apparent through object recognition,

charts encode dense quantitative and relational information via visual elements such as bars, lines, and points, along with their spatial relationships. This unique property creates unique challenges for large vision-language models (LVLMs), which, despite success in general visual understanding tasks (Alayrac et al., 2022; Li et al., 2023; Liu et al., 2024b), often struggle with chart understanding (Masry et al., 2022; Xu et al., 2023; Xia et al., 2024; Wang et al., 2024), as demonstrated in Figure 1. The difficulty lies in the models’ need to accurately decode complex and dense information within the chart’s context, requiring more specialized perception capabilities (Wang et al., 2024).

In this work, we systematically examine the perception bottleneck of LVLMs by analyzing it through two key components: the vision encoder and the language model. Specifically, we define perception as the model’s ability to accurately extract visual information from an image. For most LVLMs equipped with a dedicated vision encoder, the process of perceiving visual signals can be broken down into two stages: first, the vision encoder encodes the image into compact vector representations; second, the language model extracts the relevant information from these encoded vectors. Accordingly, we decompose the perception bottleneck into two categories: the vision encoder bottleneck and the extraction bottleneck. Our objective is to investigate how these two distinct bottlenecks impact the overall perception capability of LVLMs and how to mitigate them.

We begin our study of the vision encoder bottleneck by evaluating the chart understanding ability of CLIP, a widely used vision encoder in many LVLMs (Liu et al., 2024a;b). Specifically, we construct an image-text retrieval test set using existing chart-specific datasets and assess CLIP with the standard retrieval accuracy. As highlighted by several prior studies that use CLIP’s retrieval accuracy as an indicator of the information contained in its visual embeddings (Tong et al., 2024; Deng et al., 2024), our findings suggest that the CLIP vision encoder may experience significant information loss when encoding images. To address this limitation and facilitate our subsequent analyses, we develop enhanced versions of CLIP. Specifically, we fine-tune CLIP on chart-specific datasets within a contrastive learning framework and incorporate hard negative captions (Yuksekgonul et al., 2022) specifically designed for chart understanding. The improved CLIP achieves an absolute gain of over 10% in

---

<sup>1</sup>The Hong Kong University of Science and Technology <sup>2</sup>Independent contributor <sup>3</sup>Tencent. Correspondence to: Junteng Liu <jliugi@connect.ust.hk>, Junxian He <junxianh@cse.ust.hk>.

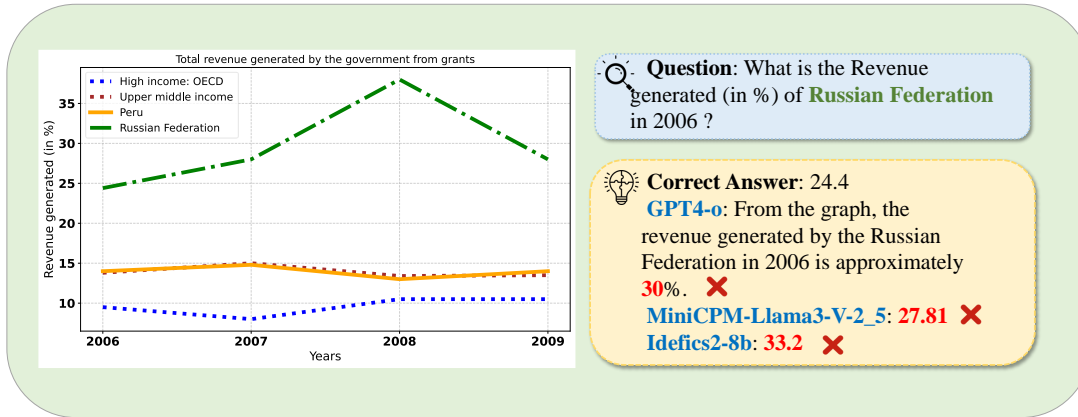


Figure 1. An example of perception QA from the PlotQA dataset (Methani et al., 2020), along with the responses from GPT4-o (Achiam et al., 2023), MiniCPM (Yao et al., 2024), and Idefics2 (Laurençon et al., 2024) for this example. (The chart has been redrawn for clarity in presentation.)

retrieval accuracy compared to the original model, demonstrating its enhanced ability to encode and represent chart-related visual information.

To investigate the extraction bottleneck in the language model part, we shift our focus to LVLMs built on top of these CLIP-based vision encoders. Specifically, we conduct LLaVA-style training (Liu et al., 2024a) combined with chart-specific instruction tuning. Our initial observations reveal that LVLMs trained with the LLaVA data perform poorly on chart understanding tasks, even worse than the original CLIP retrieval performance, reaffirming the presence of the perception bottleneck. Surprisingly, however, we observe a substantial improvement that surpasses the enhanced CLIP retrieval accuracy when the LVLM is further fine-tuned on chart-specific data, even with the original CLIP encoder kept frozen. This finding suggests that poor CLIP retrieval accuracy does not necessarily indicate a lack of useful encoded information. It also indicates that retrieval accuracy may be an inadequate proxy for assessing the vision encoder bottleneck.

As we will demonstrate in our experiments, while chart-specific instruction tuning significantly enhances the extraction capabilities of the language model, its impact on the vision encoder bottleneck remains limited, thereby restricting further improvements in overall perception. In contrast, our enhanced CLIP models successfully mitigate this limitation by raising the performance ceiling. These models achieve substantial gains across seven chart-related benchmarks, spanning both in-distribution and out-of-distribution scenarios. Notably, when integrated with our enhanced CLIPs, the model using the LLaVA-v1.5-13B architecture achieves an average improvement of nearly 3 points, while the model employing the LLaVA-v1.5-Phi-3.8B architecture demonstrates an even larger improvement of 5 points.

## 2. The Challenge of Chart Understanding

To better illustrate the perceptual challenges in chart understanding, we examine one concrete perception QA example from PlotQA (Methani et al., 2020). As shown in Figure 1, to answer “What is the Revenue generated (in %) of Russian Federation in 2006?”, models need to: (1) correctly match the dotted green line with its legend label, (2) locate the intersection point between this line and the vertical line at 2006, and (3) accurately map this point to the y-axis scale to obtain the value (~ 24%). While humans can perform this visual reasoning process effortlessly, current models like GPT4-o (Achiam et al., 2023), MiniCPM (Yao et al., 2024) and Idefics2 (Laurençon et al., 2024) often struggle with such perception tasks as demonstrated in Figure 1. Unlike natural images, chart understanding presents unique perception challenges as it requires accurately encoding and processing dense quantitative information encoded in visual elements.

Recent studies have quantitatively revealed these perceptual limitations through new chart-specific benchmarks (Xu et al., 2023; Wang et al., 2024; Xia et al., 2024). To better understand the sources of these limitations, we decompose the perception bottleneck into two key components. (1) The vision encoder bottleneck: This occurs when the vision encoder fails to encode critical information from the image into its embeddings, leading to inevitable failures in downstream LVLM tasks. (2) The extraction bottleneck: Even when the image embeddings contain the necessary information, the LLM struggles to extract and interpret them correctly, resulting in erroneous outputs. In our study, we investigate the impact of these two bottlenecks and propose strategies to mitigate them on the chart understanding task. Next, we start by analyzing the vision encoder bottleneck.

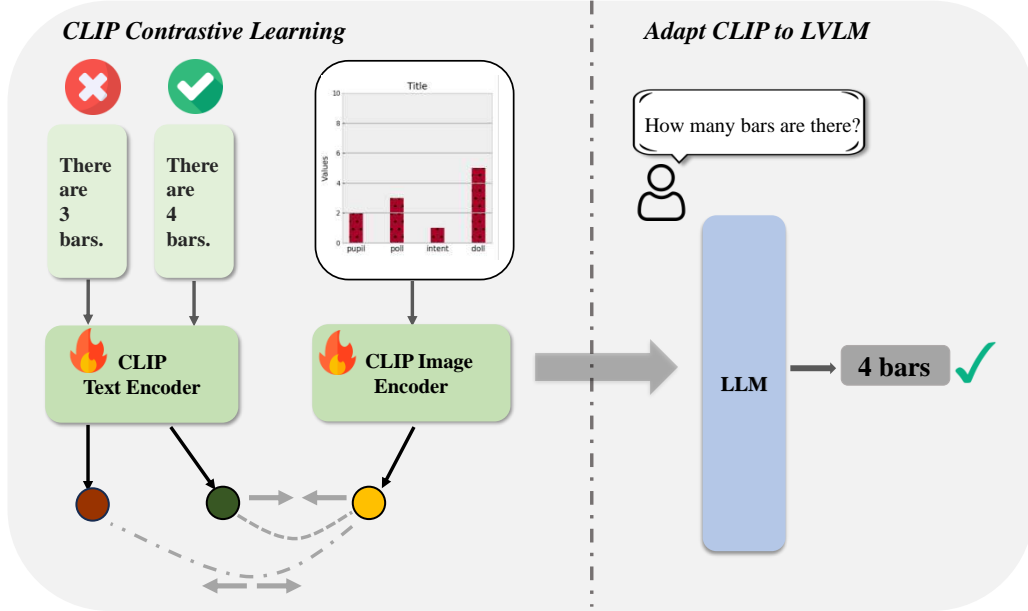


Figure 2. **Left:** By leveraging contrastive learning with hard negatives, the enhanced CLIP model learns more discriminative visual features. **Right:** When adapted to LVLMs, the enhanced CLIPs enable faster learning and achieve higher overall performance.

### 3. The Vision Encoder Bottleneck: Investigating and Improving CLIP

As CLIP serves as the vision encoder in most LVLMs (Liu et al., 2024a;b), we focus on CLIP to investigate the vision encoder bottleneck. In this section, we construct a framework for training and evaluating CLIP’s chart understanding abilities. To thoroughly assess CLIP performance, we leverage several chart-related datasets for training and evaluation, including FigureQA (Kahou et al., 2017), DVQA (Kafle et al., 2018), PlotQA (Methani et al., 2020), ChartQA (Masry et al., 2022), and ChartBench (Xu et al., 2023).

#### 3.1. Background of CLIP

The CLIP training framework features an image encoder  $f_I$  and text encoder  $f_T$  to encode a given (image, text) pair  $(I, T)$  into two vectors. Then it employs contrastive learning to align image and text representations in a shared embedding space by maximizing the similarity of matched pairs while minimizing that of unmatched ones. With  $\text{sim}(\cdot, \cdot)$  denoting cosine similarity, the training objective is formalized through the following loss functions:

##### Image-to-Text Loss:

$$\mathcal{L}_{i \rightarrow t} = -\frac{1}{N} \sum_{i=1}^N \log \frac{\exp(\text{sim}(f_I(I_i), f_T(T_i)))}{\sum_{j=1}^N \exp(\text{sim}(f_I(I_i), f_T(T_j)))} \quad (1)$$

##### Text-to-Image Loss:

$$\mathcal{L}_{t \rightarrow i} = -\frac{1}{N} \sum_{j=1}^N \log \frac{\exp(\text{sim}(f_T(T_j), f_I(I_j)))}{\sum_{i=1}^N \exp(\text{sim}(f_T(T_j), f_I(I_i)))} \quad (2)$$

##### Total CLIP Loss:

$$\mathcal{L}_{\text{CLIP}} = \frac{1}{2} (\mathcal{L}_{i \rightarrow t} + \mathcal{L}_{t \rightarrow i}) \quad (3)$$

#### 3.2. CLIP Evaluation

For CLIP evaluation, we implement an Image-to-Text Retrieval task. Specifically, given an input image, the task is to retrieve the correct caption along with several hard negative ones. The hard negative captions are specifically crafted to resemble the positive captions while being incorrect, as described in the later §3.4. This retrieval evaluation is performed using the test sets from five chart-related datasets: FigureQA (Kahou et al., 2017), DVQA (Kafle et al., 2018), PlotQA (Methani et al., 2020), ChartQA (Masry et al., 2022), and ChartBench (Xu et al., 2023).

We select the CLIP-ViT-L/14-336px (Radford et al., 2021) model in our study, as its vision model is widely used in LVLMs such as InstructBLIP, LLaVA and LLaVA-Phi (Dai et al., 2023; Liu et al., 2024b;a; Zhu et al., 2024). The retrieval evaluation results are presented in Table 1.

**Original CLIP exhibits poor retrieval performance.** While prior research has demonstrated that the original CLIP

Table 1. The Image-to-Text retrieval evaluation accuracy on original CLIP-ViT-L/14-336px and fine-tuned CLIPs, where the DVQA-E indicates DVQA Easy and the DVQA-H indicates DVQA Hard.

	Avg.	FigureQA	DVQA-E	DVQA-H	PlotQA	ChartQA	ChartBench
Random	21.3	50.0	25.8	25.6	8.9	12.8	4.8
CLIP	25.5	48.6	28.9	27.2	22.1	18.8	7.4
+ fine-tuning	41.5	64.4	54.9	53.9	42.4	23.7	9.5
+ neg. cap.	<b>51.4</b>	<b>82.0</b>	<b>65.2</b>	<b>61.0</b>	<b>54.1</b>	<b>29.7</b>	<b>16.2</b>

model achieves over 70% accuracy on ImageNet classification, its retrieval performance on chart-related datasets is notably poor, with results approaching random guessing on benchmarks such as FigureQA and DVQA. This can be attributed to the fact that the original CLIP model, pre-trained on web-crawled image-caption corpora, contains limited high-quality chart-related data. The poor retrieval accuracy is often interpreted as a sign of information loss in the encoded images (Kamath et al., 2023; Tong et al., 2024), suggesting the vision encoder bottleneck. However, as we will discuss later in §4.2, we further study it and find that low retrieval accuracy does not necessarily imply information loss.

### 3.3. CLIP Improvement

Observing the poor performance of the original CLIP, we explore methods to improve the chart understanding capabilities of CLIP. The first approach we try is to continue training CLIP on chart images with the original CLIP loss. Inspired by NegCLIP (Yuksekgonul et al., 2022), which demonstrated that CLIP’s failures may stem from learning shortcuts during training, we implement another variant that incorporates hard negative samples into our training process. The hard negative captions  $T_j^{\text{neg}}$  help push the model to learn more discriminative features. Our strategies for constructing these hard negatives will be detailed in the following section §3.4. The training objective with hard negatives is formalized as:

#### Image-to-Text Loss with Hard Negatives:

$$\mathcal{L}_{i \rightarrow t}^{\text{Neg}} = -\frac{1}{N} \sum_{i=1}^N \log \frac{\exp(\text{sim}(f_I(I_i), f_T(T_i)))}{\sum_{j=1}^N [\exp(\text{sim}(f_I(I_i), f_T(T_j))) + \exp(\text{sim}(f_I(I_i), f_T(T_j^{\text{neg}})))]} \tag{4}$$

#### Total NegCLIP Loss:

$$\mathcal{L}_{\text{NegCLIP}} = \frac{1}{2} (\mathcal{L}_{i \rightarrow t}^{\text{Neg}} + \mathcal{L}_{t \rightarrow i}) \tag{5}$$

For training data, we exclude reasoning-type questions from the PlotQA dataset (Methani et al., 2020), as they

are not suitable for CLIP training and deviate from our primary objective of analyzing CLIP’s impact on LVLm’s perceptual capabilities. In addition to the mentioned chart-related datasets, we incorporate additional datasets such as CLEVR (Johnson et al., 2017), MapQA (Chang et al.), and VQAv2 (Goyal et al., 2017), resulting in a training set of approximately 8 million samples. Detailed statistics of the training data are provided in Appendix A.1. Since most of these datasets consist of question-answer pairs, we utilize Llama3-8b-instruct (Dubey et al., 2024) to convert the question-answer pairs into assertive sentences, which are used as training and evaluation captions.

### 3.4. Constructing Hard Negative Captions

Yuksekgonul et al. (2022) introduced NegCLIP by perturbing word order to construct hard negative captions, forcing CLIP to enhance relational understanding. Similar approaches have been applied to the fine-grained conceptual understanding of color, object, location, and size (Rösch et al., 2024). In this work, we adapt the NegCLIP methodology to the domain of chart understanding. The process begins by synthesizing incorrect answers, which are then converted into assertive captions using Llama3-8b-instruct. These incorrect captions are used as hard negatives to compel CLIP to better understand and distinguish between relevant chart information.

During the synthesis of incorrect answers, we employ several strategies. In some cases, we systematically flip answers (e.g., changing “yes” to “no”) or modify numerical values. In other cases, we use Llama3-8b-instruct to generate plausible but incorrect answers. For example, in the FigureQA dataset, we flip binary answers (e.g., “yes” to “no”). In the PlotQA dataset, where answers involve numerical values, we systematically generate wrong answers with error ranges between 5% and 80% of the ground truth answer as shown in the example below. For questions querying the chart title in PlotQA, we rely on Llama3-8b-instruct to generate plausible but incorrect answers. Further details of the hard negative captions for all datasets are shown in Appendix A.2.

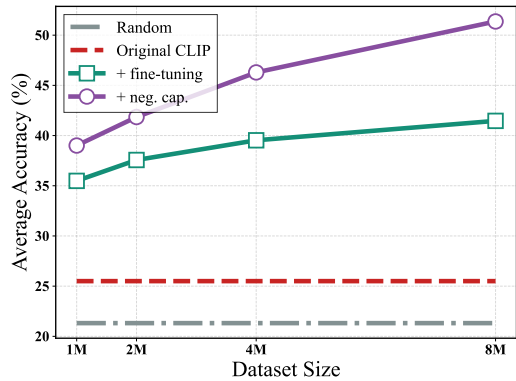


Figure 3. CLIP retrieval accuracy while scaling training data size, on the average of five datasets: FigureQA, DVQA-Easy&Hard, PlotQA, ChartQA, Chartbench.

#### Example: Caption and Hard Negative Caption 0

**Caption:** “The number of anaemic children in Malawi in 1991 was 76.3%.”

**Hard Negative Caption:** “The number of anaemic children in Malawi in 1991 was 40.6%.”

### 3.5. Performance of Enhanced CLIP

As in previous experiments, we use the CLIP-ViT-L/14-336px (Radford et al., 2021) model. The model is trained with a batch size of 64, a learning rate of  $5 \times 10^{-6}$ , for 3 epochs on our collected training data, which consists of approximately 8 million samples. The retrieval evaluation results are also presented in Table 1.

**Fine-tuned CLIP Significantly Improves Retrieval Accuracy** Compared to the original CLIP, both fine-tuned models (with and without hard negatives) show significant improvements in retrieval performance. Furthermore, Neg-CLIP (CLIP fine-tuned with neg. cap.) achieves the largest improvement, surpassing 10 points across these datasets. We conclude that incorporating hard negative captions effectively forces CLIP to learn more accurate and relevant chart information, similar to the success of NegCLIP in previous works (Yuksekgonul et al., 2022; Rösch et al., 2024).

**Fine-tuned CLIP Performance Improves with Data Scaling** We conduct data scaling experiments for CLIP training, as illustrated in Figure 3. Our observations reveal that the performance of fine-tuned CLIP steadily improves as the scale of the training data increases. Furthermore, NegCLIP consistently outperforms direct fine-tuning CLIP throughout the scaling process. Notably, our innovative method for generating hard negative captions with the aid of LLMs may be applicable to larger-scale CLIP training in the future.

## 4. The Extraction Bottleneck: Connecting CLIP Capabilities to LLM Performance

Upon finishing our study of CLIP for the vision encoder bottleneck, we shift our focus to the extraction bottleneck to understand how these CLIP models impact LLaVAs. Having observed the poor performance of the original CLIP and the improved performance of fine-tuned CLIPs, we aim to answer two questions:

- Does the failure of CLIP retrieval cause the failure of LLaVAs that are based on it?
- What is the impact of enhanced CLIPs on the performance of LLaVAs?

### 4.1. Experimental Setup

**Training Setup** Following LLaVA-v1.5-13b (Liu et al., 2024a) and LLaVA-Phi (Rasheed et al., 2024), we use Vicuna-13b (Chiang et al., 2023) or the Phi-3-mini (Abdin et al., 2024) of 3.8B parameters as the base LLM and employ a two-layer MLP connector to map CLIP’s image embeddings into the LLM’s input space. Our training process consists of three stages. First, we pretrain the connector on 558K image-caption pairs from the LLaVA training dataset, keeping both the CLIP vision encoder and the LLM fixed. In the second stage, we conduct visual instruction tuning on 665K instruction samples, also derived from the LLaVA dataset. Finally, in the third stage, we perform chart-specific tuning on a dataset of 250K chart samples, including FigureQA, DVQA, PlotQA, ChartQA, and Chart2Text (Kantharaj et al., 2022), resulting in the LLaVA-Chart-13B and LLaVA-Chart-Phi models. In both the second and third stages, we explore two strategies: freezing or unfreezing the CLIP vision encoder.

**Evaluation Setup** We sample 25K examples separately from the test sets of FigureQA, DVQA, and PlotQA for evaluation. For FigureQA and DVQA, we use exact match accuracy as the evaluation metric. For numerical answers in PlotQA, we adopt a relaxed correctness criterion, considering a prediction correct if it falls within 5% of the ground truth, following prior works (Methani et al., 2020). For ChartQA, we use its 2.5K test set and apply the same relaxed correctness criterion for numerical answers. Similarly, for ChartBench, we focus on QA tasks and split the dataset into two subtasks: binary QA (Yes/No answers) and 2.1K numerical QA samples, applying relaxed correctness for the latter. Additionally, to evaluate generalization performance, we include the MathVista benchmark (Lu et al., 2024) and ChartX (Xia et al., 2024).

Table 2. Evaluation accuracy of LLaVA-v1.5-13B, LLaVA-Chart-13B and LLaVA-Chart-Phi based on different CLIPs. The first result row, labeled “LLaVA,” corresponds to LLaVA-v1.5-13B without chart-specific tuning. “Binary” indicates tasks with Yes/No answers. “Frozen” and “Unfrozen” refer to whether the CLIP model is frozen during LLaVA training. “FT.CLIP” represents the fine-tuned CLIP without hard negative captions, while “NegCLIP” refers to the CLIP trained with hard negative captions. The  $\Delta$  rows report per-benchmark performance gains of Unfrozen-NegCLIP compared to Unfrozen-CLIP.

VLM	Vision Encoder	Avg.	FigureQA	DVQA		PlotQA	ChartQA	ChartBench		MathVista		ChartX
			Binary	Easy	Hard	QA	QA	Binary	QA	FQA	ALL	QA
CLIP	CLIP	-	48.6	28.9	27.2	22.1	18.8	-	7.4	-	-	-
	FT.CLIP	-	64.4	54.9	53.9	42.4	23.7	-	9.5	-	-	-
	NegCLIP	-	82.0	65.2	61.0	54.1	29.7	-	16.2	-	-	-
LLaVA-Chart-13B	Frozen-CLIP	25.9	51.2	25.8	25.3	12.6	18.3	53.0	9.7	23.1	27.0	12.7
	Frozen-CLIP	53.2	78.4	79.9	75.4	41.7	53.0	<b>73.4</b>	26.4	49.4	34.0	20.1
	Unfrozen-CLIP	53.6	78.9	79.7	74.9	41.7	53.1	73.2	<b>27.8</b>	50.9	<b>36.1</b>	19.6
	Frozen-FT.CLIP	54.8	83.8	84.3	78.7	43.8	54.3	73.1	26.3	48.0	34.4	21.2
	Unfrozen-FT.CLIP	55.2	83.4	84.4	78.9	44.1	54.6	73.2	26.9	49.4	35.7	20.8
	Frozen-NegCLIP	56.0	<b>86.2</b>	86.1	<b>80.9</b>	44.8	54.9	72.1	27.1	52.0	34.6	<b>21.5</b>
	Unfrozen-NegCLIP	<b>56.2</b>	86.0	<b>86.3</b>	80.7	<b>45.1</b>	<b>55.0</b>	72.8	26.9	<b>52.4</b>	35.4	21.4
	$\Delta$ over Unfrozen-CLIP	+2.6	+7.1	+6.6	+5.8	+3.4	+1.9	-0.4	-0.9	+1.5	-0.7	+1.8
LLaVA-Chart-Phi	Frozen-CLIP	49.4	72.1	76.1	70.6	38.9	48.0	70.9	23.3	43.5	33.4	17.5
	Unfrozen-CLIP	49.3	71.3	76.7	70.5	38.5	48.1	71.7	23.8	40.5	33.7	18.1
	Frozen-FT.CLIP	52.0	79.3	81.8	75.2	41.7	49.7	<b>71.8</b>	23.3	45.4	34.2	17.8
	Unfrozen-FT.CLIP	51.7	78.6	81.7	74.8	41.5	49.4	71.1	23.5	46.1	33.1	17.5
	Frozen-NegCLIP	54.1	85.0	<b>85.0</b>	<b>78.3</b>	42.5	<b>51.3</b>	71.2	24.2	49.4	34.9	19.0
	Unfrozen-NegCLIP	<b>54.3</b>	<b>85.1</b>	84.9	77.6	<b>42.6</b>	51.0	70.9	<b>24.8</b>	<b>50.6</b>	<b>35.6</b>	<b>19.5</b>
	$\Delta$ over Unfrozen-CLIP	+5.0	+13.8	+8.2	+7.1	+4.1	+2.9	-0.8	+1.0	+10.1	+1.9	+1.4

#### 4.2. Poor Retrieval Performance Does Not Imply Limited Information Encoding

Our experimental results (Table 2) show that LLaVA, without the third-stage chart-specific tuning, performs poorly on chart benchmarks, achieving lower accuracy than the original CLIP retrieval performance. After chart-specific tuning, LLaVA based on the original CLIP can learn these chart tasks successfully, even when the CLIP is frozen, indicating the improved extraction ability. For instance, LLaVA-Chart-13B achieves 78% accuracy on FigureQA, despite its CLIP nearly random retrieval accuracy on the same dataset in Table 1. Moreover, we observe that unfreezing the vision encoder provides only a minor improvement. The success of original CLIP-LLaVA training suggests that the original CLIP is not “blind”. Poor retrieval performance does not necessarily imply a lack of useful encoded information in CLIP’s image embeddings. The original CLIP still captures essential visual features that LLaVA can leverage through supervised fine-tuning (SFT). We hypothesize that retrieval accuracy primarily reflects the linear properties of CLIP’s image and text embeddings, as similarity computation in retrieval tasks relies on cosine similarity or dot product, which are inherently linear operations. However, when integrated into an LVLM, the LLM component—acting as a more powerful information processor—can extract and utilize non-linear features from CLIP’s image embeddings. Similar observations have been reported in recent work (Li

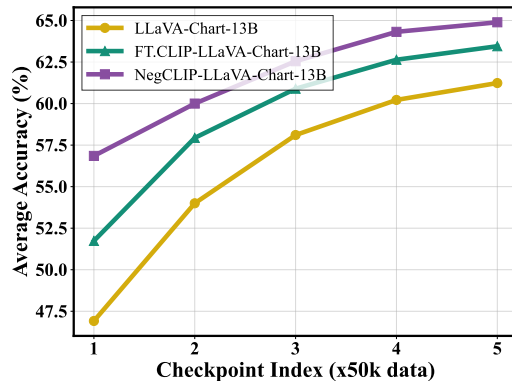


Figure 4. LLaVA training data scaling results, averaged over five datasets: FigureQA, DVQA-E&H, PlotQA, ChartQA, and Chart-Bench, for LLaVAs based on different CLIP vision encoders (the original CLIP, FT.CLIP, and NegCLIP).

et al., 2024), indicating that retrieval accuracy may be an inadequate proxy for assessing the vision encoder bottleneck.

To further validate this conclusion, we conducted an ablation study by training LLaVA with randomly initialized CLIP weights. Notably, the model failed to converge during the final chart-specific fine-tuning stage (details in the Appendix B). This confirms that the original CLIP, despite their as poor as random retrieval performance, provides crucial visual information for successful LVLM training.

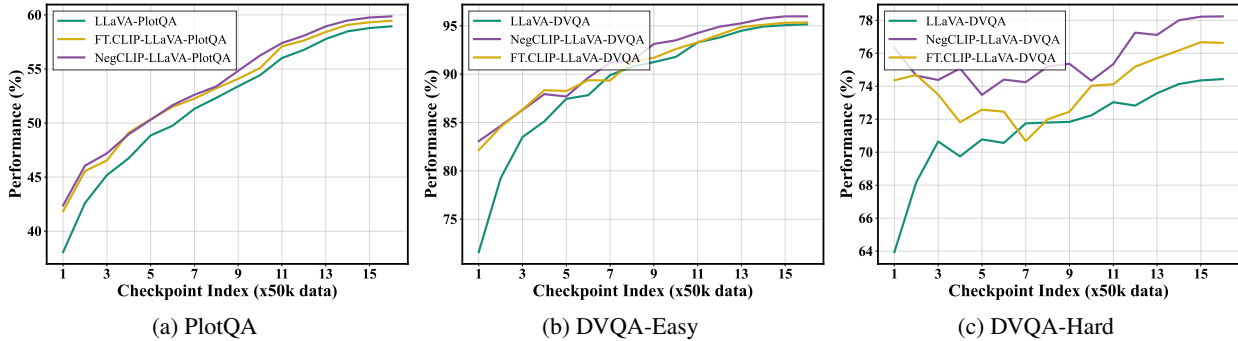


Figure 5. The large LLaVA SFT data scaling results on PlotQA and DVQA-Easy&Hard, for LLaVAs based on different CLIP vision encoders (the original CLIP, FT.CLIP, and NegCLIP).

### 4.3. The Impact of Enhanced CLIPs to LVLMS

Even though the original CLIP has provided crucial information, much more than that reflected by the poor retrieval accuracy, we find that LLaVAs based on these enhanced CLIPs still achieve significantly better performance. Consistent with the results from the CLIP evaluation (§3.2), NegCLIP-LLaVAs demonstrate the best performance across most benchmarks. Specifically, for in-distribution datasets, NegCLIP-LLaVAs achieve improvements exceeding 5 absolute points on FigureQA, DVQA, and PlotQA. Additionally, the improvements observed on MathVista and ChartX highlight the generalization capability of LLaVAs built upon our enhanced CLIP models. On average, compared to the Unfrozen-CLIP baseline, models based on NegCLIP exhibit notable gains: LLaVA-Chart-13B improves by 2.6 absolute points, while LLaVA-Chart-Phi achieves an even larger improvement of 5.0 absolute points.

In addition, we conduct data scaling experiments during the third-stage chart-specific tuning while keeping the vision encoder frozen. As illustrated in Figure 4, all LLaVA models show a consistent improvement in performance as training data increases, highlighting the effectiveness of chart-specific tuning in alleviating the extraction bottleneck. Moreover, LLaVAs leveraging enhanced CLIPs consistently surpass those utilizing the original CLIP, with NegCLIP-LLaVAs achieving the highest performance across the scaling process. These results further confirm that while chart-specific tuning helps mitigate the extraction bottleneck and improves LVLMS’ chart understanding, addressing the vision encoder bottleneck remains crucial for achieving even greater performance gains.

## 5. Scaling Chart Understanding Tuning

Building on the observed advantages of LLaVAs based on enhanced CLIPs, we aim to further verify whether these enhanced CLIPs can raise the performance ceiling of their

corresponding LLaVAs. If we further scale up the task-specific training data – it is possible that the original CLIP already encodes all the required information and the LLaVA training can extract that knowledge through more instruction tuning data. To this end, we conduct larger-scale chart understanding tuning in the third stage of LLaVA training to mitigate the extraction bottleneck. In this specific ablation experiment, we experiment with individual datasets to avoid potential confounders such as the transfer effect between different datasets. Specifically, we choose DVQA and PlotQA as they offer large training sets suitable to this scaling study.

Specifically, we conduct training for both CLIP and LLaVA using the DVQA and PlotQA datasets separately, leading to the two specialized models: LLaVA-PlotQA and LLaVA-DVQA. For CLIP training, we utilize a total of 2 million samples from DVQA and 3 million samples from PlotQA. We still incorporate both standard training data and hard negative variants, following the hard negative generation strategy and hyperparameter configuration detailed in Section 3.4. For LLaVA training, we adhere to the three-stage training process using the LLaVA-v1.5-13B model, as outlined in Section 4.1. In the third and final chart-specific tuning stage, we train LLaVA models using 800K samples from each dataset separately, allowing us to systematically investigate the performance ceiling under this setting.

### 5.1. Experimental Results

Our experimental results in Figure 5 highlight several key findings:

- Despite its poor retrieval accuracy, LLaVA based on the original CLIP demonstrates steady improvements with increased SFT data. For instance, it achieves up to 95% accuracy on DVQA-Easy. This observation supports our conclusion in §4.2 that poor retrieval accuracy does not necessarily imply a loss of encoded information.

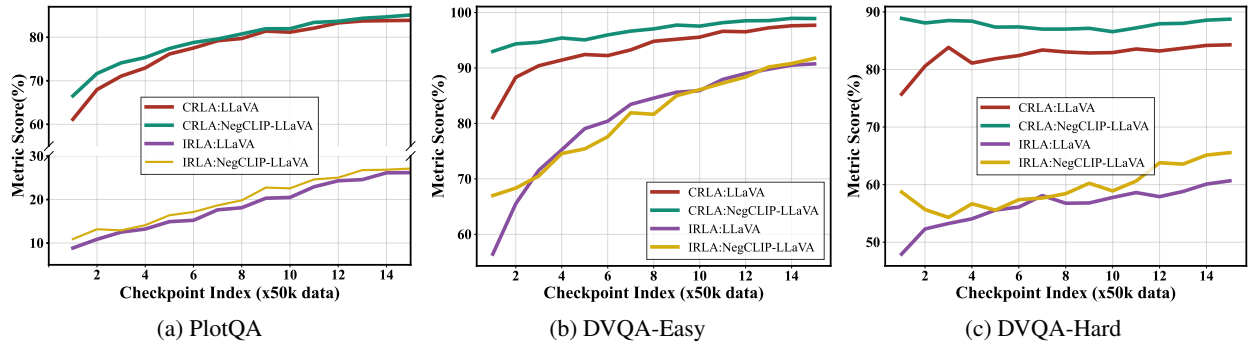


Figure 6. Analysis of large-scale LLaVA SFT data scaling on PlotQA and DVQA-Easy&Hard, evaluating two metrics: Correct-Retrieval LLaVA Accuracy (CRLA) and Incorrect-Retrieval LLaVA Accuracy (IRLA) for both the original CLIP-LLaVA and NegCLIP-LLaVA.

With sufficient SFT data, LLaVAs can still achieve strong performance on these tasks due to the strong extraction ability.

- LLaVAs built on enhanced CLIPs consistently outperform those using the original CLIP throughout the scaling process. Notably, the improvements are most pronounced when the training data size is relatively small. For instance, at the first two checkpoints (50K and 100K samples), LLaVAs based on NegCLIP achieve performance gains of over 4 points on PlotQA, 5 points on DVQA-Easy, and 6 points on DVQA-Hard. Moreover, NegCLIP-based LLaVAs exhibit a higher performance ceiling, surpassing their original CLIP counterparts by an additional 1 absolute point on PlotQA and DVQA-Easy, and 4 absolute points on DVQA-Hard. These results indicate that enhanced CLIPs encode more critical visual information, enabling a higher performance ceiling and greater efficiency in LLaVA training.

## 5.2. Statistics on CLIP and LLaVA Behavior

To discover deeper insights into how retrieval capabilities translate into task-specific performance, we analyze the statistics between CLIP retrieval correctness and LLaVA task correctness across these scaling experiments. Specifically, we use NegCLIP and examine two metrics: (1) **Correct-Retrieval LLaVA Accuracy (CRLA)**: LLaVA accuracy when NegCLIP retrieves samples correctly and (2) **Incorrect-Retrieval LLaVA Accuracy (IRLA)**: LLaVA accuracy when NegCLIP retrieves samples incorrectly. We analyze these two metrics using the original CLIP-LLaVA and the NegCLIP-LLaVA which are fine-tuned on the large-scale PlotQA or DVQA dataset. The results are illustrated in Figure 6.

**Results** The analysis reveals that CRLA is significantly higher than IRLA, indicating that samples correctly re-

trieved by NegCLIP are easier for LLaVA to learn. Additionally, during the early stages of SFT training, the NegCLIP-LLaVA CRLA is markedly higher than that of the original CLIP-LLaVA, which is the primary source of the performance gap. This explains the substantial improvement of NegCLIP-LLaVA over the original CLIP-LLaVA, as NegCLIP facilitates faster mastery of correctly encoded CLIP information.

As SFT training scales, the difference in CRLA between NegCLIP-LLaVA and original CLIP-LLaVA decreases, reflecting a narrowing performance gap. Meanwhile, for both the original CLIP-LLaVA and NegCLIP-LLaVA, IRLA steadily improves, suggesting that LLaVA can progressively leverage additional information beyond what is explicitly indicated by retrieval accuracy.

## 5.3. Rethinking Information Encoding in CLIP

Finally, we reconsider how CLIP encodes information in relation to its retrieval accuracy. Retrieval accuracy primarily reflects the linear properties of the image embeddings due to the similarity in retrieval task operates within a linear space. However, when the CLIP vision encoder is integrated into LLaVAs, the LLM component, being a more powerful and flexible information extractor, can extract and utilize non-linear features embedded in CLIP’s image representations. This means that certain aspects of the encoded information, which might not directly contribute to retrieval accuracy, can still be used for downstream tasks.

Therefore, poor retrieval accuracy does not necessarily imply a loss of crucial encoded information. Instead, through mitigating the vision encoder bottleneck, the enhanced CLIP makes its encoded information more salient, i.e. linear, as evidenced by the improved retrieval accuracy. At the same time, the more salient image embeddings make it easier for LLaVA to learn, thereby enabling the LLaVA to converge faster and achieve higher performance in downstream tasks.



## 6. Conclusion

This study investigates the perception bottlenecks of LVLMs through the vision encoder bottleneck and the extraction bottleneck. For the vision encoder bottleneck, we propose methods to construct enhanced CLIPs tailored for chart understanding. For the extraction bottleneck, the performance of the LVLMs improves significantly after chart-specific tuning. Furthermore, LVLMs built upon enhanced CLIPs exhibit considerable improvements in chart understanding tasks and raise the ceiling of visual instruction tuning. This highlights an alternative approach for mitigating the LVLMs perception bottleneck by focusing more on the vision encoder bottleneck.

**Limitations & Future Work** While our study primarily focuses on chart understanding, the success of NegCLIP training and NegCLIP-LLaVA suggests broader applicability beyond this domain, which we leave for future exploration. Our goal is not to develop a state-of-the-art LVLm for chart understanding, as many advanced models are either closed-source or prohibitively expensive to reproduce. Instead, our work aims to provide a deeper understanding of LVLMs by analyzing the vision encoder bottleneck and the extraction bottleneck of the language model. Additionally, due to computational constraints, our experiments are limited to a single vision encoder: CLIP-ViT-L/14-336px. Investigating other vision encoder variants, such as SigLIP (Zhai et al., 2023), remains for future research.

## References

- Marah Abdin, Jyoti Aneja, Hany Awadalla, Ahmed Awadallah, Ammar Ahmad Awan, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Jianmin Bao, Harkirat Behl, et al. Phi-3 technical report: A highly capable language model locally on your phone. *arXiv preprint arXiv:2404.14219*, 2024.
- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *Advances in neural information processing systems*, 35: 23716–23736, 2022.
- Shuaichen Chang, David Palzer, Jialin Li, Eric Fosler-Lussier, and Ningchuan Xiao. Mapqa: A dataset for question answering on choropleth maps. In *NeurIPS 2022 First Table Representation Workshop*.
- Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An open-source chatbot impressing gpt-4 with 90%\* chatgpt quality, March 2023. URL <https://lmsys.org/blog/2023-03-30-vicuna/>.
- Wenliang Dai, Junnan Li, Dongxu Li, Anthony Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. InstructBLIP: Towards general-purpose vision-language models with instruction tuning. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=vvoWPYqZJA>.
- Ailin Deng, Zhirui Chen, and Bryan Hooi. Seeing is believing: Mitigating hallucination in large vision-language models via clip-guided decoding. *arXiv preprint arXiv:2402.15300*, 2024.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6904–6913, 2017.
- Justin Johnson, Bharath Hariharan, Laurens Van Der Maaten, Li Fei-Fei, C Lawrence Zitnick, and Ross Girshick. Clevr: A diagnostic dataset for compositional language and elementary visual reasoning. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2901–2910, 2017.
- Kushal Kafle, Brian Price, Scott Cohen, and Christopher Kanan. Dvqa: Understanding data visualizations via question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 5648–5656, 2018.
- Samira Ebrahimi Kahou, Vincent Michalski, Adam Atkinson, Ákos Kádár, Adam Trischler, and Yoshua Bengio. Figureqa: An annotated figure dataset for visual reasoning. *arXiv preprint arXiv:1710.07300*, 2017.
- Amita Kamath, Jack Hessel, and Kai-Wei Chang. What’s “up” with vision-language models? investigating their struggle with spatial reasoning. In *The 2023 Conference on Empirical Methods in Natural Language Processing*, 2023. URL <https://openreview.net/forum?id=RN5KLywT11>.

- Shankar Kantharaj, Rixie Tiffany Leong, Xiang Lin, Ahmed Masry, Megh Thakkar, Enamul Hoque, and Shafiq Joty. Chart-to-text: A large-scale benchmark for chart summarization. In Smaranda Muresan, Preslav Nakov, and Aline Villavicencio, editors, *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 4005–4023, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-long.277. URL <https://aclanthology.org/2022.acl-long.277>.
- Hugo Laurençon, Léo Tronchon, Matthieu Cord, and Victor Sanh. What matters when building vision-language models? *arXiv preprint arXiv:2405.02246*, 2024.
- Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, pages 19730–19742. PMLR, 2023.
- Siting Li, Pang Wei Koh, and Simon Shaolei Du. On erroneous agreements of clip image embeddings. *arXiv preprint arXiv:2411.05195*, 2024.
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26296–26306, 2024a.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024b.
- Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=KUNzEQMWU7>.
- Kenneth Marino, Mohammad Rastegari, Ali Farhadi, and Roozbeh Mottaghi. Ok-vqa: A visual question answering benchmark requiring external knowledge. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- Ahmed Masry, Do Long, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 2263–2279, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.findings-acl.177. URL <https://aclanthology.org/2022.findings-acl.177>.
- Minesh Mathew, Dimosthenis Karatzas, and CV Jawahar. Docvqa: A dataset for vqa on document images. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, pages 2200–2209, 2021.
- Nitesh Methani, Pritha Ganguly, Mitesh M Khapra, and Pratyush Kumar. Plotqa: Reasoning over scientific plots. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 1527–1536, 2020.
- Anand Mishra, Shashank Shekhar, Ajeet Kumar Singh, and Anirban Chakraborty. Ocr-vqa: Visual question answering by reading text in images. In *2019 international conference on document analysis and recognition (ICDAR)*, pages 947–952. IEEE, 2019.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- Hanoona Rasheed, Muhammad Maaz, Salman Khan, and Fahad S. Khan. Llava++: Extending visual capabilities with llama-3 and phi-3, 2024. URL <https://github.com/mbzuai-oryx/LLaVA-pp>.
- Philipp J. Rösch, Norbert Oswald, Michaela Geierhos, and Jindřich Libovický. Enhancing conceptual understanding in multimodal contrastive learning through hard negative samples. In Jing Gu, Tsu-Jui (Ray) Fu, Drew Hudson, Asli Celikyilmaz, and William Wang, editors, *Proceedings of the 3rd Workshop on Advances in Language and Vision Research (ALVR)*, pages 102–115, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.alvr-1.9. URL <https://aclanthology.org/2024.alvr-1.9>.
- Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh, and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8317–8326, 2019.
- Shengbang Tong, Zhuang Liu, Yuexiang Zhai, Yi Ma, Yann LeCun, and Saining Xie. Eyes wide shut? exploring the visual shortcomings of multimodal llms. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9568–9578, 2024.
- Zirui Wang, Mengzhou Xia, Luxi He, Howard Chen, Yitao Liu, Richard Zhu, Kaiqu Liang, Xindi Wu, Haotian Liu, Sadhika Malladi, Alexis Chevalier, Sanjeev Arora, and Danqi Chen. Charxiv: Charting gaps in realistic chart understanding in multimodal LLMs. In *The Thirty-eight*

*Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2024. URL <https://openreview.net/forum?id=cy8mq7QYae>.

Renqiu Xia, Bo Zhang, Hancheng Ye, Xiangchao Yan, Qi Liu, Hongbin Zhou, Zijun Chen, Min Dou, Botian Shi, Junchi Yan, et al. Chartx & chartvlm: A versatile benchmark and foundation model for complicated chart reasoning. *arXiv preprint arXiv:2402.12185*, 2024.

Zhengzhuo Xu, Sinan Du, Yiyang Qi, Chengjin Xu, Chun Yuan, and Jian Guo. Chartbench: A benchmark for complex visual reasoning in charts. *ArXiv*, abs/2312.15915, 2023. URL <https://api.semanticscholar.org/CorpusID:266550948>.

Yuan Yao, Tianyu Yu, Ao Zhang, Chongyi Wang, Junbo Cui, Hongji Zhu, Tianchi Cai, Haoyu Li, Weilin Zhao, Zhihui He, Qianyu Chen, Huarong Zhou, Zhensheng Zou, Haoye Zhang, Shengding Hu, Zhi Zheng, Jie Zhou, Jie Cai, Xu Han, Guoyang Zeng, Dahai Li, Zhiyuan Liu, and Maosong Sun. Minicpm-v: A gpt-4v level mllm on your phone. *arXiv preprint 2408.01800*, 2024.

Mert Yuksekogunul, Federico Bianchi, Pratyusha Kalluri, Dan Jurafsky, and James Zou. When and why vision-language models behave like bags-of-words, and what to do about it? *arXiv preprint arXiv:2210.01936*, 2022.

Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 11975–11986, 2023.

Victor Zhong, Caiming Xiong, and Richard Socher. Seq2sql: Generating structured queries from natural language using reinforcement learning. *arXiv preprint arXiv:1709.00103*, 2017.

Yichen Zhu, Minjie Zhu, Ning Liu, Zhiyuan Xu, and Yaxin Peng. Llava-phi: Efficient multi-modal assistant with small language model. In *Proceedings of the 1st International Workshop on Efficient Multimedia Computing under Limited*, pages 18–22, 2024.

## A. Details of CLIP Training Data

### A.1. Statistics of Training Data

In Table 3, we present the statistics of the datasets included in the CLIP training. Here, we upsampled ChartQA and ChartBench to maintain data balance. To ensure balanced data distribution, we upsampled the ChartQA and ChartBench datasets.

Table 3. The statistics of datasets used for CLIP training. # Images is the total number of images for each dataset. # Captions is the total number of captions for each dataset in the final mixture.

Dataset	# Images	# Captions
FigureQA (Kahou et al., 2017)	99,992	1,000,000
DVQA (Kafle et al., 2018)	200,000	2,000,000
PlotQA (Methani et al., 2020)	157,044	2,000,000
ChartBench (Xu et al., 2023)	133,248	568,475
Chart2text (Kantharaj et al., 2022)	26,961	87,946
ChartQA (Masry et al., 2022)	18,317	169,030
WikiSQL (Zhong et al., 2017)	74,989	288,893
CLEVR (Johnson et al., 2017)	70,000	699,989
DocVQA (Mathew et al., 2021)	10,189	39,463
OCR-VQA (Mishra et al., 2019)	165,746	801,579
MapQA (Chang et al.)	12,470	151,536
TextVQA (Singh et al., 2019)	21,953	34,601
A-OKVQA (Marino et al., 2019)	16,539	17,056
VQAv2 (Goyal et al., 2017)	82,772	443,756

### A.2. Details of Hard Negative Captions Construction

To generate hard negative captions, we first apply specific strategies to produce incorrect answers and then use Llama3-8B-instruct to convert the question-answer pairs into assertive sentences as hard negative samples.

**FigureQA:** Since FigureQA answers are binary (“Yes” or “No”), we construct hard negatives by flipping the correct answers.

**DVQA:** For DVQA, we flip the binary answers (e.g., “Yes” to “No” and vice versa). For categorical answers (e.g., labels), we either randomly select another label from the chart or utilize Llama3-8B-instruct to generate a similar but incorrect label. For numerical and other types of answers, we consistently leverage Llama3-8B-instruct to produce plausible but incorrect alternatives.

**PlotQA:** For numerical answers, we systematically generate incorrect values by introducing errors ranging from 5% to 80% of the ground truth. For non-numerical answers, we again rely on Llama3-8B-instruct to produce reasonable yet incorrect alternatives.

**ChartBench:** The same strategies as used for PlotQA are applied to generate hard negative answers.

**Chart2text:** We split the text descriptions into individual captions corresponding to the image. Then, we use Llama3-8B-instruct to modify the meaning of these captions, such as altering numerical values, to create hard negatives.

**ChartQA:** The approach for ChartQA mirrors that of PlotQA, using similar strategies to generate hard negative answers.

**Others:** For other datasets, we exclusively use Llama3-8B-instruct to generate incorrect answers.

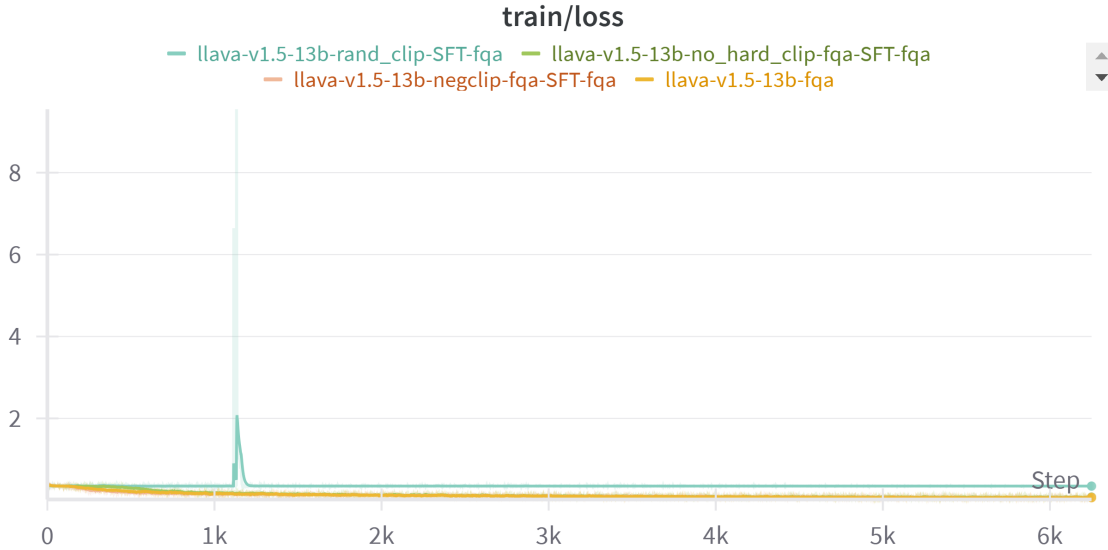


Figure 7. FigureQA instruction tuning loss of LLaVA-v1.5-13b based on different vision encoders.

### B. Investigation into LLaVA-Random-CLIP

In §4.2, we observed that LLaVA based on the original CLIP successfully learned chart-related tasks, even though the original CLIP exhibited poor, almost random retrieval accuracy. This raises an important question: is the visual information encoded by CLIP truly random? To address this, we conducted an ablation experiment by randomly initializing the CLIP weights and training a random-CLIP-based LLaVA to determine whether LLaVA can still successfully learn chart tasks in this scenario.

**Experimental Setup:** In this experiment, we used a randomly initialized CLIP while retaining the same three-stage training procedure for LLaVA as described in the paper. Specifically, we employed 800K FigureQA samples as the training data for the third stage.

**Experimental Results:** The results reveal that the training loss failed to converge during the final stage, as shown in the detailed loss plot (Figure 7). These ablation results demonstrate that purely random information leads to the failure of LLaVA learning. Moreover, the poor performance of the original CLIP does not imply that its encoded information is entirely random. In fact, the original CLIP still captures critical visual information, which is essential for the successful learning of LLaVAs.