

# Nanopass Back-Translation of Call-Return Trees for Mechanized Secure Compilation Proofs

Jérémy Thibault ✉ 

MPI-SP, Bochum, Germany

Joseph Lenormand ✉

MPI-SP, Bochum, Germany

ENS Paris-Saclay, France

Cătălin Hrițcu ✉ 

MPI-SP, Bochum, Germany

---

## Abstract

Researchers aim to build secure compilation chains enforcing that if there is no attack a source context can mount against a source program then there is also no attack an adversarial target context can mount against the compiled program. Proving that these compilation chains are secure is, however, challenging, and involves a non-trivial back-translation step: for any attack a target context mounts against the compiled program one has to exhibit a source context mounting the same attack against the source program. We describe a novel back-translation technique, which results in simpler proofs that can be more easily mechanized in a proof assistant. Given a finite set of finite trace prefixes, capturing the interaction recorded during an attack between a target context and the compiled program, we build a call-return tree that we back-translate into a source context producing the same trace prefixes. We use state in the generated source context to record the current location in the call-return tree. The back-translation is done in several small steps, each adding to the tree new information describing how the location should change depending on how the context regains control. To prove this back-translation correct we give semantics to every intermediate call-return tree language, using ghost state to store information and explicitly enforce execution invariants. We prove several small forward simulations, basically seeing the back-translation as a verified nanopass compiler. Thanks to this modular structure, we are able to mechanize this complex back-translation and its correctness proof in the Rocq prover without too much effort.

**2012 ACM Subject Classification** Security and privacy → Logic and verification; Security and privacy → Formal methods and theory of security; Software and its engineering → Compilers

**Keywords and phrases** secure compilation; back-translation; machine-checked proofs; Rocq; Coq

**Digital Object Identifier** 10.4230/LIPIcs...

## 1 Introduction

Good programming languages provide useful abstractions for writing more secure code, such as procedures, types, modules, interfaces, or even something as basic as structured control flow. However, compiling and linking with untrusted low-level code—for instance with a library written in an unsafe language like C/C++ or assembly—doesn't necessarily preserve the security properties of the source program. Indeed, such linked low-level code—which we call a target *context*—doesn't have to respect the same abstractions as source contexts, and, if malicious or compromised, can actively attack the compiled program.

Many prototype *secure compilation chains* [2–5, 7, 13, 16–18, 30, 32–34, 36, 38] aim to protect a compiled program from such attacks. More precisely, they enforce that if there is no attack a source context can mount against a source program, then there can be no attack an adversarial target context can mount against the compiled program. An attack can be represented as one or multiple execution traces, often also recording the interactions between program and context. Such an attack is a witness of the violation of a security property, which



© J. Thibault, J. Lenormand, and C. Hrițcu;  
licensed under Creative Commons License CC-BY 4.0  
Leibniz International Proceedings in Informatics

**LIPICs** Schloss Dagstuhl – Leibniz-Zentrum für Informatik, Dagstuhl Publishing, Germany

can be a trace property (e.g., safety), a hyperproperty [12] (e.g., noninterference [20]), or a relational hyperproperty [4] (e.g., trace equivalence, obtaining a well-investigated criterion called full abstraction [1, 34]). One may be interested in protecting various such security property classes against attacks, resulting in various formal criteria for secure compilation [4].

Achieving such secure compilation criteria is, however, challenging; and even more challenging is proving formally that it satisfies any of these criteria. Most proofs rely on a notion of *back-translation* [3, 7, 13, 14, 16, 17, 30, 36, 38]: given a target context performing an attack on a compiled program, often evidenced by execution traces, one must build a source context performing the same attack against the source program. Such back-translations and their corresponding proofs can be highly non-trivial, especially when the attacks are against hyperproperties and relational hyperproperties. For such classes of security properties, attacks are witnessed by several traces that the generated context must be able to produce, depending on the observable behavior of the program with which it is linked.

Moreover, existing secure compilation proofs are often hard to trust, since they can span several hundred pages when carefully spelled out even for toy compilers [13, 15, 32] and often involve complex reasoning techniques, such as cross-language logical relations [13, 30]. Because in practice every flaw would be potentially exploitable by the adversarial context, it is indispensable that the trust in secure compilation proofs be very high. So proof assistants are starting to be employed for such proofs [3, 13, 16, 18, 38], yet, the problem of designing general proof techniques that are easier to mechanize in a proof assistant is still open. Recent work in the field showed that proof assistants can help scale up secure compilation proofs to a CompCert-based compilation chain for a compartmentalized variant of C [38], by allowing the proofs to be carefully designed and engineered as if they were programs. Yet, even this recent milestone does not address the challenge of proving secure compilation for hyperproperties.

**Contributions.** As an important step towards large-scale secure compilation proofs for hyperproperties and relational hyperproperties, we propose a novel and general technique for back-translating a finite set of finite trace prefixes into a single source context, and a convenient way to prove the correctness of this back-translation in a proof assistant.

We observe that the set of finite trace prefixes recording the calls and returns between the program and the context can be represented as a *call-return tree* branching on calls and returns from the program to the context. During the execution, the context produced by our back-translation has to deduce, from the events that have already been executed, which branch it is running (i.e., what subset of programs it could still be linked with), in order to know what event to emit next. To do so, the context produced by our back-translation maintains private state storing its last *location* in the tree. Every time the context gets control, it uses this information as well as the argument or the return value from the program, to decide what event to produce next, and how to update its own location.

This raises two main challenges: (1) the generated context must correctly handle *reen-trancy*, since the program can perform arbitrary *callbacks*; and (2) because these callbacks can be arbitrarily nested, returns may occur arbitrarily far from their corresponding call. So the generated context manipulates a complex state that is difficult to reason about. Hence, as the authors have experienced first-hand in previous failed attempts to produce a mechanized proof, a monolithic approach leads to writing a complex back-translation function and to dealing with many invariants at the same time trying to prove this complex back-translation correct. To address these challenges, we instead structure the back-translation as a *nanopass compiler* [25, 26, 35]. The back-translation is done in several small steps, each performing a simple transformation of the tree, adding to each node new information describing how the location in the tree changes depending on how the context regains control. This information

is then used to generate the source context that produces the right trace prefixes.

We prove this back-translation correct by adapting compiler correctness techniques. We give semantics to each intermediate tree language and prove several small CompCert-style forward simulations [28, 37] between these representations. These small-step operational semantics reduce a tree by following a trace: for each event of the trace, the semantics follow the corresponding branch, and emit the event. The semantics also explicitly enforce invariants of the execution, using *ghost state* to store information, such as what events have already been executed, or an abstract call stack. In the last compilation step, the simulation proofs link this ghost state to a *concrete state* from the source language semantics.

Thanks to this modular structure, the effort of proving these small transformations from trees to trees and eventually to source code is lower, and we have fully mechanized these transformations and their correctness proofs in the Rocq (formerly Coq) proof assistant [29]. The back-translation targets a simple source language with procedures and compartments, and is designed to replace the existing back-translation step of an existing formally secure compartmentalizing compilation chain [3]. While we have not yet mechanized this part, it should be relatively easy to show that this compilation chain satisfies a much stronger secure compilation criterion—i.e., that it robustly preserves a class of relational hyperproperties including hypersafety (e.g., noninterference) and relational hypersafety properties (e.g., trace equivalence, thus also obtaining full abstraction)—by simply replacing the previous simplistic back-translation handling only one finite trace prefix with ours that back-translates any finite set of finite trace prefixes (see Subsection 3.1).

Finally, we believe that this general technique should be reusable for other secure compilation proofs. In particular, the nanopass approach allows us to structure the back-translation into two distinct phases: an tree-manipulating phase that only depends on the trace model, but on no other language features, and a code generation phase. Even the code generation phase and the proofs pertaining to it should be mostly reusable, as they only rely on programming language features that are common to many languages (e.g., procedures, private state). For this reason, we see this work as an important step in devising secure compilation proof techniques that can be scaled up to real-world languages, such as the recent compartmentalized version [38] of CompCert (see Section 8).

The remainder of the paper is structured as follows: Section 3 first gives a higher-level account of our back-translation and proof technique, explaining the key ideas. Section 4 then presents the design of the semantics of the intermediate languages and of the back-translation passes. Section 5 then outlines how we proved correctness for this back-translation using forward simulations. Afterwards, Section 6 describes our Rocq formalization, Section 7 discusses related work, and Section 8 closes with future work.

Our Rocq formalization is available at <https://github.com/secure-compilation/nanopass-bt>.

## 2 Background: secure compilation of compartmentalized code

Abate et al. [3] showed how one can define a secure compilation criterion for a setting with mutually-distrustful compartments and undefined behavior. They reduce this criterion to a simpler, trace-based criterion, a variant of *Robust Safety Preservation* (RSP) [4, 32] and verify that a simple compiler satisfies this criterion in Rocq. Their proof technique is of particular interest to us, because a more recent work by Thibault et al. [38] reused it at scale for a compartmentalized variant of the C language and a realistic compiler based on CompCert. By strengthening the back-translation step, it is easy to extend this proof technique to show

a much stronger secure compilation criterion, as illustrated informally in the next subsection. But first, we present the setting of Abate et al. [3], which we also use in this paper.

In this setting, programs consist in several mutually-distrustful compartments  $C_1, C_2, \dots$  that interact with each other via arbitrary procedure calls and returns, and can pass integers to each other. To simplify the exposition throughout the paper, we make the simplifying assumption that each compartment is made of only one procedure, and we equate the compartments and the procedure each contains. Cross-compartment interactions happen via calls and returns and are recorded on a trace; for instance,  $m_1$  is a finite trace prefix capturing some calls and returns between two compartments  $C_1$  and  $C_2$ :  $m_1 = \text{Call } C_1 \ C_2 \ 40; \text{Call } C_2 \ C_1 \ 41; \text{Ret } C_1 \ C_2 \ 42; \text{Ret } C_2 \ C_1 \ 42$ .

Abate et al. [4] define a hierarchy of secure compilation criteria that are based on such execution traces, among which *Robust Safety Preservation* (RSP), one of the simplest criteria, is the one proved by Abate et al. [3]:<sup>1</sup>

► **Definition 1.** *A compilation chain is said to satisfy RSP when:*

$$\forall \mathbb{P}_S \ C_T \ m. \ \mathbb{P}_S \downarrow \cup C_T \rightsquigarrow m \Rightarrow \exists C_S. \ \mathbb{P}_S \cup C_S \rightsquigarrow m.$$

where  $C_S$  and  $C_T$  are contexts, and  $\mathbb{P}_S$  a partial program, which are all sets of compartments,  $\cup$  represents linking,  $\mathbb{P} \downarrow$  denotes the compilation of  $\mathbb{P}$ ,  $m$  is a finite trace, and  $\rightsquigarrow$  represents the trace-producing semantics.<sup>2</sup> Informally, RSP means the following: for any target context  $C_T$  that mounts an attack against a compiled (partial) program  $\mathbb{P}_S \downarrow$  characterized by the finite trace prefix  $m$ , one can show that the attack  $m$  can already be mounted against the program  $\mathbb{P}_S$  in the source language, i.e., there exists a source context  $C_S$  that can be linked with  $\mathbb{P}_S$  to produce the same finite trace prefix  $m$ . In this setting both the context and the partial program are (disjoint) sets of compartments that can be put together by the linking operation  $\cup$  to produce a whole program, and they only differ in the role they play in the theorem: the program is securely compiled and protected from adversarial target contexts. RSP as well as the stronger criterion below are general properties of a whole compilation chain, including not only the compiler, but also the source and target linkers as well as the source and target semantics, which are all jointly responsible for achieving security.

Abate et al. [3] proved that their compilation chain satisfies RSP, via a proof technique that uses a trace-based back-translation. The core idea behind their technique can be found in Figure 1, by ignoring the parts in red (or equivalently setting  $K = 1$ ). In summary, they define a back-translation function  $\uparrow$  that, from the trace  $m$ , generates a whole program ( $\mathbb{P}'_S \cup C_S$ ) that produces the same trace  $m$ . This program is compiled, and via a step called recomposition, they prove that a recomposed program  $\mathbb{P}_S \downarrow \cup C_S \downarrow \rightsquigarrow m$ . They finally use backward compiler correctness to go back to the source level, obtaining:  $\mathbb{P}_S \cup C_S \rightsquigarrow m$ .

One interesting characteristic of the back-translation in this setting is that it produces *whole programs* instead of just a context. Abate et al. [3] assert that this considerably simplifies proving the back-translation correct, since it allows them to reason operationally about the behavior of a whole program produced entirely by their back-translation. If instead the back-translation produced only the source context, they would need either to reason about its behavior when linked with arbitrary source programs, or to introduce a partial semantics (often called “trace semantics” [7, 11, 15, 31]) that uses nondeterminism to abstract

<sup>1</sup> In fact they prove a slight variant of RSP [5], but for simplicity we stick with standard RSP here.

<sup>2</sup> Objects are annotated with **S** for the source language and with **T** for the target language whenever it is necessary to disambiguate. We sometimes omit the **S** annotation to simplify notations.

the missing program part. These options are, however, more involved than simply working with whole programs. Working with whole programs, moreover, enables the use of a standard notion of compiler correctness (with separate compilation, like for current CompCert [24]) to go up and down between the source and target languages (steps II and IV in Figure 1).

Note also that this back-translation constructs the source context  $\mathbb{C}_S$  of Definition 1 using solely the information that appears on  $m$  (as opposed to inspecting the target context  $\mathbb{C}_T$  [13, 17, 30, 36]; see Section 7 for a comparison). Abate et al. [3] show how to build a source context that faithfully reproduces such a single trace using a very simple scheme, also used in all the other trace-based back-translations [7, 11, 15, 31]. To understand how this back-translation is implemented, let us look at the back-translation of the previously defined  $m_1$  for  $\mathbb{C}_1$ :  $m_1 = \text{Call } \mathbb{C}_1 \ \mathbb{C}_2 \ 40; \text{Call } \mathbb{C}_2 \ \mathbb{C}_1 \ 41; \text{Ret } \mathbb{C}_1 \ \mathbb{C}_2 \ 42; \text{Ret } \mathbb{C}_2 \ \mathbb{C}_1 \ 42$ .

■ **Listing 1** Single trace back-translation of  $m_1$

```

1  C1():
2  if (ctr = 0) {           // first time called
3      ctr++;              // update counter
4      C2(40);             // perform first event
5      C1();               // recursive call
6  } else if (ctr = 1) {  // second time called
7      ctr++;              // update counter
8      return 42;         // perform second event
9  }
```

The context maintains a private counter `ctr`, storing how many events have already been produced. When  $n-1$  events have been produced and the context gets back control it simply produces the  $n$ -th event of the trace. The recursive call to `C1` is an internal call that doesn't appear on the trace, and allows performing several events sequentially. This back-translation is applied pointwise to each compartment, so as to obtain the full back-translation.

### 3 Key Ideas

#### 3.1 Towards a proof of a stronger criterion


While Abate et al. [3] proved that their compilation chain satisfies RSP, this is still a weak secure compilation criterion, one of the weakest they study. Indeed, RSP only considers attacks represented by a single finite trace prefix. What this means is that a secure compilation chain satisfying RSP only robustly preserves safety properties. In general, safety properties cannot capture data confidentiality and integrity, which are essential security properties that one would want their compilation chain to preserve.

Thankfully, Abate et al. [4] also propose stronger criteria that consider several trace prefixes, which can also represent attacks against data confidentiality and integrity. One such criterion is the one named *Robust Finite-relational Safety Preservation* (RFRSP):

► **Definition 2.** A compilation chain is said to satisfy RFRSP when:

$$\begin{aligned}
& \forall K \ \forall \mathbb{P}_1 \dots \mathbb{P}_K \ \mathbb{C}_T \ m_1 \dots m_K. \\
& (\mathbb{P}_1 \downarrow \cup \mathbb{C}_T \rightsquigarrow m_1 \wedge \dots \wedge \mathbb{P}_K \downarrow \cup \mathbb{C}_T \rightsquigarrow m_K) \implies \\
& \exists \mathbb{C}_S. (\mathbb{P}_1 \cup \mathbb{C}_S \rightsquigarrow m_1 \wedge \dots \wedge \mathbb{P}_K \cup \mathbb{C}_S \rightsquigarrow m_K).
\end{aligned}$$

RFRSP states that any attack against a finite-relational safety property of compiled programs  $\mathbb{P}_1 \dots \mathbb{P}_K$  characterized by the finite trace prefixes  $m_1 \dots m_K$ , can also be mounted against the source programs (i.e., there exists a source context  $\mathbb{C}_S$  that induces the same prefixes).

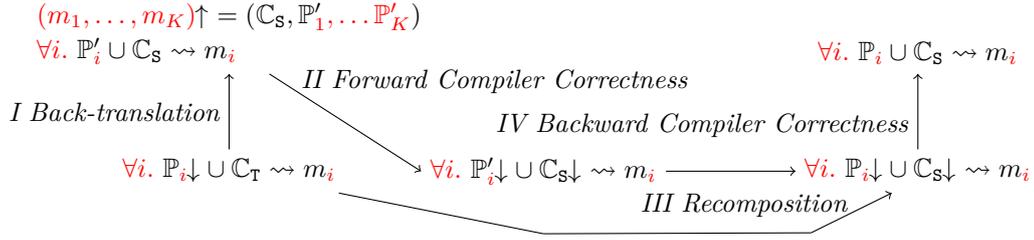

■ **Figure 1** Outline of Abate et al. [3]’s proof technique adapted for RFrSP (parts changed in red)

This criterion is particularly interesting, as it implies the robust preservation of all hypersafety properties [12], a large class that includes not just safety but also most variants of noninterference. In our context, it also implies a variant of (the security-relevant direction of) the well-studied criterion of fully abstract compilation [1, 4]. Finally, this is the strongest criterion of Abate et al. [4] that can be proved by back-translating trace prefixes.

The RFrSP criterion is, however, harder to prove than RSP: while for RSP the context generated by back-translation only needs to produce a single trace prefix when linked with a single known program, for RFrSP the produced context needs to be able to produce finitely many trace prefixes when linked with several possibly different programs.


The first insight is that it is possible to prove RFrSP using the same proof technique, with the sole difference in the back-translation. Indeed, suppose one is able to provide a back-translation  $(m_1, \dots, m_K)^\uparrow = (C_S, P'_1, \dots, P'_K)$  such that  $\forall i. P'_i \cup C_S \rightsquigarrow m_i$ . Then, it is possible to plug this back-translation in place of the single-trace back-translation and apply all the other steps pointwise. One then obtains a proof of RFrSP. The updated proof technique is given in Figure 1, with the differences highlighted in red.

### 3.2 Back-translating multiple traces

How can one back-translate a finite set of finite trace prefixes though? Consider the example from Section 2, but with compartment  $C_C$  in the context and compartment  $C_P$  in the program (instead of  $C_1$  and  $C_2$ ). Suppose that the context is linked with three other programs so that we obtain the traces  $m_1, m_2, m_3$  on the right of Figure 2. A key idea is that such prefixes can be represented as a call-return tree whose branches are labeled with events, as seen on the left of Figure 2. In the languages we consider branching can only occur when the program has control, and two different programs decide to produce different events.

In Figure 2, we give each node a unique identifier. These identifiers generalize the scheme of Abate et al. [3]: instead of relying on a counter that is always incremented, the context is now able to encode what events have already been executed by simply recording the *location* of the last executed event in a private variable `loc`. The compartment being back-translated can then use this information to determine which event to perform next and how to update `loc`. Determining how to update the `loc` counter and which event to produce is, however, far more involved than in the simple single-trace back-translation. In the lower part of Figure 2 we illustrate what compartment  $C_C$  we generate from the traces in Figure 2. The core idea of the back-translation is for the generated compartment  $C_C$  to maintain a private variable `is_call` that will be set to 1 whenever  $C_C$  is about to pass control to another compartment (and generally when it doesn’t have control). That way, it knows that a call it receives when `is_call` = 1 comes from another compartment (line 2), and that it must update its location `loc` based on the current value `loc` and the argument it received (lines 5–7).

Following the code in Figure 2,  $C_C$  goes directly to line 23, and starts branching on its current location (that just got updated). Depending on this value, it will produce either a

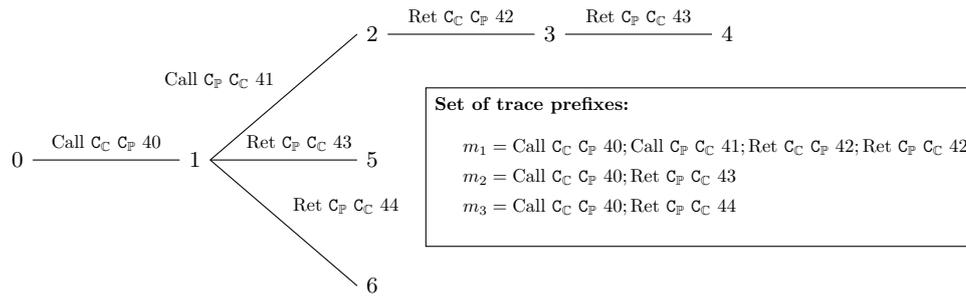

```


1  CC(arg):
2  if (is_call) {
3    /* Receiving a cross-compartment callback; we update the location based
4     on the current location and the received argument */
5    if (loc = 1) {
6      if (arg = 41)
7        loc = 2;
8    }
9  } else {
10   /* this is not an incoming call, but rather a recursive call to handle
11    a return value. We update the location based on the current location
12    and the returned value (stored in res) */
13   if (loc = 1) {
14     if (res = 43)
15       loc = 5;
16     else if (res = 44)
17       loc = 6;
18   } else if (loc = 3) {
19     if (res = 43)
20       loc = 4;
21   } };
22  // Now we generate the appropriate event based on the current location
23  if (loc = 0) {
24    is_call = 1;
25    loc = 1;
26    res = CP(40);
27    is_call = 0;
28    CC(0);
29  } else if (loc = 2) {
30    is_call = 1;
31    loc = 3;
32    return 42; }

```

■ **Figure 2** Example of a call-return tree representing a set of finite prefixes, and the corresponding code for  $C_C$  generated by the back-translation

cross-compartment call (lines 23–28) or a cross-compartment return (lines 29–33). In the case of a call, the compartment sets `is_call` to 1 (line 24) and updates its location (line 25), before calling the other compartment (line 26). When this new call returns, the return value will be stored in a third private variable `res` (line 26), the compartment will set `is_call` to 0 (line 27), and call itself recursively (line 28). Then, the `else` path of the first `if` will be taken (line 9), and the return value will be used, together with `loc`, to set a new location (lines 13–21). One may wonder, why not set the new location right after the call, between lines 26 and 28? This is because  $C_C$  might have received callbacks that updated `loc` in the meantime. Because `loc` might have changed, it is necessary for correctness to branch on it again; and it is simpler in terms of reasoning to gather all this branching at the same place in the code instead of it being dispersed among all the calls.

Finally, what happens when doing a return (lines 30–32)? Because it is about to pass

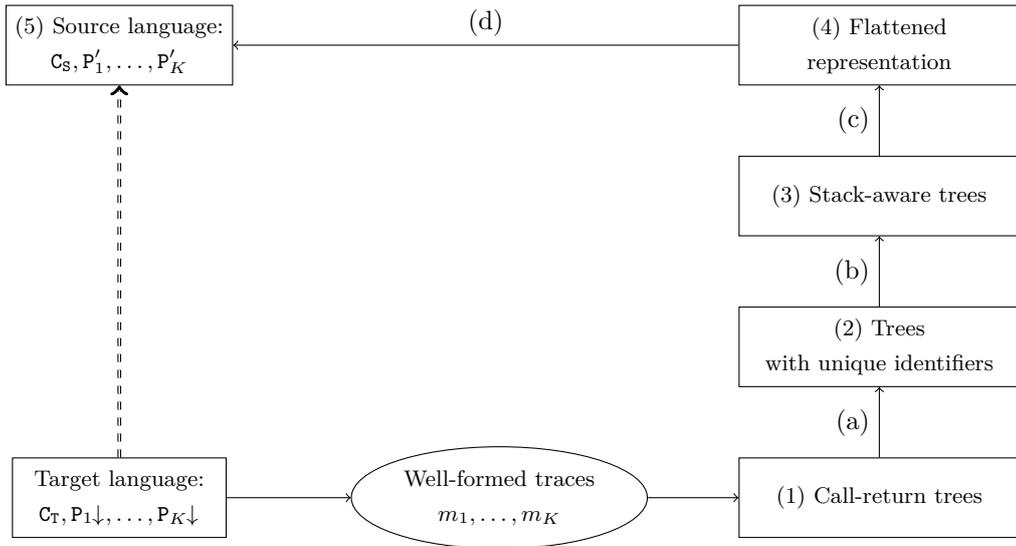

■ **Figure 3** Steps of our nanopass back-translation

control back,  $C_C$  sets `is_call` to 1, updates its location, and starts returning. Then, the return pops the stack and reaches another compartment, which if also generated by our back-translation, will handle its return value in the way described above (lines 24–29).

Note that in our example, we only consider two compartments. In the general case, we support an arbitrary number of distinct compartments; we consider one tree per compartment: for a compartment  $C$ , it is the tree obtained by filtering out all events that do not involve  $C$  from the traces. We are able to do this filtering because a compartment cannot observe the interactions between two other compartments directly. This generalization does not affect the structure of the back-translated programs.

### 3.3 Nanopass back-translation

The back-translation described above is complex; to tame this complexity, we divide the back-translation into a series of small steps, each improving upon the previous one in a minimal way, in the style of a nanopass compiler [25, 26, 35].

For this we define several *intermediary tree languages* with more and more detailed semantics as we progress through the back-translation. Each step makes explicit one *invariant* that was previously implicit, or introduces a new piece of *ghost state* that will later be related to concrete state in the generated source code.

Figure 3 gives an overview of the different passes of our back-translation. Starting from the target language on the bottom left, the compiled programs produce a well-formed set of traces when linked with the target context. This set of traces can be represented as call-return trees, as in Figure 2, which is the starting point of our formally verified back-translation:

- (a) to each node of the trees we assign a unique identifier, which will be mapped to the variable `loc` in the code;
- (b) we add an abstract cross-compartment call stack to the semantics of the trees;
- (c) we flatten the trees into lists of rules that describe how each compartment should update its private state and emit events, depending on its current private state and the last event that was executed. For instance, a rule of the form  $(n, \text{Call } C_1 \ C_2 \ 40, n')$  can mean—depending on whether it’s a rule for  $C_1$  or  $C_2$ —either that when at location  $n$ , compartment  $C_1$  must update its location to  $n'$  and call  $C_2$  with argument 40, or that

when at location  $n$ , if compartment  $C_2$  receives a call with argument 40 then it must update its location to  $n'$ ;

- (d) for each such rule, we generate a source statement; for instance, the previous rule would be translated either to `loc = n' ; C2(40) ; ...` (for  $C_1$ ) or to `if (loc = n && arg = 40) {loc = n'}` (for  $C_2$ ). We then assemble the final source programs from these sub-statements.

We write  $\uparrow_{(a-d)}$  to refer to the whole back-translation, and  $\uparrow_{(a)}, \dots, \uparrow_{(d)}$  for each back-translation step. We see verifying this back-translation as proving *compiler correctness*. We first equip the call-return trees with simple semantics of the form  $T \rightsquigarrow_n m$  meaning that the call-return tree  $T$  at level  $n$  produces the trace  $m$ . A step in this semantics works by plucking and emitting the event at the root and using the event to choose one of the child branches to reduce next. We use this to state the main theorem, saying that for any prefix  $m$  a call-return tree  $T$  can produce, in the call-return tree semantics  $\rightsquigarrow_1$ , the back-translation of  $T$  to a source whole program  $T\uparrow_{(a-d)}$  can also produce  $m$  in the source semantics,  $\rightsquigarrow_5$ :

► **Theorem 3** (Correctness of call-return tree back-translation). *If  $T \rightsquigarrow_1 m$  then  $T\uparrow_{(a-d)} \rightsquigarrow_5 m$ .*

We chose to focus on the most interesting part of the back-translation, which we have mechanized in Rocq, i.e., how we transform the trees and generate the source code, and leave for future work proving that well-formed traces can indeed be represented as such trees. To prove this theorem, we rely on the nanopass structure of the back-translation, and prove a compiler correctness lemma for each pass of the back-translation from levels (1) to (5).

► **Lemma 4** (Correctness of a back-translation step). *Let  $T$  be a program at level  $(i)$  and  $(\alpha)$  the step from  $(i)$  to  $(i+1)$ . If  $T \rightsquigarrow_{(i)} m$  then  $T\uparrow_{(\alpha)} \rightsquigarrow_{(i+1)} m$ .*

We verify each pass by proving a simulation. Because each transformation is simple, proving each of these simulations is considerably simpler than proving the entire back-translation correct at once; and while this requires more upfront setup (defining each tree language), we found this technique much easier overall.

Proving these lemmas raises two questions that have to be answered together:

- (i) How do we define the semantics of each intermediate level?
- (ii) How can we prove that the final source program obtained by back-translation is correct? In particular, what kind of *invariants* are needed in this proof?

First, we identify the core invariants that must hold of the generated source code: (1) the location stored in the private state of each compartment must always be up-to-date; and (2) completeness properties: all events on the trace have a corresponding statement in the back-translated code, all events have a corresponding statement that “consumes” it and updates the state, and all these statements should be reachable when in the right state.

Then, we build up incrementally to the source level by introducing these new invariants in the semantics, little by little. More concretely, the small-step operational semantics of our languages enforce these invariants by adding them as requirements of the small-step transitions. For instance, when we add the abstract cross-compartment stack, the semantics only allows returns if they are indeed returns from and to the compartments recorded on that stack. This enforcement is only a tool for the proof: indeed, we later prove forward simulations between the languages, showing that these invariants do not really restrict the behaviors of programs. Each of these small additions incurs a proof burden, but instead of having to deal with them all at once, our structure allows us to do it one by one, in isolation. Once an invariant has been established in the semantics of one level, the fact that each step is small makes it easy to prove that it is preserved up to the source level. Once we reach the

final pass, we only have to reason about the semantics of the source language, but all of the more complex invariants have already been dealt with in earlier passes. Moreover, all the levels except the very last one are pretty much independent of the source language we target, so we expect one would be able to reuse these parts of the proof fairly easily (Section 8).

In the following sections, we describe in more detail our methodology to build the semantics of the languages and how we use them in the proofs.

## 4 Design of the nanopass back-translation

### 4.1 The tree languages in the back-translation

**Structure and invariants.** The idea at the core of our definition of all tree languages is the following: to each compartment, we associate one tree representing the set of traces it produces. The type `tree` we use to represent all of our trees is given below in Listing 2. It is parameterized by the type `A`, which differs between each tree language and represents the data stored in each node. The branches are labeled by `events`.

■ **Listing 2** Basic type used to represent trees

```

1 Inductive tree (A : Type) : Type :=
2   | node : (* content of the node *) A →
3     (* children *) branches A → tree A
4 with branches (A : Type) : Type :=
5   | Bnil : branches A
6   | Bcons : (* label *) event →
7     (* tree corresponding to that label *) tree A →
8     (* rest of the children *) branches A → branches A

```

There is an important asymmetry in this setting: while compartments  $C \in \mathbb{C}$  (in the context) depend on the entire set of traces, compartments  $C \in \mathbb{P}_i$  (in the program) only depend on one of the trace,  $m_i$ . What this means is that, for compartments in the program, the tree that is associated to each compartment is entirely linear, and is a simple embedding of the trace in the type of tree (i.e., they look like this: `node (Bcons e1 (node (Bcons e2 ... Bnil)) Bnil)`). Conversely, for compartments in the context, the tree associated to them is branching; yet, this branching can only occur in restricted manners. Indeed, our languages are deterministic: this means that the only way for a tree associated to a compartment of the context to branch is if a compartment of the program behaved differently.

This allows us to define *determinacy invariants* that we use to prove the completeness properties discussed in the previous section. First, we define two determinacy invariants that apply at all levels. The first such invariant is `unique_current_tree` (Listing 3):

■ **Listing 3** Invariant capturing the uniqueness of the next event for the current compartment

```

1 Fixpoint unique_current_tree {A : Type} (C : Compartment.id) (tr : tree A) : bool :=
2   match tr with
3   | node _ br ⇒ unique_current_branches C br
4   end
5 with unique_current_branches {A : Type} (C : Compartment.id) (br : branches A) : bool :=
6   match br with
7   | Bnil ⇒ true
8   | Bcons e tr br' ⇒ (unique_current_tree C tr) &&
9     (if cur_comp_of_event e = C then
10      match br' with | Bnil ⇒ true | _ ⇒ false end
11      else unique_current_branches C br')
12   end.

```

$$\begin{array}{c}
\text{S-STEP} \\
\frac{s.\text{trace} = e :: t \quad \text{compartments}(e) = (C_i, C_j) \quad s.\text{trees}(C_i) = T_i \quad s.\text{trees}(C_j) = T_j}{T_i \xrightarrow{e} T'_i \quad T_j \xrightarrow{e} T'_j \quad s'.\text{trees} = s.\text{trees}[C_i \mapsto T'_i, C_j \mapsto T'_j] \quad s'.\text{trace} = t} \\
s \xrightarrow{e} s'
\end{array}$$

■ **Figure 4** Basic reduction rule for trees

This invariant captures the intuition that, if a compartment has control (line 9), then it can only execute one single next event (captured by `match br' with | Bnil ⇒ true | _ ⇒ false end`). The rest of the invariant corresponds to the recursive cases: for the subtree `tr` (line 8) and the remaining branches `br'` (line 11).

The second determinacy invariant, `deterministic_tree`, is partially listed in Listing 4:

■ **Listing 4** Invariant capturing the determinacy of trees

```

1 Inductive deterministic_tree {A : Type} : tree A → Prop := ...
2 with deterministic_branches {A : Type} : branches A → Prop := ...
3 | deterministic_branches_cons : forall (e : event) tr brs,
4   deterministic_branches brs →
5   deterministic_tree tr →
6   not_in e brs → (* once we find a given event, it doesn't appear in the rest *)
7   deterministic_branches (Bcons e tr brs)
8 with not_in {A : Type} : event → branches A → Prop := ...

```

This determinacy invariant captures the intuition that executing the same event always leads to the same state; i.e., there are no two branches at the same level in the tree that are labeled by the same event. This idea can be seen in the use of a predicate `not_in` (line 6), which enforces that an event cannot appear (anymore) in the rest of the children labels.

Finally, we introduce a third determinacy invariant (that we do not list here), during step (a). In that step, we associate to each node in the trees a location identifier and this determinacy invariant captures the uniqueness of locations. It is very similar to `deterministic_tree`, except that it is about the content of the nodes instead of the labels of the branches.

**Semantics.** As described above, programs in these languages are maps from compartments to such trees. We give a small-step operational semantics to each of the tree languages that works by reducing states. As a common basis, states contain the remaining trace that is to be produced, and, for each compartment, a tree capturing the rest of the execution. Then, the semantics are built around a reduction rule such as the one described in Figure 4. The idea of this rule is that one can follow the execution of a given trace by replaying all of its events one by one, each time reducing the trees associated with the two compartments. In this rule, the notation  $T_i \xrightarrow{e} T'_i$  means that  $T'_i$  is a child of  $T_i$  through a branch labeled  $e$ , and  $\text{compartments}(e) = (C_i, C_j)$  means that the event  $e$  is a call or a return from  $C_i$  to  $C_j$ .

Moreover, the semantics maintains some amount of *ghost state* `gs`, which stores information about what happened previously during the execution. This information contains the current location `gs.loc` (a map from compartments to natural numbers added by step (a)), and an abstract stack `gs.stack` (added in step (b)) recording cross compartment calls, i.e., a sequence of  $(\text{Compartment.id} * \text{Compartment.id})$ . Then, the semantics contain restrictions on the ghost state that capture the invariants we want to prove for the back-translated program. For instance, below one can see what we added to the rules to capture the well-bracketedness of the stack: calls add frames to the call stack, and returns are only allowed when the top

frame of the stack matches that return.

$$\begin{array}{c}
 \text{S-STEP-STACK-CALL} \\
 \dots \quad \text{gs'.stack} = (C_i, C_j) :: \text{gs.stack} \\
 \hline
 s, \text{gs} \xrightarrow{\text{Call } C_i \ C_j \ z} s', \text{gs}'
 \end{array}
 \qquad
 \begin{array}{c}
 \text{S-STEP-STACK-RETURN} \\
 \dots \quad \text{gs.stack} = (C_j, C_i) :: s \quad \text{gs'.stack} = s \\
 \hline
 s, \text{gs} \xrightarrow{\text{Ret } C_i \ C_j \ z} s', \text{gs}'
 \end{array}$$

This ghost state is an abstraction of the concrete state of the generated source code. For instance, the abstract location stored in trees correspond to the private variable `loc` of each generated compartment, and the abstract stack corresponds to the concrete stack of the source language in the sense that it captures the same cross-compartment behaviors.

We build the semantics iteratively, by taking the semantics of the previous level, and adding the new conditions in addition of the previous ones.

**Tree transformations.** Steps (a) and (b) are simple tree transformations. Pass (a) adds a unique identifier and pass (b) a stack snapshot to each node. The stack snapshot records what the state is supposed to be when reaching that node, which simplifies the statement of the properties and the reasoning in the simulation proof. These two transformations compile trees by adding new information to the nodes of the trees: pass (a) goes from `tree unit` (level 1) to `tree nat` (level 2); and pass (b) goes from this to `tree (nat * stack)` where `stack = list (Compartment.id * Compartment.id)`. These transformations are simple (they map a transformation over all nodes), and do preserve the determinacy invariants described previously. The more involved transformations, are described in the next subsection.

## 4.2 Flattening and code generation

The trees used so far cannot be easily mapped to source compartments in one go, as described in Subsection 3.2. Instead, we go through two steps, (c) and (d), that manipulate a flattened representation of the trees, in order to generate source statements.

**Flattening.** Step (c) flattens trees into a list of rules describing how compartments should update their location when they get control, and what event they need to produce at a given location. Concretely, a program at level (4) is a map from compartments to `list (nat * event * nat)`. Elements of such a list are rules on how to update location and what events to emit. As an additional invariant, these lists of rules satisfy uniqueness and determinism properties that derive from the uniqueness and determinism properties of the tree languages. For example, consider a call `Call C1 C2 40` that appears in a trace. Then:

- the list corresponding to `C1` will contain some rule  $(n_1, \text{Call } C_1 \ C_2 \ 40, n'_1)$  meaning that when `C1` is in location  $n_1$ , then it must update its location to  $n'_1$  and call `C2` with argument 40. Additionally, this list will not contain any other rule starting at  $n_1$  (because `C1` has control, it can only do one next event);
- the list corresponding to `C2` will contain some rule  $(n_2, \text{Call } C_1 \ C_2 \ 40, n'_2)$  meaning that when `C2` is called with argument 40 and its current location is  $n_2$ , it must update its location to  $n'_2$ . Additionally, the list may contain other rules starting at  $n_2$ , however none of those will also be for a call with the specific argument 40.

We give a semantics to this language in the same style as for the trees. The main difference is that a step can be taken iff a corresponding rule appears in the mapping for each compartment. Unlike the tree representation, the list of rules is *not* reduced during execution: this is similar to the source semantics in that the source code of a source compartment do not “disappear” when it is executed. Finally, the ghost state still keeps track of the abstract call stack.

**Code generation.** The code generation step (d) transforms the previous lists of rules to executable source code. For each rule, this step generates two statements: one for the compartment giving up control, and the other for the one gaining control. The statements of

each compartment are then concatenated so as to obtain source code akin to Figure 2, by filtering and folding over the list of rules and statements.

## 5 Proving the back-translation correct using forward simulations

### 5.1 Forward simulations

We use these intermediate languages and their semantics to prove Lemma 4 for each of the back-translation steps. To do so, we use *forward simulations* in the style of CompCert. In short, for each step  $\alpha$  between levels  $(i)$  and  $(i + 1)$ , we define a simulation relation  $\sim_{(\alpha)}$  between the states of two consecutive languages. Then, we prove the following lemmas:

► **Lemma 5** (Initial states are related). *Let  $s_i$  be an initial state at level  $i$  and  $s_{i+1}$  an initial state at level  $(i+1)$ , then  $s_i \sim_{(\alpha)} s_{i+1}$ .*

► **Lemma 6** (Forward simulation). *Let  $s_i$  be a state at level  $i$  and  $s_{i+1}$  a state at level  $(i+1)$ . Suppose  $s_i \sim_{(\alpha)} s_{i+1}$  and  $s_i \xrightarrow{e}_i s'_i$ . Then there exists a state  $s'_{i+1}$  at level  $(i+1)$  such that:*

$$s_{i+1} \xrightarrow{e}_{i+1}^* s'_{i+1} \quad \text{and} \quad s'_i \sim_{\alpha} s'_{i+1}$$

It is well known [28, 37] that, together, these two lemmas imply Lemma 4.

### 5.2 Simulation relations and proofs

We now describe how to define these simulation relations for each pass.

**Simulations between tree languages.** Recall that for the tree languages, states contain a map from compartment identifier to trees storing what is left to be executed. For passes between such tree languages, the basic idea is simple, and can be summarized as follows: we always maintain one essential property: if  $s_i$  is a state at level  $i$  and  $s_{i+1}$  a state at level  $i + 1$  that ought to be related by the simulation relation, then for any compartment  $C_i$ ,  $s_{i+1}.\text{trees}(C_i) = f(s_i.\text{trees}(C_i))$  where  $f$  is the transformation applied by the pass. In addition, when we introduce the abstract stack, the simulation relation captures the fact that this stack is always well-bracketed. We use the predicate in Listing 5 in the simulation relation between the states at level 2 and 3:

■ **Listing 5** Relation for the stack used in the simulation proof between levels 2 and 3

```

1 Fixpoint wf_stack_trace (tra: trace) (st: stack): bool :=
2   match tra with
3   | [] => true
4   | ECall Ccur P z Cnext :: tra' => wf_stack_trace tra' ((Ccur, P, Cnext) :: st)
5   | ERet Ccur z Cnext :: tra' =>
6     match st with
7     | (Cnext', _, Ccur') :: st' =>
8       (Ccur = Ccur') && (Cnext = Cnext') && wf_stack_trace tra' st'
9     | _ => false
10    end
11  end.
```

This predicate relates the trace remaining to be executed and the current stack: if the next event is a call (line 4), then the rest of the trace is related to the same stack, with a new frame corresponding to the call added. On the other hand, if the next event is a return (line 5), then the stack must have a top stackframe that corresponds to this return and the rest of the trace must be related to the rest of the stack. We use this predicate in the simulation to prove the well-bracketedness of the stack required by the semantics.

Note that we don't need to manipulate this predicate after step (b), because after that the semantics of the languages enforce the well-bracketedness of the stack, as in Subsection 4.1.

**Flattening.** Recall that after flattening, we do not reduce the list of rules anymore; hence, the list of rules in the flattened representation is a superset of the trees from the previous level. Instead, the invariant we maintain states the following: any rule that can be derived from the source trees in the current state can be found in the list of rules we keep.

In addition, we prove the determinacy invariants stated in Subsection 4.2 explicitly from the start, and make it part of a notion of well-formedness of our programs. We use this to prove the notion of uniqueness from Listing 6:

■ **Listing 6** Uniqueness for the flattened representation

```

1 Definition uniqueness_in {A B: Type} (l: list (B * A)) :=
2   forall b a a', In (b, a) l → In (b, a') l → a = a'.
3
4 Definition unique_incoming_calls: forall C es,
5   prog_rules p C = Some es →
6   uniqueness_in (incoming_calls C es).

```

This says that in the list of incoming calls for compartment  $C$ , there is at most one rule for each key, and here keys are of type  $(\text{nat} * \mathbb{Z})$ : the natural number corresponding to the location, and the integer argument for this rule. We have similar definitions for incoming returns and for outgoing events. Proving that the properties of the trees imply these uniqueness properties is quite involved, but only because of a complex induction on trees.

**Code generation.** Step (d) goes from the flattened representation to source code and could have been the most complex to reason about. However, since the flattened representation is very close in its structure to the actual code produced by the back-translation, most of the reasoning to prove this step correct has already been done. This proof step goes as follows:

1. We define the simulation invariant that hold at each synchronization point of the simulation (i.e., when we have to prove the two states are related).
2. We prove individual properties of the back-translations of each rule: they produce the right event, they update the location correctly, etc.
3. We prove that the generated code chooses the right branches in the branching structure, using the determinism and uniqueness properties of the flattened representation.
4. We assemble the full programs, and prove the forward simulations, using all the above properties and the determinism and uniqueness properties of the flattened representation.

The core of our simulation invariants are reproduced in Listing 7 below:

■ **Listing 7** Flattened to source simulation invariant

```

1 Inductive match_concrete_stacks: Component.id → stack → CS.stack → Prop :=
2 | match_concrete_stacks_nil: forall C, match_concrete_stacks C [] []
3 | match_concrete_stacks_int: forall C s st old_arg,
4   match_concrete_stacks C s st →
5   match_concrete_stacks C s (CS.Frame C old_arg Kstop :: st)
6 | match_concrete_stacks_ext: forall C C' s st old_arg,
7   C ≠ C' →
8   match_concrete_stacks C' s st →
9   match_concrete_stacks C
10   ((C', C) :: s)
11   (CS.Frame C' old_arg (Kafter_call C' 0) :: st) .
12
13 Definition match_mem (locs: NMap nat) (mem: Memory.t) :=
14   forall C n,
15   locs C = Some n →
16   Memory.load mem (C, Block.local, 0%Z) = Some (Int (Z.of_nat n))
17   ∧ Memory.load mem (C, Block.local, 1%Z) = Some (Int 1%Z)

```

```

18   ∧ (exists v, Memory.load mem (C, Block.local, 2%Z) = Some v).
19
20   Inductive match_states (p: Flattened.prg) (i: nat): Flattened.state → CS.state → Prop :=
21   | match_states_cons: forall t locs st C cst mem e v es,
22     forall (MS_ST: match_concrete_stacks C st cst)
23       (MS_MEM: match_mem locs mem)
24       (ES: Flattened.genv_code (globalenv (Flattened.sem p)) C = Some es),
25     e = (switch_outgoing C es E_exit) →
26     match_states4 p i (t, locs, st) (CS.State C cst mem Kstop e v) .

```

This simulation invariant states that: two states are related if the concrete program is currently executing a compartment’s code (line 24: it is about to execute the second half of the code in Figure 2); the abstract and the concrete stack are related; and the memory in the source state is related to the map of locations in the flattened state. The stacks are related (`match_concrete_stacks`) when they represent the same cross-compartment call-stack. The rule `match_concrete_stacks_int` allows the source to perform internal calls, which are then unfolded during the simulation proof when returning. The memory must agree with the location map (line 16), and the other variables must be accessible.

Once we have defined this invariant, we can proceed with the other steps; while the proof of this pass is the longest in our development, it consists mostly in step-by-step reasoning about the behavior of source statements, which is made much easier because all the harder invariants have already been established in previous steps.

## 6 Formalization in Rocq

We have implemented and verified this back-translation in the Rocq proof assistant. Starting from a well-formed tree, we define each step of the back-translation from (a) to (d) and the semantics of each intermediate language, and for each step we prove a CompCert-style forward simulation result, following the ideas described in the previous sections. Our Rocq development is, however, done in a slightly more complex setting [3] than then the simplified one we used for aiding the exposition above. In the Rocq development we consider multiple procedures per compartment, that are mediated through an interface, which is interesting, since the compartments are able to distinguish when receiving calls to different procedures. Therefore, we must generate slightly different statements for handling calls for each procedure of a compartment. We do this by recording the procedure being called in the call events.

The development is ~6000 lines of Rocq code long (comments excluded), with 1200 lines of specifications and 4800 of proofs. This figure includes the definition of the source language, but neither that of the trace model, nor that of some libraries and existing files that we reuse from Abate et al. [3]’s development. The largest part of the development is spent reasoning about the determinacy invariants, in particular proving that they imply the uniqueness from Listing 6. This part should be fully reusable with minor adaptation, because it takes place between levels 3 and 4, before we start reasoning about the source language.

**Benefits of our approach.** We found approaching the proof in nanopass style beneficial, since it allowed us to partition proof concerns relatively easily. In particular, we were able to parallelize the work between the first steps and the latter steps without too much effort, because these steps were not directly related. On the contrary, when we previously attempted a monolithic proof, any modification at any level of the proof did affect the entire development and made the verification of the many invariant complex and more time consuming.

## 7 Related Work

The kind of traces used for trace-based back-translation come from previous work on “fully-abstract trace semantics” [22, 23, 27], a form of game semantics [6, 19, 21]. Trace-based back-translation was extensively investigated for proving fully abstract compilation [7, 11, 15, 31]. In that setting, one needs to back-translate two trace prefixes that differ only in one single final event, which is much simpler than back-translating a finite set of trace prefixes.

We instead build on the work of Abate et al. [3], who prove robust safety preservation for a stateful source language. As discussed in Section 2, their secure compilation proof can be adapted to our setting, with the notable exception of the back-translation step. Their secure compilation criterion only requires back-translating a single trace prefix, which is again much easier than a finite set of trace prefixes. Another work by Abate et al. [4] does look at finite sets of trace prefixes, but for a much simpler source language with neither state nor callbacks, which are the features that cause the biggest challenges for our back-translation. Yet even in that simplified setting their back-translation does get reasonably complicated and their proofs are done only informally on paper. We believe that formalizing those proofs in a proof assistant could greatly benefit from our nanopass approach.

Trace-based back-translation is not the only way to do back-translation. Especially for proving fully abstract compilation, context-based back-translations are also quite popular, i.e., back-translations that only look at (the syntax of) the target context for producing a source context. The context-based back-translation techniques used for fully abstract compilation include: embedded interpreters [17], universal embedding [30], approximate back-translation [13], universal contracts [36], etc. Abate et al. [4] show that such context-based back-translations can be used to prove stronger secure compilation criteria, although the practical need for some of the strongest criteria is still unclear. We believe that robust hypersafety preservation [4] is already good enough for most practical applications, and the only reason we prove the stronger RFrSP is to show that we can do it without any significant increase in the complexity of the back-translation. A more practically-relevant advantage of context-based back-translations is that they can usually deal with higher-order languages. One disadvantage we see is that context-based back-translations are often very specific to the details of the source and target languages involved, while for trace-based back-translation the traces can abstract away unnecessary details, which we think can lead to better reusability across languages. Finally, context-based back-translation does not seem applicable when the source and target of the compiler are very different: for the languages we inherited from Abate et al. [4] the source has structured control flow, while the target language does not.

Only a few of the existing back-translations have been formalized in a proof assistant [3, 13, 14, 16, 38]. Secure compilation is, however, a larger area, and not all notions of secure compilation rely on back-translation. For instance, Besson et al. [9] introduce a software-fault isolation pass to one of the early intermediate languages of CompCert. This pass adds masking and checks to turn undefined behavior into defined behavior that only affects the component causing it. Other notions of secure compilation focus not on protecting trusted from untrusted code, but on preserving security (hyper)properties such as information flow control [10] and cryptographic constant-time [8].

## 8 Future Work

In the future, we plan to reuse our proof technique for other languages and compilation chains, and to scale it up to formally proving the stronger RFrSP security criterion for the compartmentalized CompCert variant recently proposed by Thibault et al. [38]. This variant

aims at providing a safer semantics to C, in which the damage from undefined behavior is restricted to only compromising the compartment that explicitly triggered it [3], e.g., by writing out of the bounds of an array. Since Thibault et al. [38] only prove a variant RSP, strengthening this to RFrSP could greatly benefit from our nanopass back-translation technique. Moreover, the first steps of our nanopass back-translation are independent of the details of the source language, and only rely on properties of the trace model. Moreover, even the code-generating step (d) should be reusable for other languages, since it relies on a limited set of standard language features, such as procedures and private state where compartments can store the location information. Hence, we believe that our back-translation technique will scale up to the more realistic setting of this CompCert variant.

Finally, we would also like to extend nanopass back-translation to the fine-grained memory sharing that occurs when passing secure pointers to data [15] and code between compartments.

**Acknowledgments.** We thank the anonymous reviewers for their helpful feedback. This work was in part supported by the European Research Council under ERC Starting Grant SECOMP (715753), and by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) as part of the Excellence Strategy of the German Federal and State Governments – EXC 2092 CASA - 390781972.

## References

- 1 Martín Abadi. Protection in programming-language translations. In *Security Issues for Mobile and Distributed Objects*, volume 1603 of *Lecture Notes in Computer Science*, pages 19–34. Springer, 1999. ISBN 3-540-66130-1. doi: 10.1007/3-540-48749-2\_2. URL <https://web.archive.org/web/20230529053230/http://www.hp1.hp.com/techreports/Compaq-DEC/SRC-RR-154.pdf>.
- 2 Martín Abadi and Gordon D. Plotkin. On protection by layout randomization. *ACM Transactions on Information and System Security*, 15(2):8, 2012. doi: 10.1145/2240276.2240279. URL <http://users.soe.ucsc.edu/~abadi/Papers/paper-journal-appendix.pdf>.
- 3 Carmine Abate, Arthur Azevedo de Amorim, Roberto Blanco, Ana Nora Evans, Guglielmo Fachini, Cătălin Hrițcu, Théo Laurent, Benjamin C. Pierce, Marco Stronati, and Andrew Tolmach. When good components go bad: Formally secure compilation despite dynamic compromise. In *25th ACM Conference on Computer and Communications Security (CCS)*, pages 1351–1368. ACM, October 2018. URL <https://arxiv.org/abs/1802.00588>.
- 4 Carmine Abate, Roberto Blanco, Deepak Garg, Cătălin Hrițcu, Marco Patrignani, and Jérémy Thibault. Journey beyond full abstraction: Exploring robust property preservation for secure compilation. In *32nd IEEE Computer Security Foundations Symposium (CSF)*, June 2019. URL <https://arxiv.org/abs/1807.04603>.
- 5 Carmine Abate, Roberto Blanco, Ștefan Ciobăcă, Adrien Durier, Deepak Garg, Cătălin Hrițcu, Marco Patrignani, Éric Tanter, and Jérémy Thibault. An extended account of trace-relating compiler correctness and secure compilation, 2021. URL <https://doi.org/10.1145/3460860>.
- 6 Samson Abramsky, Radha Jagadeesan, and Pasquale Malacaria. Full abstraction for PCF. *Inf. Comput.*, 163(2):409–470, 2000. doi: 10.1006/inco.2000.2930. URL <https://doi.org/10.1006/inco.2000.2930>.
- 7 Pieter Agten, Raoul Strackx, Bart Jacobs, and Frank Piessens. Secure compilation to modern processors. In *25th IEEE Computer Security Foundations Symposium*, pages

- 171–185. IEEE, 2012. ISBN 978-1-4673-1918-8. doi: 10.1109/CSF.2012.12. URL <http://www.cs.kuleuven.be/publicaties/rapporten/cw/CW619.pdf>.
- 8 Gilles Barthe, Sandrine Blazy, Benjamin Grégoire, Rémi Hutin, Vincent Laporte, David Pichardie, and Alix Trieu. Formal verification of a constant-time preserving C compiler. *Proc. ACM Program. Lang.*, 4(POPL):7:1–7:30, 2020. doi: 10.1145/3371075. URL <https://doi.org/10.1145/3371075>.
- 9 Frédéric Besson, Sandrine Blazy, Alexandre Dang, Thomas Jensen, and Pierre Wilke. Compiling sandboxes: Formally verified software fault isolation. In *28th European Symposium on Programming (ESOP)*, 2019. URL <http://people.rennes.inria.fr/Frederic.Besson/compcertSFI.pdf>.
- 10 Frédéric Besson, Alexandre Dang, and Thomas P. Jensen. Information-flow preservation in compiler optimisations. In *32nd IEEE Computer Security Foundations Symposium, CSF 2019, Hoboken, NJ, USA, June 25-28, 2019*, pages 230–242. IEEE, 2019. doi: 10.1109/CSF.2019.00023. URL <https://doi.org/10.1109/CSF.2019.00023>.
- 11 Matteo Busi, Job Noorman, Jo Van Bulck, Letterio Galletta, Pierpaolo Degano, Jan Tobias Mühlberg, and Frank Piessens. Provably secure isolation for interruptible enclaved execution on small microprocessors. In *33rd IEEE Computer Security Foundations Symposium, CSF 2020, Boston, MA, USA, June 22-26, 2020*, pages 262–276. IEEE, 2020. doi: 10.1109/CSF49147.2020.00026. URL <https://doi.org/10.1109/CSF49147.2020.00026>.
- 12 Michael R. Clarkson and Fred B. Schneider. Hyperproperties. *Journal of Computer Security*, 18(6):1157–1210, 2010. doi: 10.3233/JCS-2009-0393. URL [https://www.cs.cornell.edu/~clarkson/papers/clarkson\\_hyperproperties\\_journal.pdf](https://www.cs.cornell.edu/~clarkson/papers/clarkson_hyperproperties_journal.pdf).
- 13 Dominique Devriese, Marco Patrignani, Frank Piessens, and Steven Keuchel. Modular, fully-abstract compilation by approximate back-translation. *LMCS*, 13(4), 2017. doi: 10.23638/LMCS-13(4:2)2017. URL <https://arxiv.org/abs/1703.09988>.
- 14 Dominique Devriese, Eric Mark Martin, and Marco Patrignani. On the semantic expressiveness of iso- and equi-recursive types. *Log. Methods Comput. Sci.*, 20(4), 2024. doi: 10.46298/LMCS-20(4:14)2024. URL [https://doi.org/10.46298/lmcs-20\(4:14\)2024](https://doi.org/10.46298/lmcs-20(4:14)2024).
- 15 Akram El-Korashy, Stelios Tsampas, Marco Patrignani, Dominique Devriese, Deepak Garg, and Frank Piessens. CapablePtrs: Securely compiling partial programs using the pointers-as-capabilities principle. In *34th IEEE Computer Security Foundations Symposium, CSF 2021*, pages 1–16. IEEE, 2021. doi: 10.1109/CSF51468.2021.00036. URL <https://arxiv.org/abs/2005.05944>.
- 16 Akram El-Korashy, Roberto Blanco, Jérémy Thibault, Adrien Durier, Deepak Garg, and Cătălin Hrițcu. SecurePtrs: Proving secure compilation with data-flow back-translation and turn-taking simulation. In *35th IEEE Computer Security Foundations Symposium, (CSF)*, August 2022. URL <https://arxiv.org/abs/2110.01439>.
- 17 Cédric Fournet, Nikhil Swamy, Juan Chen, Pierre-Évariste Dagand, Pierre-Yves Strub, and Benjamin Livshits. Fully abstract compilation to JavaScript. In *40th Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages*, pages 371–384. ACM, 2013. ISBN 978-1-4503-1832-7. doi: 10.1145/2429069.2429114. URL <https://research.microsoft.com/pubs/176601/js-star.pdf>.
- 18 Aina Linn Georges, Alix Trieu, and Lars Birkedal. Le temps des cerises: efficient temporal stack safety on capability machines using directed capabilities. *Proc. ACM Program. Lang.*, 6(OOPSLA):1–30, 2022. doi: 10.1145/3527318. URL <https://doi.org/10.1145/3527318>.

- 19 Dan R. Ghica and Nikos Tzevelekos. A system-level game semantics. In Ulrich Berger and Michael W. Mislove, editors, *Proceedings of the 28th Conference on the Mathematical Foundations of Programming Semantics, MFPS 2012, Bath, UK, June 6-9, 2012*, volume 286 of *Electronic Notes in Theoretical Computer Science*, pages 191–211. Elsevier, 2012. doi: 10.1016/j.entcs.2012.08.013. URL <https://doi.org/10.1016/j.entcs.2012.08.013>.
- 20 Joseph A. Goguen and José Meseguer. Security policies and security models. In *Symposium on Security and Privacy*, pages 11–20, 1982. URL [https://www.cs.purdue.edu/homes/ninghui/readings/AccessControl/goguen\\_meseguer\\_82.pdf](https://www.cs.purdue.edu/homes/ninghui/readings/AccessControl/goguen_meseguer_82.pdf).
- 21 J. M. E. Hyland and C.-H. Luke Ong. On full abstraction for PCF: i, ii, and III. *Inf. Comput.*, 163(2):285–408, 2000. doi: 10.1006/inco.2000.2917. URL <https://doi.org/10.1006/inco.2000.2917>.
- 22 Alan Jeffrey and Julian Rathke. Java Jr: Fully abstract trace semantics for a core Java language. In *14th European Symposium on Programming*, volume 3444 of *Lecture Notes in Computer Science*, pages 423–438. Springer, 2005. ISBN 3-540-25435-8. doi: 10.1007/978-3-540-31987-0\_29. URL <http://ect.bell-labs.com/who/ajeffrey/papers/esop05.pdf>.
- 23 Alan Jeffrey and Julian Rathke. A fully abstract may testing semantics for concurrent objects. *Theor. Comput. Sci.*, 338(1-3):17–63, 2005. doi: 10.1016/j.tcs.2004.10.012. URL <http://dx.doi.org/10.1016/j.tcs.2004.10.012>.
- 24 Jeehoon Kang, Yoonseung Kim, Chung-Kil Hur, Derek Dreyer, and Viktor Vafeiadis. Lightweight verification of separate compilation. In *ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages*, 2016. URL <http://sf.snu.ac.kr/sepcompert/>.
- 25 Andrew W. Keep and R. Kent Dybvig. A nanopass framework for commercial compiler development. In Greg Morrisett and Tarmo Uustalu, editors, *ACM SIGPLAN International Conference on Functional Programming, ICFP'13, Boston, MA, USA - September 25 - 27, 2013*, pages 343–350. ACM, 2013. doi: 10.1145/2500365.2500618. URL <https://doi.org/10.1145/2500365.2500618>.
- 26 Andy Keep. The nanopass framework as a nanopass compiler (ELS keynote). In Ioanna Matilde Dimitriou Henríquez, editor, *Proceedings of the 13th European Lisp Symposium (ELS 2020), Zurich, Switzerland, April 27-28, 2020*. ELSAA, 2020.
- 27 James Laird. A fully abstract trace semantics for general references. In Lars Arge, Christian Cachin, Tomasz Jurdzinski, and Andrzej Tarlecki, editors, *Automata, Languages and Programming, 34th International Colloquium, ICALP 2007, Wrocław, Poland, July 9-13, 2007, Proceedings*, volume 4596 of *Lecture Notes in Computer Science*, pages 667–679. Springer, 2007. doi: 10.1007/978-3-540-73420-8\_58. URL [https://doi.org/10.1007/978-3-540-73420-8\\_58](https://doi.org/10.1007/978-3-540-73420-8_58).
- 28 Xavier Leroy. A formally verified compiler back-end. *Journal of Automated Reasoning*, 43(4):363–446, 2009. URL <http://dx.doi.org/10.1007/s10817-009-9155-4>.
- 29 The Coq development team. *The Coq proof assistant*. URL <http://coq.inria.fr>.
- 30 Max S. New, William J. Bowman, and Amal Ahmed. Fully abstract compilation via universal embedding. In *21st ACM SIGPLAN International Conference on Functional Programming, ICFP*, pages 103–116, 2016. doi: 10.1145/2951913.2951941. URL <https://www.williamjbowman.com/resources/fabcc-paper.pdf>.
- 31 Marco Patrignani and Dave Clarke. Fully abstract trace semantics for protected module architectures. *Computer Languages, Systems & Structures*, 42:22–45, 2015. doi:

- 10.1016/j.cl.2015.03.002. URL [https://people.mpi-sws.org/~marcopat/marcopat/Publications\\_files/llfatr-j.pdf](https://people.mpi-sws.org/~marcopat/marcopat/Publications_files/llfatr-j.pdf).
- 32 Marco Patrignani and Deepak Garg. Robustly safe compilation, an efficient form of secure compilation. *ACM Trans. Program. Lang. Syst.*, 43(1), February 2021. ISSN 0164-0925. doi: 10.1145/3436809. URL <https://doi.org/10.1145/3436809>.
  - 33 Marco Patrignani, Pieter Agten, Raoul Strackx, Bart Jacobs, Dave Clarke, and Frank Piessens. Secure compilation to protected module architectures. *ACM Transactions on Programming Languages and Systems*, 2015. URL [https://people.mpi-sws.org/~marcopat/marcopat/Publications\\_files/scoo-j.pdf](https://people.mpi-sws.org/~marcopat/marcopat/Publications_files/scoo-j.pdf).
  - 34 Marco Patrignani, Amal Ahmed, and Dave Clarke. Formal approaches to secure compilation: A survey of fully abstract compilation and related work. *ACM Computing Surveys*, 2019. URL [http://theory.stanford.edu/~mp/mp/Publications\\_files/main-full.pdf](http://theory.stanford.edu/~mp/mp/Publications_files/main-full.pdf).
  - 35 Dipanwita Sarkar, Oscar Waddell, and R. Kent Dybvig. Educational pearl: A nanopass framework for compiler education. *Journal of Functional Programming*, 15(5):653–667, 2005.
  - 36 Thomas Van Strydonck, Frank Piessens, and Dominique Devriese. Linear capabilities for fully abstract compilation of separation-logic-verified code. *Proc. ACM Program. Lang.*, 3(ICFP):84:1–84:29, 2019. doi: 10.1145/3341688. URL <https://doi.org/10.1145/3341688>.
  - 37 Yong Kiam Tan, Magnus O. Myreen, Ramana Kumar, Anthony Fox, Scott Owens, and Michael Norrish. The verified CakeML compiler backend. *Journal of Functional Programming*, 29, 2019. doi: 10.1017/S0956796818000229. URL <https://cakeml.org/jfp19.pdf>.
  - 38 Jérémy Thibault, Roberto Blanco, Dongjae Lee, Sven Argo, Arthur Azevedo de Amorim, Aina Linn Georges, Cătălin Hrițcu, and Andrew Tolmach. SECOMP: Formally secure compilation of compartmentalized C programs. In *ACM SIGSAC Conference on Computer and Communications Security (CCS)*, pages 1061–1075. ACM, 2024. doi: 10.1145/3658644.3670288. URL <http://arxiv.org/abs/2401.16277>.