

# Federated Learning: A new frontier in the exploration of multi-institutional medical imaging data

Dominika Ciupek<sup>a</sup>, Maciej Malawski<sup>a,b</sup>, Tomasz Pieciak<sup>c,a,\*</sup>

<sup>a</sup>*Sano Centre for Computational Medicine, Kraków, Poland*

<sup>b</sup>*AGH University of Krakow, Kraków, Poland*

<sup>c</sup>*LPI, ETSI Telecomunicación, Universidad de Valladolid, Valladolid, Spain*

---

## Abstract

Artificial intelligence has transformed the perspective of medical imaging, leading to a genuine technological revolution in modern computer-assisted healthcare systems. However, ubiquitously featured deep learning (DL) systems require access to a considerable amount of data, facilitating proper knowledge extraction and generalization. Admission to such extensive resources may be hindered due to the time and effort required to convey ethical agreements, set up and carry the acquisition procedures through, and manage the datasets adequately with a particular emphasis on proper anonymization. One of the pivotal challenges in the DL field is data integration from various sources acquired using different hardware vendors, diverse acquisition protocols, experimental setups, and even inter-operator variabilities. In this paper, we review the federated learning (FL) concept that fosters the integration of large-scale heterogeneous datasets from multiple institutions in training DL models. In contrast to a centralized approach, the decentralized FL procedure promotes training DL models while preserving data privacy at each institution involved. We formulate the FL principle and comprehensively review general and dedicated medical imaging aggregation and learning algorithms, enabling the generation of a globally generalized model. We meticulously go through the challenges in constructing FL-based systems, such as data heterogeneity across the institutions, resilience to potential attacks on data privacy, and the variability in computational and communication resources among the entangled sites that might induce efficiency issues of the entire system. Finally, we explore the up-to-date open frameworks for rapid FL-based algorithm prototyping and shed light on future directions in this intensively growing field.

*Keywords:* federated learning, deep learning, heterogeneous data, multi-institutions, aggregation methods, malicious clients, privacy protection.

---

## 1. Introduction

Medical imaging (MI) is an intrinsic part of modern healthcare systems and plays an indispensable role in clinical and medical applications nowadays. The versatility of medical image analysis systems and their advancement over the last decades have enabled to inspect, measure and visualize the structure and function of different organs, allowing for early detection, precise diagnosis and prognosis, and meticulous therapy planning (Duncan and Ayache, 2000; Bankman, 2008; Frangi et al., 2023). From initial screening to treatment selection and further follow-up, MI is critical in the healthcare chain. A variety of MI techniques and their derivatives founded on different phenomena, such as X-ray imaging, computed tomography (CT), magnetic resonance imaging (MRI) and positron emission tomography (PET), provide comprehensive and complementary information on macro- and microstructure (Lerch et al., 2017; Alexander et al., 2019; Novikov et al., 2019), as well as functional (Frangi et al., 2001; Deffieux et al.,

2021), physiological (Cohen et al., 2017) and molecular characteristics (Gambhir, 2002), resulting in a better understanding of natural processes that occur in the body, including the maturation and aging leading to normative trajectories (Cox et al., 2016; Bethlehem et al., 2022), detection and progression of miscellaneous diseases (Basu et al., 2009; Mott et al., 2012; Chen, 2019; Planche et al., 2022), exploration the similarities between the species (de Schotten et al., 2019; Pagani et al., 2023) or discovery the genetic relationships with organ structure and/or conditions (Grasby et al., 2020; Stauffer et al., 2023).

Over the last decade, we have been observing an authentic technological shift in medical image analysis and image-guided systems towards machine learning (ML) and predominantly deep learning (DL) techniques, leading to faster and more accurate data reconstruction, processing and inference (Shen et al., 2017; Litjens et al., 2017; Barragán-Montero et al., 2021). DL-based procedures have already demonstrated extraordinary results in a broad spectrum of imaging protocols and tasks (Sahiner et al., 2019; Wang et al., 2020a; Ozturk et al., 2020; Wen et al., 2020; Arabi et al., 2021; Isensee et al., 2021;

---

\*Corresponding author

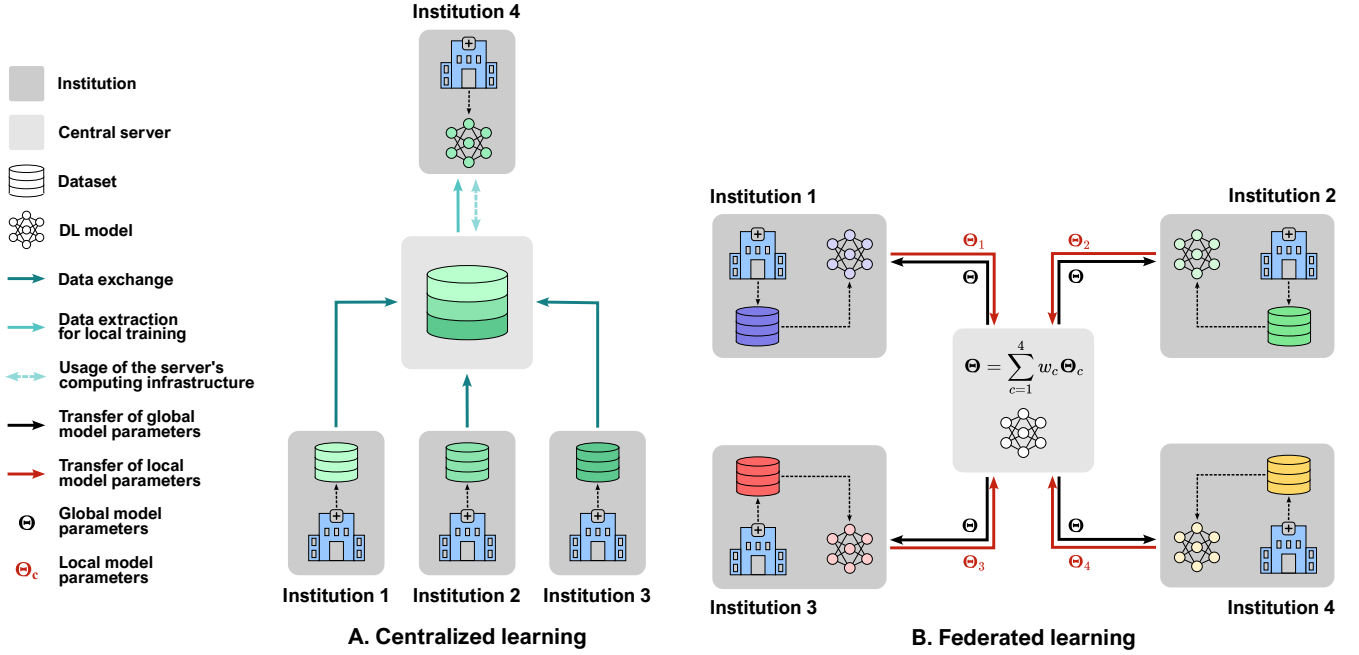


Figure 1: Comparison between centralized and federated learning approaches: **A.** In a centralized architecture, the institutions (here, 1, 2, 3) transfer their local datasets to the central server. Other centers (Institution 4) extract datasets from the global server or use its computing infrastructure to train the DL models. **B.** Each institution’s data remains locally preserved in a federated architecture while the parameters of locally trained models  $\Theta_c$  are transferred to the central server. The central server aggregates received parameters and sends back the parameters of a global model  $\Theta$  to each center.

Sermesant et al., 2021), and are considered as the future of robotic-assisted surgeries (Li et al., 2022a; Varghese et al., 2024). In order to improve the patient’s comfort and amenities as well as support clinicians, it is vital to explore the possibilities for optimizing MI phases with DL, including acquisition protocols, data reconstruction and processing procedures, and automation in making decisions that can significantly assist clinicians in everyday practice (Barragán-Montero et al., 2021). As the DL system can integrate the data and improve inference by learning from large-scale observations, training and validating such models requires an extensive amount of diverse and labeled datasets to achieve high accuracy of the models (Fan et al., 2016; Bakas et al., 2018; Simpson et al., 2019; Littlejohns et al., 2020). These datasets can be collected from multifarious sources, including diverse machine vendors, acquisition protocols, experimental setups, and the preprocessing pipelines employed. Gathering such broad-sided comprehensive datasets is challenging, mainly due to sensitive medical information that requires proper protection (Nelson, 2015; Rieke et al., 2020; Olatunji et al., 2024). Although meticulous agreements are critical to ensure secure data sharing and adequate use by the community, the datasets must be compiled suitably, including anonymization, which goes beyond merely removing patient-identifying information and may include some interference with the raw data, such as face masking (Nelson, 2015; Olatunji et al., 2024; Willeminck et al., 2020). Therefore, it is unlikely that

large and diverse datasets will be available shortly free of charge due to the considerable effort and time required for their collection, labeling and management (Rieke et al., 2020).

Federated learning (FL) is a concept that addresses the need to integrate multi-institutional heterogeneous data in training DL models. FL is a decentralized approach, which means that DL models are trained and validated locally without sharing private data between the involved sites (McMahan et al., 2017; Rieke et al., 2020; Sheller et al., 2020; Li et al., 2020a). In contrast to a traditional centralized procedure that operates on the data collected from different institutions on a single centralized server, in the FL-based approach, only the characteristics of locally trained models are exported from local collaborators to generate a global model (see Fig. 1). Developing an FL-based architecture requires carefully selected aggregation and learning strategies for a particular imaging modality and/or DL problem. The aggregation algorithm combines the parameters from locally trained models to yield a single global model (Qi et al., 2024a). The quality of the new-created model vastly depends on the aggregation strategy chosen (Reddi et al., 2021; Li et al., 2020a; Wicaksana et al., 2023; Hosseini et al., 2023; Kalapaaking et al., 2023; Wu et al., 2023b).

Learning techniques determine the overall FL-based process, such as the training strategy (Zhang et al., 2022a; Feng et al., 2023; Jiménez-Sánchez et al., 2023; Jiang et al., 2023; Dalmaz et al., 2024), information sharing

procedure (Guo et al., 2021; Liu et al., 2021a; Zhao and Huang, 2023), and data augmentation techniques for training phase (Peng et al., 2023). The appropriate selection of these methods plays a key role in the MI field, significantly affecting the accuracy and versatility of the final global model and its resilience to potential attacks on data privacy (Li et al., 2019; Feng et al., 2023; Zhao and Huang, 2023). The latest results from the use of FL-based models in MI indicate that models trained in a federated approach can compete with those trained in a centralized way (Li et al., 2020b; Feki et al., 2021; Lu et al., 2022b; Dalmaz et al., 2024) and even outperform models trained on separate institutional data (Roth et al., 2020; Bercea et al., 2022; Feng et al., 2023).

However, implementing the FL-based architecture demands further technical advancements to ensure optimal accuracy and versatility without compromising data security. In recent years, there has been an immense interest growth in federated techniques among the MI community in federated techniques (see Fig. 2), leading to the development of several unique procedures intended to address specific MI limitations and constraints, such as data heterogeneity (Li et al., 2020b; Feng et al., 2023; Zhao and Huang, 2023) or label deficiency (Wu et al., 2021; Peng et al., 2023).

### 1.1. Related works

Several review articles covering the FL concept in the context of MI have been published so far. Some of them demonstrate the application perspective in a targeted scope, including clinical oncology and cancer research (Chowdhury et al., 2021; Ankolekar et al., 2024; Bechar et al., 2025), radiomics (Guzzo et al., 2023), ocular imaging (Nguyen et al., 2022d), or radiology in general (Rehman et al., 2023). In other reviews, the FL has been exposed as a part of the study with particular emphasis on a specific problem considered in MI such as brain tumor segmentation (Ahamed et al., 2023), diagnosis of common retinal diseases (Lim et al., 2024), COVID-19 detection (Mondal et al., 2023) or skin cancer screening (Wei et al., 2024). MI has also been explored as one of the elements of a broader discussion covering the FL-based systems from the Smart Healthcare perspective, such as the Internet of Medical Things (Nguyen et al., 2022b; Chaddad et al., 2023; Shiranthika et al., 2023). Alternatively, these reviews address specific FL-related challenges, e.g., the security and privacy preservation of medical data (Kaissis et al., 2020; Aouedi et al., 2022; Koutsoubis et al., 2024), uncertainty estimation (Koutsoubis et al., 2024) or lack of large sets of labeled data (Ng et al., 2021). Other reports present the computational platforms and tools allowing for collaborative data analysis or rapid prototyping of the FL-based systems (Rootes-Murdy et al., 2022; Riviera et al., 2023).

Only a few reports summarize the applications and challenges of FL in MI area without presenting strict mathematical formulations of aggregation and learning meth-

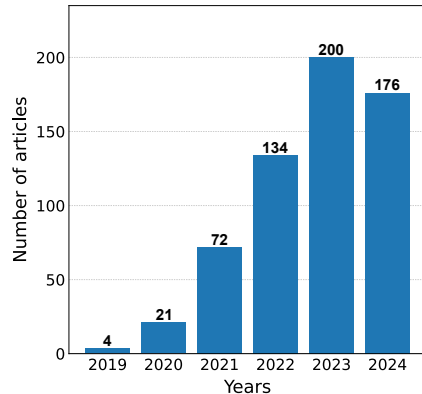


Figure 2: The number of screened research papers on applications of federated learning in medical imaging per year. The results were taken from the MEDLINE and Google Scholar databases and followed the procedure presented in section 2.1. Data is up to date as of October 2024.

ods (Darzidehkalani et al., 2022; da Silva et al., 2023; Sandhu et al., 2023; Nazir and Kaleem, 2023; Guan et al., 2024). Instead, these reviews present a general summary of FL methods without categorizing them by their dedicated problem-solving capabilities or concentrate solely on the applications of standard FL-based aggregation and learning algorithms to various imaging modalities, body organs, or DL tasks.

### 1.2. Contributions

This work goes beyond the existing reviews and offers a comprehensive overview of FL principles and the applications of dedicated procedures to various imaging modalities and DL tasks. The paper bridges the gap between previously published articles that superficially present the FL on top of DL-related topics and addresses the challenges of implementing the federated architecture for MI, such as data heterogeneity across the involved sites, the occurrence of inadvisable malicious clients, security and privacy preservation and limited data labeling. Besides, we revise various system architectures and communication efficiency problems in the federated-based systems. Compared to the previous reviews focusing on FL in MI, we provide a strict theoretical and unified mathematics to illustrate FL aggregation and learning algorithms and follow the formulations across the paper by presenting MI dedicated methodologies. Finally, the article reviews computational frameworks for rapid prototyping of algorithms in FL frameworks and presents future directions in the field.

The researchers can use this review to select appropriate aggregation and learning algorithms to address specific problems while implementing the FL architecture for a MI task. The paper might also serve as a starting point for exploring the prospective development requirements of FL algorithms.

Search query	MEDLINE	Google Scholar	Total w/o duplicates
“federated learning” and “medical imaging”	68	99	147
“federated learning” and “neuroimaging”	25	98	113
“federated learning” and “MRI”	40	100	125
“federated learning” and “magnetic resonance imaging”	41	100	127
“federated learning” and “CT”	49	100	138
“federated learning” and “computed tomography”	26	100	119
“federated learning” and “tomography”	36	100	127
“federated learning” and “PET”	10	98	101
“federated learning” and “positron emission tomography”	9	99	102
“federated learning” and “x-ray”	41	99	125
“federated learning” and (“histopathology” or “histopathological”)	15	99	101
“federated learning” and (“dermatoscopy” or “dermatoscopic”)	0	100	100
“federated learning” and “retinal”	12	100	105
“federated learning” and “OCT”	99	100	193
“federated learning” and “optical coherence tomography”	4	99	99
“federated learning” and “ultrasound”	11	100	105
“federated learning” and “mammography”	3	99	99
“federated learning” and “microscopic”	0	99	99

Table 1: The list of queries used in MEDLINE and Google Scholar engines to retrieve the preliminary list of research articles related to federated learning in medical imaging. The results from Google Scholar were limited to the first 100 entries from each query.

The contributions of this review paper can be summarized as follows:

1. it provides a comprehensive overview of the theoretical aspects of FL, including recent advances in architectures, aggregation and learning approaches, and fundamental techniques used in privacy protection for local data in MI,
2. it gives an up-to-date overview of FL applications in the field of MI, with a particular emphasis on different imaging modalities and tasks,
3. it discusses open issues in FL and recent practices used to address them,
4. it provides an overview of open-source tools and frameworks created to facilitate the rapid prototyping of FL-based algorithms,
5. finally, it defines still unsolved challenges in FL and possible directions for further development.

### 1.3. Paper organization

The paper has been organized as follows. In the next section, we define our methodology for collecting the literature used in the study and illustrate the search results from existing databases, focusing on miscellaneous imaging modalities and DL applications. Section 3 covers the fundamental concepts of FL, starting with its definition and then smoothly introducing the basic optimization and aggregation techniques, the learning techniques, and the most common data privacy protection methods. Then, section 4 delves deeper into FL, presenting various topics and problems that must be adequately clarified before developing a practical architecture. In sections 5 and 6, we present an in-depth analysis of aggregation and learning methods used in MI. Section 7 reviews actively developed

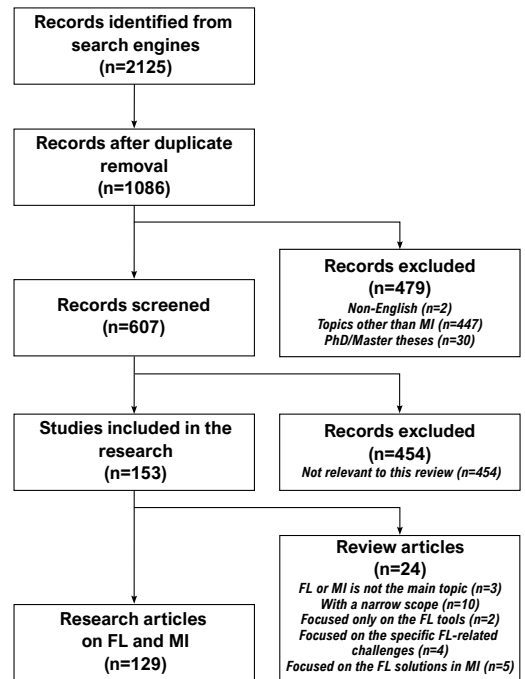


Figure 3: The flow chart presents the screening procedure used for collecting the research papers.

open-source FL frameworks for rapid prototyping and deployment. Finally, section 8 discusses the challenges of FL and proposes strategies to address them, guiding future developments in the field.

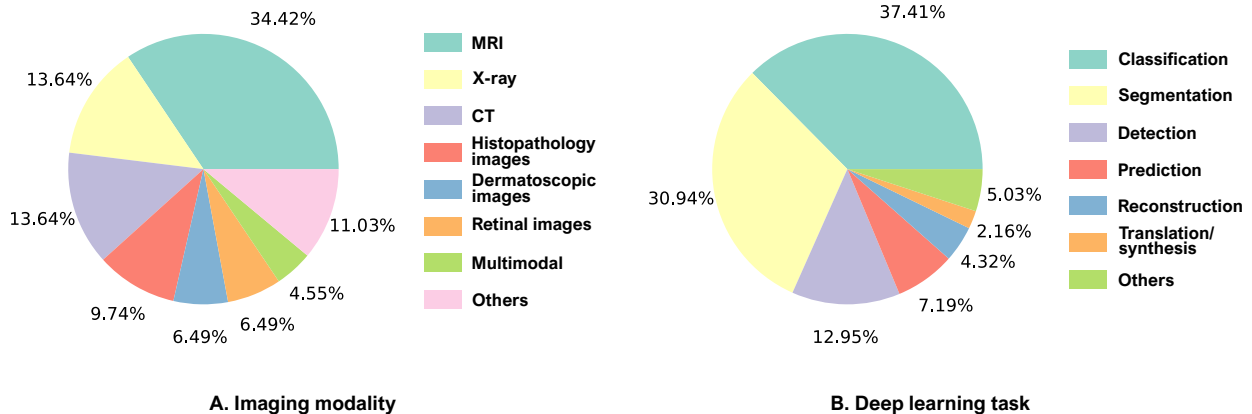


Figure 4: **A.** Distribution of imaging modalities and **B.** deep learning tasks in the examined federated learning research papers ( $n = 129$ ).

## 2. Research methodology

### 2.1. Search strategy

The sample comes from two publicly available search engines, namely MEDLINE (<https://www.nlm.nih.gov/medline/>) and Google Scholar (<https://scholar.google.com/>). Each search query combined two terms: (1) “federated learning” and (2) an imaging modality (see Table 1 for details). In the case of Google Scholar, we limited each search result to the first ten pages (i.e., 100 results).

The initial search returned 2125 papers, of which 1086 were screened after removing duplicates. Among these, 479 articles did not meet the inclusion criteria based on their titles and abstracts. Two papers were not written in English, and the remaining articles were unrelated to FL applications in MI (447) or were Ph.D./Master theses (30). In the next round of screening, we excluded another 454 articles. These papers were either short conference abstracts, unavailable, or did not present advances in aggregation or learning techniques. A total of 153 articles were considered for this study, of which 24 were review papers included in Section 1.1. The remaining records are the research papers discussed in the main body of this article. Fig. 3 illustrates the flow chart of the screening procedure used in our examination.

### 2.2. Descriptive statistical analysis

The review integrates applications of FL with a wide range of MI modalities, particularly 53 papers related to MRI, 21 to X-ray imaging, 21 to CT, and 15 articles linked to histopathological imaging. In particular, seven articles examined multimodal imaging techniques that involved CT and MRI, CT and PET, CT and X-ray, ultrasonography and mammography, or CT, MRI, ultrasonography and histopathological images. The remaining articles covered PET, OCT, mammography, dermatoscopic, retinal, endoscopic and microscopy imaging. Fig. 4A. provides an exact distribution of articles involving specific topics.

Fig. 4B shows a distribution of the papers examined according to the task they address. Among them, 52 articles focus on classification, 43 on segmentation, and 18 on detection. The rest of the papers broadly address prediction, prognosis, reconstruction, translation, restoration, denoising, screening, and super-resolution, with a few considering multiple tasks. Table 2 presents the comparative and detailed information gathered from the evaluated articles, including tasks, employed datasets with references, the presence of heterogeneous data, and the number of clients involved in the analysis.

## 3. General overview of federated learning

In this section, we provide a general theoretical overview of FL, including basic aggregation methods, learning techniques, and data privacy concerns.

### 3.1. Theory

The main FL principle can be schematically illustrated as a problem of optimizing the global model parameters  $\Theta \in \mathbb{R}^p$  that minimize the global objective function, defined as (McMahan et al., 2017; Gafni et al., 2022):

$$\min_{\Theta} \mathcal{L}(\Theta; \mathcal{D}) \quad \text{with} \quad \mathcal{L}(\Theta; \mathcal{D}) = \sum_{c=1}^C w_c \mathcal{L}_c(\Theta; \mathcal{D}_c), \quad (1)$$

where  $\mathcal{L}$  denotes the global loss function that is computed by combining  $C$  local losses  $\{\mathcal{L}_c: c \in \{1, 2, \dots, C\}\}$ , each contributing under normalized weight  $w_c \geq 0$ , and  $\mathcal{D}_c = \{\mathbf{x}_n, \mathbf{y}_n\}_{n=1}^{n_c}$  is the private dataset available only for  $c$ -th client with training data  $\mathbf{x}_n$  and corresponding labels  $\mathbf{y}_n$ .

The global model parameters are iteratively updated based on the contributions of individual collaborators, each minimizing local objective function. In practice, this process is typically carried out in the following stages (McMahan et al., 2017; Rieke et al., 2020):

Reference	Task	Used datasets	Heterogeneous data	Number of clients
<b>Magnetic resonance imaging</b>				
Roy et al. (2019)	Segmentation	MALC (Landman et al., 2012)	N/A	5, 7, 10, 20
Li et al. (2019)	Segmentation	BraTS2018 (Menze et al., 2015)	Yes	13
Parekh et al. (2021)	Segmentation	BraTS2017 (Menze et al., 2015), own dataset	Yes	2
Roth et al. (2021)	Segmentation	Medical Segmentation Decathlon (Simpson et al., 2019), PROMISE12 (Litjens et al., 2014b), NCI-ISBI2013, ProstateX (Litjens et al., 2014a)	Yes	4
Tian et al. (2021)	Segmentation	Spinal Cord Grey Matter Segmentation Challenge dataset (Prados et al., 2017)	Yes	3
Liu et al. (2021a)	Segmentation	PROMISE12 (Litjens et al., 2014b), I2CVB (Lemaître et al., 2015), NCI-ISBI2013, dataset from article (Liu et al., 2020b)	Yes	6
Wu et al. (2021)	Segmentation	ACDC (Bernard et al., 2018)	Yes	10
Sarma et al. (2021)	Segmentation	SPIE-AAPM-NCI PROSTATEX (Armato III et al., 2018), own dataset	Yes	3
Khan et al. (2022)	Segmentation	FeTS2021 (Pati et al., 2021)	Yes	17, 22
Mächler et al. (2022)	Segmentation	FeTS2021 (Pati et al., 2021)	Yes	17
He et al. (2022)	Segmentation	BraTS2018 (Menze et al., 2015)	Yes	10
Zhang et al. (2022a)	Segmentation	BraTS2017 (Menze et al., 2015)	Yes	10
Yang et al. (2022b)	Segmentation	ACDC (Bernard et al., 2018)	Yes	4
Bercea et al. (2022)	Segmentation	OASIS-3 (LaMontagne et al., 2018), ADNI-3 (Weiner et al., 2017), MSLUB (Lesjak et al., 2017), MSISBI (Carass et al., 2017), own dataset	Yes	N/A
Huang et al. (2022)	Segmentation	Dataset from articles (Putz et al., 2020; Oft et al., 2021)	Yes	2, 7
Khan et al. (2023)	Segmentation	FeTS2022 (Pati et al., 2021)	Yes	23, 33
Mächler et al. (2023)	Segmentation	FeTS2022 (Pati et al., 2021)	Yes	N/A
Mushtaq et al. (2023)	Segmentation	FeTS2021 (Pati et al., 2021)	Yes	13
Liu et al. (2023a)	Segmentation	MSSEG2016 (Commowick et al., 2018), own dataset	Yes	3, 4
Jiang et al. (2023)	Segmentation	NCI-ISBI2013, PROMISE12 (Litjens et al., 2014b), I2CVB (Lemaître et al., 2015), dataset from article (Liu et al., 2020b)	Yes	6
Yang et al. (2023)	Segmentation	PROMISE12 (Litjens et al., 2014b), I2CVB (Lemaître et al., 2015), NCI-ISBI2013	Yes	6
Kumar et al. (2024)	Segmentation	BraTS2020 (Menze et al., 2015)	Yes	10
Liang et al. (2024)	Segmentation	Dataset from articles (Liu et al., 2020b,a)	Yes	6
Sheller et al. (2020)	Classification	BraTS2017 (Menze et al., 2015), own dataset	Yes	10
Li et al. (2020b)	Classification	ABIDE (Di Martino et al., 2014)	N/A	4
Huang et al. (2021)	Classification	ADNI (Jack Jr et al., 2008), OASIS-1 (Marcus et al., 2007), AIBL (Ellis et al., 2009)	Yes	3
Kumar et al. (2022)	Classification	BraTS2019 (Menze et al., 2015), IXI	Yes	4
Linardos et al. (2022)	Classification	M&M (Campello et al., 2021), ACDC (Bernard et al., 2018)	Yes	4
Islam et al. (2022)	Classification	UK Data Service brain tumor dataset (Pernet et al., 2016)	No	50
Zhao and Huang (2023)	Classification	Alzheimer MRI dataset	N/A	3
Rajagopal et al. (2023)	Classification	Own dataset	Yes	2
Zhou et al. (2024)	Classification	Brain Tumor Classification (MRI) dataset	N/A	5
Gupta et al. (2024b)	Classification	ABIDE (Di Martino et al., 2014)	N/A	10
Albalawi et al. (2024)	Classification	Brain Tumor MRI dataset	Yes	10
Casella et al. (2023)	Detection	ADNI (Jack Jr et al., 2008)	Yes	3
Pati et al. (2022)	Detection	Own dataset	Yes	71
Mitrovska et al. (2024)	Detection	ADNI (Jack Jr et al., 2008)	Yes	2, 3, 4

NCI-ISBI2013 dataset: <https://www.cancerimagingarchive.net/analysis-result/isbi-mr-prostate-2013/>

IXI dataset: <https://brain-development.org/ixi-dataset/>

Brain Tumor Detection dataset: <https://www.kaggle.com/datasets/navoneel/brain-mri-images-for-brain-tumor-detection>

Alzheimer MRI dataset: <https://www.kaggle.com/datasets/legendahmed/alzheimermridataset>

Brain Tumor Classification (MRI) dataset: <https://www.kaggle.com/datasets/sartajbhuvaji/brain-tumor-classification-mri>

Table 2: Summary of federated learning frameworks used in various medical imaging tasks over different imaging modalities. The column “Heterogeneous data” informs whether the heterogeneous data across were used in the aggregation procedure. The last column refers to the number of clients involved in the deep learning task. All links were verified on March 10, 2025.

Reference	Task	Used datasets	Heterogeneous data	Number of clients
Yamada et al. (2024)	Detection	OpenBTAI (Ocaña-Tienda et al., 2023), own datasets	Yes	3
Stripelis et al. (2021a)	Prediction	UK Biobank (Miller et al., 2016)	No	8
Stripelis et al. (2021b)	Prediction	UK Biobank (Miller et al., 2016)	No	8
Stripelis et al. (2022)	Prediction	ADNI (Jack Jr et al., 2008), OASIS-3 (LaMontagne et al., 2018), AIBL (Ellis et al., 2009)	Yes	3, 4, 5
Peng et al. (2023)	Prediction	ABIDE (Di Martino et al., 2014), ADNI (Jack Jr et al., 2008)	Yes	5
Denissen et al. (2023)	Prediction	Own dataset	N/A	3
Guo et al. (2021)	Reconstruction	fastMRI (Knoll et al., 2020), BraTS (Menze et al., 2015), IXI, HPKS (Jiang et al., 2019)	Yes	3, 4
Feng et al. (2023)	Reconstruction	fastMRI (Knoll et al., 2020), BraTS (Menze et al., 2015), SMS (Feng et al., 2021), uMR (Feng et al., 2021)	Yes	4
Elmas et al. (2023)	Reconstruction	fastMRI (Knoll et al., 2020), BraTS (Menze et al., 2015), IXI, own dataset	Yes	3
Wu et al. (2023b)	Reconstruction	fastMRI (Knoll et al., 2020), CC359 (Beauferris et al., 2022), own dataset	Yes	3
Levac et al. (2023)	Reconstruction	fastMRI (Knoll et al., 2020), Stanford dataset, NYU knee dataset	Yes	10
Yan et al. (2024)	Reconstruction	fastMRI (Knoll et al., 2020), BraTS (Menze et al., 2015), own dataset	Yes	2, 3, 6
Dalmaz et al. (2022)	Translation	BraTS (Menze et al., 2015), IXI, MIDAS (Bullitt et al., 2005), OASIS-3 (LaMontagne et al., 2018)	Yes	4
Fischer et al. (2025)	Translation	BraTS (Menze et al., 2015), OASIS-3 (LaMontagne et al., 2018), HCP WU-Minn (Van Essen et al., 2013), HCP MGH (Fan et al., 2016), UCSF-PDGM-v3 (Calabrese et al., 2022)	Yes	6
Dalmaz et al. (2024)	Synthesis	BraTS (Menze et al., 2015), IXI, MIDAS (Bullitt et al., 2005), OASIS-3 (LaMontagne et al., 2018)	Yes	4
Liu et al. (2024a)	Super-resolution	MPMRI (Chen et al., 2020), ADNI (Jack Jr et al., 2008), Own dataset	Yes	4
<b>Computed tomography</b>				
Wang et al. (2020c)	Segmentation	Own dataset	Yes	2
Shen et al. (2021)	Segmentation	TCIA Pancreas-CT (Roth et al., 2015), Medical Segmentation Decathlon (Simpson et al., 2019), BTCV Abdomen CT (Landman et al., 2015)	Yes	3
Ziller et al. (2021b)	Segmentation	Medical Segmentation Decathlon (Simpson et al., 2019)	Yes	3
Misonne and Jodogne (2022)	Segmentation	NSCLC-Radiomics (Aerts et al., 2014), Pediatric-CT-SEG (Jordan et al., 2022), LCTSC2017 (Yang et al., 2018)	Yes	3
Guo et al. (2022)	Segmentation	Medical Segmentation Decathlon (Simpson et al., 2019), TCIA Pancreas-CT (Roth et al., 2015), BTCV Abdomen CT (Landman et al., 2015), TCIA Images in COVID-19 (Harmon et al., 2020)	Yes	3
Yang et al. (2022a)	Segmentation	Own dataset	N/A	4
Yang et al. (2023)	Segmentation	COVID-19-CT, COVID-19-1110 (Morozov et al., 2020), COVID-19-9, MS COVID-19-CT	Yes	4
Kanhere et al. (2023)	Segmentation	Medical Segmentation Decathlon (Simpson et al., 2019), BTCV Abdomen CT (Landman et al., 2015), KiTS19 (Heller et al., 2020)	Yes	4
Mushtaq et al. (2023)	Segmentation	KiTS19 (Heller et al., 2020)	N/A	6
Kim et al. (2024)	Segmentation	BTCV Abdomen CT (Landman et al., 2015), Medical Segmentation Decathlon (Simpson et al., 2019), KiTS19 (Heller et al., 2020), LiTS17 (Bilic et al., 2023)	Yes	7, 21

Brain Tumor MRI dataset: <https://www.kaggle.com/datasets/masoudnickparvar/brain-tumor-mri-dataset>

Stanford dataset: <http://mridata.org/>

NYU knee dataset: <https://fastmri.med.nyu.edu/>

COVID-19-CT dataset: <https://www.kaggle.com/datasets/andrewmvd/covid19-ct-scans>

COVID-19-9: <https://figshare.com/authors/MedSeg/9940190>

MS COVID-19-CT: <https://sirm.org/COVID-19/>

Table 2 (continued): Part II.

Reference	Task	Used datasets	Heterogeneous data	Number of clients
Zheng et al. (2024)	Segmentation	Own datasets	Yes	3
Wang et al. (2024)	Segmentation	RIDER (Zhao et al., 2009), INTEROBS, NSCLC-Radiomics (Aerts et al., 2014), own datasets	Yes	4
Luo and Wu (2022)	Classification	OrganMNIST (Yang et al., 2021)	N/A	12
Lu and Kalpathy-Cramer (2022)	Classification	OrganMNIST (Yang et al., 2021)	N/A	N/A
Wu et al. (2023a)	Classification	RSNA ICH Detection (Flanders et al., 2020)	Yes	20
Lai et al. (2024)	Classification	RSNA ICH Detection (Flanders et al., 2020)	N/A	4
Parekh et al. (2021)	Detection	Own dataset	N/A	2
Dou et al. (2021)	Detection	Own dataset, CORONACASES	Yes	3
Florescu et al. (2022)	Detection	Radiopaedia, Lung-PET-CT-Dx, Radiology Assistant, Harvard Dataverse, dataset from article (Yan et al., 2020), own dataset	N/A	3
Shiri et al. (2024)	Prediction	Datasets from articles (Ning et al., 2020; Shiri et al., 2022b)	Yes	N/A
Yang et al. (2022b)	Restoration	NIH-AAPM-Mayo Low-Dose CT (McCollough, 2016)	N/A	4
<b>Positron Emission Tomography</b>				
Vo et al. (2024)	Prediction	NSCLC (Bakr et al., 2018), own dataset	Yes	4
Zhou et al. (2023)	Denosing	Dataset from article (Xue et al., 2021), own dataset	Yes	3
<b>X-ray</b>				
Ślazyk et al. (2022)	Segmentation, Classification	Chest X-Ray Images (Pneumonia) dataset, COVID-19 Image Data Collection (IEEE) (Cohen et al., 2020), RSNA2018 (Shih et al., 2019)	N/A	3
Sun et al. (2024)	Segmentation	Datasets from article (Jaeger et al., 2014)	N/A	3
Cetinkaya et al. (2021)	Classification	Chest X-Ray Images (Pneumonia) dataset, COVID-19 Radiography Database (Chowdhury et al., 2020; Rahman et al., 2021), Figure 1 COVID-19 Chest X-ray, COVID-19 Chest X-Ray Image Repository, COVID-19 Image Data Collection (IEEE) (Cohen et al., 2020)	N/A	20
Alkhunaizi et al. (2022)	Classification	CheXpert (Irvin et al., 2019)	N/A	10
Elshabrawy et al. (2022)	Classification	Chest X-Ray Images (Pneumonia) dataset, Covid-19 Image dataset, COVID-19 Image Data Collection (IEEE) (Cohen et al., 2020), dataset from articles (Tartaglione et al., 2020; Maguolo and Nanni, 2021), own dataset	N/A	4
Kulkarni et al. (2023)	Classification	ChestX-ray8 (Wang et al., 2017), CheXpert (Irvin et al., 2019), MIMIC-CXR-JPG (Johnson et al., 2019; Goldberger et al., 2000)	N/A	2
Noman et al. (2023)	Classification	COVID-19 Radiography Database (Chowdhury et al., 2020; Rahman et al., 2021), datasets from articles (Jaeger et al., 2014; Rahman et al., 2020)	N/A	5
Naumova et al. (2024)	Classification	CheXpert (Irvin et al., 2019)	N/A	4
Babar et al. (2024)	Classification	Chest X-ray (Covid-19 & Pneumonia) dataset, COVID 19 XRay and CT Scan Image dataset, COVIDx (Wang et al., 2020b)	N/A	10, 20
Ahmed et al. (2024)	Classification	Covid19-Pneumonia-Normal Chest X-Ray Images (Shastri et al., 2022)	N/A	50, 120
Myrzashova et al. (2025)	Classification	ChestX-ray8 (Wang et al., 2017)	N/A	6

CORONACASES: <https://coronacases.org/>

Radiopaedia: <https://radiopaedia.org/>

Lung-PET-CT-Dx: <https://www.cancerimagingarchive.net/collection/lung-pet-ct-dx/>

RadiologyAssistant: <https://radiologyassistant.nl/chest/covid-19/covid19-imaging-findings>

Harvard Dataverse: <https://dataverse.harvard.edu/dataset.xhtml?persistentId=doi:10.7910/DVN/6ACUZJ>

Chest X-Ray Images (Pneumonia) dataset: <https://data.mendeley.com/datasets/rsbjbr9sj/2>

Figure 1 COVID-19 Chest X-ray dataset: <https://github.com/agchung/Figure1-COVID-chestxray-dataset>

COVID-19 Chest X-Ray Image Repository: [https://figshare.com/articles/dataset/COVID-19\\_Chest\\_X-Ray\\_Image\\_Repository/12580328](https://figshare.com/articles/dataset/COVID-19_Chest_X-Ray_Image_Repository/12580328)

Covid-19 Image dataset: <https://www.kaggle.com/datasets/pranavraikokte/covid19-image-dataset>

Chest X-ray (Covid-19 & Pneumonia) dataset: <https://www.kaggle.com/datasets/prashant268/chest-xray-covid19-pneumonia>

COVID 19 XRay and CT Scan Image dataset: <https://www.kaggle.com/datasets/ssarkar445/covid-19-xray-and-ct-scan-image-dataset>

Table 2 (continued): Part III.



Reference	Task	Used datasets	Heterogeneous data	Number of clients
Gupta et al. (2024a)	Classification	Lungs Disease Dataset (4 types) dataset	N/A	2
Yan et al. (2021)	Detection	COVIDx (Wang et al., 2020b)	N/A	5
Dong and Voiculescu (2021)	Detection	CheXpert (Irvin et al., 2019), ChestX-ray8 (Wang et al., 2017), VinDr-CXR (Nguyen et al., 2022c)	N/A	3, 6
Giuseppi et al. (2022)	Detection	COVID-19, Pneumonia and Normal Chest X-ray PA dataset	N/A	7
Nguyen et al. (2022a)	Detection	DarkCOVID (Ozturk et al., 2020), ChestCOVID (Afshar et al., 2020)	N/A	5
Kandati and Gadekallu (2023b)	Detection	Covid-19 Image dataset, Chest X-Ray Images (Pneumonia) dataset	N/A	10
Makkar and Santosh (2023)	Detection	Figure 1 COVID-19 Chest X-ray, COVID-19 Radiography Database (Chowdhury et al., 2020; Rahman et al., 2021), Actualmed COVID-19 Chest X-ray	N/A	5, 10, 20, 30, 50, 100
Zhang et al. (2022a)	Prediction	RSNA Bone Age dataset	N/A	4
Feki et al. (2021)	Screening	COVID-19 Image Data Collection (IEEE) (Cohen et al., 2020), dataset from article (Jaeger et al., 2014)	N/A	4
Casella et al. (2023)	Prognosis	Dataset from article (Soda et al., 2021)	Yes	6
<b>Histopathological images</b>				
Zhang et al. (2024)	Segmentation	CoNSeP (Graham et al., 2019b), CPM-17 (Vu et al., 2019), CRAG (Graham et al., 2019a), CryoNuSeg (Mahbod et al., 2021), Glas (Sirinukunwattana et al., 2017), TNBC (Naylor et al., 2018), dataset from article (Kumar et al., 2017)	Yes	7
Gunesli et al. (2021)	Classification	TCGA CRC-DX (Weinstein et al., 2013)	N/A	11
Lu and Kalpathy-Cramer (2022)	Classification	PathMNIST (Yang et al., 2021)	N/A	N/A
Li et al. (2022c)	Classification	BreakHis (Spanhol et al., 2015)	Yes	11
Adnan et al. (2022)	Classification	TCGA Lung (Weinstein et al., 2013)	Yes	4, 8, 16, 32
Lu et al. (2022b)	Classification, Prediction	TCGA Breast, Kidney (Weinstein et al., 2013), own dataset	Yes	4
Baid et al. (2022)	Classification	TCGA Breast, Cervix, Colon, Lung, Pancreas, Prostate, Rectum, Skin, Stomach, Uterus, Uvea of the eye (Weinstein et al., 2013)	Yes	8
Hosseini et al. (2023)	Classification	TCGA Kidney, Lung (Weinstein et al., 2013)	Yes	4, 6
Kalra et al. (2023)	Classification	Camelyon-17 (Bandi et al., 2018)	Yes	4
Lin et al. (2023)	Classification	PANDA (Bulten et al., 2022), TCGA Lung (Weinstein et al., 2013)	Yes	3, 5
Lai et al. (2024)	Classification	Camelyon-17 (Bandi et al., 2018)	Yes	3
Hossain et al. (2024)	Classification	LC25000 (Borkowski et al., 2019)	N/A	5
Deng et al. (2024a)	Classification	Multi-center CRC (Kather et al., 2019; Zhao et al., 2020), BCSS (Amgad et al., 2019)	Yes	3, 4
Kong et al. (2024)	Classification	PANDA (Bulten et al., 2022), DiagSet (Koziarski et al., 2024), own datasets	Yes	6, 7
Ke et al. (2021)	Normalization	TCGA Colon, Rectum (Weinstein et al., 2013), CRC-VAL-HE-7K, NCT-CRC-HE-100K (Kather et al., 2019)	Yes	8
<b>Dermatoscopic images</b>				
Yang et al. (2022a)	Segmentation	HAM10000 (Tschandl et al., 2018)	N/A	4
Wicaksana et al. (2023)	Segmentation	HAM10000 (Tschandl et al., 2018)	N/A	4
Tian et al. (2021)	Classification	HAM10000 (Tschandl et al., 2018), Dermofit (Ballerini et al., 2013), Derm7pt (Kawahara et al., 2018), PH2 (Mendonça et al., 2013), ISIC2017 (Codella et al., 2018)	Yes	6
Alkhunaizi et al. (2022)	Classification	HAM10000 (Tschandl et al., 2018)	N/A	10

Lungs Disease Dataset (4 types) dataset: <https://www.kaggle.com/datasets/omkarmanohardalvi/lungs-disease-dataset-4-types>  
COVID-19, Pneumonia and Normal Chest X-ray PA dataset: <https://data.mendeley.com/datasets/jctsfj2sfn/1>  
Actualmed COVID-19 Chest X-ray dataset: <https://github.com/agchung/Actualmed-COVID-chestxray-dataset>  
RSNA Bone Age dataset: <https://www.kaggle.com/datasets/kmader/rsna-bone-age>

Table 2 (continued): Part IV.

Reference	Task	Used datasets	Heterogeneous data	Number of clients
Lu and Kalpathy-Cramer (2022)	Classification	DermaMNIST (Yang et al., 2021)	N/A	N/A
Liu et al. (2023b)	Classification	ISIC2018 (Codella et al., 2018)	N/A	7
Wu et al. (2023a)	Classification	HAM10000 (Tschandl et al., 2018), PH2 (Mendonça et al., 2013), Interactive atlas of dermoscopy, ISIC2019 (Codella et al., 2018; Tschandl et al., 2018; Combalia et al., 2019)	Yes	5, 10
Lai et al. (2024)	Classification	HAM10000 (Tschandl et al., 2018), ISIC (Codella et al., 2018)	Yes	4
Deng et al. (2024b)	Classification	HAM10000 (Tschandl et al., 2018), ISIC2017 (Codella et al., 2018)	Yes	4
Agbley et al. (2021)	Detection	SIIM-ISIC Melanoma Classification dataset	N/A	5
<b>Retinal imaging</b>				
Liu et al. (2021a)	Segmentation	REFUGE (Orlando et al., 2020), DRISHTI-GS1 (Sivaswamy et al., 2015), RIM-ONE (Fumero et al., 2011)	Yes	4
Jiang et al. (2023)	Segmentation	REFUGE (Orlando et al., 2020), DRISHTI-GS1 (Sivaswamy et al., 2015), RIM-ONE (Fumero et al., 2011)	Yes	4
Wang et al. (2023)	Segmentation	REFUGE (Orlando et al., 2020), DRISHTI-GS1 (Sivaswamy et al., 2015), RIM-ONE (Fumero et al., 2011)	Yes	4
Liang et al. (2024)	Segmentation	Dataset from articles (Wang et al., 2020d, 2022)	Yes	4
Malekzadeh et al. (2021)	Classification	DR (Choi et al., 2017)	No	10
Lu and Kalpathy-Cramer (2022)	Classification	RetinaMNIST (Yang et al., 2021)	N/A	N/A
Kumar et al. (2022)	Classification	i-ROP (Lu et al., 2022a)	Yes	5
Zhang et al. (2022a)	Classification	Diabetic Retinopathy Detection dataset	Yes	4
Zhou et al. (2022)	Classification	DR (Choi et al., 2017)	No	20
Kaushal et al. (2023)	Classification	Ocular Disease Recognition dataset	Yes	2
<b>Optical Coherence Tomography</b>				
Lo et al. (2021)	Segmentation, Classification	SFU (Heisler et al., 2020), OHSU (Zang et al., 2020), dataset from article (Heisler et al., 2019)	Yes	2, 4
Kalapaaking et al. (2023)	Classification	OCTMNIST (Yang et al., 2021)	N/A	10
<b>Ultrasonography</b>				
Wicaksana et al. (2023)	Segmentation	BUS (Al-Dhabyani et al., 2020), BUSIS (Zhang et al., 2022b), UDIAT (Yap et al., 2017)	Yes	3
Xiang et al. (2024)	Segmentation	Own datasets	Yes	3
Qi et al. (2024b)	Detection	Dataset of B-mode fatty liver ultrasound images (Byra et al., 2018), dataset from article (Vianna et al., 2023)	Yes	2
Lee et al. (2021)	Prediction	Own dataset	Yes	6
<b>Mammography</b>				
Muthukrishnan et al. (2022)	Segmentation, Classification	Dataset from article (Maghsoudi et al., 2021)	N/A	2
Roth et al. (2020)	Classification	Dataset from article (Pisano et al., 2005), own dataset	Yes	7
Tan et al. (2023)	Classification	DDSM (Heath et al., 1998), CBIS-DDSM (Lee et al., 2017)	Yes	3
Jiménez-Sánchez et al. (2023)	Classification	INBreast (Moreira et al., 2012), own datasets	Yes	3
AlSalman et al. (2024)	Detection	VinDr-Mammo (Nguyen et al., 2023), CMMD (Cai et al., 2023), INBreast (Moreira et al., 2012)	Yes	2, 5
Khan et al. (2024)	Detection	DDSM (Heath et al., 1998)	Yes	3
<b>Microscopy images</b>				
Lu and Kalpathy-Cramer (2022)	Classification	BloodMNIST, TissueMNIST (Yang et al., 2021)	N/A	N/A
Kalapaaking et al. (2023)	Classification	TissueMNIST (Yang et al., 2021)	N/A	10

Interactive atlas of dermoscopy: <https://espace.library.uq.edu.au/view/UQ:229410>

SIIM-ISIC Melanoma Classification dataset: <https://kaggle.com/competitions/siim-istic-melanoma-classification>

Diabetic Retinopathy Detection dataset: <https://kaggle.com/competitions/diabetic-retinopathy-detection>

Ocular Disease Recognition dataset: <https://www.kaggle.com/datasets/andrewmvd/ocular-disease-recognition-odir5k>

Table 2 (continued): Part V.

Reference	Task	Used datasets	Heterogeneous data	Number of clients
<b>Endoscopic images</b>				
Wang et al. (2023)	Segmentation	CVC-ColonDB (Bernal et al., 2012), CVC-ClinicDB (Bernal et al., 2015), Kvasir-SEG (Jha et al., 2020), dataset from article (Silva et al., 2014)	Yes	4
<b>Multimodal imaging</b>				
Bernecker et al. (2022)	Segmentation	CT & MRI: LiTS17 (Bilic et al., 2023), 3D-IRCADb, SLIVER07 (Heimann et al., 2009), Multi-Atlas (Landman et al., 2015), CHAOS19 CT, MRI (Kavur et al., 2021), KORA (Holle et al., 2005)	Yes	2, 3
Subramanian et al. (2022)	Classification	CT & MRI: multiple Kaggle datasets	Yes	10
Parekh et al. (2021)	Detection	CT & PET: Own dataset	Yes	2
Shiri et al. (2022a)	Attenuation correction	CT & PET: Own dataset	Yes	6
Zhang et al. (2021)	Detection	CT & X-ray: Dataset from article (Yang et al., 2020), Figure 1 COVID-19 Chest X-ray, COVID-19 Radiography Database (Chowdhury et al., 2020; Rahman et al., 2021)	Yes	3
Abbas et al. (2024)	Classification	CT & MRI & Ultrasonography & Histopathological images: Multi Cancer dataset	Yes	3
Tan et al. (2024)	Segmentation	Ultrasonography & Mammography: DDSM (Heath et al., 1998), CBIS-DDSM (Lee et al., 2017), MIAS Digital Mammogram Database (Suckling, 1994), INBreast (Moreira et al., 2012), BUS (Al-Dhabyani et al., 2020)	Yes	5

Multi Cancer dataset: <https://www.kaggle.com/datasets/obulisainaren/multi-cancer>

Table 2 (continued): Part VI.

1. The central server initializes the global model parameters  $\Theta$ ;
2. Global model parameters  $\Theta$  are sent to all clients;
3. All  $C$  clients train the model locally using their private datasets  $\mathcal{D}_c$  for a selected number of local epochs;
4. The parameters of locally trained models  $\Theta_c$  are sent back to the central server;
5. The server aggregates the parameters  $\Theta_c$  in order to obtain an updated global model.

Steps 2–5 are repeated for a predetermined number of global rounds or until a global model obtains a sufficiently high accuracy for all the clients involved.

### 3.2. Federated model accuracy, versatility and efficiency

Before we go deeper into the FL, some essential terms must be adequately defined. We start with the accuracy of the FL-based model, as it can be interpreted twofold. In the former scenario, the accuracy of the global model in MI is interpreted in terms of a chosen metric, such as the mean squared error, Dice coefficient or Structural Similarity Index Measure computed by all clients with their testing datasets and then averaged across the involved sites (Gunesli et al., 2021; Baid et al., 2022; Yang et al., 2023; Wicaksana et al., 2023; Liang et al., 2024). In the latter case, particularly present in simulation experiments, the accuracy is considered across the so-called global set formed by combining test datasets from all clients involved in the training process (Ślazyk et al., 2022; Lin et al.,

2023). The metric used to assess the global model should be carefully chosen given the specific MI problem. For instance, in a clinically oriented problem, the mean squared error might be suboptimal to assess the accuracy of the DL model (Aja-Fernández et al., 2023). Overall, a model with higher accuracy is considered more acceptable in clinical scenarios than one with lower accuracy (Sohan and Basalamah, 2023).

Another characteristic is versatility, which refers to the accuracy of the global model applied to datasets from institutions that do not participate in the training process of the global model (Guo et al., 2021; Adnan et al., 2022; Wang et al., 2024; Deng et al., 2024a).

Lastly, the FL-based procedure requires extensive communication between involved sites. This process can be time-consuming, computational resources and high energy consumption demanding (Shahid et al., 2021). The efficiency relates to the capabilities of the involved sites to train the global model at a specified accuracy level in a given time regime.

### 3.3. Optimization and aggregation

The basic algorithm used to solve the problem defined in Eq. (1) is the **FederatedSGD (FedSGD)** (McMahan et al., 2017), which is equivalent to minibatch gradient descent over all data. The FedSGD applies the large-batch synchronous stochastic gradient descent (SGD) to the FL architecture. Each client  $c$  calculates the average gradient of the cost function using its local dataset,  $\nabla \mathcal{L}_c(\Theta^r; \mathcal{D}_c)$ , where  $\Theta^r$  denotes the parameters of the global model in

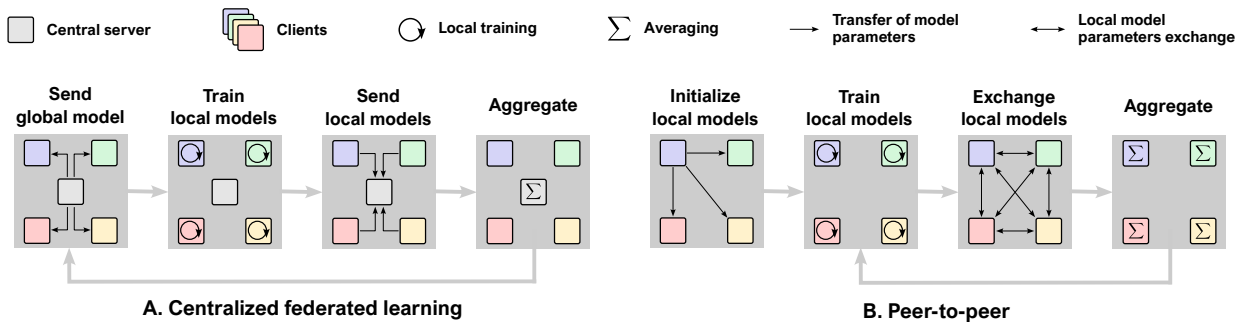


Figure 5: Overview of the two most widely used approaches in federated learning: **A.** centralized architecture with a central (global) server and **B.** decentralized peer-to-peer methodology.

the federated (global) round  $r$ . The calculated gradients are then aggregated by the central server given the equation:

$$\Theta^{r+1} = \Theta^r - \eta \sum_{c=1}^C w_c \nabla \mathcal{L}_c(\Theta^r; \mathcal{D}_c), \quad (2)$$

where  $w_c$  is the weight of the aggregation, usually defined as  $w_c = n_c/N$  with  $n_c$  being the number of examples in each client  $c$  and  $N$  a total number of examples,  $N = \sum_{c=1}^C n_c$ .

Assuming a local (single) update for client  $c$ -th performed during one local epoch is given by  $\Theta_c^r = \Theta^r - \eta \nabla \mathcal{L}_c(\Theta^r; \mathcal{D}_c)$ , the Eq. (2) can be rewritten as:

$$\Theta^{r+1} = \sum_{c=1}^C w_c \Theta_c^r. \quad (3)$$

An extension of FedSGD with more than a single local epoch is the **Federated Averaging (FedAvg)** (McMahan et al., 2017), currently the most commonly used aggregation technique due to its simplicity of implementation. To aggregate the results, FedAvg uses a weighted average given by Eq. (3), or simply the method assumes  $w_c = 1/C$ , which is the so-called FL **Equal Voting (FL-EV)** (Linardos et al., 2022).

The capabilities of each institution in the FL workflow may differ due to variations in system-level characteristics, such as hardware (e.g., central or graphics processing units, memory) and network capacity. In heterogeneous systems, FedAvg ignores the clients unable to complete a certain number of local epochs within a specific time period. **FedProx** (Li et al., 2020a) generalizes FedAvg by allowing participants to perform varying amounts of work (i.e., different number of local epochs) depending on the system resources available locally. Consequently, the clients may obtain the parameters of their local models at different levels of accuracy. To address the problem, one may include a regularization factor in the cost function.

$$\min_{\Theta_c^r} \mathcal{L}_c(\Theta_c^r; \mathcal{D}_c) + \frac{\mu}{2} \|\Theta_c^r - \Theta^r\|_2^2 \quad (4)$$

with the regularization parameter  $\mu > 0$ . Adding a proximal term to the local loss function serves two purposes. Firstly, it helps address statistical heterogeneity by ensuring that the local model updates are closer to the global model, eliminating the need to manually set the number of local epochs. Secondly, it enables the effective incorporation of the different amounts of local work that result from the heterogeneity of the system. Once the global round  $r$  is finished, the model aggregation process is carried out in the same manner as it is for the FedAvg algorithm (see Eq. (3)). Another modification of FedAvg for heterogeneous data is **FedBN** (Li et al., 2021), which assumes that local models incorporate batch normalization layers. The FedBN algorithm excludes these parameters from the aggregation process:

$$\Theta_l^{r+1} = \sum_{c=1}^C w_c \Theta_{c,l}^r, \quad (5)$$

where  $\Theta_{c,l}^r$  refers to the parameters at a global round  $r$  from  $l$ -th non-normalization layer in client  $c$ .

Standard federated learning methods are often difficult to tune and may demonstrate unfavorable convergence behavior. Adaptive algorithms for gradient-based optimization, such as **FedAdaGrad**, **FedYogi**, or **FedAdam** (Reddi et al., 2021), are used to address this issue. In such a case, each client updates the parameters of its model locally with the SGD algorithm. Once the number of local epochs has been reached, it calculates the absolute difference between the local current and global model parameters.

The global model parameters are updated then using the formula

$$\Theta^{r+1} = \Theta^r + \eta \frac{\mathbf{m}^r}{\sqrt{\mathbf{v}^r + \tau}} \quad (6)$$

and the parameter  $\mathbf{m}^r$  can be defined in general as

$$\mathbf{m}^r = \beta_1 \mathbf{m}^{r-1} + (1 - \beta_1) \Delta^r \quad \text{with} \quad \Delta^r = \frac{1}{C} \sum_{c=1}^C (\Theta_c^r - \Theta^r) \quad (7)$$

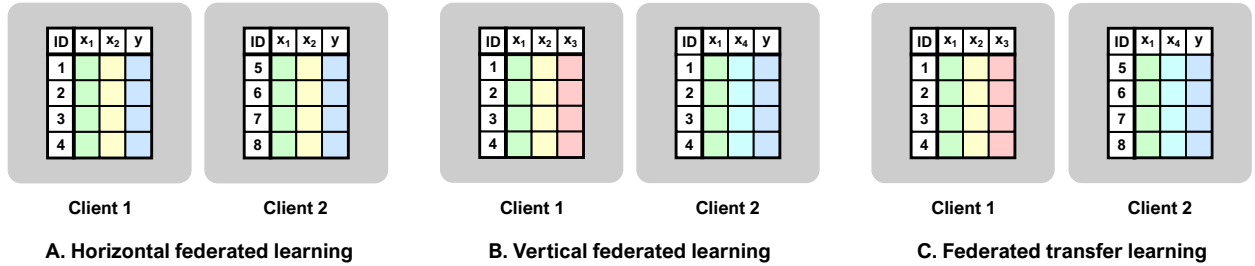


Figure 6: Classification of federated learning based on the distribution patterns of the sample and data feature spaces. **A.** Horizontal federated learning uses data that share the same function or feature space while having non-overlapping identifiers. **B.** Vertical federated learning involves datasets with different feature spaces but overlapping identifiers. **C.** Federated transfer learning utilizes data with different identifiers and feature space.

with  $\mathbf{v}^r$  defined for the FedYogi algorithm as

$$\mathbf{v}^r = \mathbf{v}^{r-1} - (1 - \beta_2)(\Delta^r)^2 \text{sign}(\mathbf{v}^{r-1} - (\Delta^r)^2), \quad (8)$$

or for the FedAdam variant as follows

$$\mathbf{v}^r = \beta_2 \mathbf{v}^{r-1} + (1 - \beta_2)(\Delta^r)^2 \quad (9)$$

with  $\beta_1, \beta_2 \in [0, 1)$  being the decay parameters. Alternatively, if one assumes  $\beta_2 = 1$  in Eq. (9), it reduces to the FedAdaGrad case (Reddi et al., 2021).

The aggregation methods presented in this section are the most fundamental and commonly used techniques in FL. They are straightforward to implement and are naturally considered as references for newly developed techniques. Besides, some of them allow addressing some challenges of FL, such as system heterogeneity (e.g., FedProx) or data heterogeneity (e.g., FedBN), and generally, improving the convergence (e.g., adaptive algorithms).

### 3.4. Learning

There are two main approaches used to implement the FL architecture, namely the **centralized** and **fully decentralized** (Rieke et al., 2020), as presented in Fig. 5. Although the fundamental idea behind the FL is based on the latter procedure, the former requires a central server (see Fig. 5A), also known as a manager. This server is typically a powerful computing unit located at the network’s edge or in the cloud. The central server generates a global model based on updates of locally trained models and manages communication between the central server and individual clients (Rieke et al., 2020; Mothukuri et al., 2021; Brecko et al., 2022). This server must remain technically stable to prevent the generation of incorrect global models and to avoid network failures that could cause a bottleneck problem, stopping the entire process (Brecko et al., 2022).

The decentralized FL eliminates the requirement for a central server to coordinate the learning process. Instead, clients communicate with each other using two primary communication modes: **peer-to-peer** (see Fig. 5B) and **blockchain** (Brecko et al., 2022). In peer-to-peer technology, all clients are treated equally and have equal privileges. Each client exchanges locally trained models with

other clients and conducts the aggregation of its model (Rieke et al., 2020; Mothukuri et al., 2021; Brecko et al., 2022).

On the other hand, the blockchain is a decentralized distributed database that stores all transaction records (in the case of FL, model parameters) generated by collaborating participants. These records are chained in blocks and are recorded over time. In FL, blocks store model updates and other basic information such as block version, previous block hash, and timestamp (Li et al., 2022b; Qammar et al., 2023). The FL via blockchain is a more complex procedure than centralized and peer-to-peer approaches. It involves many additional steps to send local parameters and perform the aggregation. The essential components for blockchain functionality include smart contracts, consensus protocols, and miners. The smart contract is a self-executing program that automates the actions required in a blockchain transaction, allowing clients to codify agreements without the need for a trusted third party (Qammar et al., 2023). In the context of FL, smart contracts are used for various purposes, including registering participants, coordinating model training, evaluating the contribution of each client, and awarding rewards (Liu et al., 2020c; Behera et al., 2022). The consensus protocols are rules that determine which information can be allowed onto a blockchain and which must be discarded, thus compensating for the lack of a central server. These protocols are key to verifying the accuracy of a transaction and ensuring network security (Qammar et al., 2023). In FL, they can be used, for example, to protect against malicious clients and enhance system scalability (Li et al., 2020c). Miners play a crucial role in the blockchain network by processing and adding new transaction records. They can be personal computers, standby servers, or cloud-based nodes that use specialized computer hardware to validate and verify transactions (Qammar et al., 2023).

The primary stages of an FL blockchain procedure are as follows (Qammar et al., 2023):

1. Clients train their models locally using their private datasets.
2. The clients register through the smart contract and transfer their local model updates to the miners on

the blockchain.

3. The miners verify and authenticate the updates of local models based on the consensus protocol.
4. The miners aggregate the updates from all verified models.
5. Each miner runs the consensus algorithm until it receives a newly generated block from other miners. Afterward, the new block is broadcast to all other miners.
6. A new block is added to the blockchain network.
7. Clients can download the global model and continue the training procedure.

The FL can be categorized with respect to the distribution patterns of the sample space and the data feature space into three categories: **horizontal FL**, **vertical FL**, and **federated transfer learning** (Brecko et al., 2022; Li et al., 2022b), as illustrated in Fig. 6. The horizontal FL relies on data that share the same function or feature space and has non-overlapping identifiers (e.g., medical record number, which allows for distinguishing records about one patient from records about another patient). Although institutions may gather data from distinct sources, the samples may look alike and thus represent a similar or identical feature space. In such cases, the FL is most commonly implemented in a traditional configuration with clients and a central server (discussed in section 3.1) to increase the number of training samples and improve the model precision (Mothukuri et al., 2021; Brecko et al., 2022). For example, the sites involved may work on a specific data segmentation problem, and hence, the medical data used by the institutions are characterized by a similar feature space, although they come from different patients.

Vertical FL, also known as heterogeneous FL, handles different feature spaces from the data (e.g., various medical modalities) but with overlapping identifiers, meaning that the same patient appears in all sets (Mothukuri et al., 2021; Brecko et al., 2022; Abad et al., 2022). It can facilitate training a common distributed model, such as a risk management model (Brecko et al., 2022). Implementing vertical FL is more challenging than horizontal FL, as it typically involves three types of participants: active, passive, and coordinator. The active participant is the institution that wants to build the model and provide data with both the sample set and their labels. The passive participant only has the sample set, and its feature set differs from the active participant’s. The coordinator is a trusted third party responsible for coordinating training and communication among the participants. In some cases, the active participant is also the coordinator (Li et al., 2023a). Furthermore, vertical FL requires encryption and a specific learning protocol, as the training process differs from horizontal FL (Mothukuri et al., 2021; Brecko et al., 2022). Firstly, it is essential to align the training data in order to identify common sample identifiers. After alignment, the participants begin training the model. The most common training protocol is gradient descent, which involves

transmitting intermediate values (e.g., softmax after the forward computation). Passive participants send the encoded intermediate results to the active participant. The active participant then calculates the losses and combines them with its loss. The aggregated loss is sent back to the passive participants. Active and passive participants use this aggregated loss to perform backpropagation and update the gradient for their local models. The encrypted gradients are sent to the coordinator, which decrypts them using a private key and returns them to the individual participants. The participants then retrain the model, and this entire process is iteratively repeated until the convergence of the model or a predefined condition is satisfied (Li et al., 2023a; Liu et al., 2024b)

Finally, federated transfer learning has been inspired by the transfer learning technique. It allows the application of knowledge from a pretrained model to a different but related problem using a similar dataset. This approach yields better results than training a new model from scratch (Mothukuri et al., 2021; Abad et al., 2022), and is especially valuable when the data from local clients has different identifiers and feature space (Brecko et al., 2022).

### 3.5. Data privacy

The basic assumption behind the FL is to keep local data private. However, sharing local model parameters with other clients or a central server can still expose data. Suppose malicious attackers gain unauthorized access to the federated learning architecture and obtain local model parameters. In that case, they can use reverse engineering techniques to recover some information about the source data on which the model was trained. Thus, additional techniques are required to increase privacy protection, such as the **Differential Privacy (DP)**, **Secure Multi-Party Computation (MPC)**, and **Homomorphic Encryption (HE)** (Li et al., 2020d; Mothukuri et al., 2021; Truong et al., 2021; Fereidooni et al., 2021).

DP adds random noise to sensitive personal characteristics, introducing some level of uncertainty in revealing individual data (Dwork et al., 2006). Depending on whether the clients or the central server is responsible for adding noise, a distinction can be made between local and global DP (Garcia et al., 2022). Noise is typically introduced to the input dataset during local training or to the local model parameters before sharing them with other clients or a central server (Mothukuri et al., 2021; Abad et al., 2022). Hence, DP protects the model against inference attacks like model inversion. Even if the data are reverse-engineered, it will not accurately represent the data of any participant. However, the DP procedure can affect the accuracy of a global model (Byrd and Polychroniadou, 2020; Truong et al., 2021; Abad et al., 2022). Therefore, it is fundamental to introduce noise at a reasonable level and use a proper noise generation mechanism, such as Gaussian (Li et al., 2020b; Lu et al., 2022b; Peng et al., 2023) or

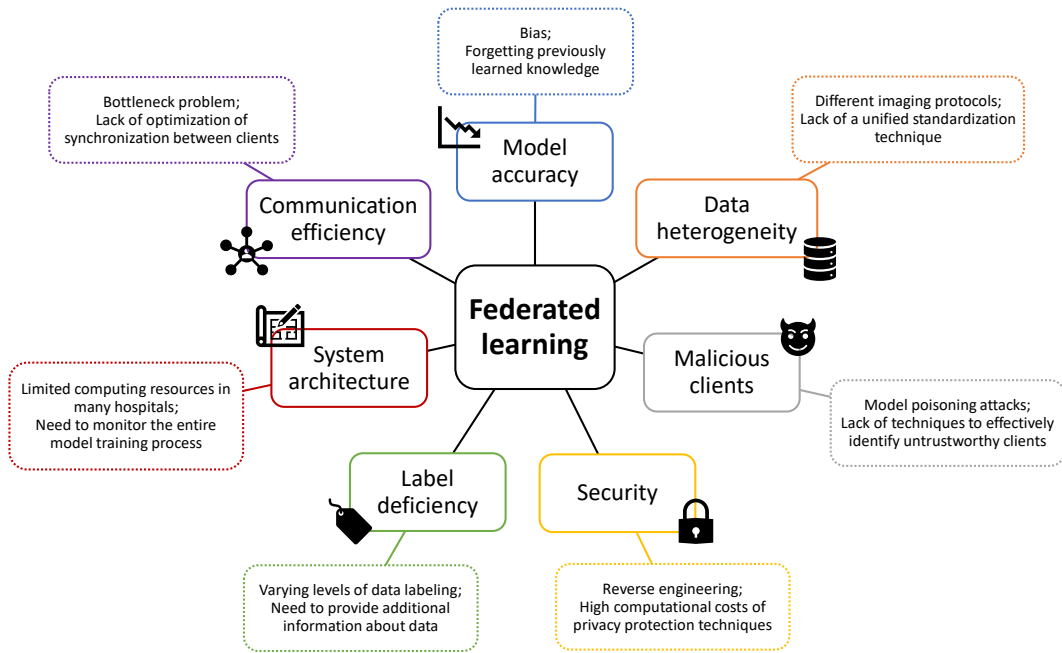


Figure 7: Summary graph presenting a broad spectrum of topics related to federated learning in the context of medical imaging.

Laplacian (Li et al., 2019, 2020b), which is typically used in MI.

The MPC is an alternative to the DP method that ensures privacy while also maintaining global model accuracy (Yao, 1986). The MPC protocol is a collaborative approach that allows multiple sites to compute a joint function of interest without revealing their private inputs. The secure MPC protocol is considered safe if the parties involved only have access to the final result and no additional information is shared (Byrd and Polychroniadou, 2020; Mothukuri et al., 2021; Truong et al., 2021). Most MPC protocols are based on classic secret sharing techniques, such as Shamir secret sharing and verifiable secret sharing schemes (Truong et al., 2021). In FL, this methodology requires the involved sites to use a secure weighted average protocol. In other words, although clients encrypt their model weights, the server can still compute a weighted average on the encrypted data (Byrd and Polychroniadou, 2020). Despite its many benefits, the MPC reduces FL efficiency. This is because carrying out sequential operations on the model parameters leads to tremendous overhead. Moreover, the communication involved in secret sharing requires a significantly larger number of steps than the basic FL technique (see section 3.1) (Kanagavelu et al., 2020; Mothukuri et al., 2021; Truong et al., 2021).

Data privacy can also be maintained through the HE. With non-homomorphic encryption, it is nearly impossible for the server to aggregate encrypted parameters of local models without the secret decryption key (Gentry, 2010). In contrast, HE enables computations on encrypted

data without the need for a secret key. The results of these computations are also encrypted and can only be decrypted upon request. Moreover, HE guarantees that the decrypted result is the same as if the computation was accomplished using the original, unencrypted dataset. There are three variants: partial HE, somewhat HE, and fully HE, all differ from each other in the encryption schemes used and the ability to perform computational procedures on encrypted data (Li et al., 2020d; Fereidooni et al., 2021; Truong et al., 2021). The HE can encode sum and product operations in a neural network but not the activation function. Activation functions are approximated using higher degree polynomials, Taylor series, or Chebyshev polynomials, implemented as part of HE schemes (Li et al., 2020d). Although HE guarantees strong privacy, it is limited in practical scenarios due to the enormous computational overhead (Truong et al., 2021).

#### 4. Broader overview of federated learning

Despite the rapid development of FL and a growing number of diverse MI applications, one has to face the challenges that must be clearly illustrated before introducing FL into practice (see Fig. 7). Handling these issues is critical, as they cover typical characteristics of MI problems, such as data heterogeneity, data privacy and security, model accuracy, system architecture, communication efficiency, and data scarcity (Patel et al., 2022; Aouedi et al., 2022; Kandati and Gadekallu, 2023a). This section briefly outlines all these fundamental issues and prospects that

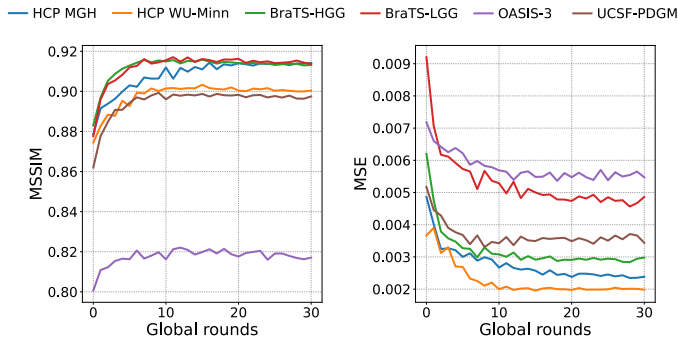


Figure 8: Changes in mean structural similarity index measure (MSSIM) and the mean squared error (MSE) for individual clients as a function of the global round in  $T_1$ - to  $T_2$ -weighted MRI data synthesis task. The graph presents the results for the FedCostWAVg algorithm (see section 6.1 for more details on FedCostWAVg aggregation scheme).

should be considered before deciding to translate the MI problem into a federated scenario. More details on particular solutions to these problems are included in the following sections, namely, **Aggregation methods in medical imaging** (section 5) and **Learning methods in medical imaging** (section 6).

#### 4.1. Model accuracy

The bias that favors a specific client is another factor that could affect the accuracy of the global model (Darzidehkalani et al., 2022). If such a situation occurs, it can lead to an increase in the accuracy of the DL task for one client and a decrease in the accuracy for the others. The reason why the bias appears is the variability in the size and distribution of the datasets across the involved sites. The models generated by participants with larger datasets might be assigned with higher weighting factors, thus resulting in an over-representation or under-representation of specific patterns (Abay et al., 2020). Besides, depending on the aggregation technique, only some clients can be involved, e.g., the institutions that conduct the entire local training within the specific timeframe. This can lead the FL algorithm to favor clients with a better computing infrastructure or faster and more reliable network connections.

To conclude, the FL requires significant computational and communication resources (Shahid et al., 2021). Thus, it is essential to establish an appropriate level of accuracy and versatility that satisfies the sites involved, considering each participant’s hardware capabilities.

#### 4.2. Data heterogeneity

Data heterogeneity is a factor that significantly affects the accuracy of the global model in MI. Imaging data across institutions are typically collected with the equipment provided by various vendors under different acquisition protocols or even various data reconstruction procedures (Gibson et al., 2018; Jiang et al., 2022;

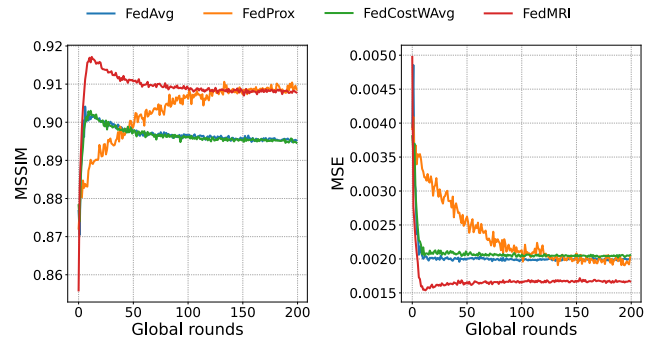


Figure 9: Changes in the mean structural similarity index measure (MSSIM) and mean squared error (MSE) for the HCP WU-Minn client as a function of the global round in  $T_1$ - to  $T_2$ -weighted MRI data synthesis task. Four different aggregation methods have been used to generate global models.

Darzidehkalani et al., 2022). For example, histological images may look different due to various staining conditions. The MRI data may exhibit variations in distributional properties due to multifarious imaging protocols or contrasts applied, such as  $T_1$ -/ $T_2$ -weighting or diffusion-weighting (Jiang et al., 2022), or even the procedure used to reconstruct magnitude data resulting in various statistical properties of the data (Den Dekker and Sijbers, 2014; Pieciak et al., 2016, 2017; Vegas-Sánchez-Ferrero et al., 2017). Consequently, the data across the institutions may be nonindependent and nonidentically distributed (non-IID).

Non-IID data can arise not only from the uneven distribution of data features caused by the use of different types of devices or acquisition techniques but also from variations in the distribution of labels (Zhu et al., 2021). In FL, it is common for label distribution to differ among clients. Two main scenarios can be observed in this context. In the former, all institutions keep data representing all groups (e.g., diseased patients and healthy individuals), but the number of samples from each group varies significantly between clients. In the latter case, some centers exclusively cover data from healthy subjects, while others secure data from diseased individuals. These situations can lead to the suboptimal accuracy of standard aggregation methods presented in section 3.3.

For the sake of illustration, we present two experimental results for the image synthesis task using  $T_1$ - and  $T_2$ -weighted MR data from heterogeneous sources. We follow the scheme presented recently in Fiszer et al. (2025). Fig. 8 demonstrates differences in the accuracy of the global model obtained with the FedCostWAVg algorithm for different institutions. Here, two involved sites include healthy brain data, i.e., Human Connectome Project (HCP) MGH and HCP WU-Minn, while others cover brain tumors (BraTS, UCSF-PDGM) and cognitive decline data (OASIS-3). We observe significant deviations in terms of the mean structural similarity index measure (MSSIM) of the OASIS-3, which is supposed to be a



malicious client. Fig. 9 exemplifies another issue that emerges from heterogeneous data – the rapid overfitting of the global model. The impact of non-IID data on the accuracy of the FL model has been highlighted recently in a real-world examination by [Fiszer et al. \(2025\)](#).

As mentioned above, data heterogeneity originates from the absence of unified imaging standardization procedures. Although the involved sites use the same acquisition protocol to collect data, they may employ different software to preprocess data, leading, for example, to reduced reproducibility of experiments ([Veraart et al., 2023](#)). In addition to these, the number of samples and their distribution can vary over time ([Darzidehkalani et al., 2022](#); [Aouedi et al., 2022](#)). For example, the number of patients affected by a particular disease in one hospital can fluctuate, including the patient’s recovery, death, or transfer of care. Finally, the institutional data deviates according to the demography of the sample. As an illustration, the MRI data change to such an extent throughout life that it allows reconstruction of the patient’s age ([Cox et al., 2016](#); [Peng et al., 2021](#); [Pieciak et al., 2023](#)). Finally, the diverse nature of the data can result in reduced global model accuracy due to its inability to converge. The global model may perform exceptionally well for some clients but inaccurately for others ([Darzidehkalani et al., 2022](#)). According to [Zhao et al. \(2018\)](#), highly heterogeneous data can cause up to 50% degradation in the accuracy of the FL global model, making heterogeneous data one of the most critical issues to address.

In addition to this, institutions still lack proper infrastructure for image data processing and data management systems that are compliant with current standards ([Darzidehkalani et al., 2022](#)).

#### 4.3. Malicious clients

The quality deterioration of the results generated from the global model may come from malicious clients in all institutions. Due to its distributed nature, the FL is susceptible to model poisoning attacks. These attacks occur if a malicious client sends manipulated model updates to the server ([Alkhunaizi et al., 2022](#); [Zhang et al., 2022c](#); [Onsu et al., 2023](#)). Model poisoning attacks can be classified into two categories: untargeted and targeted. In the former case, a corrupted global model generates incorrect predictions for multiple test inputs. In the latter scenario, a corrupted global model causes incorrect predictions for specific test inputs chosen by the attacker, while the accuracy of the global model for other inputs generally remains unaffected ([Abad et al., 2022](#); [Zhang et al., 2022c](#)). For MI applications, the risks posed by malicious clients and their effects on the accuracy of the global model have been discussed concerning untargeted poisoning attacks ([Alkhunaizi et al., 2022](#)).

#### 4.4. Security

MI data are personal information that requires particular protection under specific confidentiality procedures. Any violation of the security procedure is a significant issue that might lead to the disclosure of personality ([Truong et al., 2021](#)). The FL naturally provides a privacy protection mechanism by storing institutional datasets locally within each site without sharing them with third parties. However, the FL-based system can involve participants with unknown motives, and therefore, unduly entrusted clients can compromise security by reverse engineering ([Li et al., 2020d](#); [Darzidehkalani et al., 2022](#); [Sohan and Basalamah, 2023](#)). Specifically, since a DL algorithm stores information in its weights, the untrusted client may reconstruct some portion of the data in a decentralized network ([Darzidehkalani et al., 2022](#)). For example, recent studies have successfully rendered a face from MRI brain data ([Schwarz et al., 2019](#); [Abramian and Eklund, 2019](#)).

#### 4.5. Label deficiency

Training DL models requires reliable and large labeled datasets to achieve satisfactory results. Frequently, the institutions involved cover only partially annotated or even entirely unannotated datasets. This is not surprising, as the labeling of medical data is very time-consuming and requires sufficient knowledge and experience, making it challenging to construct necessarily labeled datasets ([Dercksen et al., 2019](#); [Ji et al., 2023](#)). In an FL scenario, different clients may have data labeled to varying degrees. In this context, the standard FL scheme (described in section 3.1) cannot be used as it requires all clients to hold fully labeled data. To address this problem, semi-supervised ([Mush-taq et al., 2023](#); [Liu et al., 2023b](#); [Wang et al., 2024](#)) and self-supervised learning ([Park et al., 2024](#)) have been introduced.

#### 4.6. System architecture

Another critical factor in FL-based systems is the appropriate computing architecture chosen to ensure the feasibility, effectiveness, and efficiency ([Darzidehkalani et al., 2022](#)). The architecture for a specific MI problem should address the issues raised in previous paragraphs while also controlling client synchronization problems ([Aouedi et al., 2022](#)). More information on optimizing client synchronization will be discussed in section 4.7, as the communication efficiency problem relates to the system architecture. Generally, system architecture covers computing power that can be either private or cloud-based train models locally, storage systems (i.e., local storage or in the cloud), and software employed to archive and maintain the data such as the Picture Archiving and Communication System (PACS) and Radiological Information System (RIS) ([Darzidehkalani et al., 2022](#); [Jacobs et al., 2023](#)). A complete system architecture for the FL partnership should include additional elements that allow tracking of

the model training process, including recording data access history, training structure, selection and modification of configuration, and hyperparameter tuning (Kandati and Gadekallu, 2023a). Such a tracking system is necessary to meet traceability and accountability requirements, as it assists researchers in interpreting the global model by examining the data source. Finally, the tracking system enables one to assess the contribution level of individual participants (Naz et al., 2022).

#### 4.7. Communication efficiency

To allow institutions to train the model smoothly, a reliable way of communicating with each other must be secured. Communication involves constantly sharing the parameters of global and local models directly between clients or between clients and the global server. This leads to a bottleneck problem if the ability to disseminate information due to network bandwidth is limited (Patel et al., 2022; Aouedi et al., 2022).

Communication efficiency is closely related to client synchronization. Institutions may differ in the characteristics of the computing system, including computing power and data storage systems. For instance, advanced DL models may require heavy computations and specialized hardware, such as GPU, making the slowest clients unable to finish local training before aggregation occurs. Sharing local model parameters at varying frequencies or with further delays negatively impacts the entire system’s speed. In addition, the institution can stop local training before the global FL process is complete or withdraw from further collaboration. Ultimately, any transfer interruption due to poor network infrastructure or temporary maintenance may occur, leading in some cases to stop the training procedure (Aouedi et al., 2022).

## 5. Aggregation methods in medical imaging

In MI the most commonly used aggregation method is the *standard* FedAvg (Roy et al., 2019; Li et al., 2019; Roth et al., 2020; Cetinkaya et al., 2021; Parekh et al., 2021; Ziller et al., 2021b; Liu et al., 2021a; Dou et al., 2021; Feki et al., 2021; Stripelis et al., 2021a; Roth et al., 2021; Stripelis et al., 2021b; Agleby et al., 2021; Linardos et al., 2022; Adnan et al., 2022; Li et al., 2022c; He et al., 2022; Yang et al., 2022b; Subramanian et al., 2022; Luo and Wu, 2022; Ślazyk et al., 2022; Zhou et al., 2022; Elshabrawy et al., 2022; Pati et al., 2022; Misonne and Jodogne, 2022; Stripelis et al., 2022; Lu et al., 2022b; Kumar et al., 2022; Tan et al., 2023; Liu et al., 2023b; Jiménez-Sánchez et al., 2023; Mushtaq et al., 2023; Elmas et al., 2023; Levac et al., 2023; Denissen et al., 2023; Kanhere et al., 2023; Kaushal et al., 2023; Makkar and Santosh, 2023; Wu et al., 2023a; Wang et al., 2023; Kim et al., 2024; Qi et al., 2024b; Al-Salman et al., 2024; Mitrovska et al., 2024; Yamada et al., 2024; Yan et al., 2024; Xiang et al., 2024; Zheng et al., 2024; Zhou et al., 2024; Hossain et al., 2024; Sun et al.,

2024; Khan et al., 2024; Deng et al., 2024a; Babar et al., 2024; Myrzashova et al., 2025; Gupta et al., 2024b; Al-balawi et al., 2024; Gupta et al., 2024a; Kumar et al., 2024; Deng et al., 2024b) or its modification with equal weights (FL-EV) (Li et al., 2020b; Guo et al., 2021; Lo et al., 2021; Florescu et al., 2022; Linardos et al., 2022; Peng et al., 2023; Naumova et al., 2024; Abbas et al., 2024; Liu et al., 2024a; Vo et al., 2024). Some of the algorithms also use FedProx (Elshabrawy et al., 2022; Subramanian et al., 2022; Qi et al., 2024b), FedBN (Elshabrawy et al., 2022; Kanhere et al., 2023; Kulkarni et al., 2023) or adaptive algorithms (Stripelis et al., 2022; Levac et al., 2023; Qi et al., 2024b). Other techniques dedicated to MI are modifications or extensions of FedAvg, involving adjusting the weighting factor (Shen et al., 2021; Mächler et al., 2022; Khan et al., 2022; Alkhunaizi et al., 2022; Mächler et al., 2023; Khan et al., 2023; Wicaksana et al., 2023; Wu et al., 2023b; Liu et al., 2023a; Yang et al., 2023; Norman et al., 2023; Lai et al., 2024; Zhang et al., 2024; Wang et al., 2024) or performing the aggregation only on specific parameters of local models, such as those from particular layers, instead of on all parameters (Gunesli et al., 2021; Bernecker et al., 2022; Liu et al., 2023a).

New aggregation techniques aim to overcome the fundamental limitations of FL. The following subsections present the most important features of different aggregation methods categorized into algorithms that enhance the global model accuracy, handle malicious clients, and improve data security.

#### 5.1. Improving model’s accuracy

Local models trained on small or low-quality datasets can negatively impact the accuracy of the global model, leading to decreased accuracy across all clients participating in federated learning. By introducing new aggregation algorithms, we expect to increase the accuracy of the global model while preventing the accuracy reduction locally. The widely used approach is to *dynamically assign weighting factor* to each involved client based on their local loss functions (Shen et al., 2021; Mächler et al., 2022, 2023; Wicaksana et al., 2023; Wu et al., 2023b; Liu et al., 2023a). The methods presented in section 3 use constant weights across global rounds. This section reviews up-to-date methods that employ round-dependent weights.

We start our review with the **Dynamic Weight Averaging (DWA)** (Shen et al., 2021), which aggregation weights are based on the variation of the loss values from the previous round:

$$w_c^r = \frac{\xi \exp(\rho_c^{r-1}/T)}{\sum_{c'=1}^C \exp(\rho_{c'}^{r-1}/T)}, \quad \rho_c^{r-1} = \frac{\mathcal{L}_c(\Theta_c^{r-1}; \mathcal{D}_c)}{\mathcal{L}_c(\Theta_c^{r-2}; \mathcal{D}_c)} \quad (10)$$

with  $w_c^r$  being the weight associated with client  $c$ -th at round  $r$ -th. The symbol  $T$  in Eq. (10) represents a temperature,  $\xi$  is used to control the impact of the weights,  $\rho_c^{r-1}$

is the dynamic proportion of the loss function  $\mathcal{L}$  changes from two consecutive rounds  $r - 1$  and  $r - 2$ .

Another strategy, known as **Federated Cost Weighted Averaging (FedCostWAvg)** (Mächler et al., 2022), incorporates the reciprocal of the factor  $\rho_c^r$ , as follows

$$w_c^r = \alpha \frac{n_c}{N} + (1 - \alpha) \frac{1}{\rho_c^r \sum_{c'=1}^C (\rho_{c'}^r)^{-1}}, \quad (11)$$

where  $\alpha \in [0, 1]$  is a hyper-parameter that needs to be selected appropriately.

An extension of this method called **Federated PID Weighted Averaging (FedPIDAvg)** (Mächler et al., 2023) has been inspired by the well-known proportional-integral-derivative controller mechanism in control theory. Here, the quotient in the factor  $(\rho_c^r)^{-1}$  has been changed to the difference between the loss functions in the consecutive rounds,  $\mathcal{L}_c(\Theta_c^{r-1}; \mathcal{D}_c) - \mathcal{L}_c(\Theta_c^r; \mathcal{D}_c)$ , and the additional summation over the local loss function from the previous five global rounds included.

Compared to DWA and FedPIDAvg procedures that incorporate the factor built upon the local loss function defined in previous rounds, the following two methods utilize non-linearly transformed local loss functions. First, the **Mixed Supervised Federated Learning (FedMix)** (Wicaksana et al., 2023) incorporates the normalized local loss function raised to the power of  $\beta$

$$u_c^r = \frac{\mathcal{L}_c(\Theta_c^r; \mathcal{D}_c)^\beta}{\sum_{c'=1}^C \mathcal{L}_{c'}(\Theta_{c'}^r; \mathcal{D}_{c'})^\beta}, \quad (12)$$

under the weight  $w_c^r$  calculated as follows:

$$w_c^r = \frac{n_c/N + \lambda u_c^r}{\sum_{c'=1}^C (n_{c'}/N + \lambda u_{c'}^r)} \quad (13)$$

with  $\lambda$  being the hyper-parameter.

The second method that nonlinearly transforms the loss function is the **Model-based Federated learning (ModFed)** (Wu et al., 2023b), which uses the exponential function, as follows:

$$w_c^r = \frac{\exp(\mathcal{L}_c(\Theta_c^r; \mathcal{D}_c))}{\sum_{c'=1}^C \exp(\mathcal{L}_{c'}(\Theta_{c'}^r; \mathcal{D}_{c'}))}. \quad (14)$$

Weighting factors can also be estimated dynamically based on local and global model parameters (Khan et al., 2022, 2023; Yang et al., 2023; Lai et al., 2024) or using various metrics, such as local prediction accuracy given by (Yang et al., 2023)

$$\text{acc}_c = \frac{\text{ratio of correct predictions}}{\text{total number of predictions}}. \quad (15)$$

Another group of methods is similarity-based techniques, which calculate the similarity between the parameters of the local and global models:

$$y_c^r = \frac{\text{sim}_{c,1}^r(\Theta_c^r, \bar{\Theta}^r)}{\sum_{c'=1}^C \text{sim}_{c',1}^r(\Theta_{c'}^r, \bar{\Theta}^r)}, \quad (16)$$

where  $\bar{\Theta}^r$  is the non-weighted average of the parameters of all local models, calculated in round  $r$ .

The similarity between two models represented by  $\Theta_1^r$  and  $\Theta_2^r$  at round  $r$  is given by

$$\text{sim}_{c,p}^r(\Theta_1^r, \Theta_2^r) = \frac{\sum_{c'=1}^C \|\Theta_{c'}^r - \Theta_2^r\|_p^p}{\|\Theta_1^r - \Theta_2^r\|_p^p}, \quad (17)$$

It is worth to remark two methods here, namely **Similarity Weighted Aggregation (SimAgg)** (Khan et al., 2022) and **Regularized Aggregation (RegAgg)** (Khan et al., 2022). The former defines the weight as

$$w_c^r = \frac{y_c^r + n_c/N}{\sum_{c'=1}^C (y_{c'}^r + n_{c'}/N)} \quad (18)$$

while the latter uses the multiplication between the similarity factor (16) and a normalized number of samples at each client:

$$w_c^r = \frac{y_c^r \cdot n_c}{\sum_{c'=1}^C y_{c'}^r \cdot n_{c'}}. \quad (19)$$

Yet another method, the **Privacy-preserving Generative Adversarial Network (MixFedGAN)** framework (Yang et al., 2023) uses the similarity (17) in its aggregation weights combined with the local model test accuracy:

$$w_c^r = \alpha \frac{\text{acc}_c}{\sum_{c'=1}^C \text{acc}_{c'}} + \beta (\text{sim}_{c,2}^r(\Theta_c^r, \Theta^r))^{-1}, \quad (20)$$

where  $\text{acc}$  is the accuracy of the predictions,  $\alpha$  and  $\beta$  are positive constants used to balance both terms in the weight.

Another class of methods used to enhance the efficacy of the global model compared to the standard approaches is based on aggregating only selected parameters from each vector  $\Theta_c^r$  (Gunesli et al., 2021; Bernecker et al., 2022). The **Federated Dropout Averaging (FedDropoutAvg)** (Gunesli et al., 2021) is one of the representatives of this class that assumes that some randomly selected parameters from  $\Theta_c^r$  are dropped before global aggregation. This approach introduces a new parameter called Federated Dropout Rate (FDR), which determines the degree of dropout (i.e., the number of clients to be removed from the aggregation process). If the  $\text{FDR} = 0$ , the FedDropoutAvg algorithm reduces to the FedAvg.

The **Modality-Based Normalization in Federated Learning (FedNorm)** (Bernecker et al., 2022) based on a modification of FedBN is yet another technique that falls into the same category. This method uses the mode normalization (MN) technique. FedNorm differentiates between normalization parameters (all parameters and statistics from all MN layers) and non-normalization parameters (all other parameters). Once the training is complete locally, the server aggregates only the non-normalization parameters.

Finally, to reduce accuracy discrepancies among the involved clients, a novel objective function has been introduced (Hosseini et al., 2023)

$$\mathcal{L}(\Theta; \mathcal{D}) = (1 - \lambda)\mathcal{L}_{\text{red}}(\Theta; \mathcal{D}) + \lambda\mathcal{L}_{\text{fair}}(\Theta; \mathcal{D}), \quad (21)$$

where  $\lambda$  is a hyper-parameter that balances both term with  $\mathcal{L}_{\text{red}}$  and  $\mathcal{L}_{\text{fair}}$  being the objective functions defined as follows:

$$\mathcal{L}_{\text{fair}}(\Theta; \mathcal{D}) = \sum_{c=1}^C \log \left\{ \frac{\sum_{c'=1}^C \mathcal{L}_{c'}(\Theta; \mathcal{D}_{c'})}{\mathcal{L}_c(\Theta; \mathcal{D}_c)} \right\}, \quad (22)$$

and

$$\mathcal{L}_{\text{red}}(\Theta; \mathcal{D}) = \frac{1}{\beta + 1} \sum_{c=1}^C \mathcal{L}_c(\Theta; \mathcal{D}_c)^{\beta+1}. \quad (23)$$

The loss function  $\mathcal{L}_{\text{fair}}$  stabilizes the variations in favoring particular client(s). Thus, the same relative loss is observed through all involved sites. This method has been called the **Proportionally Fair Federated Learning (Prop-FFL)**.

### 5.2. Malicious clients

Many current FL frameworks are built with the assumption that clients are trustworthy. However, they frequently prove to be vulnerable to poisoning attacks by malicious collaborators who seek to intentionally degrade the overall accuracy of the global model.

The **Distance-based Outlier Suppression (DOS)** technique (Alkhunaizi et al., 2022) provides a mechanism to filter out local parameter updates from malicious clients during aggregation. DOS estimates the distance between the updates of parameters from different collaborators and utilizes the Copula-based Outlier Detection (COPOD) method to determine the outlier score. The server calculates both the Euclidean and cosine distances by comparing the local parameters submitted by different clients  $c$  and  $i$ ,  $c, i \in \{1, 2, \dots, C\}$ . The normalized aggregation weights are defined as:

$$w_c^r = \frac{\exp(-o_c^r)}{\sum_{i=1}^C \exp(-o_i^r)}, \quad (24)$$

where  $o^r$  is the element of outlier scores vector  $\mathbf{o}^r$ ,  $\mathbf{o}^r = (\mathbf{o}_E^r + \mathbf{o}_K^r)/2$ , with  $\mathbf{o}_E^r$  and  $\mathbf{o}_K^r$  being the vectors of outlier scores of Euclidean and cosine distance matrices.

### 5.3. Security

The central premise of FL is to maintain privacy across the clients while generating a global model. Yet, especially in the case of heterogeneous data across the involved sites, the default FL mechanism (described in detail in section 3.1) can use an insecure method of updating the global model.

To handle this problem, a *secure aggregation* can be used (Malekzadeh et al., 2021; Makkar and Santosh, 2023;

Mitrovska et al., 2024; Myrzashova et al., 2025). For example, Malekzadeh et al. (2021) proposed the **Differentially Private Federated Learning on Medical Data** approach, which uses HE during global model aggregation. Each client generates a pair of keys, respectively public and private. The public key is distributed to all involved sites, while the private key is shared only with other collaborators except with the server. The server receives and aggregates encrypted model updates while every client decrypts the aggregated parameters before performing local training.

Another approach involves directly applying DP during the aggregation process (Shiri et al., 2024; Ahmed et al., 2024; Kong et al., 2024). An example of this approach is the **Gaussian Differentially Private Federated Averaging with Adaptive Quantile Clipping (GDP-AQuCl)**, proposed by (Shiri et al., 2024). This technique combines two key strategies: adds Gaussian noise to the local model updates before sending them to the central server, and uses an adaptive quantile clipping method for aggregation:

$$\Theta^{r+1} = \Theta^r + \frac{1}{C} \sum_{c=1}^C \text{Clip}(\text{DP}(\Theta^r - \Theta_c^r), D^r), \quad (25)$$

where  $\text{DP}(\cdot)$  is the function that adds Gaussian noise to the model update, and  $\text{Clip}(\cdot)$  is the adaptive quantile clipping function, defined as follows:

$$\text{Clip}(\Theta, D^r) = \Theta / \max\left(1, \frac{\|\Theta\|_2}{D^r}\right). \quad (26)$$

An alternative solution for secure aggregation is to replace a centralized approach with *peer-to-peer* (Giuseppi et al., 2022) or *blockchain* schemes (Kalapaaking et al., 2023; Noman et al., 2023). These avenues often require developing dedicated aggregation functions.

In a decentralized (peer-to-peer) FL, the **Consensus-based Distributed FL (FedLCon)** (Giuseppi et al., 2022) procedure employs a consensus round to update the global model parameters  $\Theta^{r+1}$  without involving the central server. To reach a consensus after global round  $r$ , the collaborators exchange information  $n_\epsilon$  times, starting from the initial values  $\mathbf{z}_c^0 = \Theta_c^r$ :

$$\mathbf{z}_c^{g+1} = \mathbf{z}_c^g + \frac{\epsilon}{n_c} \sum_{c' \in \eta_c} (\mathbf{z}_{c'}^g - \mathbf{z}_c^g) \quad (27)$$

with  $g = 0, \dots, n_\epsilon - 1$  being a consensus round,  $\eta_c$  a set of neighbours connected to client  $c$ -th that can exchange local model parameters, and  $n_c$  the number of samples from collaborator  $c$ , and  $\epsilon$  denotes the step size. At the end of the communication, the proxy variables  $\mathbf{z}_c^{n_\epsilon-1}$  approximate the parameters of the global averaged model  $\Theta^r$  (cf. Eq. (3)):

$$\mathbf{z}_c^{n_\epsilon-1} \approx \frac{1}{N} \sum_{c'=1}^C n_{c'} \Theta_{c'}^r. \quad (28)$$

The **Blockchain-based Secure Aggregation** (Kalapaaking et al., 2023) uses the additive secret-sharing scheme for the secure aggregation of the model. It allows trusted third party  $\mathcal{T}$  to receive secrets  $s_{c'}$  (i.e., the selected parameters of the models  $\Theta_{c'}$ ) from parties  $P_1, P_2, \dots, P_{C'}$ .

Each party computes the sum of the shares in  $\Theta_{c',i}$  to obtain the average of the model parameters:

$$\mathcal{P}_i = \left( \sum_{c'=1}^{C'} \Theta_{c',i} \right) \bmod Q, \quad (29)$$

where  $i$  is the parameter index and  $Q$  denotes high prime number generated by  $\mathcal{T}$ . The sum of shares from all sites  $P_1, P_2, \dots, P_{C'}$  is then added together and averaged as follows:

$$\Theta_i = \frac{1}{C'} \left( \sum_{c'=1}^{C'} \mathcal{P}_i \right) \bmod Q, \quad (30)$$

where  $\Theta_i$  refers to  $i$ -th parameter index ( $i = 0, \dots, p-1$ ) of the global model.

## 6. Learning methods in medical imaging

**Centralized approach** is the most common learning method used in context of MI (Li et al., 2019; Roth et al., 2020; Li et al., 2020b; Sheller et al., 2020; Wang et al., 2020c; Liu et al., 2021a; Lo et al., 2021; Zhang et al., 2021; Ziller et al., 2021b; Huang et al., 2021; Lee et al., 2021; Sarma et al., 2021; Gunesli et al., 2021; Agbley et al., 2021; Ke et al., 2021; Cetinkaya et al., 2021; Shen et al., 2021; Tian et al., 2021; Stripelis et al., 2021a,b; Pati et al., 2021; Parekh et al., 2021; Feki et al., 2021; Roth et al., 2021; Malekzadeh et al., 2021; Guo et al., 2021; Dou et al., 2021; Linardos et al., 2022; Bernecker et al., 2022; Ślęzyk et al., 2022; Subramanian et al., 2022; Luo and Wu, 2022; Zhang et al., 2022a; Li et al., 2022c; He et al., 2022; Yang et al., 2022a; Alkhunaizi et al., 2022; Zhou et al., 2022; Islam et al., 2022; Lu and Kalpathy-Cramer, 2022; Adnan et al., 2022; Florescu et al., 2022; Elshabrawy et al., 2022; Yang et al., 2022b; Bercea et al., 2022; Guo et al., 2022; Khan et al., 2022; Mächler et al., 2022; Dalmaz et al., 2022; Misonne and Jodogne, 2022; Muthukrishnan et al., 2022; Kumar et al., 2022; Stripelis et al., 2022; Lu et al., 2022b; Baid et al., 2022; Dalmaz et al., 2024; Kandati and Gadekallu, 2023b; Lin et al., 2023; Mächler et al., 2023; Khan et al., 2023; Wicaksana et al., 2023; Tan et al., 2023; Wu et al., 2023b; Kulkarni et al., 2023; Liu et al., 2023a,b; Jiménez-Sánchez et al., 2023; Jiang et al., 2023; Hosseini et al., 2023; Yang et al., 2023; Zhao and Huang, 2023; Mushtaq et al., 2023; Feng et al., 2023; Zhou et al., 2023; Elmas et al., 2023; Levac et al., 2023; Rajagopal et al., 2023; Denissen et al., 2023; Makkar and Santosh, 2023; Peng et al., 2023; Kaushal et al., 2023; Wu et al., 2023a; Wang et al., 2023; Kim et al., 2024; Naumova et al., 2024;

Qi et al., 2024b; AlSalman et al., 2024; Mitrovska et al., 2024; Yamada et al., 2024; Yan et al., 2024; Lai et al., 2024; Xiang et al., 2024; Abbas et al., 2024; Zheng et al., 2024; Liu et al., 2024a; Zhou et al., 2024; Hossain et al., 2024; Sun et al., 2024; Deng et al., 2024a; Babar et al., 2024; Ahmed et al., 2024; Kong et al., 2024; Shiri et al., 2024; Gupta et al., 2024b; Zhang et al., 2024; Albalawi et al., 2024; Vo et al., 2024; Liang et al., 2024; Wang et al., 2024; Deng et al., 2024b), although a **decentralized federated learning, peer-to-peer** (Roy et al., 2019; Wu et al., 2021; Giuseppe et al., 2022; Huang et al., 2022; Kalra et al., 2023; Khan et al., 2024) or **blockchain-based approach** (Nguyen et al., 2022a; Kalapaaking et al., 2023; Noman et al., 2023; Myrzashova et al., 2025; Gupta et al., 2024a; Kumar et al., 2024), can also be found in some articles.

In recent years, several modern solutions have emerged to overcome the significant challenges of federated learning, such as data heterogeneity (Li et al., 2020b; Guo et al., 2021; Liu et al., 2021a; Guo et al., 2021; Huang et al., 2021; Yang et al., 2022a; Bercea et al., 2022; Zhu and Luo, 2022; Zhang et al., 2022a; Dalmaz et al., 2022, 2024; Luo and Wu, 2022; Zhao and Huang, 2023; Elmas et al., 2023; Feng et al., 2023; Wu et al., 2023b; Jiang et al., 2023; Jiménez-Sánchez et al., 2023; Yang et al., 2023; Lin et al., 2023), or to improve the data security (Li et al., 2019; Ziller et al., 2021b; Malekzadeh et al., 2021; Yang et al., 2022b; Nguyen et al., 2022a; Kalra et al., 2023). This section presents the learning algorithms addressing limitations specific to MI, including model accuracy, data heterogeneity, label deficiency, and security.

### 6.1. Improving model accuracy

The objective of novel learning schemes is, in general, to enhance the global model accuracy after the aggregation phase. The global model accuracy may decline after aggregating individual model parameters once evaluated by some or all clients involved in the FL-based procedure. An effective approach to address this issue is to employ *curriculum learning*, which involves presenting training data to a neural network in a specific sequence. The method has been effective in classifying breast cancer using mammography data.

In the following, we briefly review current approaches used to improve the accuracy of the global model.

The **Memory-aware Curriculum Federated Learning** (Jiménez-Sánchez et al., 2023) penalizes inconsistent predictions caused by the *forgotten samples*, i.e., the inputs for which the predictions become incorrect after the global model aggregation phase. The method uses a data scheduler with a scoring function, curriculum probabilities, and a permutation function. The scoring function assigns each sample a score based on local and global predictions. The normalized score values comprise the curriculum probability used to sample the training set. Higher probabilities indicate samples that are presented earlier to the optimizer. The permutation function can be used to modify the order of the data fed to the optimizer.

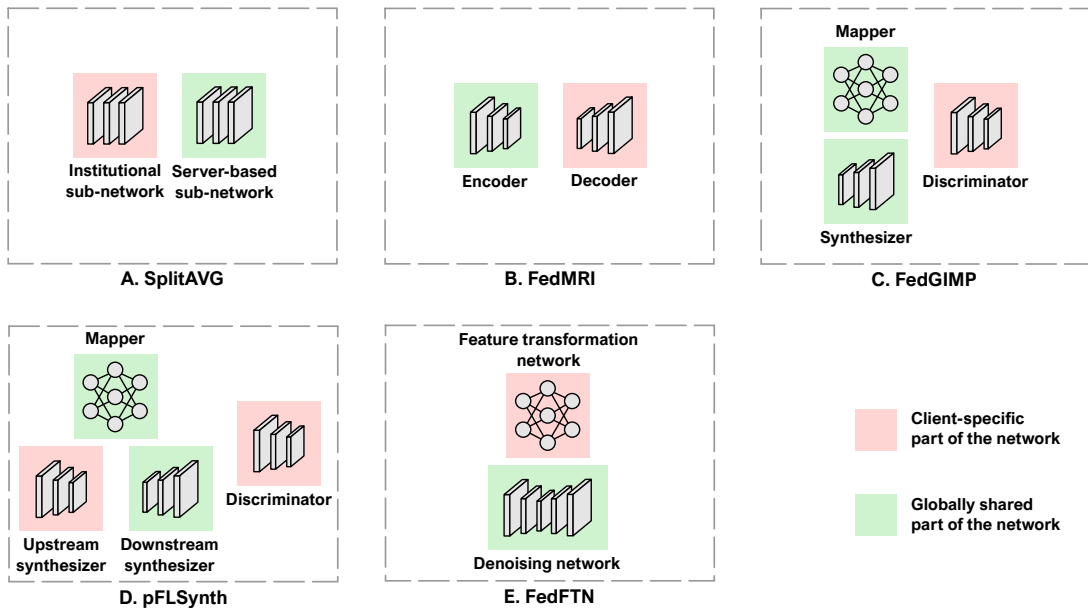


Figure 10: Schematic representation of split learning techniques: **A.** SplitAVG (Zhang et al., 2022a), **B.** FedMRI (Feng et al., 2023), **C.** FedGIMP (Elmas et al., 2023), **D.** pFLSynth (Dalmaz et al., 2024), **E.** FedFTN (Zhou et al., 2023). Each scheme represents a local model of a single client participating in the FL-based procedure. The model is divided into two components: the client-specific part and the globally shared part. The client-specific part (highlighted in red) is available exclusively to the client and remains private. In contrast, the globally shared part (highlighted in green) is sent to the central server for the aggregation procedure.

An alternative approach used to improve the accuracy of a global model is to follow *continual learning* (Sheller et al., 2020) with a particular focus on the use of *synaptic intelligence* (SI) (Huang et al., 2022). Synapses accumulate task-relevant information over time, enabling them to efficiently create and retain new memories without forgetting old ones. This technique has been successfully applied for segmenting brain metastases using structural MRI data. An example of SI is the **Continual Learning for Peer-to-Peer Federated Learning** approach (Huang et al., 2022). This method introduces a slightly different peer-to-peer scheme than the one discussed in section 3.4. The clients do not share their trained local models for the aggregation procedure. Instead, a single model is trained and transferred successively from one institution to another, repeating this process multiple times. This approach penalizes alternations in model parameters that are important for gaining knowledge from the previous client’s data.

Yet another approach to handle the problem of global model deterioration is to use *dynamic weight correction strategy*. An example method of this kind is the **Robust Split Federated Learning (RoS-FL)** (Yang et al., 2022b). Here, the global model in round  $r$  is used as the anchor model and the correction model parameters are formulated accordingly:

$$\Theta_{\text{cor}}^r = \Theta^r + \eta \nabla \mathcal{L}_{\text{cor}}(\Theta^r, \Theta^{r-1}), \quad (31)$$

where  $\mathcal{L}_{\text{cor}}$  is the correction loss function that stabilizes the training process and diminishes the model drift. The

robust model is then obtained as a linear combination of the anchor and the corrected model  $\Theta_{\text{cor}}^r$

$$\Theta_{\text{robust}}^r = (1 - \alpha)\Theta^r + \alpha\Theta_{\text{cor}}^r. \quad (32)$$

The RoS-FL has already shown robust results in the segmentation and restoration of medical images (Yang et al., 2022b).

## 6.2. Data heterogeneity

In real-world scenarios, medical data typically comes from multiple sites and may have significantly different distributions, resulting in data heterogeneity. Consequently, it can lead to substantial accuracy degradation of the global model, as reported in the previous section.

**Personalized federated learning:** The simplest method to personalize the models is to use a domain-specific such as *personalized FL* (Jiang et al., 2023; Wang et al., 2023). This procedure involves fine-tuning the global model during global rounds or after the local training, using local data to make it more suitable for each client.

Specifically, the **Inside and Outside model Personalization in FL (IOP-FL)** framework (Jiang et al., 2023) employs a locally adapted model for inside personalization (i.e., clients involved in the joint training of the global model) and applies test-time routing for outside personalization (i.e., for noninvolved clients), enabling institutions that are not part of the FL process to use the trained model effectively. By combining local gradients (client-specific optimization) and global gradients (common knowledge) during local model training, the framework generates a model that can learn the common pattern and fit the local

data distribution. The IOP-FL approach allows for a flexible combination of training knowledge and information from test data. The technique has been used for prostate segmentation from MRI data and optic disc and cup segmentation from retinal fundus images, demonstrating its advantages over traditional FL algorithms like FedAvg or FedBN.

The **Federated Learning Scheme with Dual Personalization (FedDP)** (Wang et al., 2023) improves model personalization from both feature and prediction perspectives. FedDP covers two stages: dependency personalization and inter-site prediction inconsistencies. In the former, the clients send their globally shared parameters to the central server. The parameters are aggregated and then sent back to the institutions, which combine them with their locally personalized parameters to generate a set of preliminary local models. In the latter stage, the clients collect all their local models and compute their inconsistencies with local datasets. The phrase “inconsistencies” refers here to the differences between the output of a model personalized for a specific client and the outputs of models for other clients. The parameters of each model are eventually adjusted according to the identified inter-site inconsistencies using a specialized loss function. This process leads to more accurately calibrated models.

**Split learning:** An important group of personalized methods constitutes the *split learning* procedure, which divides the parameters into local and global parts (Zhang et al., 2022a; Dalmaz et al., 2022, 2024; Elmas et al., 2023; Feng et al., 2023; Zhou et al., 2023) (see Fig. 10 for comparison). In the following, we briefly characterize the methods following this paradigm.

The **Split Averaging (SplitAVG)** by Zhang et al. (2022a) (see Fig. 10A) divides a DL network into two sub-networks, respectively, local and global at a specific cut layer. Model training involves forward and backpropagation. First, intermediate feature maps are obtained from the local sub-network and sent with corresponding labels for concatenation to the central server. These concatenated feature maps are then propagated into the global sub-network. Second, gradients are backpropagated from the last layer to the first layer of the global model, with the first global layer gradients transferred back to all clients for further backpropagation. Finally, each client and the server update their sub-networks. An improved version of the SplitAVG technique is **SplitAVG-v2** (Zhang et al., 2022a), which allows the preservation of locally confidential labels without sharing them with the server. Both methods have been used effectively for various medical imaging tasks, including the binary classification of diabetic retinopathy, the prediction of bone age, and the segmentation of brain tumors.

**Specificity-preserving FL algorithm for MR Image Reconstruction (FedMRI)** (Feng et al., 2023) is another method based on dividing the model into two parts: a globally shared encoder and a client-specific de-

coder (see Fig. 10B). In addition to the standard loss function, the FedMRI employs an extra specialized weighted contrastive regularization loss that enables further correction for local updates and provides the model with global recognition ability.

$$\mathcal{L}_{\text{con}_c}(\Theta_E^r, \Theta_{E_c}^r, \{\Theta_{E_{c'}}^{r-1} | c' \in C\}) = \frac{\|\Theta_{E_c}^r - \Theta_E^r\|_1}{\sum_{c'=1}^C \|\Theta_{E_{c'}}^{r-1} - \Theta_{E_c}^r\|_1} \quad (33)$$

with  $\Theta_E^r$  and  $\Theta_{E_c}^r$  being the parameters of global and local encoders at round  $r$ . FedMRI has already shown an improved accuracy in the reconstruction of MRI data compared to traditional FL methods such as FedAvg, FedBN, and FedProx

The **Federated Learning of Generative Image Priors (FedGIMP)** (Elmas et al., 2023) employs an unconditional adversarial model divided into a shared generator and a local discriminator (see Fig. 10C). After every epoch, the local generators are sent to the server and aggregated similarly to the FedAvg method. A model trained using this technique can be employed for inference, allowing it to adapt to a new dataset not included during training. During the inference, the trained MRI prior, which is represented as an adversarial model capable of synthesizing MRI images using site-specific latent variables, is combined with a subject-specific imaging operator and adjusted to minimize data consistency loss. FedGIMP has shown a notable improvement compared to other FL methods in the reconstruction of MRI data.

Another method based on split learning is the **Personalized FL Method for MRI Syntheses (pFLSynth)** by Dalmaz et al. (2024). Here, the adversarial model is divided into a globally shared downstream synthesizer and mapper and a client-specific upstream synthesizer and discriminator (see Fig. 10D). Finally, only the downstream synthesizer and mapper parameters are aggregated on the central server

$$\Theta_{\text{syn}}^{r+1} = \sum_{c=1}^C w_c \Theta_{\text{syn}_c}^r, \quad \Theta_{\text{map}}^{r+1} = \sum_{c=1}^C w_c \Theta_{\text{map}_c}^r, \quad (34)$$

where  $\Theta_{\text{syn}}^{r+1}/\Theta_{\text{map}}^{r+1}$  are the aggregated parameters of the downstream synthesizer/mapper in round  $(r + 1)$  and  $\Theta_{\text{syn}_c}^r/\Theta_{\text{map}_c}^r$  are client-specific upstream synthesizer/mapper parameters. The pFLSynth method has demonstrated its capabilities in synthesizing multi-contrast MRI images.

Another method under the umbrella of split learning discussed here is the **Personalized Federated Learning Method Based on Deep Feature Transformation Networks (FedFTN)** (Zhou et al., 2023). This model consists of two distinct networks: the globally shared denoising network and a local deep feature transformation network that modulates the shared network’s feature outputs (see Fig. 10E). After two initial global epochs, the global weight constraint loss is incorporated into the standard loss function to stabilize the parameter update during

local training:

$$\mathcal{L}_{\text{gwc}_c}(\Theta_{\text{den}}^r, \Theta_{\text{den}_c}^r) = \|\Theta_{\text{den}}^r - \Theta_{\text{den}_c}^r\|_2^2 \quad (35)$$

with  $\Theta_{\text{den}}^r$  and  $\Theta_{\text{den}_c}^r$  being the parameters of the global, averaged by the central server, and local denoising network, respectively. FedFTN has been used successfully to denoise low-count PET images.

In addition to dividing the model parameters into local and global parts, it is also possible to *disentangle the parameter space into shape and appearance* and share only the shape parameter between the clients. This separation uses shared structural information from various clients and reduces domain shifts by enabling personalized appearance models. This kind of approach is used by **Federated Disentanglement (FedDis)** algorithm (Bercea et al., 2022). The FedDis assumes that the anatomical structure of the data representing the brain is similar across all collaborators and that the heterogeneity is mainly due to differences in data collection devices and their parameters. The approach has been effectively applied in segmenting the MRI data, exceeding the accuracy of locally trained models.

Data sharing: The next group of methods handling data heterogeneity follows *data sharing* scheme, which can be direct (Guo et al., 2021) or indirect (Liu et al., 2021a; Luo and Wu, 2022; Zhao and Huang, 2023). Direct data sharing involves distributing the publicly available dataset among all clients, while indirect data sharing indicates that clients exclusively exchange details about the data, such as its distribution, instead of the actual data (see Fig. 11 for a graphical explanation).

The first indirect data sharing method mentioned here is the **Episodic Learning in Continuous Frequency Space (ELCFS)** by Liu et al. (2021a), which enables multiple clients to benefit from data distributions from different sources. The ELCFS employs a continuous frequency space interpolation mechanism to share distribution information between clients. Initially, low-level distributions, such as style, are extracted from the frequency domain of local participant data as an amplitude spectrum. These distributions are then compiled into a centralized distribution bank that is accessible to all clients. Consequently, this approach enables the generation of images with modified appearances that reflect the distribution characteristics of other clients. Additionally, ELCFS employs an episodic meta-learning approach that learns generalizable model parameters by simulating train and test domain shifts. Combined with boundary-oriented meta-optimization, which focuses on distinguishing boundary-related features from background-related ones, it enhances domain generalization. This method has been successfully used to segment the optic disc and cup in images of the retinal fundus and for prostate segmentation in  $T_2$ -weighted MRI scans.

Another example of an indirect data sharing method is **Federated Learning with Shared Label Distribution (FedSLD)** (Luo and Wu, 2022). This method assumes that the number of samples from every class for all

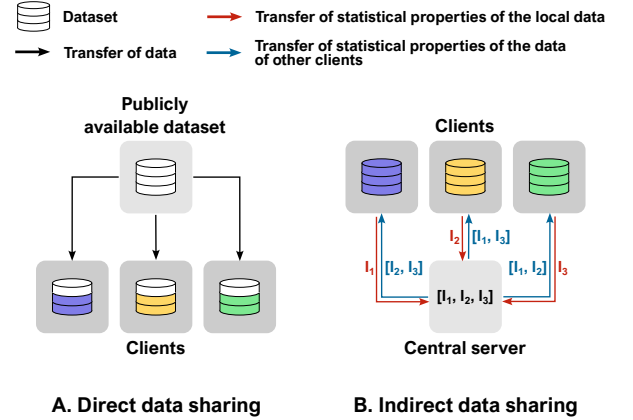


Figure 11: Comparison between two types of data sharing-based techniques. **A.** Direct data sharing assumes the existence of a publicly available dataset that all customers can access. **B.** In indirect data sharing, each client sends statistical properties of their data to a central server, which are then shared with other clients.

clients is known. This information is then used in the local objective function to ensure that each class contributes proportionally, relative to the total number of samples from that class across all clients within the FL architecture. FedSLD has been evaluated for the classification of liver and colorectal cancer images, achieving better results than FedAvg or FedProx.

Yet another indirect method called **Distribution Information Sharing Federated Learning approach (FedDIS)** by Zhao and Huang (2023) enables the involved clients to share their unique local data distributions with each other to create an independent and identically distributed (IID) dataset. The method trains a variational autoencoder (VAE) and subsequently maps local medical data to a hidden space via the encoder. The distributional information about the mapped data in the hidden space is then estimated and shared among the clients. Clients can generate a new dataset based on the received distribution information using the VAE decoder. FedDIS has significantly improved the accuracy of diagnosing Alzheimer’s disease from MRI data in a non-IID scenario.

Domain adaptation: *Domain adaptation* is the next presented approach to reduce domain shift between medical image datasets and increase model generalizability (Li et al., 2020b; Guo et al., 2021; Jiménez-Sánchez et al., 2023).

The first of two domain adaptation approaches introduced here is the **Multi-site fMRI Analysis Framework** (Li et al., 2020b). The technique uses two domain adaptation methods: a mixture of experts (MoE) and adversarial domain alignment. The MoE is a gating network that dynamically assigns weight values during the global aggregation of local models. This approach is used for adaptation near the output layer. On the other hand, adversarial domain alignment is a technique employed for



adaptation on the data knowledge representation level. The method of Li et al. (2020b) has been successfully used to classify data from individuals with autism.

The second method, previously mentioned under the umbrella of data sharing techniques, is the **FL-MR with Cross-site Modeling (FL-MRCM)** (Guo et al., 2021). The FL-MRCM aims to solve the domain shift problem by using the data of the target site, along with the adversarial domain identifier, and the reconstruction network consisting of an encoder and a decoder. The encoder projects the input from the source and target sites into the latent space, and the identifier aligns the distribution of the latent space between each pair of source-target domains. FL-MRCM has been used successfully for MRI reconstruction, achieving results comparable to those obtained from centrally trained models.

Knowledge distillation: Distillation-based approaches often involve clients’ models to teach the global model their data knowledge (Huang et al., 2021; Yang et al., 2022a, 2023).

The **Federated Conditional Mutual Learning (FedCM)** by Huang et al. (2021) uses the local performance of the clients and the similarity to improve the overall accuracy of the global model. The client performance is evaluated based on the cross-entropy loss calculated on their private test set, while similarity is assessed using predicted logits (class scores) from public data. Each client periodically uploads the loss value and the predicted logits to the server. The server then sends back the set of losses and logits of the remaining clients (see Fig. 12). The client updates its knowledge by mutual distillation and fine-tuning its local dataset for personalization. FedCM has demonstrated superior performance in classifying Alzheimer’s disease using  $T_1$ -weighted MRI data, outperforming transfer learning and FedAvg approaches.

**Federated Learning with Z-average and Cross-teaching (FedZaCt)** (Yang et al., 2022a) is another method based on knowledge distillation that uses the Z-average method to aggregate models from multiple collaborators. This approach first calculates normalized cross-evaluation metrics of Z score  $Z_{c,c'}$ , which are obtained by evaluating the local model of the client on the local data with all other clients. These metrics are then used to aggregate Z-average models that maintain diverse knowledge:

$$\Theta_{Z_c}^{r+1} = \sum_{c'=1}^C w_{c'} \bar{Z}_{c,c'} \Theta_{c'}^r, \quad (36)$$

where  $\bar{Z}_{c,c'}$  is the average value of the normalized cross-evaluation metrics of Z score for clients  $c$  and  $c'$

$$\bar{Z}_{c,c'} = \begin{cases} 0.5(Z_{c,c'} + Z_{c',c}) & \text{if } c \neq c', \\ 0.5 & \text{otherwise.} \end{cases} \quad (37)$$

Next, FedZaCt employs a cross-teaching method, which enables local clients to use the Z-average models to train

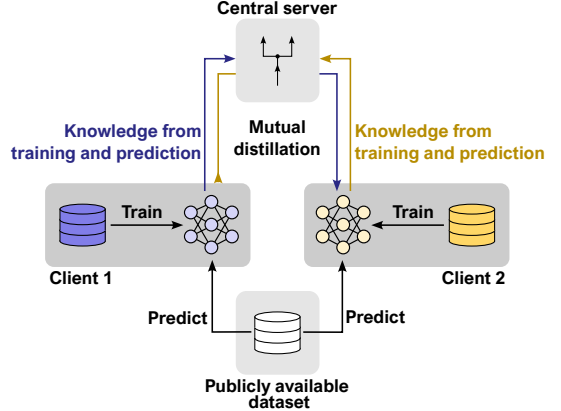


Figure 12: A schematic representation of knowledge distillation-based FedCM technique (Huang et al., 2021). Clients upload predicted logits from public data and cross-entropy loss from private test sets to a central server. The server sends back the logits and loss to the remaining clients. Each client updates its knowledge through mutual distillation.

their models. To achieve this, an additional component is included in the overall loss function. This component measures the difference between the predictions given by the local model and those of the Z-average models. FedZaCt has been successfully used to segment various medical images, including dermatoscopic images with pigmented skin lesions and CT images showing the aortic vessel region.

The **Privacy-preserving Generative Adversarial Network (MixFedGAN)** by Yang et al. (2023) incorporates knowledge distillation into the local model. The method introduces a distillation regularization loss, which employs a Kullback-Leibler divergence to minimize the difference between the local and global models. MixFedGAN has been evaluated effectively on heterogeneous datasets of COVID-19 infection and prostate MRI, demonstrating its advantages over other FL methods, including FedAvg, FedProx, and FedBN.

Contrastive learning: The goal of contrastive learning is to learn low-dimensional representations of data by distinguishing between similar (positive) and dissimilar (negative) samples. This approach aims to bring the positive samples closer together in the representation space while moving the negative samples away from each other. To achieve this, standard distance metrics such as Euclidean distance or cosine similarity are often employed.

The **FedIIC** (Wu et al., 2023a) is an example of a contrastive learning-based approach to address the challenges of class imbalance. FedIIC combines feature and classifier learning. Firstly, feature learning covers two levels of contrastive learning: intra- and inter-client. On the one hand, intra-client contrastive learning extracts class-specific features by contrasting representations of images within the same class against those from different classes. On the other hand, inter-client contrastive learning involves contrasting features across different clients. This procedure employs class-wise prototypes, which are generated from

the global model weights and shared among all clients. By aligning features from various clients, the model achieves better generalization. Secondly, classifier learning enables the dynamic adjustment of the classifier in response to real-time difficulty. These difficulties are assessed by the average cross-entropy loss of all samples within a specific class using a global model. Such an adjustment helps to prevent the model from becoming biased towards majority classes, ensuring fair performance across all classes. FedIIC has demonstrated significant advantages for the classification of dermatoscopic and CT images, compared to standard techniques such as FedAvg or FedProx.

Synthesizing additional data: This approach has been designed to deal with non-IID data and involves synthesizing additional virtual data. The **Federated Medical Image Analysis with Virtual Sample Synthesis** (Zhu and Luo, 2022) synthesizes training samples using local and global models. To improve the generalization of the local model, virtual adversarial training is applied. Unlike adversarial training, this method generates adversarial neighbors that closely resemble the selected input sample in terms of raw pixels but produce different predictions. In addition, the global model is used to generate high-confident samples, which enables the alignment of the local distribution to the global one. This method has been successfully used to detect and classify histological data from various parts of the body.

Replacing the architecture: The **Federated Learning with Hyper-network** (Lin et al., 2023) enables hyper-network training instead of global model training. The hyper-network is a neural network that produces parameters for a larger target model. The hyper-network uses a set of inputs that contain information about the structure of local model parameters and generates parameters for each layer of the target network. This approach has been successfully applied in classification.

### 6.3. Label deficiency

Supervised DL requires a large amount of labeled data to achieve satisfactory accuracy. In a real-world scenario, each client may cover insufficient labeled data due to the tedious and high cost of the data labeling procedure. As a result, the local model may be poorly trained and, therefore, negatively impact other clients involved in global training (Liu et al., 2023b; Kim et al., 2024). We can categorize the methods used to handle label deficiency into four groups, namely *contrastive learning*, *semi-supervised learning*, *synthetic data generation* and *knowledge distillation*.

Contrastive learning: Contrastive learning, mentioned in subsection 6.2, has also been applied to address label deficiency problem (Wu et al., 2021; Dong and Voiculescu, 2021).

In **Federated Contrastive Learning (FCL)** framework (Wu et al., 2021), the clients exchange features with each other during the pre-training procedure to provide

more diverse data. Local contrastive learning involves using two encoders: the main encoder, which is learned and used for initialization during fine-tuning, and the momentum encoder, a slowly evolving version of the main encoder, generating features to discriminate and intended for sharing. Then, the FCL aligns similar features among collaborators using the structural similarity of the data. FCL has been designed for the volumetric segmentation of medical images and evaluated on a cardiac MRI dataset, demonstrating its advantages over other techniques that employ contrastive learning.

The **Robust Federated Contrastive Learning (FedMoCo)** framework (Dong and Voiculescu, 2021) combines contrastive learning and metadata transfer, facilitating the augmentation of inter-node statistical data. During contrastive learning, the data augmentation procedure creates positive pairs by generating two random versions of the same image through various transformations, such as flipping and rotating. In contrast, negative pairs are formed using different versions of two distinct images. Eventually, the metadata transfer involves transferring the statistical information of the transformed features between clients. FedMoCo has been used effectively to detect COVID-19 from chest X-ray data.

Semi-supervised learning: This approach can be used in two scenarios: 1) only a few clients have completely unlabeled data (Mushtaq et al., 2023), 2) all clients have unlabeled data, but the server can provide them with labels (Liu et al., 2023b).

**Federated Alternate Training (FAT)** (Mushtaq et al., 2023) alters the training procedure between annotated and unannotated data. On the one hand, the method uses labeled datasets to fine-tune the global model parameters. On the other hand, clients with unlabeled datasets use the global model as a target model to generate pseudo-labels for self-supervised learning. Model aggregation is performed alternately. First, the global model parameters are aggregated for several rounds for clients with annotated data. Then, for the following few rounds, the aggregation is carried out for clients with unannotated data. FAT has been used in medical image segmentation and has been tested on CT and MRI data.

In **Class Imbalanced Medical Image Classification Based on Semi-Supervised Federated Learning** (Liu et al., 2023b), local clients do not have labels at all, while the labeled data is sent from the central server to each collaborator, allowing them to participate in semi-supervised training. Each client combines the labeled and unlabeled data to construct an extended dataset used to generate pseudo-labels. This method considers the class imbalance factor, which is determined based on annotated data. The technique has been successfully used to classify dermatoscopic images, outperforming FedAvg and other semi-supervised learning techniques.

Name	Application	Programming language	Information privacy	Website
APPFL	Comprehensive framework and benchmarking tool	Python	global and local differential privacy	<a href="https://appfl.ai/">https://appfl.ai/</a>
FATE	Comprehensive framework	Python	Secure computation protocols, secure multi-party computation, task security scheduling, homomorphic encryption	<a href="https://fate.fedai.org/">https://fate.fedai.org/</a>
FEDML	Research and production integrated edge-cloud platform	Python	Secure aggregation, homomorphic encryption, differential privacy	<a href="https://www.fedml.ai/">https://www.fedml.ai/</a>
FedTree	Tree-based models	C++	Secure aggregation, homomorphic encryption, differential privacy	<a href="https://fedtree.readthedocs.io/">https://fedtree.readthedocs.io/</a>
Flower	Comprehensive framework	Python	Secure aggregation, symmetric encryption, differential privacy	<a href="https://flower.dev/">https://flower.dev/</a>
FLUTE	Comprehensive framework	Python	Privacy accounting, differential privacy	<a href="https://github.com/microsoft/msrflute">https://github.com/microsoft/msrflute</a>
LEAF	Comprehensive framework	Python	N/A	<a href="https://leaf.cmu.edu/">https://leaf.cmu.edu/</a>
NVIDIA FLARE	Comprehensive framework	Python	Federated authentication and authorization, privacy policy, homomorphic encryption, differential privacy	<a href="https://developer.nvidia.com/flare">https://developer.nvidia.com/flare</a>
OpenFed	Comprehensive framework	Python	N/A	<a href="https://github.com/FederalLab/OpenFed">https://github.com/FederalLab/OpenFed</a>
OpenFL	Comprehensive framework	Python	Privacy loss reports, differential privacy	<a href="https://github.com/securefederatedai/openfl">https://github.com/securefederatedai/openfl</a>
PaddleFL	Comprehensive framework	Python, C++	Secure aggregation, secure multi-party computation, differential privacy	<a href="https://github.com/PaddlePaddle/PaddleFL">https://github.com/PaddlePaddle/PaddleFL</a>
PySyft	Comprehensive framework	Python	Secure multi-party computation, homomorphic encryption, differential privacy	<a href="https://openmined.github.io/PySyft/">https://openmined.github.io/PySyft/</a>
Substra	Healthcare research	Python	Secure enclaves, secure multi-party computation, differential privacy	<a href="https://www.owkin.com/substra">https://www.owkin.com/substra</a>
TFF	Comprehensive framework	Python	Differential privacy	<a href="https://www.tensorflow.org/federated">https://www.tensorflow.org/federated</a>

Table 3: Summary of actively developed open-source federated learning frameworks.

**Generating synthetic data: Federated Graph Learning with Network Inpainting for Population-Based Disease Prediction (FedNI)** (Peng et al., 2023) synthesizes data for graph convolutional neural networks (GCN). This method employs a network inpainting module that includes a missing node generator. It aims to predict missing nodes and augment edge connections. As a result, a larger fused local graph is generated, which serves as input to the GCN node classifier. FedNI has been used to predict neurological disorders and diseases using MRI data.

**Knowledge distillation: Federated Learning with Knowledge Distillation for Multi-organ Segmentation with Partially Labeled Datasets** (Kim et al., 2024) involves global and local versions of knowledge distillation. The global knowledge distillation is designed to prevent catastrophic forgetting by preserving predictions for organs with missing labels. In this context, catastrophic forgetting refers to the loss of knowledge about the segmentation of specific organs during local training, which occurs once clients own only partially

annotated datasets. In local knowledge distillation, each client trains a model for a specific organ before starting the FL procedure and shares its parameters with collaborators. The client uses predictions from another participant’s randomly selected organ-specific model during the local training. This approach is especially beneficial for multi-organ segmentation, where each client has labels for only one organ (Kim et al., 2024).

#### 6.4. Security

Attacks on privacy can lead to extracting sensitive information from confidential patient data. To enhance data security during the learning process, one can use privacy-enhancing techniques such as *differential privacy*, *split learning* or *selective parameter sharing*.

**Differential privacy:** An example of implementing differential privacy is the *Differentially-private Stochastic Gradient Descent (DP-SGD)* algorithm used by clients during local learning (Ziller et al., 2021b; Malekzadeh et al., 2021; Nguyen et al., 2022a; Kalra et al., 2023). The DP-SGD algorithm injects a Gaussian distributed noise

to the averaged minibatch gradients before performing an optimization step. The privacy loss is ultimately calculated based on the information maintained by the accountant. The accountant is a mechanism for tracking and managing the privacy budget across multiple training rounds. It ensures that the total privacy budget remains within acceptable limits while training decentralized clients. In another differential privacy algorithm, namely the **Differentially Private Federated Deep Learning for Multi-site Medical Image Segmentation** by Ziller et al. (2021b), the Rényi Differential Privacy Accountant technique is used instead of the standard moments accountant.

**Split learning:** This approach involves dividing the model into parts stored separately by different participants. **Robust Split Federated Learning (RoS-FL)** (Yang et al., 2022b) is an example technique that splits the model into three parts: head, tail, and body network. The head and tail models are stored with clients’ devices, while the computation server hosts the computationally intensive body networks. This server stores  $C$  body models, each belonging to a different client. On top of these, the aggregation server covers only the parameters of head and tail networks, while the computation server aggregates the body model parameters.

**Selective parameter sharing:** Privacy can also be violated by overfitting a locally trained model. The selective sharing of parameters is a solution to handle this problem. As an example, the **Privacy-preserving Federated Brain Tumor Segmentation** (Li et al., 2019) selectively shares local information, that is, model components  $\Delta\Theta_c$  whose absolute values are greater than the chosen threshold are transferred to the server. In addition, elements of  $\Delta\Theta_c$  are clipped to a specific range of  $[-\gamma, \gamma]$ . This method has been shown to be effective in segmenting brain tumors.

## 7. Federated learning frameworks

This section reviews publicly available actively developed FL computing frameworks. These software tools provide application interfaces for developing FL algorithms in C++/Python programming languages employing various resource types such as multi-CPU, GPU or cloud-based environments. We briefly characterize these frameworks below and summarize them in Table 3.

**APPFL** (Advanced Privacy-Preserving Federated Learning) (Li et al., 2024) is a high-performance framework and benchmarking tool that handles various communication protocols, data transfer and compression methods, and privacy preservation strategies. APPFL supports the Message Passing Interface standard for single-machine and cluster servers and gRPC/Globus Compute for distributed training.

**FATE** (Federated AI Technology Enabler) (Liu et al., 2021b) is an open-source tool that provides a secure computing framework to support a federated AI ecosystem. It

delivers multiple secure computation protocols for collaboration between the sites involved over large datasets while complying with data protection regulations. FATE supports numerous ML algorithms, including tree-based algorithms, deep learning, and transfer learning. The framework comprises several components, such as an end-to-end platform, a visual tool for exploring FL models, and support for high-performance and cloud computing.

**FEDML** (Foundational Ecosystem Design for Machine Learning) (He et al., 2020) is a cloud service dedicated to developers working with large language models and generative AI. It allows for launching complex model training, deployment, and FL algorithms on decentralized GPUs, multi-clouds, edge servers, and smartphones in a secure and cost-effective way.

**FedTree** (Li et al., 2023b) is a specialized tool for FL systems using tree-based models. It is designed to be highly efficient, effective, and secure. It delivers a range of features, including parallel computing on multi-core CPUs and GPUs, support for HE, secure aggregation, and DP.

**Flower** (Beutel et al., 2022) is a highly customizable framework with many components that can be used to develop new or state-of-the-art systems. Flower supports multiple ML libraries, including PyTorch, Keras, TensorFlow, and Scikit-learn. It is a platform-agnostic framework that supports Android, iOS, mobile, desktop, and cloud computing.

**FLUTE** (Federated Learning Utilities for Testing and Experimentation) (Garcia et al., 2022) is a high-performance PyTorch-based tool for rapid prototyping and validation. FLUTE features standard optimizers and aggregation methods and handles local/global differential privacy. The framework supports single-/multi GPU and cloud computing.

**LEAF** (Caldas et al., 2019) is a comprehensive benchmarking tool designed for learning in federated settings. The LEAF can be used in various domains, such as multi-task learning, meta-learning, and on-device learning. The LEAF has several open-source datasets, and it also provides a comprehensive evaluation framework and a set of reference implementations.

**NVIDIA FLARE** (NVIDIA Federated Learning Application Runtime Environment) (Roth et al., 2022) is an open-source and versatile software development kit for FL. NVIDIA FLARE supports ML libraries such as PyTorch, TensorFlow, Scikit-learn, and XGBoost. It also supports horizontal and vertical FL and has built-in algorithms like FedAvg, FedProx, FedOpt, and Scaffold. NVIDIA FLARE offers several server and client-controlled training workflows, including scatter and gather, cyclic, and validation workflows such as global model evaluation and cross-site validation. It also incorporates privacy preservation techniques like DP, HE, and private set intersection to ensure data privacy and security.

**OpenFed** (Chen et al., 2023) is a library that makes FL easier for researchers and downstream users by addressing existing challenges. OpenFed provides a framework for

researchers to quickly implement new methods and evaluate them against various benchmarks. For downstream users, OpenFed enables FL to be seamlessly integrated into different subject contexts without requiring in-depth expertise in the field.

**OpenFL** (Open Federated Learning) (Foley et al., 2022) is a library designed to be a flexible, extensible, and easy-to-learn tool for data scientists. OpenFL allows the setup of an FL experiment using one of three workflows: director-based (recommended for FL research), aggregator-based (helpful in defining and distributing experiments manually), or workflow interface (for complex experiments). The library also provides tutorials covering various frameworks, models, and datasets.

**PaddleFL** (PaddlePaddle, 2023) is an open-source framework that allows researchers to replicate and compare various FL algorithms easily. PaddleFL provides several FL strategies for computer vision, natural language processing, and recommendation systems.

**PySyft** (Ziller et al., 2021a) is an open-source stack built on top of PyTorch. PySyft provides a numpy-like interface and integrates with DL frameworks, allowing researchers to continue working with their current workflows while benefiting from enhanced privacy features.

**Substra** (Owkin, 2024) is open-source and ready-to-use FL software to train and validate ML models on distributed datasets. Substra offers a flexible Python interface and a web application for FL training. This framework is mainly used in production environments and has already been successfully deployed and used by biotech companies and hospitals for clinical research, drug discovery, and development tasks.

**TFF** (TensorFlow Federated) (Google, 2024) is an open-source framework for ML and other computations on decentralized data. The framework offers starting points and complete examples for various types of research. The building blocks provided by TFF can also be exploited for non-learning computations, such as federated analytics.

## 8. Discussion

We have been observing an enormous interest in FL over the past decade, resulting in a full gamut of new aggregation and learning techniques, as previously mentioned in sections 5 and 6. However, those methods often only partially address the problems or, not surprisingly, create new ones that require an in-depth examination. In this section, we thoroughly discuss these issues before MI can fully leverage the benefits of FL.

### 8.1. Model accuracy

We start our discussion with some important comments about the accuracy of the global model. Once training the global model is initiated, one has to ensure that the involved sites do not negatively affect the aggregation function (Darzidehkalani et al., 2022). Usually, this is achieved

by dynamically assigning a weighting factor to each client based on its local loss function (Shen et al., 2021; Mächler et al., 2022, 2023; Wicaksana et al., 2023; Wu et al., 2023b; Liu et al., 2023a) or accuracy-related metrics (Yang et al., 2023). The weighting factor may also cover the similarity between the parameters of transferred local and global models (Khan et al., 2022, 2023; Yang et al., 2023). Another approach is to abandon specific parameters of the local models during the aggregation process. The parameters to be withdrawn might be randomly selected (Gunesli et al., 2021) or chosen from specific layers (e.g., normalization layer) (Bernecker et al., 2022).

To prevent global model deterioration, it is fundamental to avoid forgetting previously learned knowledge. One can achieve this through the curriculum learning (Jiménez-Sánchez et al., 2023), where inconsistent predictions caused by forgotten data are penalized. An alternative approach is continuous learning, which introduces and manages new memories without forgetting the previously gained knowledge (Sheller et al., 2020; Huang et al., 2022). The consequence of catastrophic interference is even more critical as the training might introduce a bias towards the most recent clients involved in the training procedure. To handle the bias favoring new clients, one can use the cyclic weight transfer approach, which trains the model at the client and then transfers model parameters to the next one (Darzidehkalani et al., 2022). Dynamic weight correction is another technique that stabilizes the training process and avoids a drift between the global model and local models (Yang et al., 2022b).

Lastly, some aggregation and learning methods require computing additional parameters during local training and transferring them to the global server. Examples include MixFedGAN (Yang et al., 2023) and Memory-aware Curriculum Federated Learning (Jiménez-Sánchez et al., 2023). These prerequisites might be problematic for hospitals with limited computing resources and/or weaker communication infrastructure. Therefore, finding alternative methods to ensure the federated-based DL system properly works for all clients involved is essential in the near future.

### 8.2. Data heterogeneity

The most commonly used method to aggregate MI data is the FedAvg (McMahan et al., 2017). However, the FedAvg-derived results strongly depend on the homogeneity of the data between the sites. If the data is heterogeneous, the accuracy of the global model decreases, and the model performs satisfactorily only for some clients (Zhao et al., 2018). However, although the FedProx is a typical option for MI (Li et al., 2020a), it does not work adequately in all scenarios and therefore does not necessarily always show significantly better results than the FedAvg (Luo and Wu, 2022; Zhou et al., 2023; Yang et al., 2023). To ensure the best possible results, participants, before training starts, must find a consensus on the criteria for

selecting the best possible global model, such as the metric chosen at a satisfactory level or the number of global rounds that must be passed (Darzidehkalani et al., 2022).

Nowadays, a popular way to handle data heterogeneity is to slightly alter the concept of FL by training many personalized local models simultaneously instead of a single global model. This is usually achieved by splitting the local model into two parts: a local part being specific to each client and a global one, transmitted to the server and used in the aggregation procedure (see Fig. 10E; Zhang et al. (2022a); Dalmaz et al. (2022, 2024); Elmas et al. (2023); Feng et al. (2023); Zhou et al. (2023)). Alternatively, it is possible to separate the parameter space into shape and appearance features and share shape parameters with the server only (Bercea et al., 2022). These strategies effectively address the data heterogeneity problem resulting from engaging different devices and protocols for data acquisition. We note that training personalized local models can result in challenges in generalizing these models to other datasets not included in the training procedure. A more straightforward approach to handling data heterogeneity is fine-tuning the global model according to the client’s needs using local data (Jiang et al., 2023).

Another possible solution to handle data heterogeneity is to harmonize the data or standardize the pre-processing pipeline across the collaborators (Jiang et al., 2022). These may require sharing metadata between the institutions or even exemplary acquisitions to set up a harmonization protocol. Precisely, data harmonization protocols typically require selecting a target institution to which the data is normalized, and hence, sharing exemplary acquisitions with other clients is favorable. This might be challenging to achieve, considering the privacy constraints. Therefore, the cooperation of clinicians and technicians is essential to standardize the way data is handled in different institutions (Darzidehkalani et al., 2022). It is also beneficial to create model datasets that can serve as a target site for harmonization and to establish universal metrics used to determine the quality of harmonized data (Pinto et al., 2020).

Yet another practical approach to deal with data heterogeneity is direct (Guo et al., 2021) or indirect (Liu et al., 2021a; Luo and Wu, 2022; Zhao and Huang, 2023) data sharing (see Fig. 11). This strategy addresses the problem from a statistical point of view by sharing the distribution of classes in local data or a small amount of data that contains examples from each class. It enables clients to augment their datasets and create an independently and identically distributed (IID) dataset.

However, these kinds of solutions are computationally expensive and result in significant communication overheads (Aouedi et al., 2022). In addition, the size and distribution of classes in the data may change over time, demanding frequent modifications to local datasets to remain independently and identically distributed in relation to other institutions. Finally, more efforts could be put into decreasing the data heterogeneity by integrating de-

mographic factors such as gender, age or intelligence (Bedford et al., 2020).

The current literature still lacks in-depth analyses of new techniques that involve heterogeneous datasets. Numerous reports rely on a single dataset acquired from one institution, which is then “virtually” shared among clients, creating a simulated FL scenario. In the future, it will be vital to standardize validation methods for assessing new aggregation and learning algorithms, together with collecting standardized datasets for testing procedures.

### 8.3. Malicious clients

Most FL-based techniques assume that all clients involved in the training process are credible and do not intentionally modify the parameters of transmitted local models. If not, the global model is susceptible to poisoning attacks. Defenses against model poisoning attacks mainly rely on either Byzantine-robust methods or provably robust methods. In general, these methods aim to train a well-functioning global model even in the presence of malicious clients (Zhang et al., 2022c).

Theoretically, Byzantine-robust FL methods can minimize the changes to the global model parameters caused by malicious clients. They employ a technique that involves correlating the local updates from each client and filtering out any statistical outliers before the aggregation. However, these methods treat every client as a potential threat since there is no reliable way to determine which local updates are suspicious (Alkhunaizi et al., 2022; Cao et al., 2022; Zhang et al., 2022c). Therefore, the methods are only effective for a limited number of malicious clients. Provably robust methods, in turn, can guarantee the minimum level of testing accuracy. However, these methods require a clean validation dataset available on a server with data distribution properties similar to the overall training data distribution. In a typical FL scenario, the server may have restricted access to such a validation dataset. Thus, the global model may still be eroded by malicious clients (Zhang et al., 2022c; Onsu et al., 2023).

In conclusion, new methods must identify and reject malicious clients to protect FL-based learning procedures against poisoning attacks, which are particularly dangerous in a clinical setting.

### 8.4. Security

The most often exploited methods to preserve data privacy are DP, secure MPC, and HE. The first method, the DP, introduces random noise to the dataset to reduce the risk of revealing sensitive personal information. The commonly used algorithm for training local models is the DP-SGD (Ziller et al., 2021b; Malekzadeh et al., 2021; Nguyen et al., 2022a; Kalra et al., 2023). However, this technique may also reduce the global model accuracy (Truong et al., 2021; Abad et al., 2022). In contrast to DP, the MPC preserves high global model accuracy. It enables multiple sites to compute a function with their inputs without

revealing them to other parties (Mothukuri et al., 2021; Truong et al., 2021). HE is yet another technique that can improve data privacy and is often used for secure aggregation (Malekzadeh et al., 2021; Makkar and Santosh, 2023). Here, the computations are performed on encrypted data, and the results can only be decrypted by the institution that requests it (Fereidooni et al., 2021; Truong et al., 2021). However, the MPC and HE increase the computational burden and complicate the training algorithm, consequently significantly increasing the local training duration (Mothukuri et al., 2021; Truong et al., 2021).

Contrary to the DP, secure MPC and HE mentioned above, there are also other solutions that can be used to preserve data security. One of these approaches is to transfer local model parameters selectively, thus preventing reverse engineering (Li et al., 2019). Another solution is to split the local model into separate parts and store them independently. Hence, since the model is only partially stored by the global server and the involved clients, the ability to retrieve its parameters by other sites or an unwanted external party is limited (Yang et al., 2022b).

However, this technique increases the learning period as more parties are involved in the training procedure. Other solutions are also no less relevant: peer-to-peer (Giuseppi et al., 2022) and blockchain (Kalapaaking et al., 2023; Noman et al., 2023).

Due to the high prerequisites of privacy protection techniques, it is essential to consider whether it is necessary or not to implement them in the FL-based system. Profitability depends largely on the level of trust between the parties involved and the scale of the project (Darzidehkalani et al., 2022). If the institutions trust each other or the training involves a small group of clients who can sign appropriate data protection agreements, employing the above methods might be unfounded. Nevertheless, this does not exempt the clients from protecting their data from other parties, i.e., clarifying the required level of trust among clients is paramount before introducing a federated learning architecture (Kandati and Gadekallu, 2023a).

To sum up, there is a need to test privacy protection methods on highly heterogeneous datasets, like those observed across multi-institutional medical modalities. Current requirements for security preservation are directed toward developing techniques that can provide security without significantly increasing the computational cost.

### 8.5. Label deficiency

Three main approaches address the problem of insufficient data labeling: semi-supervised, self-supervised, and transfer learning (Jin et al., 2023).

Semi-supervised learning aims to use both annotated and unannotated data owned by clients. This approach is practical only if some of the clients involved have unlabeled data (Mushtaq et al., 2023) or all the clients have unannotated data, but the labels are available on the central server (Liu et al., 2023b). In such cases, the central

server shares the labeled data to fine-tune the global model by each client. Therefore, the fine-tuned model can generate pseudo-labels for unannotated data on the clients' side (Jin et al., 2023).

Self-supervised learning is a dedicated strategy used when the server cannot access labeled data and the institutions own unannotated data only. There are two types of self-supervised learning: generative and contrastive learning. However, in FL, attention has been focused mainly on the latter type (Wu et al., 2021; Dong and Voiculescu, 2021). Contrastive learning involves training a model to differentiate between similar and different pairs of data collection by maximizing their similarity within the same class and minimizing similarity between different classes. However, playing with heterogeneous data is challenging in contrastive learning, as there are no globally consistent labels, and local contrastive objectives can vary significantly (Jin et al., 2023).

Lastly, the concept of federated transfer learning (Fig. 6C.) can be categorized into two cases: homogeneous and heterogeneous. Homogeneous transfer learning can be further classified into single- and multi-source architectures, depending on the number of source and target domains involved (Jin et al., 2023). In a single-source architecture, there is a central server that maintains labeled data and clients with unannotated data. Since each institution has different data distribution (i.e., the data is heterogeneous across the involved sites), it creates a unique target domain, requiring adaptation methods to tackle multiple targets. The multi-source setting is much more complicated as it involves multiple source domains with labeled data transferring knowledge to a single unlabeled target domain. In this case, selecting a source domain with valuable knowledge is required without directly observing the source data. On the other hand, to make the heterogeneous transfer learning work, there must be cross-domain links between data to bridge the gap between the different feature spaces (e.g., cross-domain links between imaging modalities used for scanning the patient).

### 8.6. System architecture

We discuss here two main architectures commonly used in FL: centralized and decentralized (see Fig. 5). The former is a frequent choice in MI imaging but has weaknesses, i.e., even minor failures, like network instability, can cause a bottleneck and halt the entire global training procedure (Brecko et al., 2022). Besides, this architecture has a security risk, as clients must trust each other. The latter architecture might obey a peer-to-peer or blockchain approach. The peer-to-peer architecture eliminates the risk of a single-point failure, but the global model accuracy depends heavily on the network topology. The blockchain, in turn, significantly enhances data security but is computationally expensive as it additionally requires data validation and block generation (Brecko et al., 2022; Aouedi et al., 2022; Qammar et al., 2023).

Many institutions lack solid computing resources and reliable network infrastructure (Darzidehkalani et al., 2022). Hence, redundant computing facilities and data centers are critical to prevent data loss. An effort in architecture planning should be made to handle the failure of one or more centers without disrupting the overall training process. The FL system must be adaptable to operate with various centers in case the institution is no longer involved in the training and maintaining the global model to solve a particular MI task.

### 8.7. Communication efficiency

Communication with clients reporting delayed results is one of the most consequential problems to consider in the FL-based system. The direct and practical strategy is to ignore such clients if they cannot provide the model’s parameters in a given time regime, as done in the FedAvg algorithm (McMahan et al., 2017). However, this can lead to significant biases in the learning process. Contrary to FedAvg, FedProx (Li et al., 2020a) allows clients to perform only fragmentary work within system constraints, facilitating partial update to be safely incorporated via a proximal term (Aouedi et al., 2022). However, there is still a lack of comprehensive analysis in the literature on how removing specific clients involved in the aggregation procedure affects the accuracy of the global model. Another approach to address the issue of out-of-sync and client dropout is to randomly select clients from a large pool of participants for each training round (Wang et al., 2020c; Shen et al., 2021; Feki et al., 2021; Malekzadeh et al., 2021; Ślazyk et al., 2022; Zhang et al., 2022a; Khan et al., 2022, 2023; Mächler et al., 2023; Lin et al., 2023), or choose the subset of clients with the best training results (Zhang et al., 2021) or those with updates that are the most informative (Zhou et al., 2022). The server can also accept model parameters submitted by a single client that has achieved the best value for a specific measure, such as accuracy or loss function (Kandati and Gadekallu, 2023b). In more advanced techniques, the central server collects additional information about the client’s resources, such as wireless channel states, computational capabilities, and dataset size. The server then uses this knowledge to determine which clients can participate in the training process (Aouedi et al., 2022). However, there is still a risk of significant deterioration in the accuracy of the global model, especially when working with highly heterogeneous data. Eventually, to improve communication efficiency, a compression framework can be employed to reduce the size of the messages exchanged in each round (He et al., 2022). Various model compression schemes, such as sparsification, quantization, or subsampling, can significantly minimize the size of model parameters while achieving high accuracy at low communication costs. Nevertheless, these methods may require more computational resources as the clients must perform the compression procedure locally in addition to model training.

## 9. Conclusions

This article thoroughly reviewed the latest developments in federated learning, expressly focusing on medical image analysis applications. The paper classified newly introduced aggregation and learning techniques specifically designed to address the challenges attributed to federated learning that differentiate it from standard deep learning pipelines. These challenges are incredibly significant in the case of multi-institutional medical imaging data delivered with different equipment and/or vendors and cover issues such as accuracy of the jointly trained model, data heterogeneity, label deficiency, the occurrence of malicious clients, data security, system architecture, and communication efficiency across the involved sites. The study has inspected open-source software packages that allow for rapid prototyping of a deep learning algorithm in a federated way using various computational supplies. We believe that the federated learning concept is a giant step in demarcating the future of deep learning involving multi-institutional medical imaging data.

## Acknowledgements

This work is supported by the European Union’s Horizon 2020 research and innovation programme under grant agreement No 857533 and the International Research Agendas Programme of the Foundation for Polish Science No MAB PLUS/2019/13. This publication was created within the project of the Minister of Science and Higher Education ”Support for the activity of Centers of Excellence established in Poland under Horizon 2020” on the basis of the contract number MEiN/2023/DIR/3796. Tomasz Pieciak acknowledges the Polish National Agency for Academic Exchange for grant PPN/BEK/2019/1/00421 under the Bekker programme and the Ministry of Science and Higher Education (Poland) under the scholarship for outstanding young scientists (692/STY/13/2018).

## References

- Abad, G., Picek, S., Ramírez-Durán, V.J., Urbietta, A., 2022. On the security & privacy in federated learning. [arXiv:2112.05423](#).
- Abay, A., Zhou, Y., Baracaldo, N., Rajamoni, S., Chuba, E., Ludwig, H., 2020. Mitigating bias in federated learning. [arXiv:2012.02447](#).
- Abbas, T., Fatima, A., Shahzad, T., Alharbi, M., Khan, M.A., Ahmed, A., 2024. Multidisciplinary cancer disease classification using adaptive FL in healthcare industry 5.0. *Scientific Reports* 14, 18643.
- Abramian, D., Eklund, A., 2019. Refacing: reconstructing anonymized facial features using GANs, in: 2019 IEEE 16th International Symposium on Biomedical Imaging (ISBI 2019), pp. 1104–1108.
- Adnan, M., Kalra, S., Cresswell, J.C., Taylor, G.W., Tizhoosh, H.R., 2022. Federated learning and differential privacy for medical image analysis. *Scientific Reports* 12, 1953.
- Aerts, H.J., Velazquez, E.R., Leijenaar, R.T., Parmar, C., Grossmann, P., Carvalho, S., Bussink, J., Monshouwer, R., Haibe-Kains, B., Rietveld, D., et al., 2014. Decoding tumour phenotype



- by noninvasive imaging using a quantitative radiomics approach. *Nature Communications* 5, 4006.
- Afshar, P., Heidarian, S., Naderkhani, F., Oikonomou, A., Plataniotis, K.N., Mohammadi, A., 2020. Covid-caps: A capsule network-based framework for identification of COVID-19 cases from X-ray images. *Pattern Recognition Letters* 138, 638–643.
- Agbley, B.L.Y., Li, J., Haq, A.U., Bankas, E.K., Ahmad, S., Agyemang, I.O., Kulevome, D., Ndiaye, W.D., Cobbinah, B., Latipova, S., 2021. Multimodal melanoma detection with federated learning, in: 2021 18th International Computer Conference on Wavelet Active Media Technology and Information Processing (ICCWAMTIP), pp. 238–244.
- Ahamed, M.F., Hossain, M.M., Nahiduzzaman, M., Islam, M.R., Islam, M.R., Ahsan, M., Haider, J., 2023. A review on brain tumor segmentation based on deep learning methods with federated learning techniques. *Computerized Medical Imaging and Graphics* 110, 102313.
- Ahmed, R., Maddikunta, P.K.R., Gadekallu, T.R., Alshammari, N.K., Hendaoui, F.A., 2024. Efficient differential privacy enabled federated learning model for detecting COVID-19 disease using chest X-ray images. *Frontiers in Medicine* 11, 1409314.
- Aja-Fernández, S., Martín-Martín, C., Planchuelo-Gómez, Á., Faiyaz, A., Uddin, M.N., Schifitto, G., Tiwari, A., Shigwan, S.J., Singh, R.K., Zheng, T., et al., 2023. Validation of deep learning techniques for quality augmentation in diffusion MRI for clinical studies. *NeuroImage: Clinical* 39, 103483.
- Al-Dhabyani, W., Gomaa, M., Khaled, H., Fahmy, A., 2020. Dataset of breast ultrasound images. *Data in Brief* 28, 104863.
- Albalawi, E., TR, M., Thakur, A., Kumar, V.V., Gupta, M., Khan, S.B., Almusharraf, A., 2024. Integrated approach of federated learning with transfer learning for classification and diagnosis of brain tumor. *BMC Medical Imaging* 24, 110.
- Alexander, D.C., Dyrby, T.B., Nilsson, M., Zhang, H., 2019. Imaging brain microstructure with diffusion MRI: practicality and applications. *NMR in Biomedicine* 32, e3841.
- Alkhunaizi, N., Kamzolov, D., Takáč, M., Nandakumar, K., 2022. Suppressing poisoning attacks on federated learning for medical imaging, in: Wang, L., Dou, Q., Fletcher, P.T., Speidel, S., Li, S. (Eds.), *Medical Image Computing and Computer Assisted Intervention – MICCAI 2022*, pp. 673–683.
- AlSalman, H., Al-Rakhami, M.S., Alfakih, T., Hassan, M.M., 2024. Federated learning approach for breast cancer detection based on DCNN. *IEEE Access* 12, 40114–40138.
- Amgad, M., Elfandy, H., Hussein, H., Atteya, L.A., Elsebaie, M.A., Abo Elnasr, L.S., Sakr, R.A., Salem, H.S., Ismail, A.F., Saad, A.M., et al., 2019. Structured crowdsourcing enables convolutional segmentation of histology images. *Bioinformatics* 35, 3461–3467.
- Ankolekar, A., Boie, S., Abdollahyan, M., Gadaleta, E., Hasheminasab, S.A., Yang, G., Beauville, C., Dikaios, N., Kastis, G.A., Bussmann, M., Khalid, S., Kruger, H., Lambin, P., Papanastasiou, G., 2024. Advancing oncology with federated learning: transcending boundaries in breast, lung, and prostate cancer. a systematic review. [arXiv:2408.05249](https://arxiv.org/abs/2408.05249).
- Aouedi, O., Sacco, A., Piamrat, K., Marchetto, G., 2022. Handling privacy-sensitive medical data with federated learning: challenges and future directions. *IEEE Journal of Biomedical and Health Informatics* 27, 790–803.
- Arabi, H., AkhavanAllaf, A., Sanaat, A., Shiri, I., Zaidi, H., 2021. The promise of artificial intelligence and deep learning in PET and SPECT imaging. *Physica Medica* 83, 122–137.
- Armato III, S.G., Huisman, H., Drukker, K., Hadjiiski, L., Kirby, J.S., Petrick, N., Redmond, G., Giger, M.L., Cha, K., Mamonov, A., et al., 2018. PROSTATEx challenges for computerized classification of prostate lesions from multiparametric magnetic resonance images. *Journal of Medical Imaging* 5, 044501.
- Babar, M., Qureshi, B., Koubaa, A., 2024. Investigating the impact of data heterogeneity on the performance of federated learning algorithm using medical imaging. *PLOS One* 19, e0302539.
- Baid, U., Pati, S., Kurc, T.M., Gupta, R., Bremer, E., Abousamra, S., Thakur, S.P., Saltz, J.H., Bakas, S., 2022. Federated learning for the classification of tumor infiltrating lymphocytes. [arXiv:2203.16622](https://arxiv.org/abs/2203.16622).
- Bakas, S., Reyes, M., Jakab, A., Bauer, S., Rempfler, M., Crimi, A., Shinohara, R.T., Berger, C., Ha, S.M., Rozycki, M., et al., 2018. Identifying the best machine learning algorithms for brain tumor segmentation, progression assessment, and overall survival prediction in the BRATS challenge. [arXiv:1811.02629](https://arxiv.org/abs/1811.02629).
- Bakr, S., Gevaert, O., Echegaray, S., Ayers, K., Zhou, M., Shafiq, M., Zheng, H., Benson, J.A., Zhang, W., Leung, A.N., et al., 2018. A radiogenomic dataset of non-small cell lung cancer. *Scientific data* 5, 1–9.
- Ballerini, L., Fisher, R.B., Aldridge, B., Rees, J., 2013. *Color Medical Image Analysis*. Springer. chapter A color and texture based hierarchical K-NN approach to the classification of non-melanoma skin lesions. pp. 63–86.
- Bandi, P., Geessink, O., Manson, Q., Van Dijk, M., Balkenhol, M., Hermesen, M., Bejnordi, B.E., Lee, B., Paeng, K., Zhong, A., et al., 2018. From detection of individual metastases to classification of lymph node status at the patient level: the CAMELYON17 challenge. *IEEE Transactions on Medical Imaging* 38, 550–560.
- Bankman, I., 2008. *Handbook of medical image processing and analysis*. Elsevier.
- Barragán-Montero, A., Javaid, U., Valdés, G., Nguyen, D., Desbordes, P., Macq, B., Willems, S., Vandewinckele, L., Holmström, M., Löfman, F., et al., 2021. Artificial intelligence and machine learning for medical imaging: A technology review. *Physica Medica* 83, 242–256.
- Basu, S., Zhuang, H., Torigian, D.A., Rosenbaum, J., Chen, W., Alavi, A., 2009. Functional imaging of inflammatory diseases using nuclear medicine techniques, in: *Seminars in nuclear medicine*, Elsevier. pp. 124–145.
- Beauferris, Y., Teuwen, J., Karkalousos, D., Moriakov, N., Caan, M., Yiasemis, G., Rodrigues, L., Lopes, A., Pedrini, H., Rittner, L., et al., 2022. Multi-coil MRI reconstruction challenge—assessing brain MRI reconstruction models and their generalizability to varying coil configurations. *Frontiers in Neurosciences* 16, 919186.
- Bechar, A., Medjoudj, R., Elmir, Y., Himeur, Y., Amira, A., 2025. Federated and transfer learning for cancer detection based on image analysis. *Neural Computing and Applications* , 1–46.
- Bedford, S.A., Park, M.T.M., Devenyi, G.A., Tullo, S., Germann, J., Patel, R., Anagnostou, E., Baron-Cohen, S., Bullmore, E.T., Chura, L.R., et al., 2020. Large-scale analyses of the relationship between sex, age and intelligence quotient heterogeneity and cortical morphometry in autism spectrum disorder. *Molecular Psychiatry* 25, 614–628.
- Behera, M.R., Upadhyay, S., Shetty, S., 2022. Federated learning using smart contracts on blockchains, based on reward driven approach. [arXiv:2107.10243](https://arxiv.org/abs/2107.10243).
- Bercea, C.I., Wiestler, B., Rueckert, D., Albarqouni, S., 2022. Federated disentangled representation learning for unsupervised brain anomaly detection. *Nature Machine Intelligence* 4, 685–695.
- Bernal, J., Sánchez, F.J., Fernández-Esparrach, G., Gil, D., Rodríguez, C., Vilarino, F., 2015. WM-DOVA maps for accurate polyp highlighting in colonoscopy: Validation vs. saliency maps from physicians. *Computerized medical imaging and graphics* 43, 99–111.
- Bernal, J., Sánchez, J., Vilarino, F., 2012. Towards automatic polyp detection with a polyp appearance model. *Pattern Recognition* 45, 3166–3182.
- Bernard, O., Lalande, A., Zotti, C., Cervenansky, F., Yang, X., Heng, P.A., Cetin, I., Lekadir, K., Camara, O., Ballester, M.A.G., Sanromá, G., Napel, S., Petersen, S.E., Tziritas, G., Grinias, E., Khened, M., Kollerathu, V.A., Krishnamurthi, G., Rohé, M.M., Pennec, X., Sermesant, M., Isensee, F., Jäger, P.F., Maier-Hein, K., Full, P.M., Wolf, I., Engelhardt, S., et al., 2018. Deep learning techniques for automatic MRI cardiac multi-structures segmentation and diagnosis: Is the problem solved? *IEEE Transactions on Medical Imaging* 37, 2514–2525.
- Bernecker, T., Peters, A., Schlett, C.L., Bamberg, F., Theis, F., Rueckert, D., Weiß, J., Albarqouni, S., 2022. FedNorm: Modality-based normalization in federated learning for multi-modal liver segmentation. [arXiv:2205.11096](https://arxiv.org/abs/2205.11096).

- Bethlehem, R.A., Seidlitz, J., White, S.R., Vogel, J.W., Anderson, K.M., Adamson, C., Adler, S., Alexopoulos, G.S., Anagnostou, E., Arecas-Gonzalez, A., et al., 2022. Brain charts for the human lifespan. *Nature* 604, 525–533.
- Beutel, D.J., Topal, T., Mathur, A., Qiu, X., Fernandez-Marques, J., Gao, Y., Sani, L., Li, K.H., Parcollet, T., de Gusmão, P.P.B., et al., 2022. Flower: A friendly federated learning research framework. [arXiv:2007.14390](https://arxiv.org/abs/2007.14390).
- Bilic, P., Christ, P., Li, H.B., Vorontsov, E., Ben-Cohen, A., Kaissis, G., Szeskin, A., Jacobs, C., Mamani, G.E.H., Chartrand, G., et al., 2023. The liver tumor segmentation benchmark (LiTS). *Medical Image Analysis* 84, 102680.
- Borkowski, A.A., Bui, M.M., Thomas, L.B., Wilson, C.P., DeLand, L.A., Mastorides, S.M., 2019. Lung and colon cancer histopathological image dataset (LC25000). [arXiv:1912.12142](https://arxiv.org/abs/1912.12142).
- Brecko, A., Kajati, E., Koziorek, J., Zolotova, I., 2022. Federated learning for edge computing: A survey. *Applied Sciences* 12, 9124.
- Bullitt, E., Zeng, D., Gerig, G., Aylward, S., Joshi, S., Smith, J.K., Lin, W., Ewend, M.G., 2005. Vessel tortuosity and brain tumor malignancy: a blinded study. *Academic Radiology* 12, 1232–1240.
- Bulten, W., Kartasalo, K., Chen, P.H.C., Ström, P., Pinckaers, H., Nagpal, K., Cai, Y., Steiner, D.F., van Boven, H., Vink, R., et al., 2022. Artificial intelligence for diagnosis and Gleason grading of prostate cancer: the PANDA challenge. *Nature Medicine* 28, 154–163.
- Byra, M., Styczynski, G., Szmigielski, C., Kalinowski, P., Michałowski, L., Paluszkiwicz, R., Ziarkiewicz-Wróblewska, B., Zieniewicz, K., Sobieraj, P., Nowicki, A., 2018. Transfer learning with deep convolutional neural network for liver steatosis assessment in ultrasound images. *International journal of computer assisted radiology and surgery* 13, 1895–1903.
- Byrd, D., Polychroniadou, A., 2020. Differentially private secure multi-party computation for federated learning in financial applications, in: *Proceedings of the First ACM International Conference on AI in Finance*, pp. 1–9.
- Cai, H., Wang, J., Dan, T., Li, J., Fan, Z., Yi, W., Cui, C., Jiang, X., Li, L., 2023. An online mammography database with biopsy confirmed types. *Scientific Data* 10, 123.
- Calabrese, E., Villanueva-Meyer, J.E., Rudie, J.D., Rauschecker, A.M., Baid, U., Bakas, S., Cha, S., Mongan, J.T., Hess, C.P., 2022. The University of California San Francisco preoperative diffuse glioma MRI dataset. *Radiology: Artificial Intelligence* 4, e220058.
- Caldas, S., Duddu, S.M.K., Wu, P., Li, T., Konečný, J., McMahan, H.B., Smith, V., Talwalkar, A., 2019. Leaf: A benchmark for federated settings. [arXiv:1812.01097](https://arxiv.org/abs/1812.01097).
- Campello, V.M., Gkontra, P., Izquierdo, C., Martin-Isla, C., Sojoudi, A., Full, P.M., Maier-Hein, K., Zhang, Y., He, Z., Ma, J., et al., 2021. Multi-centre, multi-vendor and multi-disease cardiac segmentation: the M&Ms challenge. *IEEE Transactions on Medical Imaging* 40, 3543–3554.
- Cao, X., Fang, M., Liu, J., Gong, N.Z., 2022. FLTrust: Byzantine-robust federated learning via trust bootstrapping. [arXiv:2012.13995](https://arxiv.org/abs/2012.13995).
- Carass, A., Roy, S., Jog, A., Cuzzocreo, J.L., Sweeney, E.M., Gherman, A., Button, J., Nguyen, J., Prados, F., Sudre, C.H., Cardoso, M.J., Cawley, N., Ciccarelli, O., Wheeler-Kingshott, C.A.M., Ourselin, S., Catanese, L., Deshpande, H., Maurel, P., Commowick, O., Barillot, C., Tomas-Fernandez, X., Ithme, L.O., 2017. Longitudinal multiple sclerosis lesion segmentation: Resource and challenge. *NeuroImage* 148, 77–102.
- Casella, B., Riviera, W., Aldinucci, M., Menegaz, G., 2023. MERGE: A model for multi-input biomedical federated learning. *Patterns* 4, 1–11.
- Cetinkaya, A.E., Akin, M., Sagiroglu, S., 2021. A communication efficient federated learning approach to multi chest diseases classification, in: *2021 6th International Conference on Computer Science and Engineering (UBMK)*, pp. 429–434.
- Chaddad, A., Wu, Y., Desrosiers, C., 2023. Federated learning for healthcare applications. *IEEE Internet of Things Journal* 11, 7339–7358.
- Chen, D., Tan, V.J., Lu, Z., Wu, E., Hu, J., 2023. OpenFed: A comprehensive and versatile open-source federated learning framework, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 5017–5025.
- Chen, J.J., 2019. Functional MRI of brain physiology in aging and neurodegenerative diseases. *NeuroImage* 187, 209–225.
- Chen, L., Yang, X., Jeon, G., Anisetti, M., Liu, K., 2020. A trusted medical image super-resolution method based on feedback adaptive weighted dense network. *Artificial Intelligence in Medicine* 106, 101857.
- Choi, J.Y., Yoo, T.K., Seo, J.G., Kwak, J., Um, T.T., Rim, T.H., 2017. Multi-categorical deep learning neural network to classify retinal images: A pilot study employing small database. *PLOS One* 12, e0187336.
- Chowdhury, A., Kassem, H., Padoy, N., Umeton, R., Karargyris, A., 2021. A review of medical federated learning: Applications in oncology and cancer research, in: *International MICCAI Brainlesion Workshop*, pp. 3–24.
- Chowdhury, M.E., Rahman, T., Khandakar, A., Mazhar, R., Kadir, M.A., Mahbub, Z.B., Islam, K.R., Khan, M.S., Iqbal, A., Al Emadi, N., et al., 2020. Can AI help in screening viral and COVID-19 pneumonia? *IEEE Access* 8, 132665–132676.
- Codella, N.C., Gutman, D., Celebi, M.E., Helba, B., Marchetti, M.A., Dusza, S.W., Kalloo, A., Liopyris, K., Mishra, N., Kittler, H., et al., 2018. Skin lesion analysis toward melanoma detection: A challenge at the 2017 International Symposium on Biomedical Imaging (ISBI), hosted by the International Skin Imaging Collaboration (ISIC), in: *2018 IEEE 15th International Symposium on Biomedical Imaging (ISBI 2018)*, pp. 168–172.
- Cohen, J.D., Daw, N., Engelhardt, B., Hasson, U., Li, K., Niv, Y., Norman, K.A., Pillow, J., Ramadge, P.J., Turk-Browne, N.B., et al., 2017. Computational approaches to fMRI analysis. *Nature neuroscience* 20, 304–313.
- Cohen, J.P., Morrison, P., Dao, L., Roth, K., Duong, T., Ghassem, M., 2020. COVID-19 image data collection: Prospective predictions are the future. *Machine Learning for Biomedical Imaging* 1, 1–38.
- Combalia, M., Codella, N.C.F., Rotemberg, V., Helba, B., Vilaplana, V., Reiter, O., Carrera, C., Barreiro, A., Halpern, A.C., Puig, S., Malvey, J., 2019. BCN20000: Dermoscopic lesions in the wild. [arXiv:1908.02288](https://arxiv.org/abs/1908.02288).
- Commowick, O., Istace, A., Kain, M., Laurent, B., Leray, F., Simon, M., Pop, S.C., Girard, P., Ameli, R., Ferré, J.C., et al., 2018. Objective evaluation of multiple sclerosis lesion segmentation using a data management and processing infrastructure. *Scientific reports* 8, 13650.
- Cox, S.R., Ritchie, S.J., Tucker-Drob, E.M., Liewald, D.C., Hagenaars, S.P., Davies, G., Wardlaw, J.M., Gale, C.R., Bastin, M.E., Deary, I.J., 2016. Ageing and brain white matter structure in 3,513 UK Biobank participants. *Nature communications* 7, 13629.
- Dalmaz, O., Mirza, M.U., Elmas, G., Özbey, M., Dar, S.U., Ceyani, E., Oguz, K.K., Avestimehr, S., Çukur, T., 2024. One model to unite them all: Personalized federated learning of multi-contrast MRI synthesis. *Medical Image Analysis* 94, 103121.
- Dalmaz, O., Mirza, U., Elmas, G., Özbey, M., Dar, S.U.H., Çukur, T., 2022. A specificity-preserving generative model for federated MRI translation, in: Albarqouni, S., Bakas, S., Bano, S., Cardoso, M.J., Khanal, B., Landman, B., Li, X., Qin, C., Rekić, I., Rieke, N., Roth, H., Sheet, D., Xu, D. (Eds.), *Distributed, Collaborative, and Federated Learning, and Affordable AI and Healthcare for Resource Diverse Global Health*, pp. 79–88.
- Darzidehkalani, E., Ghasemi-Rad, M., van Ooijen, P., 2022. Federated learning in medical imaging: Part ii: methods, challenges, and considerations. *Journal of the American College of Radiology* 19, 975–982.
- Deffieux, T., Demené, C., Tanter, M., 2021. Functional ultrasound imaging: a new imaging modality for neuroscience. *Neuroscience* 474, 110–121.
- Den Dekker, A., Sijbers, J., 2014. Data distributions in magnetic resonance images: A review. *Physica Medica* 30, 725–741.
- Deng, T., Huang, Y., Han, G., Shi, Z., Lin, J., Dou, Q., Liu, Z., Guo,

- X.j., Chen, C.P., Han, C., 2024a. FedDBL: Communication and data efficient federated deep-broad learning for histopathological tissue classification. *IEEE Transactions on Cybernetics* 54, 7851–7864.
- Deng, Z., Yang, Y., Suzuki, K., 2024b. Federated active learning framework for efficient annotation strategy in skin-lesion classification. *Journal of Investigative Dermatology* 145, 303–311.
- Denissen, S., Grothe, M., Vaněčková, M., Uher, T., Laton, J., Kudrna, M., Horáková, D., Kirsch, M., Motýl, J., Vos, M.D., Chén, O.Y., Schependom, J.V., Sima, D.M., Nagels, G., 2023. Transfer learning on structural brain age models to decode cognition in MS: a federated learning approach. *medRxiv* doi:10.1101/2023.04.22.23288741.
- Dercksen, K., Bulten, W., Litjens, G., 2019. Dealing with label scarcity in computational pathology: A use case in prostate cancer classification. *arXiv:1905.06820*.
- Di Martino, A., Yan, C.G., Li, Q., Denio, E., Castellanos, F.X., Alaerts, K., Anderson, J.S., Assaf, M., Bookheimer, S.Y., Dapretto, M., et al., 2014. The autism brain imaging data exchange: towards a large-scale evaluation of the intrinsic brain architecture in autism. *Molecular Psychiatry* 19, 659–667.
- Dong, N., Voiculescu, I., 2021. Federated contrastive learning for decentralized unlabeled medical images, in: *Medical Image Computing and Computer Assisted Intervention—MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part III* 24, pp. 378–387.
- Dou, Q., So, T.Y., Jiang, M., Liu, Q., Vardhanabhuti, V., Kaissis, G., Li, Z., Si, W., Lee, H.H.C., Yu, K., Feng, Z., Dong, L., Burian, E., Jungmann, F., Braren, R.F., Makowski, M.R., Kainz, B., Rueckert, D., Glocker, B., Yu, S.C.H., Heng, P.A., 2021. Federated deep learning for detecting COVID-19 lung abnormalities in CT: a privacy-preserving multinational validation study. *NPJ Digital Medicine* 4.
- Duncan, J.S., Ayache, N., 2000. Medical image analysis: Progress over two decades and the challenges ahead. *IEEE transactions on pattern analysis and machine intelligence* 22, 85–106.
- Dwork, C., Kenthapadi, K., McSherry, F., Mironov, I., Naor, M., 2006. Our data, ourselves: Privacy via distributed noise generation, in: *Advances in Cryptology—EUROCRYPT 2006: 24th Annual International Conference on the Theory and Applications of Cryptographic Techniques, St. Petersburg, Russia, May 28–June 1, 2006. Proceedings* 25, pp. 486–503.
- Ellis, K.A., Bush, A.I., Darby, D., De Fazio, D., Foster, J., Hudson, P., Lautenschlager, N.T., Lenzo, N., Martins, R.N., Maruff, P., et al., 2009. The Australian Imaging, Biomarkers and Lifestyle (AIBL) study of aging: methodology and baseline characteristics of 1112 individuals recruited for a longitudinal study of Alzheimer’s disease. *International Psychogeriatrics* 21, 672–687.
- Elmas, G., Dar, S.U.H., Korkmaz, Y., Ceyani, E., Susam, B., Ozbey, M., Avestimehr, S., Çukur, T., 2023. Federated learning of generative image priors for MRI reconstruction. *IEEE Transactions on Medical Imaging* 42, 1996–2009.
- Elshabrawy, K.M., Alfares, M.M., Salem, M.A.M., 2022. Ensemble federated learning for non-IID COVID-19 detection, in: *2022 5th International Conference on Computing and Informatics (ICCI)*, pp. 57–63.
- Fan, Q., Witzel, T., Nummenmaa, A., Van Dijk, K.R., Van Horn, J.D., Drews, M.K., Somerville, L.H., Sheridan, M.A., Santillana, R.M., Snyder, J., et al., 2016. MGH–USC human connectome project datasets with ultra-high b-value diffusion MRI. *NeuroImage* 124, 1108–1114.
- Feki, I., Ammar, S., Kessentini, Y., Muhammad, K., 2021. Federated learning for COVID-19 screening from chest X-ray images. *Applied Soft Computing* 106, 107330.
- Feng, C.M., Fu, H., Yuan, S., Xu, Y., 2021. Multi-contrast MRI super-resolution via a multi-stage integration network, in: *Medical Image Computing and Computer Assisted Intervention—MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part VI* 24, pp. 140–149.
- Feng, C.M., Yan, Y., Wang, S., Xu, Y., Shao, L., Fu, H., 2023. Specificity-preserving federated learning for MR image reconstruction. *IEEE Transactions on Medical Imaging* 42, 2010–2021.
- Fereidooni, H., Marchal, S., Miettinen, M., Mirhoseini, A., Möllering, H., Nguyen, T.D., Rieger, P., Sadeghi, A.R., Schneider, T., Yalame, H., et al., 2021. SAFELearn: Secure aggregation for private federated learning, in: *2021 IEEE Security and Privacy Workshops (SPW)*, pp. 56–62.
- Fiszer, J., Ciupek, D., Malawski, M., Pieciak, T., 2025. Validation of ten federated learning strategies for multi-contrast image-to-image MRI data synthesis from heterogeneous sources. *bioRxiv* doi:10.1101/2025.02.09.637305.
- Flanders, A.E., Prevedello, L.M., Shih, G., Halabi, S.S., Kalpathy-Cramer, J., Ball, R., Mongan, J.T., Stein, A., Kitamura, F.C., Lungren, M.P., et al., 2020. Construction of a machine learning dataset through collaboration: the RSNA 2019 brain CT hemorrhage challenge. *Radiology: Artificial Intelligence* 2, e190211.
- Florescu, L.M., Streba, C.T., Șerbănescu, M.S., Mămuleanu, M., Florescu, D.N., Teică, R.V., Nica, R.E., Gheonea, I.A., 2022. Federated learning approach with pre-trained deep learning models for COVID-19 detection from unsegmented CT images. *Life* 12, 958.
- Foley, P., Sheller, M.J., Edwards, B., Pati, S., Riviera, W., Sharma, M., Moorthy, P.N., Wang, S.h., Martin, J., Mirhaji, P., et al., 2022. OpenFL: the open federated learning library. *Physics in Medicine & Biology* 67, 214001.
- Frangi, A., Prince, J., Sonka, M., 2023. *Medical Image Analysis*. Academic Press.
- Frangi, A.F., Niessen, W.J., Viergever, M.A., 2001. Three-dimensional modeling for functional analysis of cardiac images, a review. *IEEE transactions on medical imaging* 20, 2–5.
- Fumero, F., Alayón, S., Sanchez, J.L., Sigut, J., Gonzalez-Hernandez, M., 2011. RIM-ONE: An open retinal image database for optic nerve evaluation, in: *2011 24th International Symposium on Computer-based Medical Systems (CBMS)*, pp. 1–6.
- Gafni, T., Shlezinger, N., Cohen, K., Eldar, Y.C., Poor, H.V., 2022. Federated learning: A signal processing perspective. *IEEE Signal Processing Magazine* 39, 14–41.
- Gambhir, S.S., 2002. Molecular imaging of cancer with positron emission tomography. *Nature Reviews Cancer* 2, 683–693.
- Garcia, M.H., Manoel, A., Diaz, D.M., Miresghallah, F., Sim, R., Dimitriadis, D., 2022. FLUTE: A scalable, extensible framework for high-performance federated learning simulations. *arXiv:2203.13789*.
- Gentry, C., 2010. Computing arbitrary functions of encrypted data. *Communications of the ACM* 53, 97–105.
- Gibson, E., Hu, Y., Ghavami, N., Ahmed, H.U., Moore, C., Emberton, M., Huisman, H.J., Barratt, D.C., 2018. Inter-site variability in prostate segmentation accuracy using deep learning, in: *Medical Image Computing and Computer Assisted Intervention—MICCAI 2018: 21st International Conference, Granada, Spain, September 16–20, 2018, Proceedings, Part IV* 11, pp. 506–514.
- Giuseppi, A., Manfredi, S., Menegatti, D., Poli, C., Pietrabissa, A., 2022. Decentralised federated learning for hospital networks with application to COVID-19 detection. *IEEE Access* 10, 92681–92691.
- Goldberger, A.L., Amaral, L.A., Glass, L., Hausdorff, J.M., Ivanov, P.C., Mark, R.G., Mietus, J.E., Moody, G.B., Peng, C.K., Stanley, H.E., 2000. PhysioBank, PhysioToolkit, and PhysioNet: components of a new research resource for complex physiologic signals. *Circulation* 101, e215–e220.
- Google, 2024. *TensorFlow Federated: Machine learning on decentralized data*. URL: <https://www.tensorflow.org/federated>. Accessed: March 10, 2025.
- Graham, S., Chen, H., Gamper, J., Dou, Q., Heng, P.A., Snead, D., Tsang, Y.W., Rajpoot, N., 2019a. MILD-Net: Minimal information loss dilated network for gland instance segmentation in colon histology images. *Medical image analysis* 52, 199–211.
- Graham, S., Vu, Q.D., Raza, S.E.A., Azam, A., Tsang, Y.W., Kwak, J.T., Rajpoot, N., 2019b. Hover-net: Simultaneous segmentation and classification of nuclei in multi-tissue histology images. *Medical image analysis* 58, 101563.
- Grasby, K.L., Jahanshad, N., Painter, J.N., Colodro-Conde, L.,

- Bralten, J., Hibar, D.P., Lind, P.A., Pizzagalli, F., Ching, C.R., McMahon, M.A.B., et al., 2020. The genetic architecture of the human cerebral cortex. *Science* 367, eaay6690.
- Guan, H., Yap, P.T., Bozoki, A., Liu, M., 2024. Federated learning for medical image analysis: A survey. *Pattern Recognition* 151, 110424.
- Gunesli, G.N., Bilal, M., Raza, S.E.A., Rajpoot, N.M., 2021. Fed-DropoutAvg: Generalizable federated learning for histopathology image classification. [arXiv:2111.13230](https://arxiv.org/abs/2111.13230).
- Guo, P., Wang, P., Zhou, J., Jiang, S., Patel, V.M., 2021. Multi-institutional collaborations for improving deep learning-based magnetic resonance image reconstruction using federated learning, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 2423–2432.
- Guo, P., Yang, D., Hatamizadeh, A., Xu, A., Xu, Z., Li, W., Zhao, C., Xu, D., Harmon, S., Turkbey, E., Turkbey, B., Wood, B., Patella, F., Stellato, E., Carrafiello, G., Patel, V.M., Roth, H.R., 2022. Auto-FedRL: Federated hyperparameter optimization for multi-institutional medical image segmentation, in: *Avidan, S., Brostow, G., Cissé, M., Farinella, G.M., Hassner, T. (Eds.), Computer Vision – ECCV 2022*, pp. 437–455.
- Gupta, M., Kumar, M., Gupta, Y., 2024a. A blockchain-empowered federated learning-based framework for data privacy in lung disease detection system. *Computers in Human Behavior* 158, 108302.
- Gupta, S., Bhuiyan, M.R.I., Chowa, S.S., Montaha, S., Rahman, R., Mehedi, S.T., Rahman, Z., 2024b. Enhancing autism spectrum disorder classification with lightweight quantized CNNs and federated learning on ABIDE-1 dataset. *Mathematics* 12, 2886.
- Guzzo, A., Fortino, G., Greco, G., Maggiolini, M., 2023. Data and model aggregation for radiomics applications: Emerging trend and open challenges. *Information Fusion* 100, 101923.
- Harmon, S.A., Sanford, T.H., Xu, S., Turkbey, E.B., Roth, H., Xu, Z., Yang, D., Myronenko, A., Anderson, V., Amalou, A., et al., 2020. Artificial intelligence for the detection of COVID-19 pneumonia on chest CT using multinational datasets. *Nature Communications* 11, 4080.
- He, C., Li, S., So, J., Zeng, X., Zhang, M., Wang, H., Wang, X., Vepakomma, P., Singh, A., Qiu, H., Zhu, X., Wang, J., Shen, L., Zhao, P., Kang, Y., Liu, Y., Raskar, R., Yang, Q., Annavaram, M., Avestimehr, S., 2020. FedML: A research library and benchmark for federated machine learning. [arXiv:2007.13518](https://arxiv.org/abs/2007.13518).
- He, Y., Wang, H.P., Zenk, M., Fritz, M., 2022. CosSGD: Communication-efficient federated learning with a simple cosine-based quantization. [arXiv:2012.08241](https://arxiv.org/abs/2012.08241).
- Heath, M., Bowyer, K., Kopans, D., Kegelmeyer Jr, P., Moore, R., Chang, K., Munishkumar, S., 1998. *Digital Mammography*. Springer. chapter Current status of the digital database for screening mammography. pp. 457–460.
- Heimann, T., Van Ginneken, B., Styner, M.A., Arzhaeva, Y., Aurich, V., Bauer, C., Beck, A., Becker, C., Beichel, R., Bekes, G., et al., 2009. Comparison and evaluation of methods for liver segmentation from CT datasets. *IEEE Transactions on Medical Imaging* 28, 1251–1265.
- Heisler, M., Chan, F., Mammo, Z., Balaratnasingam, C., Prentas, P., Docherty, G., Ju, M., Rajapakse, S., Lee, S., Merkur, A., Kirker, A., Albani, D., Maberley, D., Freund, K.B., Beg, M.F., Loncaric, S., Sarunic, M.V., Navajas, E.V., 2019. Deep learning vessel segmentation and quantification of the foveal avascular zone using commercial and prototype OCT-A platforms. [arXiv:1909.11289](https://arxiv.org/abs/1909.11289).
- Heisler, M., Karst, S., Lo, J., Mammo, Z., Yu, T., Warner, S., Maberley, D., Beg, M.F., Navajas, E.V., Sarunic, M.V., 2020. Ensemble deep learning for diabetic retinopathy detection using optical coherence tomography angiography. *Translational Vision Science & Technology* 9, 20–20.
- Heller, N., Sathianathan, N., Kalapara, A., Walczak, E., Moore, K., Kaluzniak, H., Rosenberg, J., Blake, P., Rengel, Z., Oestreich, M., Dean, J., Tradewell, M., Shah, A., Tejpal, R., Edgerton, Z., Peterson, M., Raza, S., Regmi, S., Papanikolopoulos, N., Weight, C., 2020. The KiTS19 challenge data: 300 kidney tumor cases with clinical context, CT semantic segmentations, and surgical outcomes. [arXiv:1904.00445](https://arxiv.org/abs/1904.00445).
- Holle, R., Happich, M., Löwel, H., Wichmann, H.E., null for the MONICA/KORA Study Group, et al., 2005. KORA—a research platform for population based health research. *Das Gesundheitswesen* 67, 19–25.
- Hossain, M.M., Islam, M.R., Ahamed, M.F., Ahsan, M., Haider, J., 2024. A collaborative federated learning framework for lung and colon cancer classifications. *Technologies* 12, 151.
- Hosseini, S.M., Sikaroudi, M., Babaie, M., Tizhoosh, H.R., 2023. Proportionally fair hospital collaborations in federated learning of histopathology images. *IEEE Transactions on Medical Imaging* 42, 1982–1995.
- Huang, Y., Bert, C., Fischer, S., Schmidt, M., Dörfler, A., Maier, A., Fietkau, R., Putz, F., 2022. Continual learning for peer-to-peer federated learning: A study on automated brain metastasis identification. [arXiv:2204.13591](https://arxiv.org/abs/2204.13591).
- Huang, Y.L., Yang, H.C., Lee, C.C., 2021. Federated learning via conditional mutual learning for Alzheimer’s disease classification on T1w MRI, in: *2021 43rd Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*, pp. 2427–2432.
- Irvin, J., Rajpurkar, P., Ko, M., Yu, Y., Ciurea-Ilcus, S., Chute, C., Marklund, H., Haghgoo, B., Ball, R., Shpanskaya, K., et al., 2019. Chexpert: A large chest radiograph dataset with uncertainty labels and expert comparison, in: *Proceedings of the AAAI Conference on Artificial Intelligence*, pp. 590–597.
- Isensee, F., Jaeger, P.F., Kohl, S.A., Petersen, J., Maier-Hein, K.H., 2021. nnU-Net: a self-configuring method for deep learning-based biomedical image segmentation. *Nature methods* 18, 203–211.
- Islam, M., Reza, M.T., Kaosar, M., Parvez, M.Z., 2022. Effectiveness of federated learning and CNN ensemble architectures for identifying brain tumors using MRI images. *Neural Processing Letters* 55, 3779–3809.
- Jack Jr, C.R., Bernstein, M.A., Fox, N.C., Thompson, P., Alexander, G., Harvey, D., Borowski, B., Britson, P.J., L. Whitwell, J., Ward, C., et al., 2008. The Alzheimer’s disease neuroimaging initiative (ADNI): MRI methods. *Journal of Magnetic Resonance Imaging* 27, 685–691.
- Jacobs, P.P., Ehrengut, C., Bucher, A.M., Penzkofer, T., Lukas, M., Kleesiek, J., Denecke, T., 2023. Challenges in implementing the local node infrastructure for a national federated machine learning network in radiology. *Healthcare* 11, 2377.
- Jaeger, S., Candemir, S., Antani, S., Wang, Y.X.J., Lu, P.X., Thoma, G., 2014. Two public chest X-ray datasets for computer-aided screening of pulmonary diseases. *Quantitative Imaging in Medicine and Surgery* 4, 475.
- Jha, D., Smedsrud, P.H., Riegler, M.A., Halvorsen, P., De Lange, T., Johansen, D., Johansen, H.D., 2020. Kvasir-SEG: A segmented polyp dataset, in: *MultiMedia modeling: 26th international conference, MMM 2020, Daejeon, South Korea, January 5–8, 2020, proceedings, part II* 26, pp. 451–462.
- Ji, S., Tan, Y., Saravirta, T., Yang, Z., Vasankari, L., Pan, S., Long, G., Walid, A., 2023. Emerging trends in federated learning: From model fusion to federated X learning. [arXiv:2102.12920](https://arxiv.org/abs/2102.12920).
- Jiang, M., Wang, Z., Dou, Q., 2022. HarmoFL: Harmonizing local and global drifts in federated learning on heterogeneous medical images, in: *Proceedings of the AAAI Conference on Artificial Intelligence*, pp. 1087–1095.
- Jiang, M., Yang, H., Cheng, C., Dou, Q., 2023. IOP-FL: Inside-outside personalization for federated medical image segmentation. *IEEE Transactions on Medical Imaging* 42, 2106–2117.
- Jiang, S., Eberhart, C.G., Lim, M., Heo, H.Y., Zhang, Y., Blair, L., Wen, Z., Holdhoff, M., Lin, D., Huang, P., et al., 2019. Identifying recurrent malignant glioma after treatment using amide proton transfer-weighted MR imaging: a validation study with image-guided stereotactic biopsy. *Clinical Cancer Research* 25, 552–561.
- Jiménez-Sánchez, A., Tardy, M., Ballester, M.A.G., Mateus, D., Piella, G., 2023. Memory-aware curriculum federated learning for breast cancer classification. *Computer Methods and Programs in Biomedicine* 229, 107318.

- Jin, Y., Liu, Y., Chen, K., Yang, Q., 2023. Federated learning without full labels: A survey. [arXiv:2303.14453](https://arxiv.org/abs/2303.14453).
- Johnson, A.E., Pollard, T.J., Berkowitz, S.J., Greenbaum, N.R., Lungren, M.P., Deng, C.y., Mark, R.G., Horng, S., 2019. MIMIC-CXR, a de-identified publicly available database of chest radiographs with free-text reports. *Scientific Data* 6, 317.
- Jordan, P., Adamson, P.M., Bhattbhatt, V., Beriwal, S., Shen, S., Radermecker, O., Bose, S., Strain, L.S., Offe, M., Fraley, D., et al., 2022. Pediatric chest-abdomen-pelvis and abdomen-pelvis CT images with expert organ contours. *Medical Physics* 49, 3523–3528.
- Kaissis, G.A., Makowski, M.R., Rückert, D., Braren, R.F., 2020. Secure, privacy-preserving and federated machine learning in medical imaging. *Nature Machine Intelligence* 2, 305–311.
- Kalapaaking, A.P., Khalil, I., Yi, X., 2023. Blockchain-based federated learning with SMPC model verification against poisoning attack for healthcare systems. *IEEE Transactions on Emerging Topics in Computing* 12, 269–280.
- Kalra, S., Wen, J., Cresswell, J.C., Volkovs, M., Tizhoosh, H.R., 2023. Decentralized federated learning through proxy model sharing. *Nature Communications* 14, 2899.
- Kanagavelu, R., Li, Z., Samsudin, J., Yang, Y., Yang, F., Goh, R.S.M., Cheah, M., Wiwatphonhthana, P., Akkarajitsakul, K., Wang, S., 2020. Two-phase multi-party computation enabled privacy-preserving federated learning, in: 2020 20th IEEE/ACM International Symposium on Cluster, Cloud and Internet Computing (CCGRID), pp. 410–419.
- Kandati, D.R., Gadekallu, T.R., 2023a. A comprehensive survey on federated learning techniques for healthcare informatics. *Computational Intelligence and Neuroscience* 2023, 8393990.
- Kandati, D.R., Gadekallu, T.R., 2023b. Federated learning approach for early detection of chest lesion caused by COVID-19 infection using particle swarm optimization. *Electronics* 12, 710.
- Kanhere, A.U., Kulkarni, P., Yi, P.H., Parekh, V.S., 2023. SegViz: A federated-learning based framework for multi-organ segmentation on heterogeneous data sets with partial annotations. [arXiv:2301.07074](https://arxiv.org/abs/2301.07074).
- Kather, J.N., Krisam, J., Charoentong, P., Luedde, T., Herpel, E., Weis, C.A., Gaiser, T., Marx, A., Valous, N.A., Ferber, D., et al., 2019. Predicting survival from colorectal cancer histology slides using deep learning: A retrospective multicenter study. *PLOS Medicine* 16, e1002730.
- Kaushal, V., Hada, N.S., Sharma, S., 2023. Eye disease detection through image classification using federated learning. *SN Computer Science* 4, 836.
- Kavur, A.E., Gezer, N.S., Barış, M., Aslan, S., Conze, P.H., Groza, V., Pham, D.D., Chatterjee, S., Ernst, P., Özkan, S., et al., 2021. CHAOS challenge-combined (CT-MR) healthy abdominal organ segmentation. *Medical Image Analysis* 69, 101950.
- Kawahara, J., Daneshvar, S., Argenziano, G., Hamarneh, G., 2018. Seven-point checklist and skin lesion classification using multitask multimodal neural nets. *IEEE Journal of Biomedical and Health Informatics* 23, 538–546.
- Ke, J., Shen, Y., Lu, Y., 2021. Style normalization in histology with federated learning, in: 2021 IEEE 18th International Symposium on Biomedical Imaging (ISBI), pp. 953–956.
- Khan, M.I., Azeem, M.A., Alhoniemi, E., Kontio, E., Khan, S.A., Jafaritadi, M., 2023. Regularized weight aggregation in networked federated learning for glioblastoma segmentation, in: Bakas, S., Crimi, A., Baid, U., Malec, S., Pytlarz, M., Baheti, B., Zenk, M., Dorent, R. (Eds.), *Brainlesion: Glioma, Multiple Sclerosis, Stroke and Traumatic Brain Injuries*, pp. 121–132.
- Khan, M.I., Jafaritadi, M., Alhoniemi, E., Kontio, E., Khan, S.A., 2022. Adaptive weight aggregation in federated learning for brain tumor segmentation, in: Crimi, A., Bakas, S. (Eds.), *Brainlesion: Glioma, Multiple Sclerosis, Stroke and Traumatic Brain Injuries*, pp. 455–469.
- Khan, S., Nosheen, F., Naqvi, S.S.A., Jamil, H., Faseeh, M., Khan, M.A., Kim, D.H., 2024. Bilevel hyperparameter optimization and neural architecture search for enhanced breast cancer detection in smart hospitals interconnected with decentralized federated learning environment. *IEEE Access* 12, 63618–63628.
- Kim, S., Park, H., Kang, M., Jin, K.H., Adeli, E., Pohl, K.M., Park, S.H., 2024. Federated learning with knowledge distillation for multi-organ segmentation with partially labeled datasets. *Medical Image Analysis* 95, 103156.
- Knoll, F., Zbontar, J., Sriram, A., Muckley, M.J., Bruno, M., Defazio, A., Parente, M., Geras, K.J., Katsnelson, J., Chandarana, H., et al., 2020. fastMRI: A publicly available raw k-space and DICOM dataset of knee images for accelerated MR image reconstruction using machine learning. *Radiology: Artificial Intelligence* 2, e190007.
- Kong, F., Wang, X., Xiang, J., Yang, S., Wang, X., Yue, M., Zhang, J., Zhao, J., Han, X., Dong, Y., et al., 2024. Federated attention consistent learning models for prostate cancer diagnosis and Gleason grading. *Computational and Structural Biotechnology Journal* 23, 1439–1449.
- Koutsoubis, N., Yilmaz, Y., Ramachandran, R.P., Schabath, M., Rasool, G., 2024. Privacy preserving federated learning in medical imaging with uncertainty estimation. [arXiv:2406.12815](https://arxiv.org/abs/2406.12815).
- Koziarski, M., Cyganek, B., Niedziela, P., Olborski, B., Antosz, Z., Żydak, M., Kwolek, B., Wasowicz, P., Bułko, A., Swadźba, J., et al., 2024. DiagSet: a dataset for prostate cancer histopathological image classification. *Scientific Reports* 14, 6780.
- Kulkarni, P., Kanhere, A., Yi, P.H., Parekh, V.S., 2023. Optimizing federated learning for medical image classification on distributed non-IID datasets with partial labels. [arXiv:2303.06180](https://arxiv.org/abs/2303.06180).
- Kumar, N., Verma, R., Sharma, S., Bhargava, S., Vahadane, A., Sethi, A., 2017. A dataset and a technique for generalized nuclear segmentation for computational pathology. *IEEE transactions on medical imaging* 36, 1550–1560.
- Kumar, R., Bernard, C.M., Ullah, A., Khan, R.U., Kumar, J., Kulevome, D.K., Yunbo, R., Zeng, S., 2024. Privacy-preserving blockchain-based federated learning for brain tumor segmentation. *Computers in Biology and Medicine* 177, 108646.
- Kumar, S., Lakshminarayanan, A., Chang, K., Guretno, F., Mien, I.H., Kalpathy-Cramer, J., Krishnaswamy, P., Singh, P., 2022. Towards more efficient data valuation in healthcare federated learning using ensembling, in: Albarqouni, S., Bakas, S., Bano, S., Cardoso, M.J., Khanal, B., Landman, B., Li, X., Qin, C., Rekić, I., Rieke, N., Roth, H., Sheet, D., Xu, D. (Eds.), *Distributed, Collaborative, and Federated Learning, and Affordable AI and Healthcare for Resource Diverse Global Health*, pp. 119–129.
- Lai, H., Luo, Y., Li, B., Lu, J., Yuan, J., 2024. Bilateral proxy federated domain generalization for privacy-preserving medical image diagnosis. *IEEE Journal of Biomedical and Health Informatics*.
- LaMontagne, P.J., Keefe, S.J., Lauren, W., Xiong, C., Grant, E.A., Moulder, K.L., Morris, J.C., Benzinger, T.L.S., Marcus, D.S., 2018. OASIS-3: Longitudinal neuroimaging, clinical, and cognitive dataset for normal aging and Alzheimer’s disease. *Alzheimer’s & Dementia* 14.
- Landman, B., Ribbens, A., Lucas, B., Christos, C., Avants, B., Ledig, C., Ma, D., Rueckert, D., Warfield, S., Vandermeulen, D., et al., 2012. MICCAI 2012 Workshop on Multi-Atlas Labeling. CreateSpace Independent Publishing Platform.
- Landman, B., Xu, Z., Iglesias, J.E., Styner, M., Langerak, T.R., Klein, A., 2015. Multi-atlas labeling beyond the cranial vault - Workshop and Challenge. URL: <https://www.synapse.org/Synapse:syn3193805/wiki/89480>. Accessed: March 10, 2025.
- Lee, H., Chai, Y.J., Joo, H., Lee, K., Hwang, J.Y., Kim, S.M., Kim, K., Nam, I.C., Choi, J.Y., Yu, H.W., et al., 2021. Federated learning for thyroid ultrasound image analysis to protect personal information: Validation study in a real health care environment. *JMIR Medical Informatics* 9, e25869.
- Lee, R.S., Gimenez, F., Hoogi, A., Miyake, K.K., Gorovoy, M., Rubin, D.L., 2017. A curated mammography data set for use in computer-aided detection and diagnosis research. *Scientific Data* 4, 1–9.
- Lemaître, G., Martí, R., Freixenet, J., Vilanova, J.C., Walker, P.M., Meriaudeau, F., 2015. Computer-aided detection and diagnosis for prostate cancer based on mono and multi-parametric MRI: a review. *Computers in Biology and Medicine* 60, 8–31.
- Lerch, J.P., Van Der Kouwe, A.J., Raznahan, A., Paus, T., Johansen-

- Berg, H., Miller, K.L., Smith, S.M., Fischl, B., Sotiropoulos, S.N., 2017. Studying neuroanatomy using MRI. *Nature neuroscience* 20, 314–326.
- Lesjak, Ž., Galimzianova, A., Koren, A., Lukin, M., Pernuš, F., Likar, B., Špiclin, Ž., 2017. A novel public MR image dataset of multiple sclerosis patients with lesion segmentations based on multi-rater consensus. *Neuroinformatics* 16, 51–63.
- Levac, B.R., Arvinte, M., Tamir, J.I., 2023. Federated end-to-end unrolled models for magnetic resonance image reconstruction. *Bio-engineering* 10, 364.
- Li, B., Feridooni, T., Cuen-Ojeda, C., Kishibe, T., de Mestral, C., Mamdani, M., Al-Omran, M., 2022a. Machine learning in vascular surgery: a systematic review and critical appraisal. *NPJ Digital Medicine* 5, 7.
- Li, D., Han, D., Weng, T.H., Zheng, Z., Li, H., Liu, H., Castiglione, A., Li, K.C., 2022b. Blockchain for federated learning toward secure distributed machine learning systems: a systemic survey. *Soft Computing* 26, 4423–4440.
- Li, L., Xie, N., Yuan, S., 2022c. A federated learning framework for breast cancer histopathological image classification. *Electronics* 11, 3767.
- Li, Q., Thapa, C., Ong, L., Zheng, Y., Ma, H., Camtepe, S.A., Fu, A., Gao, Y., 2023a. Vertical federated learning: Taxonomies, threats, and prospects. [arXiv:2302.01550](https://arxiv.org/abs/2302.01550).
- Li, Q., Wu, Z., Cai, Y., Yung, C.M., Fu, T., He, B., et al., 2023b. FedTree: A federated learning system for trees. *Proceedings of Machine Learning and Systems* 5.
- Li, T., Sahu, A.K., Zaheer, M., Sanjabi, M., Talwalkar, A., Smith, V., 2020a. Federated optimization in heterogeneous networks. *Proceedings of Machine learning and systems* 2, 429–450.
- Li, W., Milletari, F., Xu, D., Rieke, N., Hancox, J., Zhu, W., Baust, M., Cheng, Y., Ourselin, S., Cardoso, M.J., Feng, A., 2019. Privacy-preserving federated brain tumour segmentation, in: Suk, H.I., Liu, M., Yan, P., Lian, C. (Eds.), *Machine Learning in Medical Imaging*, pp. 133–141.
- Li, X., Gu, Y., Dvornek, N., Staib, L.H., Ventola, P., Duncan, J.S., 2020b. Multi-site fMRI analysis using privacy-preserving federated learning and domain adaptation: ABIDE results. *Medical Image Analysis* 65, 101765.
- Li, X., Jiang, M., Zhang, X., Kamp, M., Dou, Q., 2021. FedBN: Federated learning on non-IID features via local batch normalization. [arXiv:2102.07623](https://arxiv.org/abs/2102.07623).
- Li, Y., Chen, C., Liu, N., Huang, H., Zheng, Z., Yan, Q., 2020c. A blockchain-based decentralized federated learning framework with committee consensus. *IEEE Network* 35, 234–241.
- Li, Z., He, S., Yang, Z., Ryu, M., Kim, K., Madduri, R., 2024. Advances in APPFL: A comprehensive and extensible federated learning framework. [arXiv:2409.11585](https://arxiv.org/abs/2409.11585).
- Li, Z., Sharma, V., Mohanty, S.P., 2020d. Preserving data privacy via federated learning: Challenges and solutions. *IEEE Consumer Electronics Magazine* 9, 8–16.
- Liang, Z., Zhao, K., Liang, G., Wu, Y., Guo, J., 2024. ACFL: Communication-efficient adversarial contrastive federated learning for medical image segmentation. *Knowledge-Based Systems* 304, 112516.
- Lim, J.I., Rachitskaya, A.V., Hallak, J.A., Gholami, S., Alam, M.N., 2024. Artificial intelligence for retinal diseases. *Asia-Pacific Journal of Ophthalmology* 13, 100096.
- Lin, Y., Wang, H., Li, W., Shen, J., 2023. Federated learning with hyper-network—a case study on whole slide image analysis. *Scientific Reports* 13, 1724.
- Linardos, A., Kushibar, K., Walsh, S., Gkontra, P., Lekadir, K., 2022. Federated learning for multi-center imaging diagnostics: a simulation study in cardiovascular disease. *Scientific Reports* 12, 3551.
- Litjens, G., Debats, O., Barentsz, J., Karssemeijer, N., Huisman, H., 2014a. Computer-aided detection of prostate cancer in MRI. *IEEE Transactions on Medical Imaging* 33, 1083–1092.
- Litjens, G., Kooi, T., Bejnordi, B.E., Setio, A.A.A., Ciompi, F., Ghafoorian, M., Van Der Laak, J.A., Van Ginneken, B., Sánchez, C.I., 2017. A survey on deep learning in medical image analysis. *Medical image analysis* 42, 60–88.
- Litjens, G., Toth, R., Van De Ven, W., Hoeks, C., Kerkstra, S., Van Ginneken, B., Vincent, G., Guillard, G., Birbeck, N., Zhang, J., et al., 2014b. Evaluation of prostate segmentation algorithms for MRI: the PROMISE12 challenge. *Medical Image Analysis* 18, 359–373.
- Littlejohns, T.J., Holliday, J., Gibson, L.M., Garratt, S., Oesingmann, N., Alfaro-Almagro, F., Bell, J.D., Boultonwood, C., Collins, R., Conroy, M.C., et al., 2020. The UK Biobank imaging enhancement of 100,000 participants: rationale, data collection, management and future directions. *Nature communications* 11, 2624.
- Liu, D., Cabezas, M., Wang, D., Tang, Z., Bai, L., Zhan, G., Luo, Y., Kyle, K., Ly, L., Yu, J., Shieh, C.C., Nguyen, A., Kandasamy Karupiah, E., Sullivan, R., Calamante, F., Barnett, M., Ouyang, W., Cai, W., Wang, C., 2023a. Multiple sclerosis lesion segmentation: revisiting weighting mechanisms for federated learning. *Frontiers in Neuroscience* 17, 1167612.
- Liu, F., Jiang, A., Chen, L., 2024a. A multi-scale channel attention network with federated learning for magnetic resonance image super-resolution. *Multimedia Systems* 30, 214.
- Liu, Q., Chen, C., Qin, J., Dou, Q., Heng, P.A., 2021a. FedDG: Federated domain generalization on medical image segmentation via episodic learning in continuous frequency space, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 1013–1023.
- Liu, Q., Dou, Q., Heng, P.A., 2020a. Shape-aware meta-learning for generalizing prostate mri segmentation to unseen domains, in: *Medical Image Computing and Computer Assisted Intervention—MICCAI 2020: 23rd International Conference, Lima, Peru, October 4–8, 2020, Proceedings, Part II* 23, pp. 475–485.
- Liu, Q., Dou, Q., Yu, L., Heng, P.A., 2020b. MS-Net: multi-site network for improving prostate segmentation with heterogeneous MRI data. *IEEE Transactions on Medical Imaging* 39, 2713–2724.
- Liu, W., Mo, J., Zhong, F., 2023b. Class imbalanced medical image classification based on semi-supervised federated learning. *Applied Sciences* 13, 2109.
- Liu, Y., Fan, T., Chen, T., Xu, Q., Yang, Q., 2021b. FATE: An industrial grade platform for collaborative learning with data protection. *Journal of Machine Learning Research* 22, 1–6.
- Liu, Y., Kang, Y., Zou, T., Pu, Y., He, Y., Ye, X., Ouyang, Y., Zhang, Y.Q., Yang, Q., 2024b. Vertical federated learning: Concepts, advances, and challenges. *IEEE Transactions on Knowledge and Data Engineering* 36, 3615–3634.
- Liu, Y., Peng, J., Kang, J., Ilyasu, A.M., Niyato, D., Abd El-Latif, A.A., 2020c. A secure federated learning framework for 5G networks. *IEEE Wireless Communications* 27, 24–31.
- Lo, J., Timothy, T.Y., Ma, D., Zang, P., Owen, J.P., Zhang, Q., Wang, R.K., Beg, M.F., Lee, A.Y., Jia, Y., et al., 2021. Federated learning for microvasculature segmentation and diabetic retinopathy classification of OCT data. *Ophthalmology Science* 1, 100069.
- Lu, C., Hanif, A., Singh, P., Chang, K., Coyner, A.S., Brown, J.M., Ostmo, S., Chan, R.V.P., Rubin, D., Chiang, M.F., et al., 2022a. Federated learning for multicenter collaboration in ophthalmology: improving classification performance in retinopathy of prematurity. *Ophthalmology Retina* 6, 657–663.
- Lu, C., Kalpathy-Cramer, J., 2022. Distribution-free federated learning with conformal predictions. [arXiv:2110.07661](https://arxiv.org/abs/2110.07661).
- Lu, M.Y., Chen, R.J., Kong, D., Lipkova, J., Singh, R., Williamson, D.F., Chen, T.Y., Mahmood, F., 2022b. Federated learning for computational pathology on gigapixel whole slide images. *Medical Image Analysis* 76, 102298.
- Luo, J., Wu, S., 2022. FedSLD: Federated learning with shared label distribution for medical image classification, in: *2022 IEEE 19th International Symposium on Biomedical Imaging (ISBI)*, pp. 1–5.
- Mächler, L., Ezhov, I., Kofler, F., Shit, S., Paetzold, J.C., Loehr, T., Zimmer, C., Wiestler, B., Menze, B.H., 2022. FedCostWAVg: A new averaging for better federated learning, in: Crimi, A., Bakas, S. (Eds.), *Brainlesion: Glioma, Multiple Sclerosis, Stroke and Traumatic Brain Injuries*, pp. 383–391.
- Mächler, L., Ezhov, I., Shit, S., Paetzold, J.C., 2023. FedPIDAvg: A PID controller inspired aggregation method for federated learning,

- in: Bakas, S., Crimi, A., Baid, U., Malec, S., Pytlarz, M., Baheti, B., Zenk, M., Dorent, R. (Eds.), *Brainlesion: Glioma, Multiple Sclerosis, Stroke and Traumatic Brain Injuries*, pp. 209–217.
- Maghsoudi, O.H., Gastouniotti, A., Scott, C., Pantalone, L., Wu, F.F., Cohen, E.A., Winham, S., Conant, E.F., Vachon, C., Kontos, D., 2021. Deep-LIBRA: An artificial-intelligence method for robust quantification of breast density with independent validation in breast cancer risk assessment. *Medical Image Analysis* 73, 102138.
- Maguolo, G., Nanni, L., 2021. A critic evaluation of methods for COVID-19 automatic detection from X-ray images. *Information Fusion* 76, 1–7.
- Mahbod, A., Schaefer, G., Bancher, B., Löw, C., Dorffner, G., Ecker, R., Ellinger, I., 2021. Cryonuseg: A dataset for nuclei instance segmentation of cryosectioned h&e-stained histological images. *Computers in biology and medicine* 132, 104349.
- Makkar, A., Santosh, K., 2023. SecureFed: federated learning empowered medical imaging technique to analyze lung abnormalities in chest X-rays. *International Journal of Machine Learning and Cybernetics* 14, 2659–2670.
- Malekzadeh, M., Hasircioglu, B., Mital, N., Katarya, K., Ozfatura, M.E., Gündüz, D., 2021. Dopamine: Differentially private federated learning on medical data. [arXiv:2101.11693](https://arxiv.org/abs/2101.11693).
- Marcus, D.S., Wang, T.H., Parker, J., Csernansky, J.G., Morris, J.C., Buckner, R.L., 2007. Open Access Series of Imaging Studies (OASIS): cross-sectional MRI data in young, middle aged, nondemented, and demented older adults. *Journal of Cognitive Neuroscience* 19, 1498–1507.
- McCollough, C., 2016. TU-FG-207A-04: overview of the low dose CT grand challenge. *Medical Physics* 43, 3759–3760.
- McMahan, B., Moore, E., Ramage, D., Hampson, S., y Arcas, B.A., 2017. Communication-efficient learning of deep networks from decentralized data, in: Singh, A., Zhu, J. (Eds.), *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics*, pp. 1273–1282.
- Mendonça, T., Ferreira, P.M., Marques, J.S., Marcal, A.R., Rozeira, J., 2013. PH 2-A dermoscopic image database for research and benchmarking, in: 2013 35th annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC), pp. 5437–5440.
- Menze, B.H., Jakab, A., Bauer, S., Kalpathy-Cramer, J., Farahani, K., Kirby, J., Burren, Y., Porz, N., Slotboom, J., Wiest, R., et al., 2015. The multimodal brain tumor image segmentation benchmark (BRATS). *IEEE Transactions on Medical Imaging* 34, 1993–2024.
- Miller, K.L., Alfaro-Almagro, F., Bangerter, N.K., Thomas, D.L., Yacoub, E., Xu, J., Bartsch, A.J., Jbabdi, S., Sotiropoulos, S.N., Andersson, J.L., et al., 2016. Multimodal population brain imaging in the UK Biobank prospective epidemiological study. *Nature Neuroscience* 19, 1523–1536.
- Misonne, T., Jodogne, S., 2022. Federated learning for heart segmentation, in: 2022 IEEE 14th Image, Video, and Multidimensional Signal Processing Workshop (IVMSP), pp. 1–5.
- Mitrovska, A., Safari, P., Ritter, K., Shariati, B., Fischer, J.K., 2024. Secure federated learning for alzheimer’s disease detection. *Frontiers in Aging Neuroscience* 16, 1324032.
- Mondal, M.R.H., Bharati, S., Podder, P., Kamruzzaman, J., 2023. Deep learning and federated learning for screening COVID-19: A Review. *BioMedInformatics* 3, 691–713.
- Moreira, I.C., Amaral, I., Domingues, I., Cardoso, A., Cardoso, M.J., Cardoso, J.S., 2012. INbreast: toward a full-field digital mammographic database. *Academic Radiology* 19, 236–248.
- Morozov, S.P., Andreychenko, A.E., Pavlov, N.A., Vladzimirskyy, A.V., Ledikhova, N.V., Gombolevskiy, V.A., Blokhin, I.A., Gelezhe, P.B., Gonchar, A.V., Chernina, V.Y., 2020. MosMed-Data: Chest CT scans with COVID-19 related findings dataset. [arXiv:2005.06465](https://arxiv.org/abs/2005.06465).
- Mothukuri, V., Parizi, R.M., Pouriyeh, S., Huang, Y., Dehghan-tanha, A., Srivastava, G., 2021. A survey on security and privacy of federated learning. *Future Generation Computer Systems* 115, 619–640.
- Mott, L.S., Park, J., Murray, C.P., Gangell, C.L., de Klerk, N.H., Robinson, P.J., Robertson, C.F., Ranganathan, S.C., Sly, P.D., Stick, S.M., et al., 2012. Progression of early structural lung disease in young children with cystic fibrosis assessed using CT. *Thorax* 67, 509–516.
- Mushtaq, E., Bakman, Y.F., Ding, J., Avestimehr, S., 2023. Federated alternate training (FAT): Leveraging unannotated data silos in federated segmentation for medical imaging. [arXiv:2304.09327](https://arxiv.org/abs/2304.09327).
- Muthukrishnan, R., Heyler, A., Katti, K., Pati, S., Mankowski, W., Alahari, A., Sanborn, M., Conant, E.F., Scott, C., Winham, S., Vachon, C., Chaudhari, P., Kontos, D., Bakas, S., 2022. MammoDL: Mammographic breast density estimation using federated learning. [arXiv:2206.05575](https://arxiv.org/abs/2206.05575).
- Myrzashova, R., Alsamhi, S.H., Hawbani, A., Curry, E., Guizani, M., Wei, X., 2025. Safeguarding patient data-sharing: Blockchain-enabled federated learning in medical diagnostics. *IEEE Transactions on Sustainable Computing* 10, 176–189.
- Naumova, K., Devos, A., Karimireddy, S.P., Jaggi, M., Hartley, M.A., 2024. MyThisYourThat for interpretable identification of systematic bias in federated learning for biomedical images. *npj Digital Medicine* 7, 238.
- Naylor, P., Laé, M., Reyal, F., Walter, T., 2018. Segmentation of nuclei in histopathology images by deep regression of the distance map. *IEEE transactions on medical imaging* 38, 448–459.
- Naz, S., Phan, K.T., Chen, Y.P.P., 2022. A comprehensive review of federated learning for COVID-19 detection. *International Journal of Intelligent Systems* 37, 2371–2392.
- Nazir, S., Kaleem, M., 2023. Federated learning for medical image analysis with deep neural networks. *Diagnostics* 13, 1532.
- Nelson, G.S., 2015. Practical implications of sharing data: a primer on data privacy, anonymization, and de-identification, in: *SAS Global Forum Proceedings*, pp. 1–23.
- Ng, D., Lan, X., Yao, M.M.S., Chan, W.P., Feng, M., 2021. Federated learning: a collaborative effort to achieve better medical imaging models for individual sites that have small labelled datasets. *Quantitative Imaging in Medicine and Surgery* 11, 852.
- Nguyen, D.C., Ding, M., Pathirana, P.N., Seneviratne, A., Zomaya, A.Y., 2022a. Federated learning for COVID-19 detection with generative adversarial networks in edge cloud computing. *IEEE Internet of Things Journal* 9, 10257–10271.
- Nguyen, D.C., Pham, Q.V., Pathirana, P.N., Ding, M., Seneviratne, A., Lin, Z., Dobre, O., Hwang, W.J., 2022b. Federated learning for smart healthcare: A survey. *ACM Computing Surveys (Csur)* 55, 1–37.
- Nguyen, H.Q., Lam, K., Le, L.T., Pham, H.H., Tran, D.Q., Nguyen, D.B., Le, D.D., Pham, C.M., Tong, H.T., Dinh, D.H., et al., 2022c. VinDr-CXR: An open dataset of chest X-rays with radiologist’s annotations. *Scientific Data* 9, 429.
- Nguyen, H.T., Nguyen, H.Q., Pham, H.H., Lam, K., Le, L.T., Dao, M., Vu, V., 2023. VinDr-Mammo: A large-scale benchmark dataset for computer-aided diagnosis in full-field digital mammography. *Scientific Data* 10, 277.
- Nguyen, T.X., Ran, A.R., Hu, X., Yang, D., Jiang, M., Dou, Q., Cheung, C.Y., 2022d. Federated learning in ocular imaging: current progress and future direction. *Diagnostics* 12, 2835.
- Ning, W., Lei, S., Yang, J., Cao, Y., Jiang, P., Yang, Q., Zhang, J., Wang, X., Chen, F., Geng, Z., et al., 2020. Open resource of clinical data from patients with pneumonia for the prediction of COVID-19 outcomes via deep learning. *Nature biomedical engineering* 4, 1197–1207.
- Noman, A.A., Rahaman, M., Pranto, T.H., Rahman, R.M., 2023. Blockchain for medical collaboration: A federated learning-based approach for multi-class respiratory disease classification. *Healthcare Analytics* 3, 100135.
- Novikov, D.S., Fieremans, E., Jespersen, S.N., Kiselev, V.G., 2019. Quantifying brain microstructure with diffusion MRI: Theory and parameter estimation. *NMR in Biomedicine* 32, e3998.
- Ocaña-Tienda, B., Pérez-Beteta, J., Villanueva-García, J.D., Romero-Rosales, J.A., Molina-García, D., Suter, Y., Asenjo, B., Albillo, D., Ortiz de Mendivil, A., Pérez-Romasanta, L.A., et al.,

2023. A comprehensive dataset of annotated brain metastasis MR images with clinical and radiomic data. *Scientific data* 10, 208.

Ofit, D., Schmidt, M.A., Weissmann, T., Roesch, J., Mengling, V., Masitho, S., Bert, C., Lettmaier, S., Frey, B., Distel, L.V., Fietkau, R., Putz, F., 2021. Volumetric regression in brain metastases after stereotactic radiotherapy: Time course, predictors, and significance. *Frontiers in Oncology* 10, 590980.

Olatunji, I.E., Rauch, J., Katzensteiner, M., Khosla, M., 2024. A review of anonymization for healthcare data. *Big Data* 12, 538–555.

Onsu, M.A., Kantarci, B., Boukerche, A., 2023. How to cope with malicious federated learning clients: An unsupervised learning-based approach. *Computer Networks* 234, 109938.

Orlando, J.I., Fu, H., Breda, J.B., Van Keer, K., Bathula, D.R., Diaz-Pinto, A., Fang, R., Heng, P.A., Kim, J., Lee, J., et al., 2020. Refuge challenge: A unified framework for evaluating automated methods for glaucoma assessment from fundus photographs. *Medical Image Analysis* 59, 101570.

Owkin, 2024. Substra: Open source federated learning software. URL: <https://github.com/substra>. Accessed: March 10, 2025.

Ozturk, T., Talo, M., Yildirim, E.A., Baloglu, U.B., Yildirim, O., Acharya, U.R., 2020. Automated detection of COVID-19 cases using deep neural networks with X-ray images. *Computers in Biology and Medicine* 121, 103792.

PaddlePaddle, 2023. PFL Paddle Federated Learning. URL: <https://github.com/PaddlePaddle/PaddleFL>. Accessed: March 10, 2025.

Pagani, M., Gutierrez-Barragan, D., de Guzman, A.E., Xu, T., Gozzi, A., 2023. Mapping and comparing fMRI connectivity networks across species. *Communications Biology* 6, 1238.

Parekh, V.S., Lai, S., Braverman, V., Leal, J., Rowe, S., Pillai, J.J., Jacobs, M.A., 2021. Cross-domain federated learning in medical imaging. [arXiv:2112.10001](https://arxiv.org/abs/2112.10001).

Park, S., Lee, I.J., Kim, J.W., Ye, J.C., 2024. MS-DINO: Masked self-supervised distributed learning using vision transformer. *IEEE Journal of Biomedical and Health Informatics* 28, 6180–6192.

Patel, V.A., Bhattacharya, P., Tanwar, S., Gupta, R., Sharma, G., Bokoro, P.N., Sharma, R., 2022. Adoption of federated learning for healthcare informatics: Emerging applications and future directions. *IEEE Access* 11, 7339–7358.

Pati, S., Baid, U., Edwards, B., Sheller, M., Wang, S.H., Reina, G.A., Foley, P., Gruzdev, A., Karkada, D., Davatzikos, C., Sako, G., Ghodasara, S., Billello, M., Mohan, S., Vollmuth, P., Brugnara, G., Preetha, C.J., Sahm, F., Maier-Hein, K., Zenk, M., Bendszus, M., Wick, W., Calabrese, E., Rudie, J., Villanueva-Meyer, J., Cha, S., Ingalhalikar, M., Jadhav, M., Pandey, U., Saini, J., Garrett, J., Larson, M., Jeraj, R., Currie, S., Frood, R., Fatania, K., Huang, R.Y., Chang, K., a, C., Capellades, J., Puig, J., Trenkler, J., Pichler, J., Necker, G., Haunschmidt, A., Meckel, S., Shukla, G., Liem, S., Alexander, G.S., Lombardo, J., Palmer, J.D., Flanders, A.E., Dicker, A.P., Sair, H.I., Jones, C.K., Venkataraman, A., Jiang, M., So, T.Y., Chen, C., Heng, P.A., Dou, Q., Kozubek, M., Lux, F., lek, J., Matula, P., y, M., á, T., l, M., hal, V., Vogelbaum, M.A., Mitchell, J.R., Farinhas, J., Maldjian, J.A., Yogananda, C.G.B., Pinho, M.C., Reddy, D., Holcomb, J., Wagner, B.C., Ellingson, B.M., Cloughesy, T.F., Raymond, C., Oughourlian, T., Hagiwara, A., Wang, C., To, M.S., Bhardwaj, S., Chong, C., Agzarian, M., o, A.X., Martins, S.B., Teixeira, B.C.A., Sprenger, F., Menotti, D., Lucio, D.R., LaMontagne, P., Marcus, D., Wiestler, B., Kofler, F., Ezhov, I., Metz, M., Jain, R., Lee, M., Lui, Y.W., McKinley, R., Slotboom, J., Radojewski, P., Meier, R., Wiest, R., Murcia, D., Fu, E., Haas, R., Thompson, J., Ormond, D.R., Badve, C., Sloan, A.E., Vadmal, V., Waite, K., Colen, R.R., Pei, L., Ak, M., Srinivasan, A., Bapuraj, J.R., Rao, A., Wang, N., Yoshiaki, O., Moritani, T., Turk, S., Lee, J., Prabhudesai, S., n, F., Mandel, J., Kamnitsas, K., Glocker, B., Dixon, L.V.M., Williams, M., Zampakis, P., Panagiotopoulos, V., Tsiganos, P., Alexiou, S., Haliassos, I., Zacharaki, E.I., Moustakas, K., Kalogeropoulos, C., Kardamakis, D.M., Choi, Y.S., Lee, S.K., Chang, J.H., Ahn, S.S., Luo, B., Poisson, L., Wen, N., Tiwari, P., Verma, R., Bareja, R., Yadav, I., Chen, J., Kumar, N., Smits, M., van der Voort, S.R., Alafandi, A., Incekara, F., Wijnga, M.M.J., Kapsas, G., Gahrman, R., Schouten, J.W., Dubbink, H.J., Vincent, A.J.P.E., van den Bent, M.J., French, P.J., Klein, S., Yuan, Y., Sharma, S., Tseng, T.C., Adabi, S., Niclou, S.P., Keunen, O., Hau, A.C., res, M., Fortin, D., Lepage, M., Landman, B., Ramadass, K., Xu, K., Chotai, S., Chambless, L.B., Mistry, A., Thompson, R.C., Gusev, Y., Bhuvaneshwar, K., Sayah, A., Bencheqroun, C., Belouali, A., Madhavan, S., Booth, T.C., Chelliah, A., Modat, M., Shuaib, H., Dragos, C., Abayazeed, A., Kolodziej, K., Hill, M., Abbassy, A., Gamal, S., Mekhaimar, M., Qayati, M., Reyes, M., Park, J.E., Yun, J., Kim, H.S., Mahajan, A., Muji, M., Benson, S., Beets-Tan, R.G.H., Teuwen, J., Herrera-Trujillo, A., Trujillo, M., Escobar, W., Abello, A., Bernal, J., mez, J., Choi, J., Baek, S., Kim, Y., Ismael, H., Allen, B., Buatti, J.M., Kotrotsou, A., Li, H., Weiss, T., Weller, M., Bink, A., Pouymayou, B., Shaykh, H.F., Saltz, J., Prasanna, P., Shrestha, S., Mani, K.M., Payne, D., Kurc, T., Pelaez, E., Franco-Maldonado, H., Loayza, F., Quevedo, S., Guevara, P., Torche, E., Mendoza, C., Vera, F., os, E., pez, E., Velastin, S.A., Ogbole, G., Soneye, M., Oyekunle, D., Odafeyoyibotha, O., Osobu, B., Shu'aibu, M., Dorcas, A., Dako, F., Simpson, A.L., Hamghalam, M., Peoples, J.J., Hu, R., Tran, A., Cutler, D., Moraes, F.Y., Boss, M.A., Gimpel, J., Veettil, D.K., Schmidt, K., Bialecki, B., Marella, S., Price, C., Cimino, L., Apgar, C., Shah, P., Menze, B., Barnholtz-Sloan, J.S., Martin, J., Bakas, S., 2022. Federated learning enables big data for rare cancer boundary detection. *Nature Communications* 13, 7346.

Pati, S., Baid, U., Zenk, M., Edwards, B., Sheller, M., Reina, G.A., Foley, P., Gruzdev, A., Martin, J., Albarqouni, S., Chen, Y., Shinohara, R.T., Reinke, A., Zimmerer, D., Freymann, J.B., Kirby, J.S., Davatzikos, C., Colen, R.R., Kotrotsou, A., Marcus, D., Milchenko, M., Nazeri, A., Fathallah-Shaykh, H., Wiest, R., Jakab, A., Weber, M.A., Mahajan, A., Maier-Hein, L., Kleesiek, J., Menze, B., Maier-Hein, K., Bakas, S., 2021. The federated tumor segmentation (FeTS) challenge. [arXiv:2105.05874](https://arxiv.org/abs/2105.05874).

Peng, H., Gong, W., Beckmann, C.F., Vedaldi, A., Smith, S.M., 2021. Accurate brain age prediction with lightweight deep neural networks. *Medical image analysis* 68, 101871.

Peng, L., Wang, N., Dvornek, N., Zhu, X., Li, X., 2023. FedNI: Federated graph learning with network inpainting for population-based disease prediction. *IEEE Transactions on Medical Imaging* 42, 2032–2043.

Pernet, C.R., Gorgolewski, K.J., Job, D., Rodriguez, D., Whittle, I., Wardlaw, J., 2016. A structural and functional magnetic resonance imaging dataset of brain tumour patients. *Scientific Data* 3, 1–6.

Pieciak, T., Aja-Fernandez, S., Vegas-Sanchez-Ferrero, G., 2017. Non-stationary Rician noise estimation in parallel MRI using a single image: a variance-stabilizing approach. *IEEE transactions on pattern analysis and machine intelligence* 39, 2015–2029.

Pieciak, T., Paris, G., Beck, D., Maximov, I.I., Tristán-Vega, A., de Luis-García, R., Westlye, L.T., Aja-Fernández, S., 2023. Spherical means-based free-water volume fraction from diffusion MRI increases non-linearly with age in the white matter of the healthy human brain. *NeuroImage* 279, 120324.

Pieciak, T., Vegas-Sánchez-Ferrero, G., Aja-Fernández, S., 2016. Variance stabilization of noncentral-chi data: Application to noise estimation in MRI, in: 2016 IEEE 13th International Symposium on Biomedical Imaging (ISBI), IEEE. pp. 1376–1379.

Pinto, M.S., Paoletta, R., Billiet, T., Van Dyck, P., Guns, P.J., Jeurissen, B., Ribbens, A., den Dekker, A.J., Sijbers, J., 2020. Harmonization of brain diffusion MRI: concepts and methods. *Frontiers in Neuroscience* 14, 396.

Pisano, E.D., Gatsonis, C., Hendrick, E., Yaffe, M., Baum, J.K., Acharyya, S., Conant, E.F., Fajardo, L.L., Bassett, L., D'Orsi, C., et al., 2005. Diagnostic performance of digital versus film mammography for breast-cancer screening. *New England Journal of Medicine* 353, 1773–1783.

Planche, V., Manjon, J.V., Mansencal, B., Lanuza, E., Tourdias, T., Catheline, G., Coupé, P., 2022. Structural progression of Alzheimer's disease over decades: the MRI staging scheme. *Brain*



- Communications 4, fcac109.
- Prados, F., Ashburner, J., Blaiotta, C., Brosch, T., Carballido-Gamio, J., Cardoso, M.J., Conrad, B.N., Datta, E., Dávid, G., De Leener, B., et al., 2017. Spinal cord grey matter segmentation challenge. *NeuroImage* 152, 312–329.
- Putz, F., Weissmann, T., Oft, D., Schmidt, M.A., Roesch, J., Siavooshhaghghi, H., Filimonova, I., Schmitter, C., Mengling, V., Bert, C., Frey, B., Lettmaier, S., Distel, L.V., Semrau, S., Fietkau, R., 2020. FSRT vs. SRS in brain metastases—differences in local control and radiation necrosis—a volumetric study. *Frontiers in Oncology* 10.
- Qammar, A., Karim, A., Ning, H., Ding, J., 2023. Securing federated learning with blockchain: a systematic literature review. *Artificial Intelligence Review* 56, 3951–3985.
- Qi, P., Chiaro, D., Guzzo, A., Ianni, M., Fortino, G., Piccialli, F., 2024a. Model aggregation techniques in federated learning: A comprehensive survey. *Future Generation Computer Systems* 150, 272–293.
- Qi, Y., Vianna, P., Cadrin-Chênevert, A., Blanchet, K., Montagnon, E., Belilovsky, E., Wolf, G., Mullie, L.A., Cloutier, G., Chassé, M., et al., 2024b. Simulating federated learning for steatosis detection using ultrasound images. *Scientific Reports* 14, 13253.
- Rahman, T., Khandakar, A., Kadir, M.A., Islam, K.R., Islam, K.F., Mazhar, R., Hamid, T., Islam, M.T., Kashem, S., Mahub, Z.B., et al., 2020. Reliable tuberculosis detection using chest X-ray with deep learning, segmentation and visualization. *IEEE Access* 8, 191586–191601.
- Rahman, T., Khandakar, A., Qiblawey, Y., Tahir, A., Kiranyaz, S., Kashem, S.B.A., Islam, M.T., Al Maadeed, S., Zughair, S.M., Khan, M.S., et al., 2021. Exploring the effect of image enhancement techniques on COVID-19 detection using chest X-ray images. *Computers in Biology and Medicine* 132, 104319.
- Rajagopal, A., Redekop, E., Kemisetti, A., Kulkarni, R., Raman, S., Sarma, K., Magudia, K., Arnold, C.W., Larson, P.E., 2023. Federated learning with research prototypes: application to multi-center MRI-based detection of prostate cancer with diverse histopathology. *Academic Radiology* 30, 644–657.
- Reddi, S., Charles, Z., Zaheer, M., Garrett, Z., Rush, K., Konečný, J., Kumar, S., McMahan, H.B., 2021. Adaptive federated optimization. [arXiv:2003.00295](https://arxiv.org/abs/2003.00295).
- Rehman, M.H.U., Hugo Lopez Pinaya, W., Nachev, P., Teo, J.T., Ourselin, S., Cardoso, M.J., 2023. Federated learning for medical imaging radiology. *The British Journal of Radiology* 96, 20220890.
- Rieke, N., Hancox, J., Li, W., Milletari, F., Roth, H.R., Albarqouni, S., Bakas, S., Galtier, M.N., Landman, B.A., Maier-Hein, K., et al., 2020. The future of digital health with federated learning. *NPJ Digital Medicine* 3, 119.
- Riviera, W., Galazzo, I.B., Menegaz, G., 2023. FeLebrities: a user-centric assessment of federated learning frameworks. *IEEE Access* 11, 96865–96878.
- Rootes-Murdy, K., Gazula, H., Verner, E., Kelly, R., DeRamus, T., Plis, S., Sarwate, A., Turner, J., Calhoun, V., 2022. Federated analysis of neuroimaging data: a review of the field. *Neuroinformatics* 1, 1–14.
- Roth, H.R., Chang, K., Singh, P., Neumark, N., Li, W., Gupta, V., Gupta, S., Qu, L., Ihsani, A., Bizzo, B.C., Wen, Y., Buch, V., Shah, M., Kitamura, F., Mendonça, M., Lavour, V., Harouni, A., Compas, C., Tetreault, J., Dogra, P., Cheng, Y., Erdal, S., White, R., Hashemian, B., Schultz, T., Zhang, M., McCarthy, A., Yun, B.M., Sharaf, E., Hoebel, K.V., Patel, J.B., Chen, B., Ko, S., Leibovitz, E., Pisano, E.D., Coombs, L., Xu, D., Dreyer, K.J., Dayan, I., Naidu, R.C., Flores, M., Rubin, D., Kalpathy-Cramer, J., 2020. Federated learning for breast density classification: A real-world implementation, in: Albarqouni, S., Bakas, S., Kamnitsas, K., Cardoso, M.J., Landman, B., Li, W., Milletari, F., Rieke, N., Roth, H., Xu, D., Xu, Z. (Eds.), *Domain Adaptation and Representation Transfer, and Distributed and Collaborative Learning*, pp. 181–191.
- Roth, H.R., Cheng, Y., Wen, Y., Yang, I., Xu, Z., Hsieh, Y.T., Kersten, K., Harouni, A., Zhao, C., Lu, K., Zhang, Z., Li, W., Myronenko, A., Yang, D., Yang, S., Rieke, N., Quraini, A., Chen, C., Xu, D., Ma, N., Dogra, P., Flores, M., Feng, A., 2022. NVIDIA FLARE: Federated learning from simulation to real-world. [arXiv:2210.13291](https://arxiv.org/abs/2210.13291).
- Roth, H.R., Lu, L., Farag, A., Shin, H.C., Liu, J., Turkbey, E.B., Summers, R.M., 2015. DeepOrgan: Multi-level deep convolutional networks for automated pancreas segmentation, in: *Medical Image Computing and Computer-Assisted Intervention—MICCAI 2015: 18th International Conference, Munich, Germany, October 5–9, 2015, Proceedings, Part I* 18, pp. 556–564.
- Roth, H.R., Yang, D., Li, W., Myronenko, A., Zhu, W., Xu, Z., Wang, X., Xu, D., 2021. Federated whole prostate segmentation in MRI with personalized neural architectures, in: de Bruijne, M., Cattin, P.C., Cotin, S., Padoy, N., Speidel, S., Zheng, Y., Essert, C. (Eds.), *Medical Image Computing and Computer Assisted Intervention – MICCAI 2021*, pp. 357–366.
- Roy, A.G., Siddiqui, S., Pölsterl, S., Navab, N., Wachinger, C., 2019. BrainTorrent: A peer-to-peer environment for decentralized federated learning. [arXiv:1905.06731](https://arxiv.org/abs/1905.06731).
- Sahiner, B., Pezeshk, A., Hadjiiski, L.M., Wang, X., Drukker, K., Cha, K.H., Summers, R.M., Giger, M.L., 2019. Deep learning in medical imaging and radiation therapy. *Medical physics* 46, e1–e36.
- Sandhu, S.S., Gorji, H.T., Tavakolian, P., Tavakolian, K., Akhbardeh, A., 2023. Medical imaging applications of federated learning. *Diagnostics* 13, 3140.
- Sarma, K.V., Harmon, S., Sanford, T., Roth, H.R., Xu, Z., Tetreault, J., Xu, D., Flores, M.G., Raman, A.G., Kulkarni, R., et al., 2021. Federated learning improves site performance in multicenter deep learning without data sharing. *Journal of the American Medical Informatics Association* 28, 1259–1264.
- de Schotten, M.T., Croxson, P.L., Mars, R.B., 2019. Large-scale comparative neuroimaging: Where are we and what do we need? *cortex* 118, 188–202.
- Schwarz, C.G., Kremers, W.K., Therneau, T.M., Sharp, R.R., Gunter, J.L., Vemuri, P., Arani, A., Spychalla, A.J., Kantarci, K., Knopman, D.S., et al., 2019. Identification of anonymous MRI research participants with face-recognition software. *New England Journal of Medicine* 381, 1684–1686.
- Sermesant, M., Delingette, H., Cochet, H., Jaïs, P., Ayache, N., 2021. Applications of artificial intelligence in cardiovascular imaging. *Nature Reviews Cardiology* 18, 600–609.
- Shahid, O., Pouriyeh, S., Parizi, R.M., Sheng, Q.Z., Srivastava, G., Zhao, L., 2021. Communication efficiency in federated learning: Achievements and challenges. [arXiv:2107.10996](https://arxiv.org/abs/2107.10996).
- Shastri, S., Kansal, I., Kumar, S., Singh, K., Popli, R., Mansotra, V., 2022. Cheximagenet: a novel architecture for accurate classification of covid-19 with chest x-ray digital images using deep convolutional neural networks. *Health and technology* 12, 193–204.
- Sheller, M.J., Edwards, B., Reina, G.A., Martin, J., Pati, S., Kotrotsou, A., Milchenko, M., Xu, W., Marcus, D., Colen, R.R., et al., 2020. Federated learning in medicine: facilitating multi-institutional collaborations without sharing patient data. *Scientific Reports* 10, 12598.
- Shen, C., Wang, P., Roth, H.R., Yang, D., Xu, D., Oda, M., Wang, W., Fuh, C.S., Chen, P.T., Liu, K.L., Liao, W.C., Mori, K., 2021. Multi-task federated learning for heterogeneous pancreas segmentation, in: Oyarzun Laura, C., Cardoso, M.J., Rosen-Zvi, M., Kaissis, G., Linguraru, M.G., Shekhar, R., Wesarg, S., Erdt, M., Drechsler, K., Chen, Y., Albarqouni, S., Bakas, S., Landman, B., Rieke, N., Roth, H., Li, X., Xu, D., Gabrani, M., Konukoglu, E., Guindy, M., Rueckert, D., Ziller, A., Usynin, D., Passerat-Palmbach, J. (Eds.), *Clinical Image-Based Procedures, Distributed and Collaborative Learning, Artificial Intelligence for Combating COVID-19 and Secure and Privacy-Preserving Machine Learning*, pp. 101–110.
- Shen, D., Wu, G., Suk, H.I., 2017. Deep learning in medical image analysis. *Annual review of biomedical engineering* 19, 221–248.
- Shih, G., Wu, C.C., Halabi, S.S., Kohli, M.D., Prevedello, L.M., Cook, T.S., Sharma, A., Amorosa, J.K., Arteaga, V., Galperin-Aizenberg, M., et al., 2019. Augmenting the national institutes of

health chest radiograph dataset with expert annotations of possible pneumonia. *Radiology: Artificial Intelligence* 1, e180041.

Shiranthika, C., Saeedi, P., Bajić, I.V., 2023. Decentralized learning in healthcare: a review of emerging techniques. *IEEE Access* 11, 54188–54209.

Shiri, I., Sadr, A.V., Akhavan, A., Salimi, Y., Sanaat, A., Amini, M., Razeghi, B., Saberi, A., ARABI, H., Ferdowsi, S., Voloshynovskiy, S., Gündüz, D., Rahmim, A., Zaidi, H., 2022a. Decentralized collaborative multi-institutional PET attenuation and scatter correction using federated deep learning. *European Journal of Nuclear Medicine and Molecular Imaging* 50, 1034–1050.

Shiri, I., Salimi, Y., Pakbin, M., Hajianfar, G., Avval, A.H., Sanaat, A., Mostafaei, S., Akhavanallaf, A., Saberi, A., Mansouri, Z., et al., 2022b. COVID-19 prognostic modeling using CT radiomic features and machine learning algorithms: Analysis of a multi-institutional dataset of 14,339 patients. *Computers in biology and medicine* 145, 105467.

Shiri, I., Salimi, Y., Sirjani, N., Razeghi, B., Bagherieh, S., Pakbin, M., Mansouri, Z., Hajianfar, G., Avval, A.H., Askari, D., et al., 2024. Differential privacy preserved federated learning for prognostic modeling in COVID-19 patients using large multi-institutional chest CT dataset. *Medical Physics* 51, 4736–4747.

da Silva, F.R., Camacho, R., Tavares, J.M.R., 2023. Federated learning in medical image analysis: A systematic survey. *Electronics* 13, 47.

Silva, J., Histace, A., Romain, O., Dray, X., Granado, B., 2014. Toward embedded detection of polyps in wce images for early diagnosis of colorectal cancer. *International journal of computer assisted radiology and surgery* 9, 283–293.

Simpson, A.L., Antonelli, M., Bakas, S., Bilello, M., Farahani, K., van Ginneken, B., Kopp-Schneider, A., Landman, B.A., Litjens, G., Menze, B., Ronneberger, O., Summers, R.M., Bilic, P., Christ, P.F., Do, R.K.G., Gollub, M., Golia-Pernicka, J., Heckers, S.H., Jarnagin, W.R., McHugo, M.K., Napel, S., Vorontsov, E., Maier-Hein, L., Cardoso, M.J., 2019. A large annotated medical image dataset for the development and evaluation of segmentation algorithms. [arXiv:1902.09063](https://arxiv.org/abs/1902.09063).

Sirinukunwattana, K., Pluim, J.P., Chen, H., Qi, X., Heng, P.A., Guo, Y.B., Wang, L.Y., Matuszewski, B.J., Bruni, E., Sanchez, U., et al., 2017. Gland segmentation in colon histology images: The glas challenge contest. *Medical image analysis* 35, 489–502.

Sivaswamy, J., Krishnadas, S., Chakravarty, A., Joshi, G., Tabish, A.S., et al., 2015. A comprehensive retinal image dataset for the assessment of glaucoma from the optic nerve head analysis. *JSM Biomedical Imaging Data Papers* 2, 1004.

Ślazyk, F., Jabłocki, P., Lisowska, A., Malawski, M., Płotka, S., 2022. CXR-FL: Deep learning-based chest X-ray image analysis using federated learning, in: Groen, D., de Mulatier, C., Paszynski, M., Krzhizhanovskaya, V.V., Dongarra, J.J., Sloot, P.M.A. (Eds.), *Computational Science – ICCS 2022*, pp. 433–440.

Soda, P., D’Amico, N.C., Tessori, J., Valbusa, G., Guarrasi, V., Bortolotto, C., Akbar, M.U., Sicilia, R., Cordelli, E., Fazzini, D., et al., 2021. AIforCOVID: Predicting the clinical outcomes in patients with COVID-19 applying AI to chest-X-rays. An Italian multicentre study. *Medical image analysis* 74, 102216.

Sohan, M.F., Basalamah, A., 2023. A systematic review on federated learning in medical image analysis. *IEEE Access* 11, 28628–28644.

Spanhol, F.A., Oliveira, L.S., Petitjean, C., Heutte, L., 2015. A dataset for breast cancer histopathological image classification. *IEEE Transactions on Biomedical Engineering* 63, 1455–1462.

Stauffer, E.M., Bethlehem, R.A., Dorfschmidt, L., Won, H., Warrier, V., Bullmore, E.T., 2023. The genetic relationships between brain structure and schizophrenia. *Nature Communications* 14, 7820.

Stripelis, D., Ambite, J.L., Lam, P., Thompson, P., 2021a. Scaling neuroscience research using federated learning, in: 2021 IEEE 18th International Symposium on Biomedical Imaging (ISBI), pp. 1191–1195.

Stripelis, D., Gupta, U., Saleem, H., Dhinagar, N., Ghai, T., Sanchez, R., Anastasiou, C., Asghar, A., Steeg, G.V., Ravi, S., Naveed, M., Thompson, P.M., Ambite, J.L., 2022. Secure federated learning for neuroimaging. [arXiv:2205.05249](https://arxiv.org/abs/2205.05249).

Stripelis, D., Saleem, H., Ghai, T., Dhinagar, N., Gupta, U., Anastasiou, C., Ver Steeg, G., Ravi, S., Naveed, M., Thompson, P.M., et al., 2021b. Secure neuroimaging analysis using federated learning with homomorphic encryption, in: 17th International Symposium on Medical Information Processing and Analysis, pp. 351–359.

Subramanian, M., Rajasekar, V., V. E., S., Shanmugavadivel, K., Nandhini, P.S., 2022. Effectiveness of decentralized federated learning algorithms in healthcare: A case study on cancer classification. *Electronics* 11.

Suckling, J., 1994. The mammographic images analysis society digital mammogram database, in: *Excerpta Medica. International Congress Series*, pp. 375–378.

Sun, G., Shu, H., Shao, F., Racharak, T., Kong, W., Pan, Y., Dong, J., Wang, S., Nguyen, L.M., Xin, J., 2024. FKD-Med: Privacy-aware, communication-optimized medical image segmentation via federated learning and model lightweighting through knowledge distillation. *IEEE Access* 12, 33687–33704.

Tan, Y.N., Lam, P.D., Tinh, V.P., Le, D.D., Nam, N.H., Khoa, T.A., 2024. Joint federated learning using deep segmentation and the Gaussian mixture model for breast cancer tumors. *IEEE Access* 12, 94231–94249.

Tan, Y.N., Tinh, V.P., Lam, P.D., Nam, N.H., Khoa, T.A., 2023. A transfer learning approach to breast cancer classification in a federated learning framework. *IEEE Access* 11, 27462–27476.

Tartaglione, E., Barbano, C.A., Berzovini, C., Calandri, M., Grangetto, M., 2020. Unveiling COVID-19 from chest X-ray with deep learning: a hurdles race with small data. *International Journal of Environmental Research and Public Health* 17, 6933.

Tian, C.X., Li, H., Wang, Y., Wang, S., 2021. Privacy-preserving constrained domain generalization for medical image classification. [arXiv:2105.08511](https://arxiv.org/abs/2105.08511).

Truong, N., Sun, K., Wang, S., Guitton, F., Guo, Y., 2021. Privacy preservation in federated learning: An insightful survey from the GDPR perspective. *Computers & Security* 110, 102402.

Tschandl, P., Rosendahl, C., Kittler, H., 2018. The HAM10000 dataset, a large collection of multi-source dermatoscopic images of common pigmented skin lesions. *Scientific Data* 5, 1–9.

Van Essen, D.C., Smith, S.M., Barch, D.M., Behrens, T.E., Yacoub, E., Ugurbil, K., Consortium, W.M.H., et al., 2013. The WU-Minn human connectome project: an overview. *NeuroImage* 80, 62–79.

Varghese, C., Harrison, E.M., O’Grady, G., Topol, E.J., 2024. Artificial intelligence in surgery. *Nature Medicine* 30, 1257–1268.

Vegas-Sánchez-Ferrero, G., Ledesma-Carbayo, M.J., Washko, G.R., Estépar, R.S.J., 2017. Statistical characterization of noise for spatial standardization of CT scans: enabling comparison with multiple kernels and doses. *Medical image analysis* 40, 44–59.

Veraart, J., Winzeck, S., Planchuelo-Gómez, Á., Fricke, B., Korneopoulou, E.N., Merisaari, H., Pieciak, T., Zou, Y., Descoteaux, M., 2023. Assessing the variability of brain diffusion MRI preprocessing pipelines using a region-of-interest analysis, in: *ISMRM & ISMRT Annual Meeting & Exhibition, Toronto, Canada*, p. 5015.

Vianna, P., Calce, S.I., Boustros, P., Larocque-Rigney, C., Patry-Beaudoin, L., Luo, Y.H., Aslan, E., Marinos, J., Alamri, T.M., Vu, K.N., et al., 2023. Comparison of radiologists and deep learning for us grading of hepatic steatosis. *Radiology* 309, e230659.

Vo, V.T.T., Shin, T.h., Yang, H.J., Kang, S.R., Kim, S.H., 2024. A comparison between centralized and asynchronous federated learning approaches for survival outcome prediction using clinical and PET data from non-small cell lung cancer patients. *Computer Methods and Programs in Biomedicine* 248, 108104.

Vu, Q.D., Graham, S., Kurc, T., To, M.N.N., Shaban, M., Qaiser, T., Koohbanani, N.A., Khurram, S.A., Kalpathy-Cramer, J., Zhao, T., et al., 2019. Methods for segmentation and classification of digital microscopy tissue images. *Frontiers in bioengineering and biotechnology* 7, 433738.

Wang, D., Han, C., Zhang, Z., Zhai, T., Lin, H., Yang, B., Cui, Y., Lin, Y., Zhao, Z., Zhao, L., et al., 2024. FedDUS: Lung tumor segmentation on CT images through federated semi-supervised with dynamic update strategy. *Computer Methods and Programs*

- in *Biomedicine* 249, 108141.
- Wang, G., Ye, J.C., De Man, B., 2020a. Deep learning for tomographic image reconstruction. *Nature Machine Intelligence* 2, 737–748.
- Wang, J., Jin, Y., Stoyanov, D., Wang, L., 2023. FedDP: Dual personalization in federated medical image segmentation. *IEEE Transactions on Medical Imaging* 43, 297–308.
- Wang, J., Jin, Y., Wang, L., 2022. Personalizing federated medical image segmentation via local calibration, in: *Proceedings of the European Conference on Computer Vision*, pp. 456–472.
- Wang, L., Lin, Z.Q., Wong, A., 2020b. COVID-Net: A tailored deep convolutional neural network design for detection of COVID-19 cases from chest X-ray images. *Scientific Reports* 10, 19549.
- Wang, P., Shen, C., Roth, H.R., Yang, D., Xu, D., Oda, M., Misawa, K., Chen, P.T., Liu, K.L., Liao, W.C., Wang, W., Mori, K., 2020c. Automated pancreas segmentation using multi-institutional collaborative deep learning, in: Albarqouni, S., Bakas, S., Kamnitsas, K., Cardoso, M.J., Landman, B., Li, W., Milletari, F., Rieke, N., Roth, H., Xu, D., Xu, Z. (Eds.), *Domain Adaptation and Representation Transfer, and Distributed and Collaborative Learning*, pp. 192–200.
- Wang, S., Yu, L., Li, K., Yang, X., Fu, C.W., Heng, P.A., 2020d. Dofe: Domain-oriented feature embedding for generalizable fundus image segmentation on unseen datasets. *IEEE Transactions on Medical Imaging* 39, 4237–4248.
- Wang, X., Peng, Y., Lu, L., Lu, Z., Bagheri, M., Summers, R.M., 2017. ChestX-ray8: Hospital-scale chest X-ray database and benchmarks on weakly-supervised classification and localization of common thorax diseases, in: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 2097–2106.
- Wei, M.L., Tada, M., So, A., Torres, R., 2024. Artificial intelligence and skin cancer. *Frontiers in Medicine* 11, 1331895.
- Weiner, M.W., Veitch, D.P., Aisen, P.S., Beckett, L.A., Cairns, N.J., Green, R.C., Harvey, D., Jack Jr, C.R., Jagust, W., Morris, J.C., et al., 2017. The Alzheimer’s disease neuroimaging initiative 3: Continued innovation for clinical trial improvement. *Alzheimer’s & Dementia* 13, 561–571.
- Weinstein, J.N., Collisson, E.A., Mills, G.B., Shaw, K.R., Ozenberger, B.A., Ellrott, K., Shmulevich, I., Sander, C., Stuart, J.M., 2013. The cancer genome atlas pan-cancer analysis project. *Nature Genetics* 45, 1113–1120.
- Wen, J., Thibeau-Sutre, E., Diaz-Melo, M., Samper-González, J., Routier, A., Bottani, S., Dormont, D., Durrleman, S., Burgos, N., Colliot, O., et al., 2020. Convolutional neural networks for classification of Alzheimer’s disease: Overview and reproducible evaluation. *Medical image analysis* 63, 101694.
- Wicaksana, J., Yan, Z., Zhang, D., Huang, X., Wu, H., Yang, X., Cheng, K.T., 2023. FedMix: Mixed supervised federated learning for medical image segmentation. *IEEE Transactions on Medical Imaging* 42, 1955–1968.
- Willemink, M.J., Koszek, W.A., Hardell, C., Wu, J., Fleischmann, D., Harvey, H., Folio, L.R., Summers, R.M., Rubin, D.L., Lungen, M.P., 2020. Preparing medical imaging data for machine learning. *Radiology* 295, 4–15.
- Wu, N., Yu, L., Yang, X., Cheng, K.T., Yan, Z., 2023a. FedIIC: Towards robust federated learning for class-imbalanced medical image classification, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pp. 692–702.
- Wu, R., Li, C., Zou, J., Liu, Q., Zheng, H., Wang, S., 2023b. Model-based federated learning for accurate MR image reconstruction from undersampled k-space data. [arXiv:2304.07502](https://arxiv.org/abs/2304.07502).
- Wu, Y., Zeng, D., Wang, Z., Shi, Y., Hu, J., 2021. Federated contrastive learning for volumetric medical image segmentation, in: de Bruijne, M., Cattin, P.C., Cotin, S., Padoy, N., Speidel, S., Zheng, Y., Essert, C. (Eds.), *Medical Image Computing and Computer Assisted Intervention – MICCAI 2021*, pp. 367–377.
- Xiang, Z., Tian, X., Liu, Y., Chen, M., Zhao, C., Tang, L.N., Xue, E.S., Zhou, Q., Shen, B., Li, F., et al., 2024. Federated learning via multi-attention guided UNet for thyroid nodule segmentation of ultrasound images. *Neural Networks* 181, 106754.
- Xue, S., Guo, R., Bohn, K.P., Matzke, J., Viscione, M., Alberts, I., Meng, H., Sun, C., Zhang, M., Zhang, M., et al., 2021. A cross-scanner and cross-tracer deep learning method for the recovery of standard-dose imaging quality from low-dose PET. *European Journal of Nuclear Medicine and Molecular Imaging* , 1–14.
- Yamada, A., Hanaoka, S., Takenaga, T., Miki, S., Yoshikawa, T., Nomura, Y., 2024. Investigation of distributed learning for automated lesion detection in head MR images. *Radiological Physics and Technology* , 1–14.
- Yan, B., Wang, J., Cheng, J., Zhou, Y., Zhang, Y., Yang, Y., Liu, L., Zhao, H., Wang, C., Liu, B., 2021. Experiments of federated learning for COVID-19 chest X-ray images, in: Sun, X., Zhang, X., Xia, Z., Bertino, E. (Eds.), *Advances in Artificial Intelligence and Security*, pp. 41–53.
- Yan, T., Wong, P.K., Ren, H., Wang, H., Wang, J., Li, Y., 2020. Automatic distinction between COVID-19 and common pneumonia using multi-scale convolutional neural network on chest CT scans. *Chaos, Solitons & Fractals* 140, 110153.
- Yan, Y., Wang, H., Huang, Y., He, N., Zhu, L., Xu, Y., Li, Y., Zheng, Y., 2024. Cross-modal vertical federated learning for MRI reconstruction. *IEEE Journal of Biomedical and Health Informatics* 28, 6384–6394.
- Yang, J., Shi, R., Ni, B., 2021. Medmnist classification decathlon: A lightweight autoML benchmark for medical image analysis, in: *2021 IEEE 18th International Symposium on Biomedical Imaging (ISBI)*, pp. 191–195.
- Yang, J., Veeraraghavan, H., Armato III, S.G., Farahani, K., Kirby, J.S., Kalpathy-Kramer, J., van Elmpt, W., Dekker, A., Han, X., Feng, X., et al., 2018. Autosegmentation for thoracic radiation treatment planning: a grand challenge at AAPM 2017. *Medical Physics* 45, 4568–4581.
- Yang, L., He, J., Fu, Y., Luo, Z., 2023. Federated learning for medical imaging segmentation via dynamic aggregation on non-IID data silos. *Electronics* 12, 1687.
- Yang, T., Xu, J., Zhu, M., An, S., Gong, M., Zhu, H., 2022a. FedZaCt: Federated learning with Z average and cross-teaching on image segmentation. *Electronics* 11, 3262.
- Yang, X., He, X., Zhao, J., Zhang, Y., Zhang, S., Xie, P., 2020. COVID-CT-Dataset: a CT scan dataset about COVID-19. [arXiv:2003.13865](https://arxiv.org/abs/2003.13865).
- Yang, Z., Chen, Y., Huangfu, H., Ran, M., Wang, H., Li, X., Zhang, Y., 2022b. Robust split federated learning for U-shaped medical image networks. [arXiv:2212.06378](https://arxiv.org/abs/2212.06378).
- Yao, A.C.C., 1986. How to generate and exchange secrets, in: *27th Annual Symposium on Foundations of Computer Science (Sfcs 1986)*, pp. 162–167.
- Yap, M.H., Pons, G., Marti, J., Ganau, S., Sentis, M., Zwiggelaar, R., Davison, A.K., Marti, R., 2017. Automated breast ultrasound lesions detection using convolutional neural networks. *IEEE Journal of Biomedical and Health Informatics* 22, 1218–1226.
- Zang, P., Gao, L., Hormel, T.T., Wang, J., You, Q., Hwang, T.S., Jia, Y., 2020. DcardNet: diabetic retinopathy classification at multiple levels based on structural and angiographic optical coherence tomography. *IEEE Transactions on Biomedical Engineering* 68, 1859–1870.
- Zhang, M., Qu, L., Singh, P., Kalpathy-Cramer, J., Rubin, D.L., 2022a. SplitAVG: A heterogeneity-aware federated deep learning method for medical imaging. *IEEE Journal of Biomedical and Health Informatics* 26, 4635–4644.
- Zhang, W., Zhou, T., Lu, Q., Wang, X., Zhu, C., Sun, H., Wang, Z., Lo, S.K., Wang, F.Y., 2021. Dynamic-fusion-based federated learning for COVID-19 detection. *IEEE Internet of Things Journal* 8, 15884–15891.
- Zhang, Y., Qi, Y., Qi, X., Senhadji, L., Wei, Y., Chen, F., Yang, G., 2024. Fedsoda: Federated cross-assessment and dynamic aggregation for histopathology segmentation, in: *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 1656–1660.
- Zhang, Y., Xian, M., Cheng, H.D., Shareef, B., Ding, J., Xu, F., Huang, K., Zhang, B., Ning, C., Wang, Y., 2022b. BUSIS: a benchmark for breast ultrasound image segmentation. *Healthcare* 10, 729.

- Zhang, Z., Cao, X., Jia, J., Gong, N.Z., 2022c. FLDetector: Defending federated learning against model poisoning attacks via detecting malicious clients, in: Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining, pp. 2545–2555.
- Zhao, B., James, L.P., Moskowitz, C.S., Guo, P., Ginsberg, M.S., Lefkowitz, R.A., Qin, Y., Riely, G.J., Kris, M.G., Schwartz, L.H., 2009. Evaluating variability in tumor measurements from same-day repeat CT scans of patients with non-small cell lung cancer. *Radiology* 252, 263–272.
- Zhao, K., Li, Z., Yao, S., Wang, Y., Wu, X., Xu, Z., Wu, L., Huang, Y., Liang, C., Liu, Z., 2020. Artificial intelligence quantified tumour-stroma ratio is an independent predictor for overall survival in resectable colorectal cancer. *EBioMedicine* 61.
- Zhao, L., Huang, J., 2023. A distribution information sharing federated learning approach for medical image data. *Complex & Intelligent Systems* 9, 5625–5636.
- Zhao, Y., Li, M., Lai, L., Suda, N., Civin, D., Chandra, V., 2018. Federated learning with non-iid data. [arXiv:1806.00582](https://arxiv.org/abs/1806.00582).
- Zheng, Z., Hayashi, Y., Oda, M., Kitasaka, T., Misawa, K., Mori, K., 2024. Federated 3D multi-organ segmentation with partially labeled and unlabeled data. *International Journal of Computer Assisted Radiology and Surgery* , 1–14.
- Zhou, B., Xie, H., Liu, Q., Chen, X., Guo, X., Feng, Z., Hou, J., Zhou, S.K., Li, B., Rominger, A., et al., 2023. FedFTN: Personalized federated learning with deep feature transformation network for multi-institutional low-count PET denoising. *Medical Image Analysis* 90, 102993.
- Zhou, L., Wang, M., Zhou, N., 2024. Distributed federated learning-based deep learning model for privacy MRI brain tumor detection. [arXiv:2404.10026](https://arxiv.org/abs/2404.10026).
- Zhou, S., Landman, B.A., Huo, Y., Gokhale, A., 2022. Communication-efficient federated learning for multi-institutional medical image classification. *Proceedings of SPIE—the International Society for Optical Engineering* 14, 1203703.
- Zhu, H., Xu, J., Liu, S., Jin, Y., 2021. Federated learning on non-IID data: A survey. *Neurocomputing* 465, 371–390.
- Zhu, W., Luo, J., 2022. Federated medical image analysis with virtual sample synthesis, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pp. 728–738.
- Ziller, A., Trask, A., Lopardo, A., Szymkow, B., Wagner, B., Bluemke, E., Nounahon, J.M., Passerat-Palmbach, J., Prakash, K., Rose, N., et al., 2021a. PySyft: A library for easy federated learning. *Federated learning systems: Towards next-generation AI* 965, 111–139.
- Ziller, A., Usynin, D., Remerscheid, N., Knolle, M., Makowski, M., Braren, R., Rueckert, D., Kaissis, G., 2021b. Differentially private federated deep learning for multi-site medical image segmentation. [arXiv:2107.02586](https://arxiv.org/abs/2107.02586).