

MLLM-Selector: Necessity and Diversity-driven High-Value Data Selection for Enhanced Visual Instruction Tuning

Yiwei Ma^{1†}, Guohai Xu^{2†}, Xiaoshuai Sun¹, Jiayi Ji¹, Jie Lou², Debing Zhang², Rongrong Ji¹

¹Key Laboratory of Multimedia Trusted Perception and Efficient Computing, Ministry of Education of China, Xiamen University, 361005, Fujian, P.R. China.

²Xiaohongshu Inc, 200025, Shanghai, P.R. China.

Contributing authors: yiweima@stu.xmu.edu.cn; guohai.explorer@gmail.com; xssun@xmu.edu.cn; jjyxmu@gmail.com; loujie0822@gmail.com; dengyang@xiaohongshu.com; rrji@xmu.edu.cn;

[†]These authors contributed equally to this work.

Abstract

Visual instruction tuning (VIT) has emerged as a crucial technique for enabling multi-modal large language models (MLLMs) to follow user instructions adeptly. Yet, a significant gap persists in understanding the attributes of high-quality instruction tuning data and frameworks for its automated selection. To address this, we introduce MLLM-Selector, an automated approach that identifies valuable data for VIT by weighing necessity and diversity. Our process starts by randomly sampling a subset from the VIT data pool to fine-tune a pretrained model, thus creating a seed model with an initial ability to follow instructions. Then, leveraging the seed model, we calculate necessity scores for each sample in the VIT data pool to identify samples pivotal for enhancing model performance. Our findings underscore the importance of mixing necessity and diversity in data choice, leading to the creation of MLLM-Selector, our methodology that fuses necessity scoring with strategic sampling for superior data refinement. Empirical results indicate that within identical experimental conditions, MLLM-Selector surpasses LLaVA-1.5 in some benchmarks with less than 1% of the data and consistently exceeds performance across all validated benchmarks when using less than 50%.

Keywords: Visual Instruction Tuning, Data Selection, Multi-modal Large Language Model

1 Introduction

The advent of large language models (LLMs), such as GPT [1–4], Gemma [5], LLaMA [6], InterLM [7, 8], and QWen [9, 10], has profoundly transformed the field of natural language processing (NLP) [11–13]. These models have significantly advanced our ability to understand and

generate human-like text, revolutionizing applications across domains such as healthcare, finance, and education. To further extend these capabilities into the realm of visual understanding, a series of pioneering studies [14–17] have integrated visual encoders into LLMs, leading to the development of multimodal large language models (MLLMs). Notable examples include Gemini [18], LLaVA [19, 20], and QWen-VL [21].

To enhance the instruction-following abilities of MLLMs, visual instruction tuning (VIT) [19, 22–24] is paramount. This process involves fine-tuning MLLMs with meticulously curated instruction datasets [19, 25]. However, the success of this stage is critically dependent on the quality of VIT data. Utilizing suboptimal data can lead to severe consequences, such as excessive computational resource consumption and diminished model performance due to erroneous or low-value data. For instance, as illustrated in Figure 1, erroneous data may include incorrectly annotated answers for given images and instructions, which can degrade the model’s accuracy and reliability. Similarly, low-value data consists of instructions with low correlation to the relevant image or overly simple instructions. An example would be an instruction asking, “How many men are in the photo? Give a very brief answer.” for an image of a “stop” sign. Such data does not significantly contribute to enhancing the model’s instruction-following capability. Therefore, constructing high-quality visual instruction datasets is crucial for achieving optimal MLLM performance. Current research primarily emphasizes manually curating training datasets from diverse domains or tasks to improve these models’ capabilities [14, 19, 26–34]. While MLLMs fine-tuned on these visual instruction datasets have shown impressive results across numerous downstream multimodal benchmarks, a significant knowledge gap persists, particularly in understanding the defining characteristics of high-quality instruction tuning data and methodologies for its efficient and automated selection.

To address this critical gap, we introduce MLLM-Selector—a pioneering approach specifically designed to automatically identify and select high-value data for VIT. Specifically, MLLM-Selector initiates with random sampling from the VIT data pool to create a seed dataset. This seed dataset forms the foundation for fine-tuning the base model, resulting in a seed model endowed with preliminary instruction-following capabilities. Leveraging the capabilities of this seed model, we compute a necessity score for each sample in the VIT data pool. Samples with higher necessity scores are deemed crucial for further improving model performance, thereby ensuring that the most beneficial data is selected. Experimental results robustly underscore the importance of maintaining a balance between

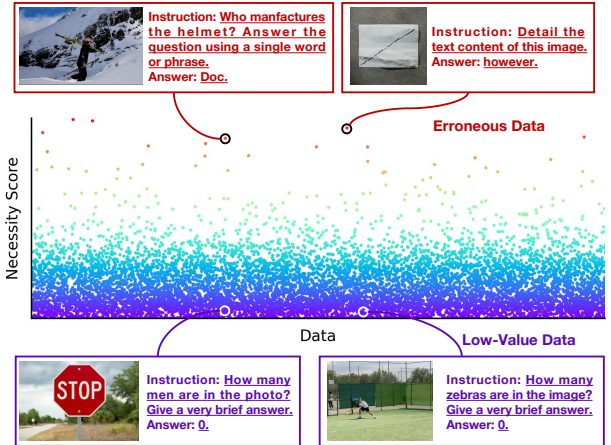


Fig. 1 The VIT dataset might include low-value or erroneous data, potentially impairing MLLM performance.

necessity and diversity in data selection. Consequently, MLLM-Selector employs a *necessity-based grouped sampling strategy*. This strategy not only focuses on the necessity of the data but also incorporates diversity through strategic grouping. By doing so, it ensures a well-rounded and representative data selection, crucial for comprehensive model training and performance. To substantiate the efficacy of MLLM-Selector, we conducted experiments across a series of benchmarks and compared the results with those of the widely-used open-source MLLM, LLaVA-1.5 [20], under identical experimental settings. Our findings reveal several promising observations: 1) Using less than 1% of the data (6k vs. 665k), MLLM-Selector was able to outperform LLaVA-1.5 on certain benchmarks. 2) With less than 50% of the data (301k vs. 665k), MLLM-Selector exceeded the performance of LLaVA-1.5 on all validated benchmarks. 3) Employing the same amount of data (665k vs. 665k), MLLM-Selector achieved substantial improvements on various benchmarks, *e.g.*, +14.54% on DOCVQA, +25.36% on ChartQA, and +9.47% on Hallusion-Benchmark.

Our contributions are summarized as follows:

- We introduce novel criteria for instruction data selection that emphasize necessity and diversity, and demonstrate their pivotal importance through empirical analysis.

- We propose a high-value data selection method, MLLM-Selector, which comprehensively evaluates the necessity and diversity of each data point to optimize data quality.
- Our extensive experimental results validate the effectiveness of MLLM-Selector, showing that it can surpass the performance of LLaVA-1.5 with a substantially smaller training dataset, and achieve substantial performance gains when using equivalent amounts of data.

2 Related Works

2.1 Instruction Tuning

In the past few years, machine learning (ML) and natural language processing (NLP) have experienced tremendous advancement, particularly in the development and training of models. The advent of pre-trained models such as BERT [12] and GPT [2] has revolutionized the field. Fine-tuning these pre-trained models for downstream tasks has become the new standard, leading to substantial performance improvements [35–39]. Specifically, while pre-trained language models possess enormous potential, they are not typically experts in specific domains. To tailor these models for tasks such as sentiment analysis [40–43], language translation [44, 45], or question answering [46–49] on specialized topics, fine-tuning becomes essential. This process involves exposing the model to labeled examples relevant to the targeted tasks, thereby adjusting pretrained parameters and representations to enhance task-specific performance. Subsequently, the capabilities of larger language models continued to evolve, notably through techniques such as contextual learning using prompts. Recently, a transformative method known as Instruction Tuning (IT) [50–52] has emerged, making large language models (LLMs) increasingly practical and effective in real-world applications. IT is a critical step in endowing pre-trained foundation models with instruction-following abilities, enabling them to handle complex instructions and respond in a human-like manner. Prominent examples include Alpaca [53], Vicuna [54], and WizardLM [55], which have distilled instruction-tuning datasets from GPT-family models. Building on the concept of IT, visual instruction tuning (VIT) [56–58]

plays a crucial role in the development of multi-modal large language models (MLLMs). VIT aims to equip MLLMs with the ability to follow visual instructions, thus enhancing their versatility and application range. Current research [20, 59, 60] often involves synthesizing visual instruction data and mixing it with existing academic datasets to form a comprehensive training dataset. MLLMs trained on these mixed datasets have demonstrated exceptional performance across numerous academic benchmarks [61–63]. For instance, MiniGPT-4 [23] and LLaVA-1.5 [20] have organized existing datasets into instruction formats and generated additional instruction data using GPT. Despite these successes, current methods often simply amalgamate all types of instructions, failing to address potential redundancies within and across different task instructions. Our research introduces an automated method for selecting high-value data for visual instruction tuning, effectively addressing redundancies. This nuanced approach ensures that the models are not only trained on diverse data but are also optimized for quality and relevance, ultimately leading to more robust and efficient instruction-following capabilities.

2.2 Data Selection for Instruction Tuning

Redundant and low-quality data in instruction datasets can lead to increased training costs and result in suboptimal model performance, making the selection of high-value data critically important. Recently, the topic of data selection for instruction tuning has gained significant attention in the development of large language models (LLMs). The goal is to curate a subset of data that maximizes model performance while minimizing unnecessary computational expenses. One pioneering effort in this area is LIMA [64], which demonstrated that the vast majority of knowledge within a large model is acquired during the pre-training stage. Consequently, only a limited number of carefully selected instructions are required to fine-tune the model for high-quality content generation. Following this, Alpapasus [65] introduced an innovative automatic filtering approach using ChatGPT to evaluate the quality of each sample, thus significantly improving training efficiency. Instruction Mining [66] further advanced

the field by employing a linear combination of several indicators to assess sample quality, providing a robust framework for data selection. As data selection becomes increasingly popular in instruction tuning, the approach is also being explored in the context of visual instruction tuning (VIT). VIT aims to enhance multimodal large language models (MLLMs) by enabling them to follow complex visual instructions effectively. For instance, InstructionGPT-4 [67] employs a set of custom-designed indicators to identify high-quality visual instructions, ensuring the training data is both relevant and valuable. SELE-FILTER [68] champions data selection via a trained score network, ensuring robust model performance. Moreover, TIVE [69] addresses the challenges of selecting data from highly complex visual instruction mixtures, introducing sophisticated metrics to evaluate each data sample’s utility. However, many of these existing methods rely on additional models or networks for data selection, which can add complexity and computational overhead to the process. Different from these approaches, our proposed MLLM-Selector achieves a fully automated data selection process without the need for training supplementary models, such as score networks. This streamlined approach not only simplifies the data selection procedure but also enhances efficiency.

3 Preliminary

3.1 Visual Instruction Tuning

The training process of multi-modal large language models (MLLMs) can be effectively divided into two distinct stages: *Pretraining* and *Visual Instruction Tuning*. In the *Pretraining* stage, the primary focus is on fine-tuning the projector to harmonize vision and language features. This is typically achieved through the extensive use of image-caption pairs, which serve as a rich source of aligned visual and textual data. By leveraging these pairs, the model learns to intertwine visual inputs with corresponding linguistic descriptions, thereby establishing a foundational understanding of multimodal data. Nevertheless, models resulting from this stage often exhibit limited instruction-following capabilities, which hampers their ability to engage in coherent and meaningful dialogues with human users.

Recognizing the inherent limitations of the pretraining stage, the subsequent *Visual Instruction Tuning*—also referred to as self-supervised fine-tuning—plays a critical role in augmenting the model’s interactive capacities. This phase is instrumental in imbuing the pretrained model with enhanced instruction-following abilities. By utilizing a variety of conversation-format data, the model becomes adept at interpreting and responding to nuanced instructions, significantly improving its conversational fluency and responsiveness. In this paper, we present a novel approach aimed at automatically selecting high-value visual instruction tuning data to achieve better training efficiency.

3.2 Task Formulation

In this section, we delineate the formulation of the data selection task for visual instruction tuning (VIT), a crucial step towards optimizing the training efficiency and performance of our multi-modal large language models (MLLMs).

Consider a VIT data pool denoted as $\mathcal{D}^M = \{x_i^t, x_i^v\}_{i=1}^M$, where each (x_i^t, x_i^v) pair represents the textual and visual components, respectively, of the i -th sample in the data pool, and M represents the total number of samples in this pool. The primary objective of the VIT data selection task is to identify and select a high-value subset $\mathcal{D}^m \subseteq \mathcal{D}^M$, where m is the size of the desired subset. This subset \mathcal{D}^m retains the most informative and relevant examples from the original data pool.

This selective approach is imperative for several reasons. First, utilizing the entire data pool \mathcal{D}^M for fine-tuning can be computationally prohibitive and inefficient, especially as the size of the data pool scales. Second, not all data points contribute equally to the model’s learning process; some may be redundant or even detrimental to the model’s performance. Therefore, by carefully curating a high-value subset \mathcal{D}^m , we can significantly enhance the efficiency of the fine-tuning process.

In this task, the pretrained model \mathbf{f}^{pre} , obtained after the pretraining stage, is subsequently fine-tuned using the selected subset \mathcal{D}^m . The goal is to achieve superior performance across a wide range of downstream tasks, leveraging the distilled and more potent training data.

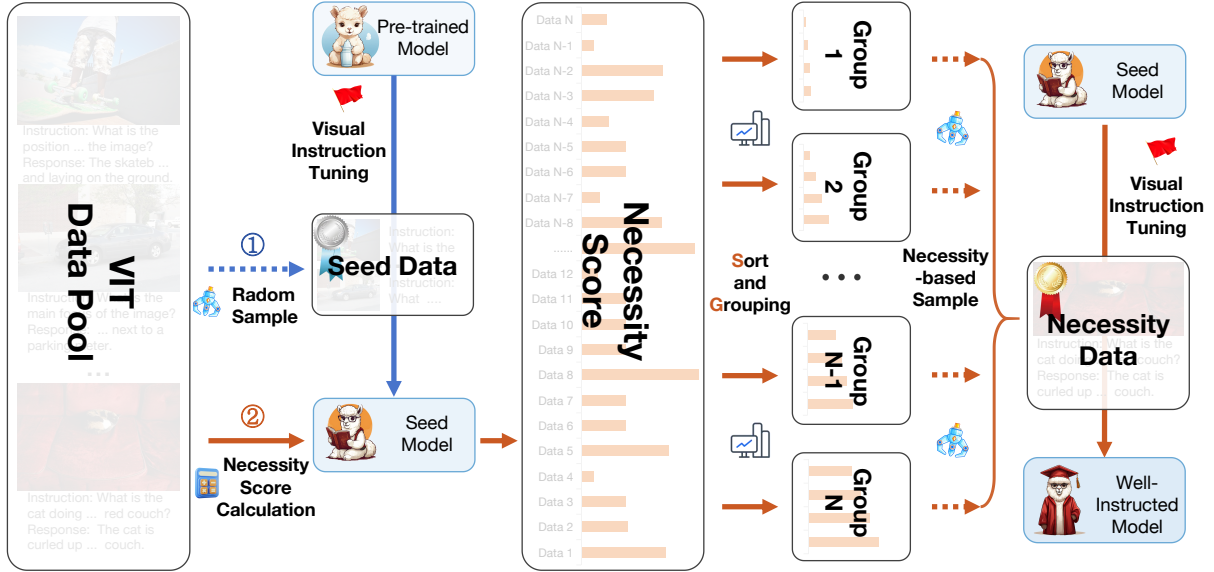


Fig. 2 Overview of MLLM-Selector, which consists of two stages: *Stage 1: Initial Seed Data Selection via Random Sampling* and *Stage 2: Necessity Data Selection through Necessity-Based Grouped Sampling*.

4 MLLM-Selector

In this section, we introduce our proposed MLLM-Selector, depicted in Figure 2. This innovative methodology automatically selects high-value data for MLLMs. Initially, in Section 4.1, we outline the process of initial seed data selection via random sampling, which imparts an initial instruction-following ability to the pre-trained model. Subsequently, in Section 4.2, we describe the necessity data selection phase, where necessity-based grouped sampling is used to systematically identify and address gaps within the seed model.

4.1 Stage 1: Initial Seed Data Selection via Random Sampling.

In this stage, our objective is to sample a subset \mathcal{D}^{n_1} , referred to as seed data, from the entire data pool \mathcal{D}^M . The primary purpose of the seed data is to endow the pretrained model \mathbf{f}^{pre} with an initial instruction-following ability. To achieve this, we employ the simplest random sampling strategy, selecting n_1 data points from \mathcal{D}^M to form \mathcal{D}^{n_1} , which is formulated as follows:

$$\mathcal{D}^{n_1} \subseteq \mathcal{D}^M = \{(x_i^t, x_i^v) \mid i \in I\}, \quad (1)$$

Algorithm 1 Stage 1: Initial Seed Data Selection via Random Sampling

- 1: **procedure** SEED DATA SELECTION AND FINE-TUNING
- 2: **Input:** Data pool \mathcal{D}^M , pretrained model \mathbf{f}^{pre} , seed data size n_1
- 3: **Output:** Seed model \mathbf{f}^{seed}
- 4: **Step 1: Seed Data Sampling**
- 5: Randomly sample n_1 indices I from $\{1, 2, \dots, M\}$
- 6: $\mathcal{D}^{n_1} \leftarrow \{(x_i^t, x_i^v) \mid i \in I\}$
- 7: **Step 2: Fine-tune the Pretrained Model**
- 8: Fine-tune \mathbf{f}^{pre} with the seed data \mathcal{D}^{n_1} to obtain the seed model \mathbf{f}^{seed}
- 9: **Return:** \mathbf{f}^{seed}
- 10: **end procedure**

where I denotes a set of indices randomly selected from $\{1, 2, \dots, M\}$ with a size of n_1 :

$$I \sim \text{Uniform}(\{1, 2, \dots, M\}, n_1). \quad (2)$$

Subsequently, we use this seed data \mathcal{D}^{n_1} to fine-tune the pretrained model \mathbf{f}^{pre} , resulting in the seed model \mathbf{f}^{seed} . The procedure for initial seed data selection is summarized in Algorithm 1.

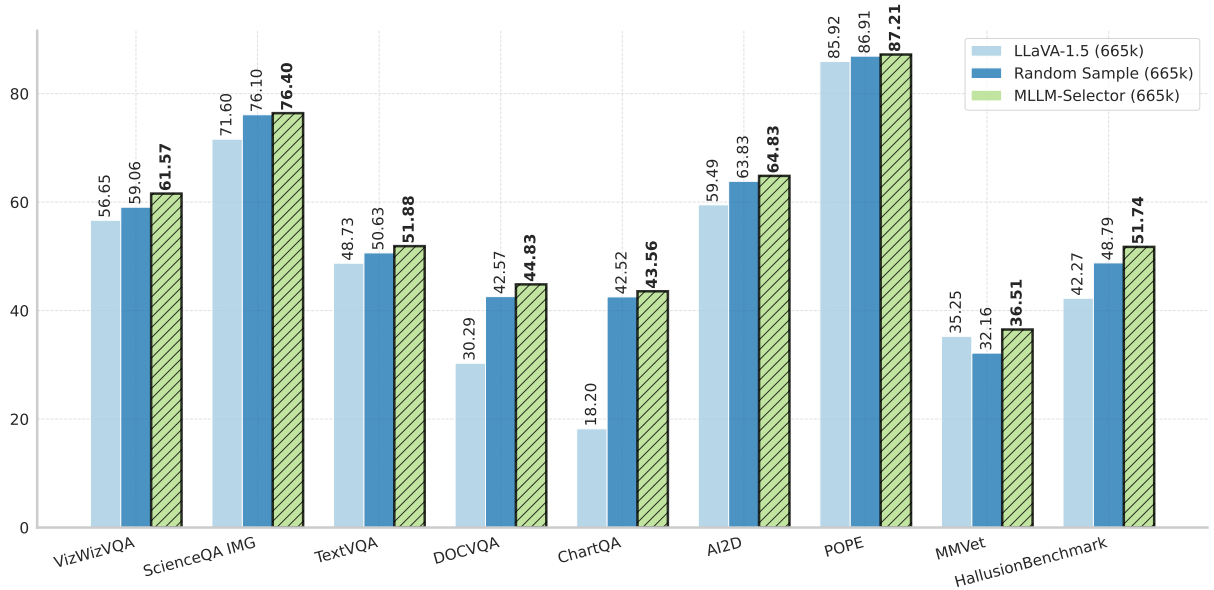


Fig. 3 Performance comparison of different visual instruction tuning data composition methods. The highest score for each benchmark is highlighted.

4.2 Stage 2: Necessity Data Selection via Necessity-Based Grouped Sampling

In Stage 2, our primary objective is to automatically select the most critical data to optimize the seed model \mathbf{f}^{seed} . For this purpose, we introduce a necessity score, which quantifies the importance of each sample in improving the seed model’s instruction-following capabilities. The necessity score for each sample $(V, T, R_{1:T})$ is defined as:

$$s^{\text{nec}} = \sum_{t=1}^T \log(p_{\theta}(R_t | V, T, R_{1:t-1})), \quad (3)$$

where V represents the visual input, T the instruction, $R_{1:T}$ the ground truth response, and θ the parameters of the seed model. A higher necessity score s^{nec} indicates that the sample is more crucial for enhancing the seed model’s instruction-following proficiency. To merely select data with the highest necessity scores directly might seem intuitive, but it often leads to a lack of diversity in the dataset, which hampers overall model performance, as shown in Table 3. Therefore, we propose the Necessity-Based Grouped Sampling (NBGS) method to balance both necessity and

data diversity. Initially, we sorted the samples based on necessity scores. The sorted samples are then divided into N groups $\{\mathcal{G}_j\}_{j=1}^N$, each containing k samples. Within each group \mathcal{G}_j , we convert the necessity scores into sampling probabilities using the softmax function:

$$p_i = \frac{\exp(s_i^{\text{nec}})}{\sum_{x_k \in \mathcal{G}_j} \exp(s_k^{\text{nec}})} \quad \text{for each } x_i \in \mathcal{G}_j, \quad (4)$$

where s_i^{nec} is the necessity score of x_i . Subsequently, a proportionate number of samples, $\frac{n_2}{N}$, are selected from each group based on the computed sampling probabilities:

$$\mathcal{S}_j = \text{Sample}\left(\mathcal{G}_j, \frac{n_2}{N}, \{p_i | x_i \in \mathcal{G}_j\}\right). \quad (5)$$

This balanced sampling strategy ensures that each group effectively contributes to the final dataset, incorporating both high-necessity and diverse samples. The selected samples from each group are then aggregated to form a comprehensive set of necessity data points:

$$\mathcal{D}^{n_2} = \bigcup_{j=1}^N \mathcal{S}_j. \quad (6)$$

Algorithm 2 Stage 2: Necessity Data Selection via Necessity-Based Grouped Sampling

```
1: procedure NECESSITY SAMPLING AND FINE-TUNING
2:   Input: Seed model  $\mathbf{f}^{\text{seed}}$ , data pool  $\mathcal{D}^M$ , selected data size  $n_2$ , group size  $k$ 
3:   Output: Well-instructed model  $\mathbf{f}^{\text{ins}}$ 
4:   Step 1: Compute Necessity Scores
5:   for each sample in  $\mathcal{D}^M$  do
6:     Compute the necessity score  $s^{\text{nec}}$  using Equation (3)
7:   end for
8:   Step 2: Sort and Group Samples
9:   Sort samples based on  $s^{\text{nec}}$ 
10:  Divide the sorted samples into  $N$  groups,  $\{\mathcal{G}_i\}_{i=1}^N$ , each containing  $k$  samples
11:  Step 3: Compute Sampling Probabilities
12:  for each group  $\mathcal{G}_j$  do
13:    for each sample  $x_i \in \mathcal{G}_j$  do
14:      Compute the sampling probability  $p_i$  using Equation (4)
15:    end for
16:  end for
17:  Step 4: Sample Data from Each Group
18:  for each group  $\mathcal{G}_j$  do
19:    Select  $\frac{n_2}{N}$  samples based on  $p_i$ 
20:  end for
21:  Step 5: Aggregate Selected Samples
22:  Merge selected samples from all groups to form  $\mathcal{D}^{n_2}$ 
23:  Combine  $\mathcal{D}^{n_2}$  with  $\mathcal{D}^{n_1}$  to construct  $\mathcal{D}^m$ 
24:  Step 6: Fine-tune the Seed Model
25:  Fine-tune  $\mathbf{f}^{\text{seed}}$  using  $\mathcal{D}^m$ 
26:  Return: Well-instructed model  $\mathbf{f}^{\text{ins}}$ 
27: end procedure
```

To create the final dataset \mathcal{D}^m , we merge \mathcal{D}^{n_2} and \mathcal{D}^{n_1} , then use it to fine-tune the seed model \mathbf{f}^{seed} into the well-instructed model \mathbf{f}^{ins} .

5 Experiments

5.1 Implementation Details

To rigorously assess the effectiveness of the proposed MLLM-Selector, we conducted experimental validation using LLaVA-1.5 [20], a well-recognized open-source MLLM. LLaVA-1.5

includes 665k visual instruction tuning training samples and comprises a vision encoder, a projector, and an LLM. Our methodology adheres strictly to the original instruction-tuning settings and hyperparameters as specified in the official implementations. The experiments were executed on 8 A800 GPUs. k is set to 50,000. Unless otherwise specified, the seed and necessity data volumes are 100k and 565k, respectively. The default LLM is Vicuna-13B. To evaluate performance across different benchmarks, we used the LMMs-Eval toolkit [70] for comprehensive evaluation. Detailed information regarding the data pool can be found in the Appendix A.1.

5.2 Quantitative Experiment

5.2.1 What Are the Impacts of Different Selection Strategies?

To rigorously validate the effectiveness of MLLM-Selector, we present a comparative analysis with two representative approaches. The first approach utilizes a manually constructed VIT dataset, referred to as LLaVA-1.5-mix665k [20]. This dataset, created by human experts leveraging their knowledge and experience, exemplifies a method of manual dataset construction. To ensure a fair comparison, our automated construction method employs the same dataset size, i.e., 665k samples. The second approach serves as the baseline for automating VIT dataset construction, where 665k samples are randomly selected from the data pool. The performance comparison is illustrated in Figure 3. Our observations are as follows:

- Across all nine benchmarks, MLLM-Selector consistently outperforms both the manually constructed VIT dataset and the random sampling strategy. This highlights the efficacy of the proposed Necessity-Based Grouped Sampling strategy.
- In specific benchmarks, such as DOCVQA and ChartVQA, both the random sampling strategy and MLLM-Selector substantially surpass the manually constructed VIT dataset. This could be attributed to the diverse nature of the data pool, wherein the sampled data includes a wide range of instructional content related to documents and charts. In contrast, the manually constructed dataset might have overlooked these critical aspects.

Table 1 Experimental results of different quantities of sampled data using MLLM-Selector, with the number of seed data set to 1k. “See.+Nec.” represents the combination of Seed Data + Necessity Data. Performance differences compared to LLaVA-1.5 are highlighted, with values exceeding LLaVA-1.5 in green and those falling short in red.

| See.+Nec. | Total | ScienceQA | TextVQA | DOCVQA | ChartQA | AI2D | POPE |
|------------------|-------------|----------------|----------------|----------------|----------------|----------------|---------------|
| LLaVA-1.5 | 665k | 71.60 | 48.73 | 30.29 | 18.20 | 59.49 | 85.92 |
| 1k+5k | 6k | 58.45 (-13.15) | 38.04 (-10.69) | 26.08 (-4.21) | 19.72 (+1.52) | 47.60 (-11.89) | 81.09 (-4.83) |
| 1k+10k | 11k | 68.67 (-2.93) | 42.12 (-6.61) | 30.30 (+0.01) | 20.80 (+2.60) | 53.50 (-5.99) | 83.98 (-1.94) |
| 1k+50k | 51k | 71.69 (+0.09) | 45.08 (-3.65) | 35.37 (+5.08) | 23.84 (+5.64) | 57.58 (-1.91) | 85.91 (-0.01) |
| 1k+100k | 101k | 70.15 (-1.45) | 46.53 (-2.20) | 36.72 (+6.43) | 27.92 (+9.72) | 57.51 (-1.98) | 84.88 (-1.04) |
| 1k+200k | 201k | 73.28 (+1.68) | 47.83 (-0.90) | 40.51 (+10.22) | 33.72 (+15.52) | 57.29 (-2.20) | 86.11 (+0.19) |
| 1k+300k | 301k | 75.21 (+3.61) | 49.46 (+0.73) | 42.06 (+11.77) | 37.88 (+19.68) | 61.08 (+1.59) | 86.46 (+0.54) |
| 1k+400k | 401k | 73.57 (+1.97) | 49.93 (+1.20) | 42.92 (+12.63) | 37.80 (+19.60) | 62.95 (+3.46) | 86.57 (+0.65) |
| 1k+600k | 601k | 76.50 (+4.90) | 50.95 (+2.22) | 43.13 (+12.84) | 39.28 (+21.08) | 63.67 (+4.18) | 86.50 (+0.58) |

5.2.2 How Much Data is Needed to Exceed LLaVA-1.5?

Previous experiments have established that using 665k data sampled via MLLM-Selector results in consistent and significant performance improvements over LLaVA-1.5 under identical experimental settings. In this section, we delve into determining the minimum amount of data that MLLM-Selector needs to outperform LLaVA-1.5, while keeping all other settings constant. We conducted experiments with the seed data fixed at 1k. As shown in Table 1, our analyses reveal that on certain datasets, including ScienceQA, DOCVQA, and ChartQA, MLLM-Selector requires only 7.7% of the data (i.e., 1k+50k) to surpass the performance of LLaVA-1.5. Moreover, our results indicate that MLLM-Selector achieves superior performance across all datasets with less over 50% of the total data volume. Specifically, with 301k total data (1k seed data + 300k necessity data), MLLM-Selector consistently outperforms LLaVA-1.5 on all benchmarks. This highlights the efficiency and effectiveness of our data selection method. For instance, in the case of ScienceQA, our method outperforms LLaVA-1.5 by a margin of 3.61 points with just 301k total data. Similarly, for DOCVQA and ChartQA, our approach shows improvements of 11.77 and 19.68 points, respectively, under the same data constraints. These substantial gains underscore the robustness of our methodology in enhancing performance with a significantly reduced dataset size.

Table 2 Performance comparison of Stage 2 with and without checkpoint initialization from Stage 1. SQA, TQA, DQA, and CQA refer to ScienceQA IMG, TextVQA, DOCVQA, and ChartQA, respectively. The best performances are highlighted in bold.

| Init | SQA | TQA | DQA | CQA | AI2D | POPE |
|------|--------------|--------------|--------------|--------------|--------------|--------------|
| | 76.30 | 51.33 | 44.85 | 42.36 | 64.22 | 86.97 |
| ✓ | 76.40 | 51.88 | 44.83 | 43.56 | 64.83 | 87.21 |

5.3 Ablation Study

5.3.1 What is the relationship between performance and data volume?

To investigate the relationship between data volume and model performance across various benchmarks, we conducted a comprehensive analysis by randomly sampling different volumes of training data (i.e., 10k, 20k, 33k, 50k, 100k, 500k, 665k) from our constructed data pool. As illustrated in Figure 4, while most benchmarks exhibit performance improvement as the training data volume increases, some benchmarks do not follow this trend uniformly. Our analysis identifies four distinct patterns in the performance data.

- First, we observe benchmarks where performance consistently improves with increasing training data volume. Examples include TextVQA, DOCVQA, ChartQA, AI2D, SeedBench 2, GQA, and SeedBench IMG. These benchmarks indicate a strong data dependency, with models continuing to benefit from additional data up to the maximum tested volume of 665k, without showing signs of saturation.

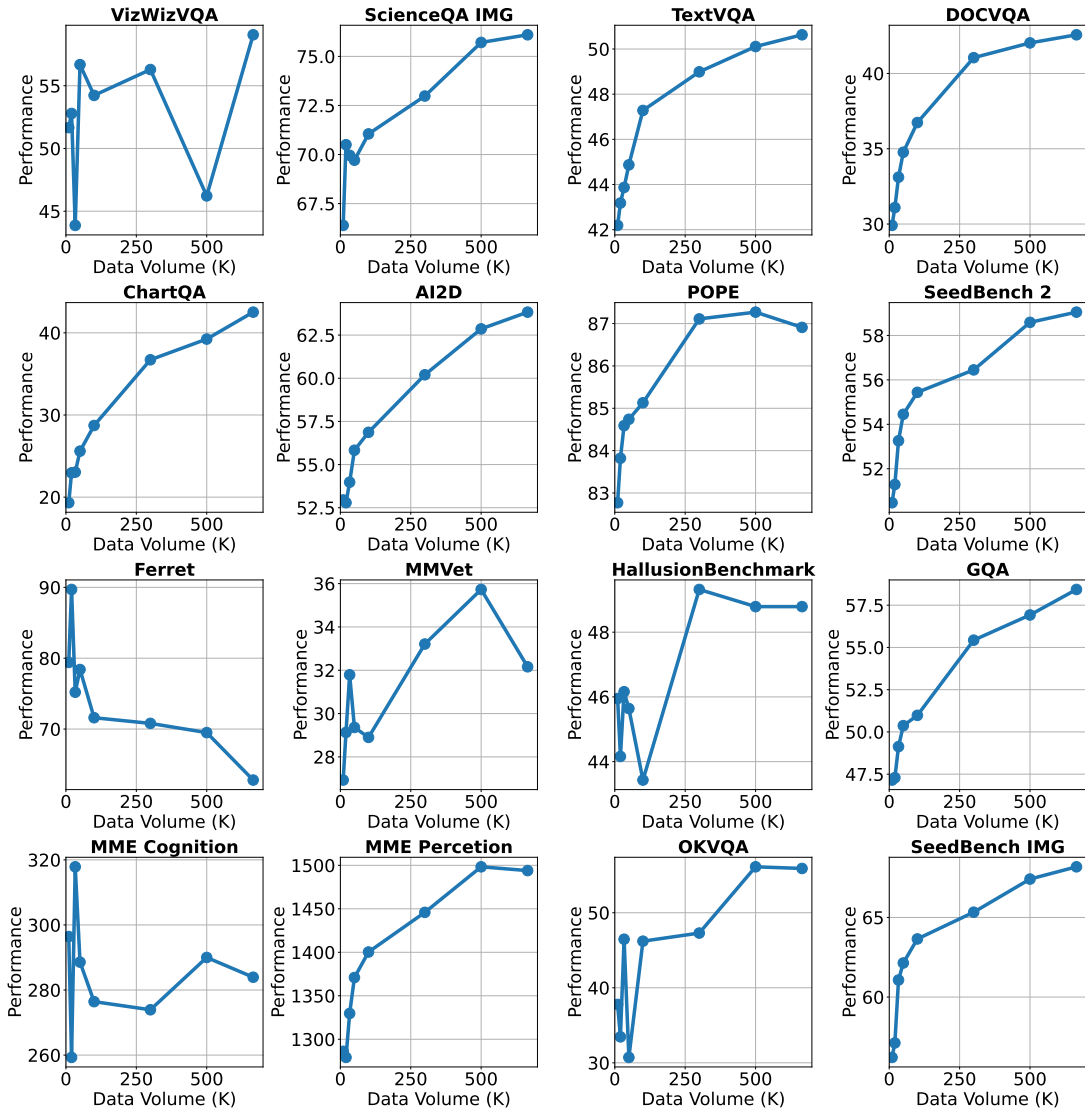


Fig. 4 The relationship between data volume and performance across various benchmarks: VizWizVQA [71], ScienceQA IMG [72], TextVQA [73], DOCVQA [74], ChartQA [75], AI2D [76], POPE [77], SeedBench 2 [78], Ferret [79], MMVet [80], HallusionBenchmark [81], GQA [82], MME Cognition [83], MME Percetion [83], OKVQA [62], and SeedBench IMG [84]. The data shows how performance metrics change as the data volume increases from 0 to 665 thousand samples for each benchmark.

- Second, there are benchmarks where performance initially improves with increasing data volume but reaches saturation before the maximum volume. Notably, POPE and MME Percetion achieve peak performance at around 500k data samples. Beyond this volume, further increases in data do not yield performance gains and sometimes even lead to performance decline.
- The third pattern involves benchmarks where performance improves overall with increased data volume but exhibits variability, or “performance jitter,” at certain points. ScienceQA IMG, MMVet, HallusionBenchmark, and OKVQA fall into this category. These benchmarks reflect inconsistent performance improvements, suggesting possible inefficiencies or noise in data assimilation.
- Lastly, there are benchmarks where model performance shows little to no correlation with the

Table 3 Performance comparison of different data selection methods based on necessity score. The best performance for each benchmark is highlighted in bold.

| Method | SQA | TQA | DQA | CQA | AI2D | POPE |
|--------|--------------|--------------|--------------|--------------|--------------|--------------|
| Top | 75.34 | 51.63 | 43.47 | 41.88 | 64.05 | 86.79 |
| Bottom | 75.53 | 50.79 | 43.58 | 42.76 | 63.90 | 86.59 |
| Ours | 76.40 | 51.88 | 44.83 | 43.56 | 64.83 | 87.21 |

Table 4 Performance comparison of different τ values for data selection based on necessity scores. The highest performance for each benchmark is highlighted in bold.

| τ | SQA | TQA | DQA | CQA | AI2D | POPE |
|--------|--------------|--------------|--------------|--------------|--------------|--------------|
| 0.5 | 74.67 | 50.46 | 43.77 | 40.44 | 64.77 | 86.83 |
| 1 | 76.40 | 51.88 | 44.83 | 43.56 | 64.83 | 87.21 |
| 2 | 75.95 | 51.90 | 43.67 | 41.08 | 64.05 | 86.61 |
| 10 | 76.90 | 52.06 | 44.48 | 42.32 | 64.51 | 87.06 |

amount of training data. VizWizVQA, Ferret, and MME Cognition exemplify this pattern. Here, additional training data does not translate into significant performance improvements, indicating that other factors may play a more critical role in model efficacy.

5.3.2 Does Stage 2 Training Require Initialization?

In this section, we investigate the necessity of using the weights from the seed model trained in Stage 1 as initialization for Stage 2. Table 2 presents the performance of models trained with and without initialization from Stage 1. Our findings indicate that initializing Stage 2 training with the checkpoint from Stage 1 generally leads to performance improvements across most benchmarks. This enhancement is likely due to the fact that the necessity data was selected based on the Stage 1 checkpoint. By initializing the model with the seed checkpoint, the selected necessity data appears to have a greater positive impact, as it aligns with the knowledge embedded in the seed model. Given these observations, we recommend using checkpoint initialization from Stage 1 to enhance Stage 2 training outcomes.

Table 5 Performance comparison of different k values for data selection based on necessity scores. The highest performance for each benchmark is highlighted in bold.

| k | SQA | TQA | DQA | CQA | AI2D | POPE |
|-------|--------------|--------------|--------------|--------------|--------------|--------------|
| 1k | 77.84 | 51.05 | 44.26 | 42.48 | 65.29 | 86.77 |
| 5k | 77.94 | 50.69 | 43.04 | 41.60 | 65.19 | 86.52 |
| 10k | 77.49 | 51.55 | 44.40 | 42.24 | 65.54 | 86.84 |
| 50k | 76.40 | 51.88 | 44.83 | 43.56 | 64.83 | 87.21 |
| 100k | 77.44 | 51.49 | 44.25 | 41.92 | 64.41 | 87.01 |
| 200k | 77.44 | 50.77 | 45.02 | 41.52 | 63.12 | 87.57 |
| 500k | 77.39 | 51.67 | 43.69 | 41.36 | 64.12 | 87.06 |
| 1000k | 76.40 | 49.83 | 43.34 | 42.76 | 65.09 | 87.19 |

5.3.3 How to Sample Data Based on Necessity Score?

Once we have computed the necessity score for each sample, it is crucial to adopt effective strategies to select data for training. In this study, we evaluate three distinct strategies to gauge their impact on model performance. 1. *Top Necessity Scores*: We select the top 565k samples with the highest necessity scores, representing the most essential data for the seed model. 2. *Bottom Necessity Scores*: Conversely, we select the 565k samples with the lowest necessity scores, representing the least necessity data for the seed model. 3. *Proposed Method*: Our proposed approach (MLLM-Selector) selects data by balancing both necessity and diversity to maximize overall model performance. The performance results of these three strategies are presented in Table 3. The results clearly demonstrate that our proposed method outperforms both the top and bottom necessity score strategies across all benchmarks. This superiority likely stems from our method’s ability to consider data diversity, which prevents the model from overfitting to a narrow data distribution and ensures comprehensive learning. Additionally, the top necessity score strategy does not consistently outperform the bottom necessity score strategy. This inconsistency could be attributed to the presence of excessively difficult samples within the high necessity score group, which may hinder the model’s performance improvement. Such challenging samples might overwhelm the model, leading to suboptimal learning outcomes.

Table 6 Experimental results for different distributions of seed data and necessity data quantities. “Sec.+Nec.” denotes Seed Data + Necessity Data. The total dataset size is consistently maintained at 665k for fair comparison. The best performance for each benchmark is highlighted in bold.

| Sec.+Nec. | Total | ScienceQA | TextVQA | DOCVQA | ChartQA | AI2D | POPE |
|-----------|-------|--------------|--------------|--------------|--------------|--------------|--------------|
| 1k+664k | 665k | 77.19 | 51.49 | 43.78 | 40.92 | 63.92 | 87.20 |
| 10k+655k | 665k | 75.16 | 51.35 | 44.59 | 41.48 | 64.31 | 87.24 |
| 20k+645k | 665k | 77.54 | 50.46 | 44.42 | 42.40 | 64.90 | 86.50 |
| 33k+632k | 665k | 74.62 | 51.01 | 43.56 | 42.04 | 64.18 | 86.51 |
| 50k+615k | 665k | 77.74 | 51.07 | 44.21 | 41.64 | 65.38 | 87.20 |
| 100k+565k | 665k | 76.40 | 51.88 | 44.83 | 43.56 | 64.83 | 87.21 |
| 300k+365k | 665k | 76.60 | 50.51 | 44.51 | 42.80 | 65.64 | 86.83 |
| 500k+165k | 665k | 76.25 | 51.23 | 44.46 | 43.04 | 65.32 | 86.98 |

Table 7 Performance comparison of different LLM sizes and data construction methods. “Artificial” represents the manually curated dataset in LLaVA-1.5, “Random” represents random sampling from our proposed dataset pool, and “MLLM-Selector” represents our proposed method. The total dataset size is maintained at 665k for fair comparison. The best performance for each benchmark is highlighted in bold.

| LLM Size | Data | ScienceQA | TextVQA | DOCVQA | ChartQA | AI2D | POPE |
|----------------|---------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Vicuna -7B | Artificial | 70.43 | 46.07 | 28.08 | 18.24 | 54.79 | 85.87 |
| | Random | 74.57 | 49.51 | 40.14 | 34.84 | 60.14 | 86.43 |
| | MLLM-Selector | 75.71 | 49.08 | 42.0 | 37.20 | 61.08 | 87.07 |
| Vicuna -13B | Artificial | 71.60 | 48.73 | 30.29 | 18.20 | 59.49 | 85.92 |
| | Random | 76.10 | 50.63 | 42.57 | 42.52 | 63.83 | 86.91 |
| | MLLM-Selector | 76.40 | 51.88 | 44.83 | 43.56 | 64.83 | 87.21 |

5.3.4 How Does the Temperature in Softmax Affect Sampling?

In our methodology, the softmax function is utilized to transform necessity scores into sampling probabilities. The temperature parameter τ in the softmax function plays a critical role in shaping the distribution of the sampled data. Increasing the temperature parameter τ leads to a more uniform distribution, making the sampling process similar to random sampling. Consequently, the selected data may encompass a broader range of necessity scores, including both high and low extremes. Conversely, decreasing τ focuses the sampling process towards the highest necessity scores. This results in data selection that is heavily weighted towards samples deemed most necessary by the necessity scoring mechanism. We experimented with various τ settings to understand their effects on model performance. The results, presented in Table 4, reveal that the choice of τ significantly influences the outcomes across different benchmarks. From the table, it is evident

that setting τ to 1 yields the best performance on four out of six benchmarks. This indicates a balanced approach where the model benefits from a mix of high-necessity data without entirely disregarding lower-scoring yet potentially valuable samples. Consequently, we adopt $\tau = 1$ as our default setting, ensuring an optimal balance between diversity and necessity in the sampled data. However, for certain benchmarks like SQA and TQA, the highest performance is observed with $\tau = 10$. This suggests that for specific tasks, a more uniform distribution may still be beneficial, likely due to the broader coverage of data types and scenarios.

5.3.5 How Does k Affect Data Selection Performance?

The group size k is a critical hyperparameter that significantly influences the distribution of selected data. When the value of k is very small, the data selection approach of MLLM-Selector closely approximates random selection. Conversely, when k is exceedingly large, the selection process is

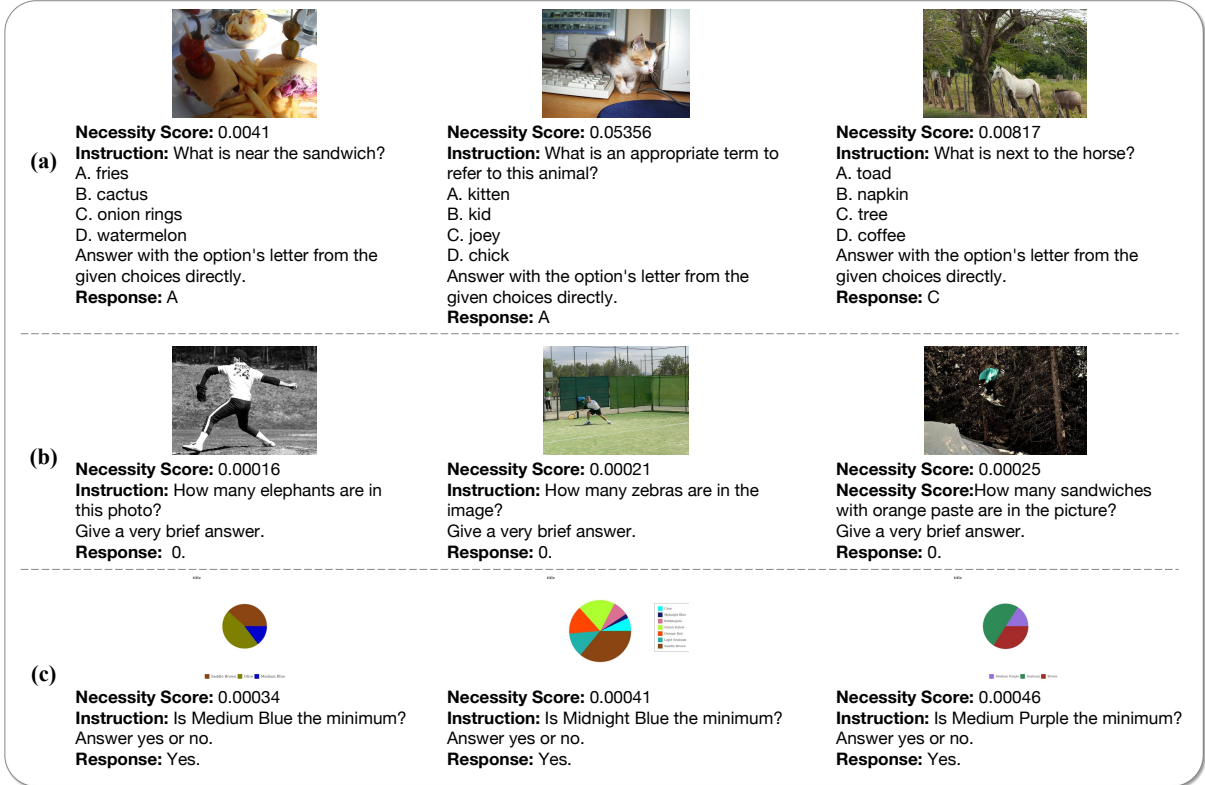


Fig. 5 Examples of samples with low necessity scores, categorized into three types: (a) Samples with noticeable differences in options, leading to easily solvable problems. (b) Samples where the problem is loosely related to the image, resulting in straightforward answers. (c) Samples with overly simple questions about charts.

primarily based on necessity scores, potentially disregarding the importance of diversity within the selected subset of data. Our experimental evaluations indicate that the choice of k has a pronounced impact on model performance. Table 5 presents a detailed comparison of different k values, highlighting the necessity of an optimal k for achieving superior performance. Notably, the highest performance was not observed for either the smallest ($k = 1k$) or the largest ($k = 1000k$) values. Instead, intermediate values offered a more favorable balance, with $k = 50k$ demonstrating the best performance across two different benchmarks. Based on these findings, we adopt $k = 50k$ as the default setting for MLLM-Selector. This value effectively balances the need for necessity and diversity, resulting in consistent performance improvements across various benchmarks.

5.3.6 How to Allocate the Seed Data and Necessity Data?

In our proposed MLLM-Selector, the training data is divided into two categories: seed data and necessity data. The seed data is used to train the initial seed model, which in turn generates necessity scores used to sample the necessity data. A larger volume of seed data can potentially ensure more reliable necessity scores because it allows the model to learn better representations. However, increasing the amount of seed data necessarily decreases the amount of necessity data, due to the fixed total dataset size. To explore the optimal balance between seed data and necessity data, we conducted experiments with different allocations. The results, displayed in Table 6, indicate that neither extremely large nor extremely small amounts of seed data result in optimal performance. A minimal amount of seed data leads to unreliable necessity scores, while an excessive amount of seed

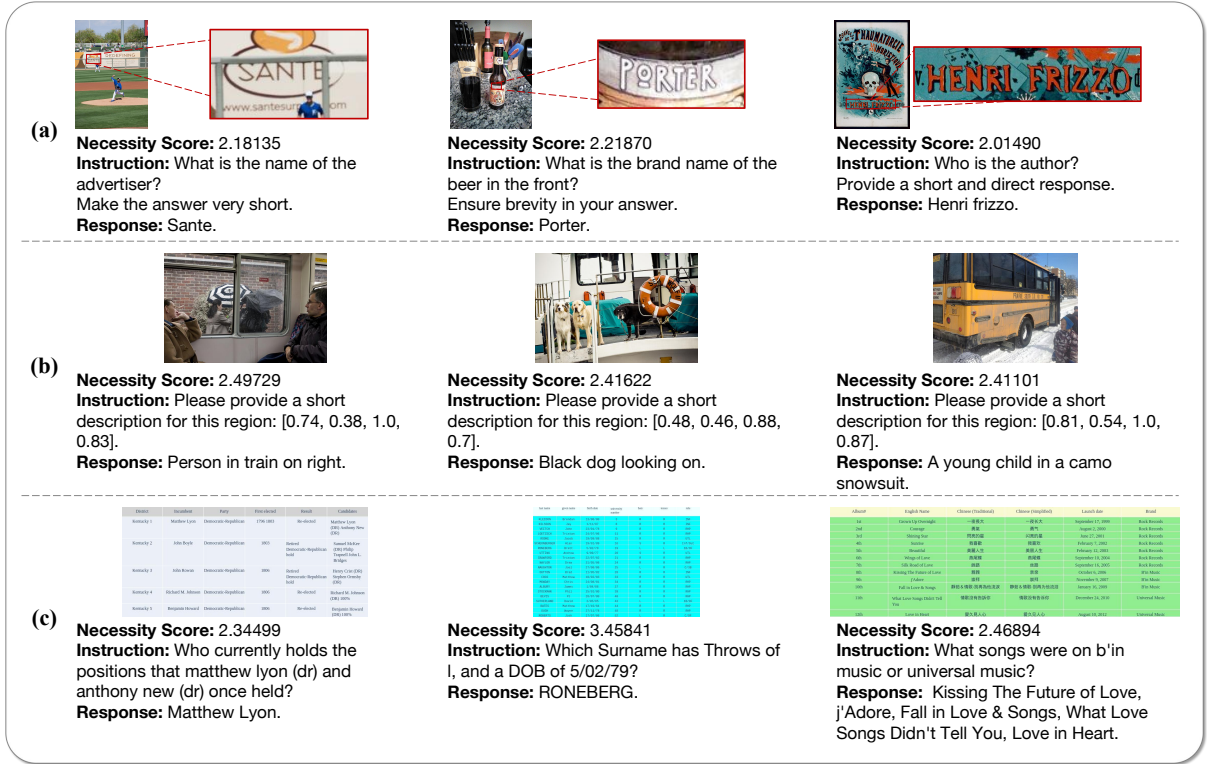


Fig. 6 Examples of samples with high necessity scores, categorized into three types: (a) Fine-grained text recognition problems, such as identifying specific text in an image. (b) Understanding specific regions within an image rather than the whole scene, including providing descriptions for specified coordinates. (c) Interpreting complex charts and tables, which require detailed analysis and extraction of specific information.

data leaves too little room for necessity data. Our findings show that a configuration of 100k seed data and 565k necessity data achieves top performance in half of the benchmarks. Therefore, we adopt this allocation as our default setting.

5.3.7 What is the Impact of Different LLM Sizes on the Results?

To evaluate the effectiveness of our proposed data selection methods across different LLM sizes, we conducted experiments using two popular configurations: Vicuna-7B and Vicuna-13B. As shown in Table 7, the performance trends are consistent regardless of the LLM size used. Our findings indicate that the MLLM-Selector consistently outperforms both the Artificial and Random data construction methods across all benchmarks for both LLM sizes. This consistency reinforces the robustness and effectiveness of our proposed method in enhancing model performance. Notably, while

the larger Vicuna-13B model demonstrates superior performance in absolute terms, the relative improvements gained through our MLLM-Selector are similar for both Vicuna-7B and Vicuna-13B. This suggests that the benefits of our data selection approach are scalable and applicable across different model sizes.

5.4 Qualitative Analysis

In MLLM-Selector, the necessity score plays a crucial role in guiding data selection. To investigate the differences in samples with varying necessity scores, we conducted an illustrative qualitative analysis. Figure 5 categorizes samples with low necessity scores into three main types:

- *Easily solvable problems due to noticeable differences in options:* For instance, in the first example of Figure 5(a), the options are “A. fries”, “B. cactus”, “C. onion rings”, and “D. watermelon”. The vast differences between these options make

it unnecessary for the model to exhibit deep understanding or reasoning about the image to select the correct answer.

- *Problems loosely related to the image, resulting in straightforward answers:* For example, in the first example of Figure 5(b), the question “How many elephants are in this photo?” pertains to an image devoid of elephants. Thus, the model does not need to deeply comprehend the image to respond correctly.
- *Overly simple questions about charts:* As shown in the first example of Figure 5(c), the question “Is Medium Blue the minimum? Answer yes or no.” requires the model to merely identify if “Medium Blue” represents the smallest quantity, without understanding other elements within the image.

In contrast, Figure 6 highlights samples with high necessity scores, also categorized into three distinct types:

- *Fine-grained text recognition problems:* For instance, in the first example of Figure 6(a), the question “What is the name of the advertiser?” necessitates the model to accurately recognize all text in the image and identify the specific text corresponding to the advertiser.
- *Understanding specific regions within an image:* As depicted in the first example of Figure 6(b), the question “Please provide a short description for this region: [0.74, 0.38, 1.0, 0.83]” is more challenging than a general request to describe the entire image. The model must comprehend the content of the image and accurately interpret the specified coordinate area.
- *Interpreting complex charts and tables:* An example is shown in Figure 6(c), where the question “Who currently holds the positions that Matthew Lyon (dr) and Anthony New (dr) once held?” requires the model to process and understand intricate details within the table.

Our qualitative analysis reveals that samples with high necessity scores are significantly more valuable for enhancing model comprehension of complex problems. Hence, it is judicious for MLLM-Selector to prioritize data selection based on necessity scores. Nevertheless, relying exclusively on high necessity score samples can pose challenges. These samples are inherently tough, potentially complicating model learning.

Moreover, this exclusive focus may overlook diversity, which is crucial for robust model performance. Therefore, incorporating a grouping strategy based on necessity scores before sampling can further optimize performance.

6 Conclusion

This paper introduced MLLM-Selector, a novel method for automating the selection of high-quality data for Visual Instruction Tuning (VIT) by balancing necessity and diversity. Our approach leverages necessity scores and a grouped sampling strategy to ensure a comprehensive and effective dataset for training multi-modal large language models (MLLMs). Experimental results demonstrated that MLLM-Selector significantly outperforms baseline methods like LLaVA-1.5. Remarkably, MLLM-Selector achieved superior performance with less than 1% of the data on some benchmarks and less than 50% on all validated benchmarks. With the same amount of data, it yielded notable improvements such as +14.54% on DOCVQA and +25.36% on ChartQA.

References

- [1] Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I., *et al.*: Language models are unsupervised multitask learners. OpenAI blog 1(8), 9 (2019)
- [2] Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J.D., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., *et al.*: Language models are few-shot learners. Advances in neural information processing systems 33, 1877–1901 (2020)
- [3] Ouyang, L., Wu, J., Jiang, X., Almeida, D., Wainwright, C., Mishkin, P., Zhang, C., Agarwal, S., Slama, K., Ray, A., *et al.*: Training language models to follow instructions with human feedback. Advances in neural information processing systems 35, 27730–27744 (2022)
- [4] Achiam, J., Adler, S., Agarwal, S., Ahmad, L., Akkaya, I., Aleman, F.L., Almeida, D., Altenschmidt, J., Altman, S., Anadkat, S.,

- et al.: Gpt-4 technical report. arXiv preprint arXiv:2303.08774 (2023)
- [5] Team, G., Mesnard, T., Hardin, C., Dadashi, R., Bhupatiraju, S., Pathak, S., Sifre, L., Rivière, M., Kale, M.S., Love, J., et al.: Gemma: Open models based on gemini research and technology. arXiv preprint arXiv:2403.08295 (2024)
- [6] Touvron, H., Lavril, T., Izacard, G., Martinet, X., Lachaux, M.-A., Lacroix, T., Rozière, B., Goyal, N., Hambro, E., Azhar, F., et al.: Llama: Open and efficient foundation language models. arXiv preprint arXiv:2302.13971 (2023)
- [7] Team, I.: Internlm: A multilingual language model with progressively enhanced capabilities (2023)
- [8] Cai, Z., Cao, M., Chen, H., Chen, K., Chen, K., Chen, X., Chen, X., Chen, Z., Chen, Z., Chu, P., et al.: Internlm2 technical report. arXiv preprint arXiv:2403.17297 (2024)
- [9] Bai, J., Bai, S., Chu, Y., Cui, Z., Dang, K., Deng, X., Fan, Y., Ge, W., Han, Y., Huang, F., et al.: Qwen technical report. arXiv preprint arXiv:2309.16609 (2023)
- [10] Yang, A., Yang, B., Hui, B., Zheng, B., Yu, B., Zhou, C., Li, C., Li, C., Liu, D., Huang, F., et al.: Qwen2 technical report. arXiv preprint arXiv:2407.10671 (2024)
- [11] Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A.N., Kaiser, Ł., Polosukhin, I.: Attention is all you need. *Advances in neural information processing systems* **30** (2017)
- [12] Devlin, J., Chang, M.-W., Lee, K., Toutanova, K.: Bert: Pre-training of deep bidirectional transformers for language understanding. arXiv preprint arXiv:1810.04805 (2018)
- [13] Chen, M., Tworek, J., Jun, H., Yuan, Q., Pinto, H.P.D.O., Kaplan, J., Edwards, H., Burda, Y., Joseph, N., Brockman, G., et al.: Evaluating large language models trained on code. arXiv preprint arXiv:2107.03374 (2021)
- [14] Chen, Z., Wu, J., Wang, W., Su, W., Chen, G., Xing, S., Zhong, M., Zhang, Q., Zhu, X., Lu, L., et al.: Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 24185–24198 (2024)
- [15] Li, C., Wong, C., Zhang, S., Usuyama, N., Liu, H., Yang, J., Naumann, T., Poon, H., Gao, J.: Llava-med: Training a large language-and-vision assistant for biomedicine in one day. *Advances in Neural Information Processing Systems* **36** (2024)
- [16] Lu, H., Liu, W., Zhang, B., Wang, B., Dong, K., Liu, B., Sun, J., Ren, T., Li, Z., Sun, Y., et al.: Deepseek-vl: towards real-world vision-language understanding. arXiv preprint arXiv:2403.05525 (2024)
- [17] Wu, S., Fei, H., Qu, L., Ji, W., Chua, T.-S.: Next-gpt: Any-to-any multimodal llm. arXiv preprint arXiv:2309.05519 (2023)
- [18] Team, G., Anil, R., Borgeaud, S., Wu, Y., Alayrac, J.-B., Yu, J., Soricut, R., Schalkwyk, J., Dai, A.M., Hauth, A., et al.: Gemini: a family of highly capable multimodal models. arXiv preprint arXiv:2312.11805 (2023)
- [19] Liu, H., Li, C., Wu, Q., Lee, Y.J.: Visual instruction tuning. *Advances in neural information processing systems* **36** (2024)
- [20] Liu, H., Li, C., Li, Y., Lee, Y.J.: Improved baselines with visual instruction tuning. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 26296–26306 (2024)
- [21] Bai, J., Bai, S., Yang, S., Wang, S., Tan, S., Wang, P., Lin, J., Zhou, C., Zhou, J.: Qwen-vl: A frontier large vision-language model with versatile abilities. arXiv preprint arXiv:2308.12966 (2023)

- [22] Li, C., Ge, Y., Li, D., Shan, Y.: Vision-language instruction tuning: A review and analysis. *Transactions on Machine Learning Research* (2023)
- [23] Zhu, D., Chen, J., Shen, X., Li, X., Elhoseiny, M.: Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592* (2023)
- [24] Ma, Y., Xu, G., Sun, X., Yan, M., Zhang, J., Ji, R.: X-clip: End-to-end multi-grained contrastive learning for video-text retrieval. In: *Proceedings of the 30th ACM International Conference on Multimedia*, pp. 638–647 (2022)
- [25] Chen, L., Li, J., Dong, X., Zhang, P., He, C., Wang, J., Zhao, F., Lin, D.: Sharegpt4v: Improving large multi-modal models with better captions. *arXiv preprint arXiv:2311.12793* (2023)
- [26] Luo, G., Zhou, Y., Zhang, Y., Zheng, X., Sun, X., Ji, R.: Feast your eyes: Mixture-of-resolution adaptation for multi-modal large language models. *arXiv preprint arXiv:2403.03003* (2024)
- [27] Li, Y., Zhang, Y., Wang, C., Zhong, Z., Chen, Y., Chu, R., Liu, S., Jia, J.: Minigemini: Mining the potential of multi-modality vision language models. *arXiv preprint arXiv:2403.18814* (2024)
- [28] Xu, R., Yao, Y., Guo, Z., Cui, J., Ni, Z., Ge, C., Chua, T.-S., Liu, Z., Sun, M., Huang, G.: Llava-uhd: an lmm perceiving any aspect ratio and high-resolution images. *arXiv preprint arXiv:2403.11703* (2024)
- [29] Zhao, X., Li, X., Duan, H., Huang, H., Li, Y., Chen, K., Yang, H.: Mg-llava: Towards multi-granularity visual instruction tuning. *arXiv preprint arXiv:2406.17770* (2024)
- [30] Laurençon, H., Tronchon, L., Cord, M., Sanh, V.: What matters when building vision-language models? *arXiv preprint arXiv:2405.02246* (2024)
- [31] Ma, Y., Ji, J., Sun, X., Zhou, Y., Ji, R.: Towards local visual modeling for image captioning. *Pattern Recognition* **138**, 109420 (2023)
- [32] Zhang, X., Liu, Y., Li, Y., Zhang, R., Liu, Y., Wang, K., Ouyang, W., Xiong, Z., Gao, P., Hou, Q., et al.: Tar3d: Creating high-quality 3d assets via next-part prediction. *arXiv preprint arXiv:2412.16919* (2024)
- [33] Zhang, X., Zhou, Y., Wang, K., Wang, Y., Li, Z., Shao, X., Zhou, D., Hou, Q., Cheng, M.-M.: Ar-1-to-3: Single image to consistent 3d object generation via next-view prediction. *arXiv preprint arXiv:2503.12929* (2025)
- [34] Ma, Y., Ji, J., Sun, X., Zhou, Y., Wu, Y., Huang, F., Ji, R.: Knowing what it is: Semantic-enhanced dual attention transformer. *IEEE Transactions on Multimedia* **25**, 3723–3736 (2022)
- [35] Li, X., Yin, X., Li, C., Zhang, P., Hu, X., Zhang, L., Wang, L., Hu, H., Dong, L., Wei, F., et al.: Oscar: Object-semantics aligned pre-training for vision-language tasks. In: *Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XXX 16*, pp. 121–137 (2020). Springer
- [36] Li, J., Li, D., Xiong, C., Hoi, S.: Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In: *International Conference on Machine Learning*, pp. 12888–12900 (2022). PMLR
- [37] Li, J., Li, D., Savarese, S., Hoi, S.: Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In: *International Conference on Machine Learning*, pp. 19730–19742 (2023). PMLR
- [38] Li, C., Xu, H., Tian, J., Wang, W., Yan, M., Bi, B., Ye, J., Chen, H., Xu, G., Cao, Z., et al.: mplug: Effective and efficient vision-language learning by cross-modal skip-connections. *arXiv preprint*

- arXiv:2205.12005 (2022)
- [39] Xu, H., Ye, Q., Yan, M., Shi, Y., Ye, J., Xu, Y., Li, C., Bi, B., Qian, Q., Wang, W., *et al.*: mplug-2: A modularized multi-modal foundation model across text, image and video. In: International Conference on Machine Learning, pp. 38728–38748 (2023). PMLR
- [40] Medhat, W., Hassan, A., Korashy, H.: Sentiment analysis algorithms and applications: A survey. *Ain Shams engineering journal* **5**(4), 1093–1113 (2014)
- [41] Wankhade, M., Rao, A.C.S., Kulkarni, C.: A survey on sentiment analysis methods, applications, and challenges. *Artificial Intelligence Review* **55**(7), 5731–5780 (2022)
- [42] Ma, Y., Sun, X., Ji, J., Jiang, G., Zhuang, W., Ji, R.: Beat: Bi-directional one-to-many embedding alignment for text-based person retrieval. In: Proceedings of the 31st ACM International Conference on Multimedia, pp. 4157–4168 (2023)
- [43] Zhang, X., Sun, X., Luo, Y., Ji, J., Zhou, Y., Wu, Y., Huang, F., Ji, R.: Rstnet: Captioning with adaptive attention on visual and non-visual words. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 15465–15474 (2021)
- [44] Dong, D., Wu, H., He, W., Yu, D., Wang, H.: Multi-task learning for multiple language translation. In: Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers), pp. 1723–1732 (2015)
- [45] Green, S., Heer, J., Manning, C.D.: The efficacy of human post-editing for language translation. In: Proceedings of the SIGCHI Conference on Human Factors in Computing Systems, pp. 439–448 (2013)
- [46] Choi, E., He, H., Iyyer, M., Yatskar, M., Yih, W.-t., Choi, Y., Liang, P., Zettlemoyer, L.: Quac: Question answering in context. arXiv preprint arXiv:1808.07036 (2018)
- [47] Duan, N., Tang, D., Chen, P., Zhou, M.: Question generation for question answering. In: Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing, pp. 866–874 (2017)
- [48] Zhang, X., Yin, B., Lin, Z., Hou, Q., Fan, D.-P., Cheng, M.-M.: Referring camouflaged object detection. *IEEE Transactions on Pattern Analysis and Machine Intelligence* (2025)
- [49] Zhang, X., Yin, B.-W., Chen, Y., Lin, Z., Li, Y., Hou, Q., Cheng, M.-M.: Temo: Towards text-driven 3d stylization for multi-object meshes. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 19531–19540 (2024)
- [50] Zhang, S., Dong, L., Li, X., Zhang, S., Sun, X., Wang, S., Li, J., Hu, R., Zhang, T., Wu, F., *et al.*: Instruction tuning for large language models: A survey. arXiv preprint arXiv:2308.10792 (2023)
- [51] Longpre, S., Hou, L., Vu, T., Webson, A., Chung, H.W., Tay, Y., Zhou, D., Le, Q.V., Zoph, B., Wei, J., *et al.*: The flan collection: Designing data and methods for effective instruction tuning. In: International Conference on Machine Learning, pp. 22631–22648 (2023). PMLR
- [52] Peng, B., Li, C., He, P., Galley, M., Gao, J.: Instruction tuning with gpt-4. arXiv preprint arXiv:2304.03277 (2023)
- [53] Taori, R., Gulrajani, I., Zhang, T., Dubois, Y., Li, X., Guestrin, C., Liang, P., Hashimoto, T.B.: Alpaca: a strong, replicable instruction-following model; 2023. URL <https://crfm.stanford.edu/2023/03/13/alpaca.html>
- [54] Chiang, W.-L., Li, Z., Lin, Z., Sheng, Y., Wu, Z., Zhang, H., Zheng, L., Zhuang, S., Zhuang, Y., Gonzalez, J.E., *et al.*: Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality. See

- <https://vicuna.lmsys.org> (accessed 14 April 2023) **2**(3), 6 (2023)
- [55] Xu, C., Sun, Q., Zheng, K., Geng, X., Zhao, P., Feng, J., Tao, C., Jiang, D.: Wizardlm: Empowering large language models to follow complex instructions. arXiv preprint arXiv:2304.12244 (2023)
- [56] Zhao, B., Wu, B., He, M., Huang, T.: Svit: Scaling up visual instruction tuning. arXiv preprint arXiv:2307.04087 (2023)
- [57] Lin, W., Mirza, M.J., Doveh, S., Feris, R., Giryes, R., Hochreiter, S., Karlinsky, L.: Comparison visual instruction tuning. arXiv preprint arXiv:2406.09240 (2024)
- [58] Chen, D., Liu, J., Dai, W., Wang, B.: Visual instruction tuning with polite flamingo. In: Proceedings of the AAAI Conference on Artificial Intelligence, vol. 38, pp. 17745–17753 (2024)
- [59] Dai, W., Li, J., Li, D., Tiong, A.M.H., Zhao, J., Wang, W., Li, B., Fung, P., Hoi, S.: InstructBLIP: Towards General-purpose Vision-Language Models with Instruction Tuning (2023)
- [60] Ji, J., Ma, Y., Sun, X., Zhou, Y., Wu, Y., Ji, R.: Knowing what to learn: a metric-oriented focal mechanism for image captioning. *IEEE Transactions on Image Processing* **31**, 4321–4335 (2022)
- [61] Goyal, Y., Khot, T., Summers-Stay, D., Batra, D., Parikh, D.: Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, pp. 6904–6913 (2017)
- [62] Marino, K., Rastegari, M., Farhadi, A., Mottaghi, R.: Ok-vqa: A visual question answering benchmark requiring external knowledge. In: Proceedings of the IEEE/cvf Conference on Computer Vision and Pattern Recognition, pp. 3195–3204 (2019)
- [63] Schwenk, D., Khandelwal, A., Clark, C., Marino, K., Mottaghi, R.: A-okvqa: A benchmark for visual question answering using world knowledge. In: European Conference on Computer Vision, pp. 146–162 (2022). Springer
- [64] Zhou, C., Liu, P., Xu, P., Iyer, S., Sun, J., Mao, Y., Ma, X., Efrat, A., Yu, P., Yu, L., et al.: Lima: Less is more for alignment. *Advances in Neural Information Processing Systems* **36** (2024)
- [65] Chen, L., Li, S., Yan, J., Wang, H., Gunaratna, K., Yadav, V., Tang, Z., Srinivasan, V., Zhou, T., Huang, H., et al.: Alpapasus: Training a better alpaca with fewer data. arXiv preprint arXiv:2307.08701 (2023)
- [66] Cao, Y., Kang, Y., Sun, L.: Instruction mining: High-quality instruction data selection for large language models. arXiv preprint arXiv:2307.06290 (2023)
- [67] Wei, L., Jiang, Z., Huang, W., Sun, L.: Instructiongpt-4: A 200-instruction paradigm for fine-tuning minigpt-4. arXiv preprint arXiv:2308.12067 (2023)
- [68] Chen, R., Wu, Y., Chen, L., Liu, G., He, Q., Xiong, T., Liu, C., Guo, J., Huang, H.: Your vision-language model itself is a strong filter: Towards high-quality instruction tuning with data selection. arXiv preprint arXiv:2402.12501 (2024)
- [69] Liu, Z., Zhou, K., Zhao, W.X., Gao, D., Li, Y., Wen, J.-R.: Less is more: Data value estimation for visual instruction tuning. arXiv preprint arXiv:2403.09559 (2024)
- [70] Li*, B., Zhang*, P., Zhang*, K., Pu*, F., Du, X., Dong, Y., Liu, H., Zhang, Y., Zhang, G., Li, C., Liu, Z.: LMMs-Eval: Accelerating the Development of Large Multimodal Models. Zenodo (2024). <https://github.com/EvolvingLMMs-Lab/lmms-eval>
- [71] Gurari, D., Li, Q., Stangl, A.J., Guo, A., Lin, C., Grauman, K., Luo, J., Bigham, J.P.: Vizviz grand challenge: Answering visual

- questions from blind people. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, pp. 3608–3617 (2018)
- [72] Lu, P., Mishra, S., Xia, T., Qiu, L., Chang, K.-W., Zhu, S.-C., Tafjord, O., Clark, P., Kalyan, A.: Learn to explain: Multimodal reasoning via thought chains for science question answering. *Advances in Neural Information Processing Systems* **35**, 2507–2521 (2022)
- [73] Singh, A., Natarajan, V., Shah, M., Jiang, Y., Chen, X., Batra, D., Parikh, D., Rohrbach, M.: Towards vqa models that can read. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 8317–8326 (2019)
- [74] Mathew, M., Karatzas, D., Jawahar, C.: Docvqa: A dataset for vqa on document images. In: Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision, pp. 2200–2209 (2021)
- [75] Masry, A., Long, D.X., Tan, J.Q., Joty, S., Hoque, E.: Chartqa: A benchmark for question answering about charts with visual and logical reasoning. arXiv preprint arXiv:2203.10244 (2022)
- [76] Kembhavi, A., Salvato, M., Kolve, E., Seo, M., Hajishirzi, H., Farhadi, A.: A diagram is worth a dozen images. In: Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part IV 14, pp. 235–251 (2016). Springer
- [77] Li, Y., Du, Y., Zhou, K., Wang, J., Zhao, W.X., Wen, J.-R.: Evaluating object hallucination in large vision-language models. arXiv preprint arXiv:2305.10355 (2023)
- [78] Li, B., Ge, Y., Ge, Y., Wang, G., Wang, R., Zhang, R., Shan, Y.: Seed-bench-2: Benchmarking multimodal large language models. arXiv preprint arXiv:2311.17092 (2023)
- [79] You, H., Zhang, H., Gan, Z., Du, X., Zhang, B., Wang, Z., Cao, L., Chang, S.-F., Yang, Y.: Ferret: Refer and ground anything anywhere at any granularity. arXiv preprint arXiv:2310.07704 (2023)
- [80] Yu, W., Yang, Z., Li, L., Wang, J., Lin, K., Liu, Z., Wang, X., Wang, L.: Mm-vet: Evaluating large multimodal models for integrated capabilities. arXiv preprint arXiv:2308.02490 (2023)
- [81] Guan, T., Liu, F., Wu, X., Xian, R., Li, Z., Liu, X., Wang, X., Chen, L., Huang, F., Yacoob, Y., *et al.*: Hallusionbench: an advanced diagnostic suite for entangled language hallucination and visual illusion in large vision-language models. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 14375–14385 (2024)
- [82] Hudson, D.A., Manning, C.D.: Gqa: A new dataset for real-world visual reasoning and compositional question answering. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 6700–6709 (2019)
- [83] Fu, C., Chen, P., Shen, Y., Qin, Y., Zhang, M., Lin, X., Yang, J., Zheng, X., Li, K., Sun, X., *et al.*: Mme: A comprehensive evaluation benchmark for multimodal large language models. arXiv preprint arXiv:2306.13394 (2023)
- [84] Li, B., Wang, R., Wang, G., Ge, Y., Ge, Y., Shan, Y.: Seed-bench: Benchmarking multimodal llms with generative comprehension. arXiv preprint arXiv:2307.16125 (2023)
- [85] Goyal, Y., Khot, T., Agrawal, A., Summers-Stay, D., Batra, D., Parikh, D.: Making the v in vqa matter: Elevating the role of image understanding in visual question answering. *International Journal of Computer Vision*, 398–414 (2019) <https://doi.org/10.1007/s11263-018-1116-0>
- [86] Ren, M., Kiros, R., Zemel, R.: Exploring models and data for image question answering. arXiv: Learning, arXiv: Learning (2015)

- [87] Zhu, Y., Groth, O., Bernstein, M., Fei-Fei, L.: Visual7w: Grounded question answering in images. In: 2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR) (2016). <https://doi.org/10.1109/cvpr.2016.540> . <http://dx.doi.org/10.1109/cvpr.2016.540>
- [88] Schwenk, D., Khandelwal, A., Clark, C., Marino, K., Mottaghi, R.: A-okvqa: A benchmark for visual question answering using world knowledge (2022)
- [89] Acharya, M., Kafle, K., Kanan, C.: Tallyqa: Answering complex counting questions. Proceedings of the AAAI Conference on Artificial Intelligence, 8076–8084 (2019) <https://doi.org/10.1609/aaai.v33i01.33018076>
- [90] Marino, K., Rastegari, M., Farhadi, A., Mottaghi, R.: Ok-vqa: A visual question answering benchmark requiring external knowledge. Cornell University - arXiv, Cornell University - arXiv (2019)
- [91] Kiela, D., Hamed, F., Mohan, A., Goswami, V., Singh, A., Ringshia, P., Testuggine, D.: The hateful memes challenge: Detecting hate speech in multimodal memes. Cornell University - arXiv, Cornell University - arXiv (2020)
- [92] Lau, J.J., Gayen, S., Ben Abacha, A., Demner-Fushman, D.: A dataset of clinically generated visual questions and answers about radiology images. Scientific Data (2018) <https://doi.org/10.1038/sdata.2018.251>
- [93] Pont-Tuset, J., Uijlings, J., Changpinyo, S., Soricut, R., Ferrari, V.: Connecting vision and language with localized narratives. In: Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part V 16, pp. 647–664 (2020). Springer
- [94] Wang, B., Li, G., Zhou, X., Chen, Z., Grossman, T., Li, Y.: Screen2words: Automatic mobile ui summarization with multimodal learning. In: The 34th Annual ACM Symposium on User Interface Software and Technology, pp. 498–510 (2021)
- [95] Liu, F., Emerson, G., Collier, N.: Visual spatial reasoning. Transactions of the Association for Computational Linguistics **11**, 635–651 (2023)
- [96] wendlerc: RenderedText. <https://huggingface.co/datasets/wendlerc/RenderedText> (2023)
- [97] Sidorov, O., Hu, R., Rohrbach, M., Singh, A.: Textcaps: a dataset for image captioning with reading comprehension. Cornell University - arXiv, Cornell University - arXiv (2020)
- [98] Singh, A., Natarajan, V., Shah, M., Jiang, Y., Chen, X., Batra, D., Parikh, D., Rohrbach, M.: Towards vqa models that can read. In: 2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) (2019). <https://doi.org/10.1109/cvpr.2019.00851> . <http://dx.doi.org/10.1109/cvpr.2019.00851>
- [99] Biten, A.F., Tito, R., Mafla, A., Gomez, L., Rusinol, M., Valveny, E., Jawahar, C., Karatzas, D.: Scene text visual question answering. In: Proceedings of the IEEE/CVF International Conference on Computer Vision, pp. 4291–4301 (2019)
- [100] Mishra, A., Shekhar, S., Singh, A.K., Chakraborty, A.: Ocr-vqa: Visual question answering by reading text in images. In: 2019 International Conference on Document Analysis and Recognition (ICDAR) (2019). <https://doi.org/10.1109/icdar.2019.00156> . <http://dx.doi.org/10.1109/icdar.2019.00156>
- [101] Tanaka, R., Nishida, K., Yoshida, S.: Visualmrc: Machine reading comprehension on document images. Proceedings of the AAAI Conference on Artificial Intelligence, 13878–13888 (2022) <https://doi.org/10.1609/aaai.v35i15.17635>
- [102] Marti, U.-V., Bunke, H.: The iam-database: an english sentence database for offline

- handwriting recognition. *International Journal on Document Analysis and Recognition*, 39–46 (2002) <https://doi.org/10.1007/s100320200071>
- [103] Mathew, M., Bagal, V., Tito, R., Karatzas, D., Valveny, E., Jawahar, C.: Infographicvqa. In: *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pp. 1697–1706 (2022)
- [104] Kamizuru00: Diagram image-to-text. https://huggingface.co/datasets/Kamizuru00/diagram_image_to_text (2023)
- [105] Obeid, J., Hoque, E.: Chart-to-text: Generating natural language descriptions for charts by adapting the transformer model. *arXiv preprint arXiv:2010.09142* (2020)
- [106] Kafle, K., Price, B., Cohen, S., Kanan, C.: Dvqa: Understanding data visualizations via question answering. In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 5648–5656 (2018)
- [107] Tang, B., Boggust, A., Satyanarayan, A.: Vistext: A benchmark for semantically rich chart captioning (2023)
- [108] Methani, N., Ganguly, P., Khapra, M., Kumar, P.: Plotqa: Reasoning over scientific plots. *Cornell University - arXiv, Cornell University - arXiv* (2019)
- [109] Kahou, S., Michalski, V., Atkinson, e.: Figureqa: An annotated figure dataset for visual reasoning. *arXiv: Computer Vision and Pattern Recognition, arXiv: Computer Vision and Pattern Recognition* (2017)
- [110] Chang, S., Palzer, D., Li, J., Fosler-Lussier, E., Xiao, N.: Mapqa: A dataset for question answering on choropleth maps (2022)
- [111] Lu, P., Qiu, L., Chang, K.-W., Wu, Y.N., Zhu, S.-C., Rajpurohit, T., Clark, P., Kalyan, A.: Dynamic prompt learning via policy gradient for semi-structured mathematical reasoning. *arXiv preprint arXiv:2209.14610* (2022)
- [112] Zhu, F., Lei, W., Huang, Y., Wang, C., Zhang, S., Lv, J., Feng, F., Chua, T.-S.: Tat-qa: A question answering benchmark on a hybrid of tabular and textual content in finance. *arXiv preprint arXiv:2105.07624* (2021)
- [113] Cheng, Z., Dong, H., Wang, Z., Jia, R., Guo, J., Gao, Y., Han, S., Lou, J.-G., Zhang, D.: Hitab: A hierarchical table dataset for question answering and natural language generation. In: *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)* (2022). <https://doi.org/10.18653/v1/2022.acl-long.78> . <http://dx.doi.org/10.18653/v1/2022.acl-long.78>
- [114] Zhao, Y., Li, Y., Li, C., Zhang, R.: Multihiertt: Numerical reasoning over multi hierarchical tabular and textual data. *arXiv preprint arXiv:2206.01347* (2022)
- [115] Chen, Z., Chen, W., Smiley, C., Shah, S., Borova, I., Langdon, D., Moussa, R., Beane, M., Huang, T.-Y., Routledge, B., Wang, W.: Finqa: A dataset of numerical reasoning over financial data. *Cornell University - arXiv, Cornell University - arXiv* (2021)
- [116] Zhong, V., Xiong, C., Socher, R.: Seq2sql: Generating structured queries from natural language using reinforcement learning. *Cornell University - arXiv, Cornell University - arXiv* (2017)
- [117] Iyyer, M., Yih, W.-t., Chang, M.-W.: Search-based neural structured learning for sequential question answering. In: *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)* (2017). <https://doi.org/10.18653/v1/p17-1167> . <http://dx.doi.org/10.18653/v1/p17-1167>
- [118] Pasupat, P., Liang, P.: Compositional semantic parsing on semi-structured tables. *arXiv preprint arXiv:1508.00305* (2015)
- [119] Kazemi, M., Alvari, H., Anand, A., Wu, J.,

- Chen, X., Soriccut, R.: Geomverse: A systematic evaluation of large models for geometric reasoning. arXiv preprint arXiv:2312.12241 (2023)
- [120] Lindström, A.D., Abraham, S.S.: Clevr-math: A dataset for compositional language, visual and mathematical reasoning. arXiv preprint arXiv:2208.05358 (2022)
- [121] Johnson, J., Hariharan, B., Maaten, L., Fei-Fei, L., Zitnick, C.L., Girshick, R.: Clevr: A diagnostic dataset for compositional language and elementary visual reasoning. In: 2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR) (2017). <https://doi.org/10.1109/cvpr.2017.215> . <http://dx.doi.org/10.1109/cvpr.2017.215>
- [122] Lu, P., Qiu, L., Chen, J., Xia, T., Zhao, Y., Zhang, W., Yu, Z., Liang, X., Zhu, S.-C.: Iconqa: A new benchmark for abstract diagram understanding and visual language reasoning. arXiv preprint arXiv:2110.13214 (2021)
- [123] Zhang, C., Gao, F., Jia, B., Zhu, Y., Zhu, S.-C.: Raven: A dataset for relational and analogical visual reasoning. In: 2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) (2019). <https://doi.org/10.1109/cvpr.2019.00546> . <http://dx.doi.org/10.1109/cvpr.2019.00546>
- [124] Lu, P., Gong, R., Jiang, S., Qiu, L., Huang, S., Liang, X., Zhu, S.-C.: Inter-gps: Interpretable geometry problem solving with formal language and symbolic reasoning. arXiv preprint arXiv:2105.04165 (2021)
- [125] Kembhavi, A., Seo, M., Schwenk, D., Choi, J., Farhadi, A., Hajishirzi, H.: Are you smarter than a sixth grader? textbook question answering for multimodal machine comprehension. In: 2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR) (2017). <https://doi.org/10.1109/cvpr.2017.571> . <http://dx.doi.org/10.1109/cvpr.2017.571>
- [126] Suhr, A., Zhou, S., Zhang, A., Zhang, I., Bai, H., Artzi, Y.: A corpus for reasoning about natural language grounded in photographs. arXiv preprint arXiv:1811.00491 (2018)
- [127] Li, B., Zhang, Y., Chen, L., Wang, J., Pu, F., Yang, J., Li, C., Liu, Z.: Mimic-it: Multimodal in-context instruction tuning. arXiv preprint arXiv:2306.05425 (2023)
- [128] Jhamtani, H., Berg-Kirkpatrick, T.: Learning to describe differences between pairs of similar images. arXiv preprint arXiv:1808.10584 (2018)
- [129] Laurençon, H., Tronchon, L., Sanh, V.: Unlocking the conversion of web screenshots into html code with the websight dataset. arXiv preprint arXiv:2403.09029 (2024)
- [130] Belouadi, J., Lauscher, A., Eger, S.: Automatikz: Text-guided synthesis of scientific vector graphics with tikz. arXiv preprint arXiv:2310.00367 (2023)
- [131] Teknium: OpenHermes 2.5: An Open Dataset of Synthetic Data for Generalist LLM Assistants. HuggingFace (2023). <https://huggingface.co/datasets/teknium/OpenHermes-2.5>

Appendix A Appendix

A.1 Composition of the Data Pool

We collected existing datasets and combined them into a large visual instruction tuning dataset covering a wide range of tasks including general visual question answering, captioning, OCR, document understanding, chart/figure understanding, table understanding, reasoning, logic, maths, textbook/academic questions, differences between two images, and screenshot to code, among others. The details of the data pool are presented in Table A1 and Table A2.

For general visual question answering, we included datasets such as VQAv2 [85], COCO-QA [86], Visual7W [87], A-OKVQA [88], TallyQA [89], OK-VQA [90], HatefulMemes [91], and VQA-RAD [92]. These datasets collectively provide tens of thousands of images, hundreds of thousands of question/answer pairs, and millions of tokens.

In the captioning task, we incorporated datasets like LNarratives [93], Screen2Words [94], and VSR [95], contributing a substantial number of images with corresponding textual descriptions, collectively amounting to millions of tokens.

For OCR, document understanding, and text transcription, our datasets include RenderedText [96], DocVQA [74], TextCaps [97], TextVQA [98], ST-VQA [99], OCR-VQA [100], VisualMRC [101], IAM [102], InfoVQA [103], and Diagram image-to-text [104]. These datasets focus on converting textual information from various document types into digital text.

For chart/figure understanding, we included datasets such as Chart2Text [105], DVQA [106], VisText [107], ChartQA [75], PlotQA [108], FigureQA [109], and MapQA [110]. These datasets provide a varied range of images, extensive Q/A pairs, and millions of tokens, focusing on chart and figure data.

For table understanding, we included datasets like TabMWP [111], TAT-QA [112], HiTab [113], MultiHiertt [114], FinQA [115], WikiSQL [116], SQA [117], and WTQ [118], contributing significantly in terms of tables, related Q/A pairs, and millions of tokens.

For reasoning, logic, and maths, our datasets include GeomVerse [119], CLEVR-Math [120], CLEVR [121], IconQA [122], RAVEN [123], and Inter-GPs [124]. These datasets are invaluable for tasks involving complex logical and mathematical reasoning.

For textbook and academic questions, we incorporated datasets such as AI2D [76], TQA [125], and ScienceQA [72]. These datasets focus on educational materials and contribute a substantial number of images, Q/A pairs, and tokens pertinent to academic content.

For tasks involving differences between two images, we included datasets such as NLVR2 [126], GSD [127], and Spot the Difference [128]. These datasets are designed to test the ability to identify discrepancies between pairs of images, providing thousands of image pairs and related Q/A pairs.

For the screenshot-to-code task, our dataset pool comprises WebSight [129] and DaTikz [130]. These datasets convert screenshots into code, contributing an extensive number of tokens due to the nature of the programming languages involved.

Lastly, we included text-only data from OpenHermes-2.5 [131], which offers a sizeable collection of Q/A pairs and tokens, focusing purely on textual data without the image component.

Overall, our data pool integrates a diverse array of datasets, collectively contributing to a comprehensive and large-scale visual instruction-tuning dataset suitable for a variety of tasks. This extensive collection ensures broad coverage of different domains and challenges, thereby supporting robust model training and evaluation across multiple applications in visual and textual understanding.

Table A1 Composition of the Data Pool (Part 1).

| Dataset | # images | # Q/A pairs | # tokens |
|--|----------|-------------|-------------|
| General visual question answering | | | |
| VQAv2 [85] | 82,772 | 443,757 | 1,595,929 |
| COCO-QA [86] | 46,287 | 78,736 | 286,982 |
| Visual7W [87] | 14,366 | 69,817 | 279,268 |
| A-OKVQA [88] | 16,539 | 17,056 | 236,492 |
| TallyQA [89] | 98,680 | 183,986 | 738,254 |
| OK-VQA [90] | 8,998 | 9,009 | 38,853 |
| HatefulMemes [91] | 8,500 | 8,500 | 25,500 |
| VQA-RAD [92] | 313 | 1,793 | 8,418 |
| Captioning | | | |
| LNarratives [93] | 507,444 | 507,444 | 21,328,731 |
| Screen2Words [94] | 15,730 | 15,743 | 143,103 |
| VSR [95] | 2,157 | 3,354 | 10,062 |
| OCR, document understanding, text transcription | | | |
| RenderedText [96] | 999,000 | 999,000 | 27,207,774 |
| DocVQA [74] | 10,189 | 39,463 | 337,829 |
| TextCaps [97] | 21,953 | 21,953 | 389,658 |
| TextVQA [73] | 21,953 | 34,602 | 181,918 |
| ST-VQA [99] | 17,247 | 23,121 | 127,846 |
| OCR-VQA [100] | 165,746 | 801,579 | 6,073,824 |
| VisualMRC [101] | 3,027 | 11,988 | 168,828 |
| IAM [102] | 5,663 | 5,663 | 144,216 |
| InfoVQA [103] | 2,118 | 10,074 | 61,048 |
| Diagram image-to-text [104] | 300 | 300 | 22,196 |
| Chart/figure understanding | | | |
| Chart2Text [105] | 26,985 | 30,242 | 2,852,827 |
| DVQA [106] | 200,000 | 2,325,316 | 8,346,234 |
| VisText [107] | 7,057 | 9,969 | 1,245,485 |
| ChartQA [75] | 18,271 | 28,299 | 185,835 |
| PlotQA [108] | 157,070 | 20,249,479 | 847,829,278 |
| FigureQA [109] | 100,000 | 1,327,368 | 3,982,104 |
| MapQA [110] | 37,417 | 483,416 | 6,470,485 |

Table A2 Composition of the Data Pool (Part 2).

| Dataset | # images | # Q/A pairs | # tokens |
|-------------------------------------|-----------------|--------------------|-----------------|
| Table understanding | | | |
| TabMWP [111] | 22,729 | 23,059 | 1,948,166 |
| TAT-QA [112] | 2,199 | 13,215 | 283,776 |
| HiTab [113] | 2,500 | 7,782 | 351,299 |
| MultiHiertt [114] | 7,619 | 7,830 | 267,615 |
| FinQA [115] | 5,276 | 6,251 | 242,561 |
| WikiSQL [116] | 74,989 | 86,202 | 9,680,673 |
| SQA [117] | 8,514 | 34,141 | 1,894,824 |
| WTQ [118] | 38,246 | 44,096 | 6,677,013 |
| Reasoning, logic, maths | | | |
| GeomVerse [119] | 9,303 | 9,339 | 2,489,459 |
| CLEVR-Math [120] | 70,000 | 788,650 | 3,184,656 |
| CLEVR [121] | 70,000 | 699,989 | 2,396,781 |
| IconQA [122] | 27,315 | 29,859 | 112,969 |
| RAVEN [123] | 42,000 | 42,000 | 105,081 |
| Inter-GPs [124] | 1,451 | 2,101 | 8,404 |
| Textbook/academic questions | | | |
| AI2D [76] | 3,099 | 9,708 | 38,832 |
| TQA [125] | 1,496 | 6,501 | 26,004 |
| ScienceQA [72] | 4,985 | 6,218 | 24,872 |
| Differences between 2 images | | | |
| NLVR2 [126] | 50,426 | 86,373 | 259,119 |
| GSD [127] | 70,939 | 141,869 | 4,637,229 |
| Spot the diff [128] | 8,566 | 9,524 | 221,477 |
| Screenshot to code | | | |
| WebSight [129] | 500,000 | 500,000 | 276,743,299 |
| DaTikz [130] | 47,974 | 48,296 | 59,556,252 |
| Text-only data | | | |
| OpenHermes-2.5 [131] | 0 | 1,006,223 | 248,553,747 |