

# TAMA: A Human-AI Collaborative Thematic Analysis Framework Using Multi-Agent LLMs for Clinical Interviews

Huimin Xu, PhD<sup>1\*</sup>, Seungjun Yi, BS<sup>2\*</sup>, Terence Lim, PhD<sup>3,4</sup>, Jiawei Xu, BS<sup>1</sup>, Andrew Well, MD, MPH, MSHCT<sup>5,6</sup>, Carlos Mery, MD, MPH<sup>5,6</sup>, Aidong Zhang, PhD<sup>7</sup>, Yuji Zhang, PhD<sup>8</sup>, Heng Ji, PhD<sup>8</sup>, Keshav Pingali, PhD<sup>9</sup>, Yan Leng, PhD<sup>10</sup>, Ying Ding, PhD<sup>1,11</sup>

<sup>1</sup> School of Information, University of Texas at Austin, TX

<sup>2</sup> Department of Biomedical Engineering, University of Texas at Austin, TX

<sup>3</sup> College of Natural Sciences, University of Texas at Austin, TX

<sup>4</sup> Graphen, Inc., NY

<sup>5</sup> Department of Cardiac Surgery, Division of Pediatric Cardiac Surgery, Vanderbilt University School of Medicine, Nashville, TN

<sup>6</sup> Pediatric Heart Institute, Monroe Carell Jr. Children’s Hospital at Vanderbilt, Nashville, TN

<sup>7</sup> Department of Computer Science, University of Virginia, Charlottesville, VA

<sup>8</sup> Department of Computer Science, University of Illinois at Urbana-Champaign, IL

<sup>9</sup> Department of Computer Science, University of Texas at Austin, TX

<sup>10</sup> McCombs School of Business, University of Texas at Austin, TX

<sup>11</sup> Dell Medical School, University of Texas at Austin, TX

## Abstract

*Thematic analysis (TA) is a widely used qualitative approach for uncovering latent meanings in unstructured text data. TA provides valuable insights in healthcare but is resource-intensive. Large Language Models (LLMs) have been introduced to perform TA, yet their applications in healthcare remain unexplored. Here, we propose TAMA: A Human-AI Collaborative Thematic Analysis framework using Multi-Agent LLMs for clinical interviews. We leverage the scalability and coherence of multi-agent systems through structured conversations between agents and coordinate the expertise of cardiac experts in TA. Using interview transcripts from parents of children with Anomalous Aortic Origin of a Coronary Artery (AAOCA), a rare congenital heart disease, we demonstrate that TAMA outperforms existing LLM-assisted TA approaches, achieving higher thematic hit rate, coverage, and distinctiveness. TAMA demonstrates strong potential for automated TA in clinical settings by leveraging multi-agent LLM systems with human-in-the-loop integration by enhancing quality while significantly reducing manual workload.*

## 1 Introduction

Thematic Analysis (TA), a qualitative approach used to systematically identify, analyze, and interpret patterns<sup>†</sup> within data, is widely applied across various fields. Employing inductive TA in healthcare can significantly improve patient care<sup>1,2</sup>, medical practices<sup>2,3,4</sup>, and policy decisions<sup>5</sup>. Traditionally, TA involves the following processes: (1) Researchers immerse themselves in qualitative data (such as interview transcripts) by reading the material multiple times to become thoroughly familiar with its content, (2) generate initial codes (codebook) to identify significant features of the data, and (3) organize into broader themes that capture meaningful patterns within the dataset. To reduce the manual workload involved in this process, single-agent large language models (LLMs) have been shown to have potential for partially automating TA. However, this approach also encounters challenges in scalability<sup>6</sup>, consistency<sup>7,8</sup>, and coherence<sup>8</sup>. Moreover, TA in healthcare is inherently a resource-intensive endeavor, which inevitably requires expert analysis and ethical approvals<sup>9</sup>, which add complexity and prolong data collection.


To address these limitations, we present **TAMA: A Human-AI Collaborative Thematic Analysis** framework using **Multi-Agent LLMs** for clinical interviews (Figure 1) to enhance the scalability, consistency, and coherence of inductive

\*These authors contributed equally

†A pattern refers to a repeated idea, experience, or issue that appears across multiple data points, while a theme is a broader, interpretive insight that captures the significance of those patterns.

TA in healthcare contexts. Using TAMA, we performed TA on de-identified transcripts from nine focus group sessions involving 42 parents of children with a rare congenital heart disease - Anomalous Aortic Origin of a Coronary Artery (AAOCA). We employed a combination of quantitative and qualitative metrics to evaluate the themes generated by our framework. Jaccard Similarity and Hit Rate assessed the overlap between LLM-generated and human-generated themes, while embedding-based semantic similarity measured cosine similarity scores.

Our results show that TAMA outperforms existing LLM-assisted TA methods, achieving higher thematic accuracy (Hit Rate) while maintaining Distinctiveness across themes closer to human-generated themes. Our framework enhances scalability, efficiency, and reliability, by significantly reducing the manual workload required in traditional TA workflows while preserving thematic depth and representativeness. Also, TAMA automates coding and thematic synthesis, completing the TA process in under 10 minutes, a 99% reduction compared to the 30 hours required for manual analysis. By leveraging multi-agent LLMs, TAMA demonstrates strong potential for real-world automated TA with human-in-the-loop integration in clinical settings, enhancing quality while significantly reducing resource demands.

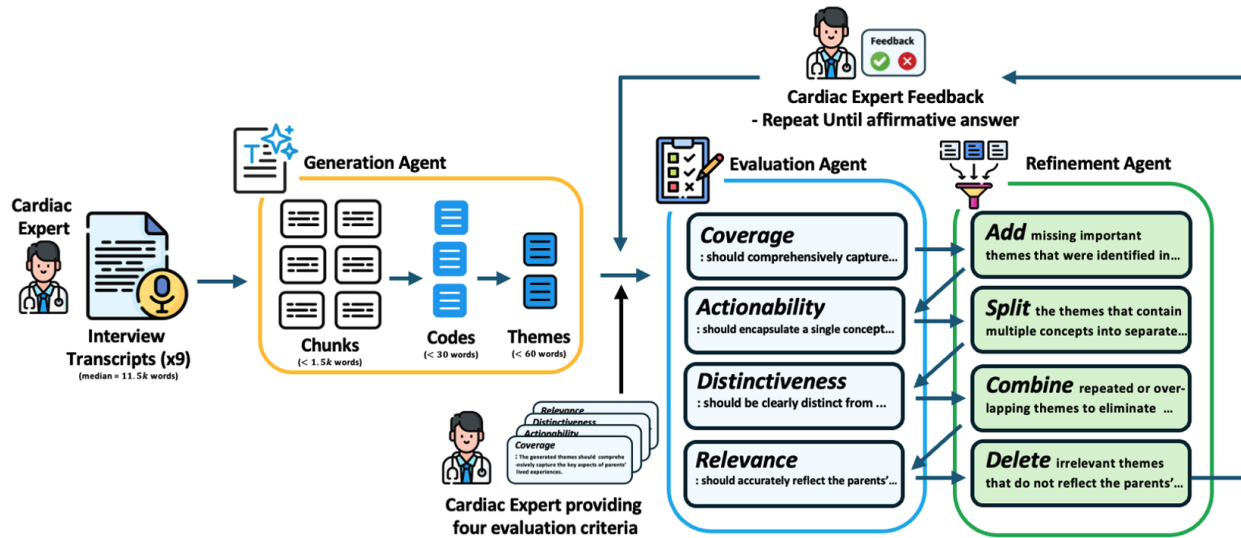

**Figure 1: The TAMA Framework** is a human-in-the-loop, multi-agent system designed to generate, evaluate, and refine themes from clinical interview transcripts.

## 2 Related Work

**LLM in Thematic Analysis (TA).** Recent work suggests that LLMs can support deductive coding in qualitative research through consistent, systematic code identification<sup>10</sup>. Furthermore, in a human-AI collaboration approach, GPT-3.5 generated codes of quality comparable to those of human analysts<sup>11</sup>. Although LLMs have also shown the capabilities to conduct inductive TA at a level comparable to human annotators across various fields, including social media<sup>12</sup>, literature<sup>13</sup>, and journalism<sup>14</sup>, these applications involve low-stakes contexts with minimal privacy concerns in data collection. The LLM applications of healthcare interview transcripts remain under-explored due to their high-stakes nature. Moreover, previous work<sup>15,16</sup> has relied heavily on single-agent LLMs, which struggle with multitasking<sup>17</sup>, extended context<sup>18</sup>, and accuracy<sup>19</sup> in critical fields including medicine and law<sup>20</sup>.

**Multi-Agent LLM Systems.** To address the gap listed above, multi-agent LLM systems<sup>21,22,23,24,25,26</sup> have been introduced as a promising solution. These systems utilize the strengths of multiple specialized LLMs working in a group, much like a team of experts collaborating on a complex project. Each agent in the system contributes its unique expertise, communicates with other agents, and iteratively refines outputs to tackle challenging tasks that may be beyond the capabilities of a single LLM. Recent work highlights the potential of multi-agent LLM systems across various tasks, including long-context analysis<sup>21</sup>, conversational task-solving<sup>27</sup>, evaluation of LLM generated outputs<sup>28,29</sup> and TA<sup>12</sup>. However, human-in-the-loop approaches, where humans act as agents within multi-agent LLM

systems, have yet to be implemented. In the healthcare domain, the active involvement of clinicians in the deployment of LLM is essential<sup>30,31</sup>. Clinicians serve as an agent in evaluating the outputs generated by LLMs, making informed decisions about whether to accept, refine, or dismiss these results. Recent work attempts to integrate human agents into multi-agent LLM systems, which is known as human-AI teaming<sup>32</sup>. Human involvement can enhance reliability by mitigating hallucinations through feedback<sup>33</sup>, ensure regulatory compliance, and significantly reduce manual workload for doctors when implemented as a real-time interactive diagnosis environment<sup>34</sup>.


**LLM Agents in Medical Transcript Analysis.** Previous work has demonstrated that LLMs can summarize an entire corpus of medical interviews within minutes<sup>15</sup>, and a pipeline for integrating LLMs to rapidly perform TA has been introduced<sup>16</sup>. Recently, multi-agent LLM systems have been explored for analyzing clinical transcripts and dialogues. MDAgents<sup>35</sup>, a framework that dynamically assigns medical expert roles (such as diagnostician and reviewer) to a team of LLMs, outperforms single models on clinical reasoning benchmarks. Additionally, multi-agent simulations of clinical scenarios have demonstrated improvements in information completeness and reasoning<sup>34</sup>.

### 3 Methods

#### Definitions:

- **Code** is a discrete analytical unit that contains a key pattern within the data, generated directly from the dataset, and retaining its interpretive significance without being reducible to smaller meaningful components.
- An **agent** is an autonomous computational entity (Large Language Model) that interacts with other agents or the environment to perform specific tasks.
- **Single-agent LLM** refer to one large language model working independently to process, analyze, or generate text based on a given input, without interacting with other models or specialized agents.
- **Multi-agent LLM Systems** refer to more than one language models collaborating to enhance task performance through interaction, coordination, or division, where agents communicate by exchanging messages and feedback to refine outputs and optimize decision-making.

**Human AI Teaming Framework.** TAMA consists of one Cardiac expert and three agents: (1) Generation Agent, (2) Evaluation Agent, and (3) Refinement Agent. The cardiac expert plays a pivotal role in interacting with these three LLM agents: (1) providing background information and setting goals for the Generation Agent, (2) defining evaluation criteria for the Evaluation Agent, and (3) determining the stopping point for the Refinement Agent. Throughout each stage, dynamic interaction between the expert and the agents ensures continuous collaboration and iterative improvement (Figure 2).

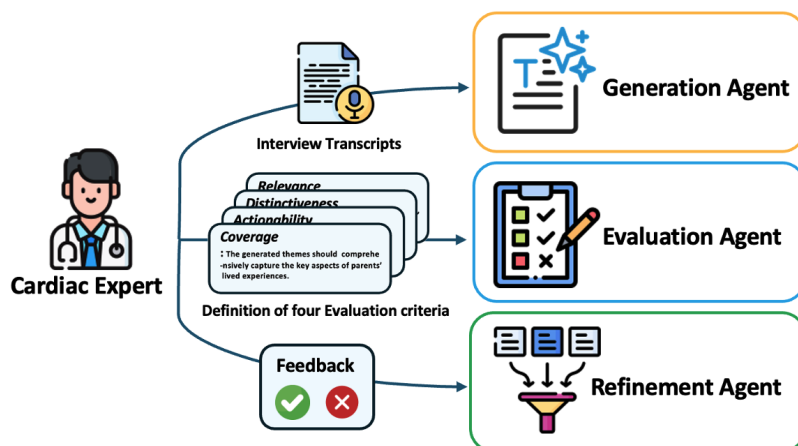

**Figure 2: Human-in-the-Loop in TAMA Framework.** The Cardiac expert actively collaborates with each LLM agent to provide domain expertise to ensure accurate and clinically relevant outcomes.

**Dataset.** We use the dataset from prior work<sup>16</sup>, comprising de-identified transcripts from nine focus group sessions with 42 parents. These transcripts (word count:  $10,987 \pm 1,537$ , median: 11,457) document discussions between interviewers and parents of children with Anomalous Aortic Origin of a Coronary Artery (AAOCA).

**The TAMA Framework.** The overall workflow of the TAMA framework consists of six steps (Figure 1).

**Step 1: Expert Provides Background Information and Sets Goals for the Generation Agent.** The expert provides background information and instructs the Generation Agent to generate initial codes and themes. The prompt given to the Generation Agent is as follows:

*“You are provided with transcripts from interviews with parents of children suffering from Anomalous Aortic Origin of a Coronary Artery (AAOCA). The transcripts reflect the desires, concerns, and meaningful outcomes of parents living with or caring for children with AAOCA. Some children have recently undergone open-heart surgery.*

*The goals of this study is for the coding and theme generation: Your goal is to carefully look through the text and identify all codes discussed by the parents exhaustively. Identify all relevant codes in the text, provide a Name for each code in 8 to 15 words in sentence case. Write with concise, concrete details and avoid clichés, generalizations. Give a dense Description of the code in 80 words and direct Quotes from the participant for each code in around 120 words. These quotes can consist of multiple excerpts from the text.*

*Your task at this stage is to group the initial codes into distinct themes based on the initial codes, descriptions, and quotes. Themes specifically focus on the perspectives of parents, describing their own thoughts, concerns, and responses related to their child’s condition. Provide a descriptive and specific name of 8 to 15 words for each theme based on the code’s names, quotes and descriptions. Provide a detailed description of 60 to 80 words for each theme.”*

**Step 2: Theme Generation Agent Segments Chunks, Generates Codes, and Identifies Themes.** The Theme Generation agent generates themes based on the background information and goals. Given the transcripts are too long for LLM to process, they are segmented into smaller chunks ( $\leq 1,500$  words) while maintaining contextual coherence. Secondly, the Generation Agent generates initial codes capturing significant concepts and ideas from the transcripts, along with descriptive labels and representative quotes as evidence. These codes are then grouped to facilitate subsequent theme generation. Third, the LLM synthesizes preliminary themes from grouped codes before refining them into comprehensive themes that capture key insights from the data.

**Step 3: Expert Defines Evaluation Criteria for the Evaluation Agent.** Four evaluation criteria are used: Coverage, Actionability, Distinctness, and Relevance. Detailed descriptions for each criterion are provided in Table 1. The cardiac expert highlighted a potential challenge in distinguishing between the experiences of parents and those of children/patients, particularly in assessing Relevance. To address this issue, the expert provided the Evaluation Agent with examples to clarify the distinction. The examples are as below:

*“Parent Outcomes refer to parents reporting feeling limited by their child’s diagnosis, whereas Patient/Child Outcomes pertain to parents perceiving that their child is limited by the diagnosis.*

*Parent Outcomes: Parents report they feel limited by their child’s diagnosis. Parents report they have PTSD from their child’s experience. Parents report being distressed by the uncertainty of treatment choices. Parents report needing more social connections.*

*Patient/Child Outcomes: Parents report they feel their child is limited by the child’s diagnosis. Parents report their child has PTSD from their child’s experience. Parents report their child is distressed by the uncertainty of treatment choices. Parents report their child needs more social connections.”*

**Step 4: Evaluation Agent Provides Feedback.** The Evaluation Agent assesses the themes based on the four defined criteria (Coverage, Actionability, Distinctness, and Relevance) and provides feedback for improvement for each criterion. The generated evaluation examples are listed in Table 1.

**Step 5: Refinement Agent Improves Themes Based on Feedback.** The Refinement Agent improves themes based on feedback from the Evaluation Agent by applying four refinement actions (add, split, combine, and delete) which

correspond to the criteria of Coverage, Actionability, Distinctness, and Relevance, respectively. Details are outlined in Table 1.

**Step 6: Expert Terminates the Refinement Process.** The refinement process iterates through Step 4 (Evaluation) and Step 5 (Refinement) until the expert determines that the themes meet the required quality standards. After each round of evaluation and refinement, the cardiac expert reviews the refined themes and decides whether to finalize them or continue the process. If the expert approves the themes, the process is terminated. If the themes do not meet the quality standards, the expert instructs the system to return to Step 4 for further evaluation and refinement.

Criteria	Description (by expert)	Evaluation Agent (examples)	Refinement Agent
<b>Coverage</b>	The generated themes should comprehensively capture the key aspects of parents' lived experiences while caring for children with AAOCA from the transcripts.	<i>e.g., Include Long-term Concerns:</i> The original data discusses long-term health monitoring and transition to adult care, which could be more explicitly addressed in the themes to reflect parents' ongoing concerns about their child's future health outcomes.	<b>Add</b> missing important themes identified in sub-themes but not yet captured in the generated themes.
<b>Actionability</b>	Each theme should encapsulate a single concept that provides clear, specific, and meaningful insights. These insights should be actionable and useful for informing interventions, resources, or research.	<i>e.g., Some themes, like 'Desiring comprehensive data and addressing frustration with lack of statistics,' combine two concepts (desire for data and frustration with lack of it), which could be split into separate themes for clarity.</i>	<b>Split</b> themes that contain multiple concepts into separate, more focused themes.
<b>Distinctiveness</b>	Each theme should be clearly distinct from one another, with no overlaps or redundancies.	<i>e.g., The themes 'Desiring emotional support and understanding from healthcare providers' and 'Emphasizing the role of medical professionals in emotional support' have overlapping elements and could be merged or refined to better distinguish their focus.</i>	<b>Combine</b> repeated or overlapping themes to eliminate redundancies and ensure each theme is unique.
<b>Relevance</b>	Each theme should clearly reflect the parents' lived experiences, concerns, and needs, without confusing or overlapping with themes related to the child/patient's feelings, concerns, or experiences.	<i>e.g., The theme 'Managing the emotional impact of surgery on the child' should clearly distinguish between the child's and the parent's emotional experiences.</i>	<b>Delete</b> irrelevant themes that do not reflect the parents' experiences or concerns.

**Table 1: Detailed Prompts, Examples, and Refinement Actions for Each Evaluation Criterion.** This table outlines the four evaluation criteria, along with their descriptions, sample feedback generated by the Evaluation Agent, and the corresponding Refinement Agent prompts.

**Evaluation Metrics.** To evaluate the quality of the generated themes within our framework, we employ two traditional metrics: (1) **Jaccard Similarity**, which measures the overlap between generated and human-generated themes, and (2) **HIT Rate**, which quantifies the proportion of themes that meet a predefined similarity threshold. These metrics provide a comparative evaluation of our framework's performance against human-generated themes.

Let the set of human-generated and LLM-generated themes be  $T = \{t_1, t_2, \dots, t_n\}$  and  $L = \{l_1, l_2, \dots, l_n\}$ , where

$n$  represents the total number of themes. We calculate the similarity score  $s(h_i, l_j)$  for every possible pair  $(t_i, l_j)$  in  $T \times L$ . The similarity matrix  $S_\theta$ , which contains all the calculated similarity scores meeting a predefined threshold  $\theta$ , can be defined as:

$$S_\theta = \{(t_i, l_j) \in T \times L \mid s(h_i, l_j) > \theta\}$$

where  $|x|$  represents the number of elements in  $x$ . The definitions of each metric are as follows:

### (1) Jaccard Similarity

The Jaccard Similarity is defined as the ratio of theme pairs that meet the similarity threshold to the total number of possible pairs:

$$Jaccard\ Similarity = \frac{|S_\theta|}{|T \times L|} = \frac{|S_\theta|}{n^2}$$

### (2) HIT Rate

The HIT Rate measures the proportion of human-generated themes that exceed a predefined similarity threshold when mapped to LLM-generated themes:


$$Hit\ Rate = \frac{|T_s|}{n}$$

“HIT” refers to a theme whose similarity score to a human-generated theme meets or exceeds the specified threshold ( $> 0.60$ ). If at least one similarity score met or exceeded this threshold, the theme was considered a “hit.”

**Experimental Settings.** For all of our methods, we use `gpt-4o` from OpenAI Inc. with temperature of 0 for reproducibility. To compute embedding-based cosine similarity, we use sentence encoder `all-MiniLM-L6-v2` to generate embeddings.

## 4 Results and Discussion


**Improved Distinctiveness and Alignment of LLM-Generated Themes via Multi-Agent Refinement** Human-generated themes served as a baseline to evaluate the distinctiveness and alignment of themes. We observed a lower percentage of high Jaccard similarity theme pairs (29%) in LLM-generated themes after evaluation, which is even lower than that of human-generated themes (33%), and significantly reduced from 42% before refinement (Figure 3a). At the same time, the hit rate increased from 83% to 92% (Figure 3b).

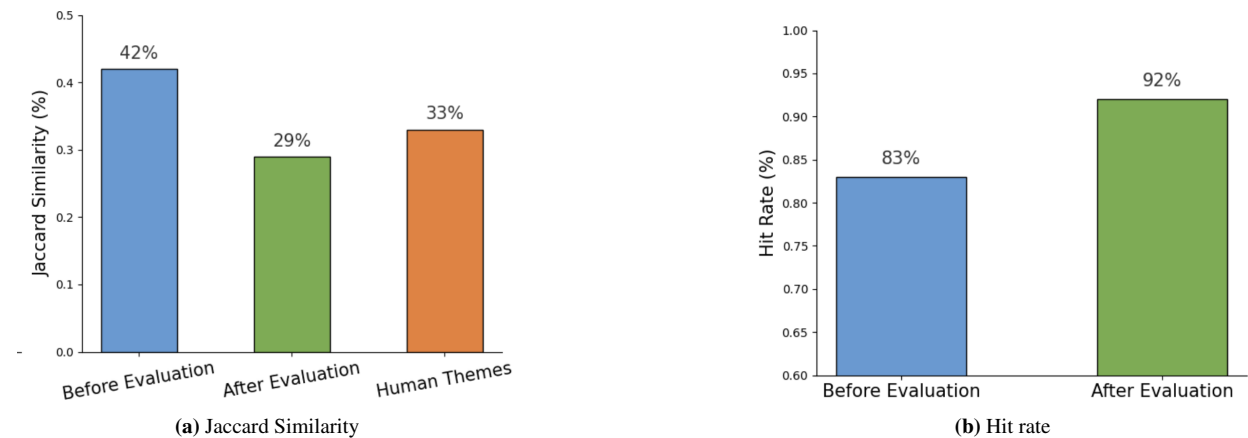

**Figure 3: Comparison of Jaccard Similarity and HIT Rate for LLM-Generated Themes (Before and After Evaluation) Relative to Human-Generated Themes.** Higher values for both metrics indicate a greater overlap between LLM-generated themes and human-generated themes.

Jaccard Similarity provides a measure of how much content is shared between themes. It reflects the semantic similarity between theme pairs (comparable to cosine similarity), which can be thought of as measuring the “letter-level”, whereas Hit Rate quantifies how well the semantics of LLM-generated themes match the human-generated themes. Therefore, the reduction in Jaccard similarity paired with an increased hit rate after evaluation indicates that the refined LLM-generated themes are both more distinct with each other and more closely aligned with the human-generated themes. This outcome demonstrates that the evaluation and refinement agents in TAMA executed thematic analysis in a novel way, while also ensuring comprehensive coverage of all themes without merely replicating themes generated by humans. In traditional TA, final themes should be distinct and non-overlapping.

To objectively evaluate alignment with human-generated themes, we also calculated the similarity between each LLM-generated theme (before and after evaluation) and its corresponding human-generated theme. The similarity scores between the themes were stored in a similarity matrix (Figure 4). The overall decrease in similarity scores among human-generated themes suggests improved distinctiveness of the LLM-generated themes, which is compatible with our previous findings.

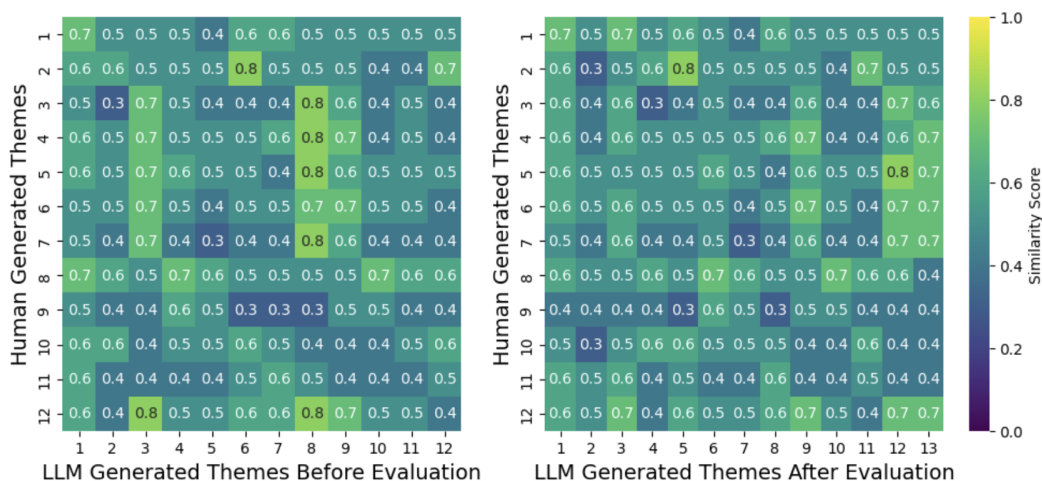

**Figure 4: Similarity Matrix Between Human-Generated Themes and LLM-Generated Themes (Before and after Evaluation.)** Higher scores indicate greater similarity (1 = perfect overlap, and 0 = no overlap). Each row represents a human-generated theme, and each column represents an LLM-generated theme. Full theme names are listed in Table 2. Cell values indicate similarity scores between the two. The first sentence of each theme description is used for comparison, as theme names are too short for evaluation.

**The Role of Multi-agents coordination.** We aimed to compare the LLM-generated themes before and after evaluation by incorporating multiple agents (the Evaluation Agent and the Refinement Agent). Table 2 shows the themes generated by human and LLM before and after evaluations. We incorporated feedback from an expert and five laypersons to review the themes. Their feedback indicated that LLM-generated themes after evaluation demonstrated improved Coverage, Distinctiveness, Actionability, and Relevance compared to those before evaluation. For instance, the post-evaluation themes included “*Desiring comprehensive and statistical data on treatment outcomes,*”, which is a key concern for parents. However, a gap remains between human-generated and LLM-generated themes, with the latter tending to be longer and using more complex terminology.

**The Role of Human Oversight.** The Cardiac Expert played a crucial role in defining the evaluation criteria. Without human input, LLM-generated evaluations were overly broad, emphasizing Distinctiveness while failing to capture Coverage, Actionability, and Relevance. To address this, the **Cardiac expert** provided four specific definitions based on the experience of the three coding experts. This ensures that the evaluation criteria are precise and relevant, facilitating a more effective and focused refinement process.

No.	Human Generated Themes	LLM Generated Themes Before Evaluation	LLM Generated Themes After Evaluation
1	Clarity of potential risks and outcomes	Seeking clarity and reassurance about my child’s health journey	Seeking reassurance through multiple medical opinions
2	Freedom from hypervigilance related to the condition	Balancing normalcy and protection in my child’s life	<b>Desiring comprehensive and statistical data on treatment outcomes</b>
3	The diagnosis given in a compassionate and empathetic way	Coping with emotional turmoil and uncertainty about my child’s future	Managing emotional challenges with proactive strategies
4	A sense of control over the future	Desiring emotional support and understanding from healthcare providers	<b>Balancing normalcy and protection in child’s life</b>
5	Being heard and taken seriously by clinicians	Experiencing relief and gratitude for successful interventions	Living with constant vigilance and fear
6	Individualized support for management decision-making	Living with constant vigilance and fear of health crises	<b>Improving interactions with healthcare providers</b>
7	Receiving support from others	Struggling with guilt and self-blame regarding my child’s condition	<b>Experiencing relief and gratitude for successful interventions</b>
8	Being appropriately informed	Desiring positive messaging about health outcomes	Struggling with guilt and self-blame
9	Partnership with the care team	Feeling overwhelmed by the demands of caregiving	Feeling overwhelmed by caregiving demands
10	Feeling that my child is safe	Building a supportive community with other parents	Building a supportive community with other parents
11	Not feeling responsible for the diagnosis and its timing	Managing the emotional impact of surgery on my child	Advocating for awareness and understanding of heart conditions
12	Appropriately coping with stress, anxiety, and depression	Advocating for awareness and understanding of heart conditions	<b>Addressing frustration with the healthcare system</b>
13			<b>Long-term concerns about child’s health</b>

**Table 2: Comparison of Human-Generated Themes and LLM-Generated Themes Before and After Evaluation.** Bolded text in the “LLM Generated Themes After Evaluation” column highlights elements that were not captured by the human-generated themes and the LLM-generated themes before evaluation. The human-generated themes (rows) and LLM-generated themes after evaluation (columns) used in Figure 4 correspond to the first and third columns of this table, respectively.

Initially, we designed the refinement process with an automated scoring system using the G-Eval method.<sup>28,29</sup> Evaluation Agents were instructed to rate generated themes on a scale from 1 (poor) to 5 (excellent), averaging scores over ten runs. A threshold score of 4.5 was set, meaning the refinement process would conclude once the final theme exceeded this score. However, the scores consistently remained around 4, with no significant improvements observed after multiple refinement iterations. While the model continued generating suggestions, this led to over-refinement, incorporating less critical topics based on the Coverage criterion. For example, it introduced themes such as “concerns about insurance”, even though this was not frequently mentioned by parents. To address this, we incorporated the Cardiac Expert into the decision-making process, ensuring human oversight in determining whether to continue or terminate the evaluation and refinement cycles. Our observation may indicate limitations of the LLM-as-judge approach using numerical scoring methods in multi-agent LLM systems, particularly in the context of iterative refinement.

**Limitations and Future Work** We acknowledge several areas for improvement. First, applying this framework to different contexts, such as other diseases, remains an open challenge. Second, better simulating manual TA where two coders ensure consistency in the coding book could enhance consistency in the initial coding process. Third, increasing architectural complexity could enable multiple agents to discuss and negotiate during the coding and theme-



generation process. Fourth, incorporating reinforcement learning to integrate human feedback into the evaluation process could further refine results. Fourth, evaluate TAMA by performing TA multiple times and comparing results, rather than solely against human-generated codes. High similarity with human-generated results does not guarantee high performance, as even human analysts produce varying outcomes across analyses. Lastly, future work should explore different collaboration protocols among multiple agents to determine their effectiveness in multi-agent LLM systems, especially in Evaluation and Refinement Agents.

## 5 Conclusion

We present **TAMA**, a Human-AI Collaborative Thematic Analysis framework that leverages multi-agent LLMs and domain expertise to enhance the quality, scalability, and efficiency of thematic analysis in clinical interview data. By structuring agent roles and integrating iterative evaluation and refinement guided by cardiac experts, TAMA significantly improved the distinctiveness (lower Jaccard similarity) and alignment (higher hit rate) of LLM-generated themes. Our findings demonstrate that multi-agent LLMs, when combined with human-in-the-loop collaboration, can perform high-quality thematic analysis in a fraction of the time required by traditional manual methods. This highlights their potential for broader application in healthcare and other high-stakes qualitative research areas.

## References

1. Osborn K, Bradley J, Knox E, Leighton P. What matters to patients? A thematic analysis of patient information and support needs. *Eye (Lond)*. 2020;34(1):103-15.
2. Jowsey T, Deng C, Weller J. General-purpose thematic analysis: a useful qualitative method for anaesthesia research. *BJA Education*. 2021;21(12):472-8.
3. Copel LC, Smeltzer SC, Byrne CD, et al. A thematic analysis of shared experiences of essential health and support personnel in the COVID-19 pandemic. *PLoS One*. 2023;18(3):e0282946.
4. Braun V, Clarke V. A critical review of the reporting of reflexive thematic analysis in Health Promotion International. *Health Promotion International*. 2024;39(3):daae049.
5. AL-Ruzzieh MA, AL-Helih YM, Haroun A, Ayaad O. Higher and Middle Management Perspectives on Patient-Centered Care in an Oncology Setting: A Qualitative Study. *Nursing Reports*. 2024;14:3378-90.
6. Milat AJ, King L, Bauman AE, Redman S. The Concept of Scalability: Increasing the Scale and Potential Adoption of Health Promotion Interventions into Policy and Practice. *Health Promotion International*. 2012;28(3):285-98.
7. Vaismoradi M, Turunen H, Bondas T. Content Analysis and Thematic Analysis: Implications for Conducting a Qualitative Descriptive Study. *Nursing & Health Sciences*. 2013;15(3):398-405.
8. Holloway I, Todres L. The status of method: flexibility, consistency and coherence. *Qualitative research*. 2003;3(3):345-57.
9. Wade D. Ethics of collecting and using healthcare data. *BMJ*. 2007;334(7608):1330-1.
10. Tai RH, Bentley LR, Xia X, Sitt JM, Fankhauser SC, Chicas-Mosier AM, et al. An Examination of the Use of Large Language Models to Aid Analysis of Textual Data. *International Journal of Qualitative Methods*. 2024;23. Original work published 2024. Available from: <https://doi.org/10.1177/16094069241231168>.
11. Dai SC, Xiong A, Ku LW. LLM-in-the-loop: Leveraging Large Language Model for Thematic Analysis. In: Bouamor H, Pino J, Bali K, editors. *Findings of the Association for Computational Linguistics: EMNLP 2023*. Singapore: Association for Computational Linguistics; 2023. p. 9993-10001. Available from: <https://aclanthology.org/2023.findings-emnlp.669/>.
12. Qiao T, Walker C, Cunningham CW, Koh YS. Thematic-LM: a LLM-based Multi-agent System for Large-scale Thematic Analysis. In: *THE WEB CONFERENCE 2025*; 2025. Available from: <https://openreview.net/forum?id=jiv0G16sto>.
13. De Paoli S. Further Explorations on the Use of Large Language Models for Thematic Analysis. *Open-Ended Prompts, Better Terminologies and Thematic Maps*. *Forum Qualitative Sozialforschung / Forum: Qualitative Social Research*. 2024;25(3). Available from: <https://doi.org/10.17169/fqs-25.3.4196>.
14. Khan AH, Kegalle H, D'Silva R, Watt N, Whelan-Shamy D, Ghahremanlou L, et al.. Automating Thematic Analysis: How LLMs Analyse Controversial Topics; 2024. Available from: <https://arxiv.org/abs/2405.06919>.

15. Mathis WS, Zhao S, Pratt N, Weleff J, De Paoli S. Inductive thematic analysis of healthcare qualitative interviews using open-source large language models: How does it compare to traditional methods? *Computer Methods and Programs in Biomedicine*. 2024;255:108356.
16. Raza MZ, Xu J, Lim T, Boddy L, Mery CM, Well A, et al.. LLM-TA: An LLM-Enhanced Thematic Analysis Pipeline for Transcripts from Parents of Children with Congenital Heart Disease; 2025. Available from: <https://arxiv.org/abs/2502.01620>.
17. Sreedhar K, Chilton L. Simulating Human Strategic Behavior: Comparing Single and Multi-agent LLMs; 2024. Available from: <https://arxiv.org/abs/2402.08189>.
18. Hosseini P, Castro I, Ghinassi I, Purver M. Efficient Solutions For An Intriguing Failure of LLMs: Long Context Window Does Not Mean LLMs Can Analyze Long Sequences Flawlessly; 2024. Available from: <https://arxiv.org/abs/2408.01866>.
19. Quinn TP, Senadeera M, Jacobs S, Coghlan S, Le V. Trust and medical AI: the challenges we face and the expertise needed to overcome them. *Journal of the American Medical Informatics Association*. 2021;28(4):890-4.
20. Drápal J, Westermann H, Savelka J. Using Large Language Models to Support Thematic Analysis in Empirical Legal Studies. *Frontiers of Artificial Intelligence and Applications*. 2023. Forthcoming. Available from: <https://ssrn.com/abstract=4617116>.
21. Zhang Y, Sun R, Chen Y, Pfister T, Zhang R, Arik SO. Chain of Agents: Large Language Models Collaborating on Long-Context Tasks; 2024. Available from: <https://arxiv.org/abs/2406.02818>.
22. Talebirad Y, Nadiri A. Multi-Agent Collaboration: Harnessing the Power of Intelligent LLM Agents; 2023. Available from: <https://arxiv.org/abs/2306.03314>.
23. Guo T, Chen X, Wang Y, Chang R, Pei S, Chawla NV, et al.. Large Language Model based Multi-Agents: A Survey of Progress and Challenges; 2024. Available from: <https://arxiv.org/abs/2402.01680>.
24. Tran KT, Dao D, Nguyen MD, Pham QV, O'Sullivan B, Nguyen HD. Multi-Agent Collaboration Mechanisms: A Survey of LLMs; 2025. Available from: <https://arxiv.org/abs/2501.06322>.
25. Wang Z, Mao S, Wu W, Ge T, Wei F, Ji H. Unleashing Cognitive Synergy in Large Language Models: A Task-Solving Agent through Multi-Persona Self-Collaboration. In: *Proc. 2024 Annual Conference of the North American Chapter of the Association for Computational Linguistics (NAACL2024)*; 2024. .
26. Zhu K, Du H, Hong Z, Yang X, Guo S, Wang Z, et al. MultiAgentBench: Evaluating the Collaboration and Competition of LLM agents. In: *arxiv*; 2025. .
27. Becker J. Multi-Agent Large Language Models for Conversational Task-Solving; 2024. Available from: <https://arxiv.org/abs/2410.22932>.
28. Liu Y, Iter D, Xu Y, Wang S, Xu R, Zhu C. G-Eval: NLG Evaluation using Gpt-4 with Better Human Alignment. In: Bouamor H, Pino J, Bali K, editors. *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*. Singapore: Association for Computational Linguistics; 2023. p. 2511-22. Available from: <https://aclanthology.org/2023.emnlp-main.153/>.
29. Yi S, Lim J, Yoon J. ProtoLLM: Automatic Evaluation Framework of LLMs on Domain-Specific Scientific Protocol Formulation Tasks; 2024. Available from: <https://arxiv.org/abs/2410.04601>.
30. Sezgin E. Artificial intelligence in healthcare: Complementing, not replacing, doctors and healthcare providers. *Digital Health*. 2023;9:20552076231186520. Published 2023 Jul 2.
31. Sivaraman V, Bukowski LA, Levin J, Kahn JM, Perer A. Ignore, Trust, or Negotiate: Understanding Clinician Acceptance of AI-Based Treatment Recommendations in Health Care; 2023. Available from: <https://arxiv.org/abs/2302.00096>.
32. Yuan M, Bao P, Yuan J, Shen Y, Chen Z, Xie Y, et al.. Large Language Models Illuminate a Progressive Pathway to Artificial Healthcare Assistant: A Review; 2023. Available from: <https://arxiv.org/abs/2311.01918>.
33. Strong J, Men Q, Noble A. Trustworthy and Practical AI for Healthcare: A Guided Deferral System with Large Language Models; 2025. Available from: <https://arxiv.org/abs/2406.07212>.
34. Fan Z, Tang J, Chen W, Wang S, Wei Z, Xi J, et al.. AI Hospital: Benchmarking Large Language Models in a Multi-agent Medical Interaction Simulator; 2024. Available from: <https://arxiv.org/abs/2402.09742>.
35. Kim Y, Park C, Jeong H, Chan YS, Xu X, McDuff D, et al. MDAgents: An Adaptive Collaboration of LLMs for Medical Decision-Making. In: *The Thirty-eighth Annual Conference on Neural Information Processing Systems*; 2024. Available from: <https://openreview.net/forum?id=EKdk4vxKO4>.