UniEDU: A Unified Language and Vision Assistant for Education Applications

Zhendong Chu[♡]*, Jian Xie[♠]*, Shen Wang[♡], Zichao Wang^σ, Qingsong Wen[♡] [○]Squirrel Ai Learning

^ΦFudan University ^σAdobe Research

Abstract

Education materials for K-12 students often consist of multiple modalities, such as text and images, posing challenges for models to fully understand nuanced information in these materials. In this paper, we propose a unified language and vision assistant UniEDU designed for various educational applications, including knowledge recommendation, knowledge tracing, time cost prediction, and user answer prediction, all within a single model. Unlike conventional task-specific models, UniEDU offers a unified solution that excels across multiple educational tasks while maintaining strong generalization capabilities. Its adaptability makes it well-suited for real-world deployment in diverse learning environments. Furthermore, UniEDU is optimized for industry-scale deployment by significantly reducing computational overhead—achieving approximately a 300% increase in efficiency-while maintaining competitive performance with minimal degradation compared to fully fine-tuned models. This work represents a significant step toward creating versatile AI systems tailored to the evolving demands of education.

1 Introduction

The incorporation of artificial intelligence significantly enhances the quality of K-12 education by enabling more personalized learning experiences, improving student engagement (Chen and Leitch, 2024; Adetayo et al., 2024), and providing educators with valuable insights to tailor instruction to individual needs (Bhowmik et al., 2024; Zheng et al., 2025). For example, knowledge recommendation systems leverage AI to suggest relevant learning materials based on students' past performance and preferences (Wang et al., 2024; Chu et al., 2025), while knowledge tracing techniques track students' understanding over time, allowing for real-time adjustments to learning paths (Li et al., 2024; Shen et al., 2024; Yang et al., 2024b).

Despite these advancements, previous research has primarily focused on plain text modality, while real-world K-12 scenarios often involve multimodal data, such as text and images. Furthermore, the significant differences between tasks pose a challenge in designing a unified model that can effectively handle diverse input types. However, since user profiles remain consistent across tasks, a unified approach could facilitate seamless knowledge transfer between them. For instance, while knowledge recommendation is typically framed as a ranking problem and knowledge tracing as a binary classification task, both rely on a shared understanding of student learning behaviors and knowledge states. These disparities underscore the need for a unified model capable of handling the complexities of multimodal scenarios and supporting diverse task types within the context of educational AI assistance.

Large Multimodal Models (LMMs) (Liu et al., 2023b,a; Chen et al., 2024) emerge as a promising solution due to their proficiency in handling multimodal data. Furthermore, by leveraging the flexibility of natural language, LMMs can reframe tasks in a generative format and tailor input descriptions to effectively support a wide range of distinct tasks. However, the computational cost of processing long input contexts remains a significant challenge. Since user interaction histories often span extended periods-up to 300 interactions in our study, with a maximum length reaching 45,000 tokens-retaining all interactions would substantially increase token costs, thereby escalating both training and inference expenses. Conversely, truncating this data results in the loss of critical user profile information. A detailed analysis of these computational costs is provided in Section 3.4. Unlike other domains, user profile modeling in educational contexts primarily depends on interaction

^{*}Equal contribution.

histories to construct user profiles, allowing for a degree of data compression, as not all information requires lossless transmission (Rendle and Zhang, 2023; Purificato et al., 2024).

To address these challenges and accommodate the unique demands of educational settings, we propose UniEDU-a unified large multimodal model optimized for efficient deployment in educational assistant systems. UniEDU compresses student interaction histories into a compact set of tokens for efficient feature extraction and reformulates diverse real-world educational tasks within a generative framework. Extensive experiments demonstrate that UniEDU delivers strong performance across practical tasks while maintaining high computational efficiency. Comprehensive experiments demonstrate that UniEDU not only outperforms task-specific models on real-world tasks but also achieves approximately 300% improvement in computational efficiency.

2 Related Work

To ensure that students receive the most suitable education aligned with their learning path and knowledge domain, it is crucial to develop an effective artificial intelligence system assistant in K-12 education. At the outset of AI integration in education, improving e-learning quality was a primary focus (Murtaza et al., 2022; Rahayu et al., 2022), with technologies such as recommendation systems for personalized learning and adaptive learning platforms playing a central role in tailoring educational content to individual student needs (Zaiane, 2002; Ali et al., 2022). While these systems are effective, most are designed for specific tasks, such as knowledge tracing (Li et al., 2024; Shen et al., 2024), and lack generalization across diverse educational contexts. With the development of LLMs (OpenAI, 2022, 2023; Dubey et al., 2024; Yang et al., 2024a), which leverage superior understanding and generation capabilities, e-learning assistants have made significant strides in expanding their generalization. These assistants can now serve both as teaching assistants (Xu et al., 2024; Guo et al., 2024; Abu-Rasheed et al., 2024) and student support (Park et al., 2024; Liu et al., 2024; Scarlatos et al., 2025), reducing teachers' workloads while offering personalized responses tailored to each student's needs. However, because LLMs are typically trained on general domain data, they struggle to fully adapt to the multimodal data and long-context environments

often found in modern e-learning. As a result, there remains a need for a unified model that can better handle these complexities.

3 Methodology

3.1 Architecture

UniEDU comprises two primary modules: the Profile Encoder and the Language Model. As illustrated in Figure 1, the Profile Encoder is for extracting features from the user's interaction history. Formally, let $S = \{X_1, X_2, \dots, X_n\}$ represent a sequence of user interactions, where each interaction X_i is defined as $X_i = \{q_i, a_i, k_i, c_i, t_i\}$. Each component of X_i is characterized as follows: q_i denotes the question content, a_i represents the user's response, k_i corresponds to the knowledge associated with the question, c_i indicates the correctness of the user's response, and t_i captures the time taken by the user to complete the interaction. q_i may be multimodal, encompassing both visual information (e.g., figures associated with the question) and textual content. The objective of the profile encoder is to compress S into a feature matrix of dimensions $n \times m \times h$, where n denotes the length of the sequence S, m is a hyperparameter controlling the compression ratio, and m represents the hidden state size of the language model.

For the candidate interactions $\hat{X} = \{q, a, k, c, t\}$ that require prediction, UniEDU preserves their original size due to their high information density. By processing S and \hat{X} through the **Profile Encoder** and **Projector**, we obtain $m \times |S|$ compressed profile embeddings, denoted as $H_p = \{h_1, \ldots, h_{m|S|}\}$, along with the uncompressed candidate interaction embeddings H_c . These embeddings, together with the task instruction embeddings H_i , are then processed by the **Language Model**, which generates the final prediction.

3.2 Training

To train a unified model capable of solving diverse types of tasks, UniEDU is designed to generate answers based on the given user's interaction history and task instructions. Specifically, given a sequence of user interactions S and a task instruction \mathbf{X}_{inst} , the model predicts the answer \mathbf{X}_a . The training process employs the standard auto-regressive training objective, formally defined as:

$$p(\mathbf{X}_a \mid \mathbf{S}, \mathbf{X}_{\text{inst}}) = \prod_{i=1}^{L} p_{\theta}(x_i \mid \mathbf{S}, \mathbf{X}_{\text{inst}}, \mathbf{X}_{a, < i}), \quad (1)$$

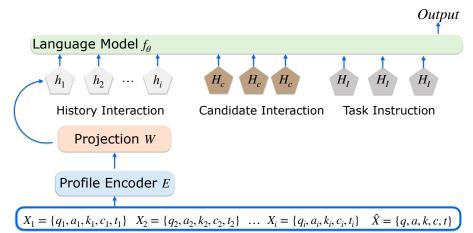


Figure 1: The architecture of UniEDU. The profile encoder processes historical and candidate interactions with multimodal information, while the language model integrates compressed history, uncompressed candidate interactions, and task instructions to generate the output.

Variable	Definition
a	number of attention heads
b	batch size
d	hidden dimension size
l	number of transformer layers
s	sequence length
t	tensor parallel size
v	vocabulary size

Table 1: Definitions of the variables.

where θ represents the trainable parameters, and \mathbf{X}_{inst} and $\mathbf{X}_{a,<i}$ denote the instruction tokens and the answer tokens preceding the current prediction token x_i , respectively.

3.3 VRAM Computation

In this section, we provide a detailed analysis of why UniEDU is VRAM-efficient for both training and inference. We compare UniEDU's VRAM requirements with general fine-tuning demands, focusing on two key components: parameters-loaded VRAM ($VRAM_{para}$) and activation memory ($VRAM_{activation}$). In Table 1, we list all the definitions of the variables used in this section.

Assuming both model parameters and activations are stored in a 16-bit floating point format, each element requires 2 bytes of storage. During the training stage, in addition to S_{model} for model loading, additional memory is required for storing optimizer states and gradients. Specifically, the Adam optimizer maintains two sets of moment estimates—first-order (mean of past gradients) and second-order (variance of past gradients)—for each model parameter, effectively doubling the memory required for optimization. As a result, the optimizer states require $2S_{model}$. Additionally, gradient storage requires S_{model} . Thus, the total VRAM for loading the parameters in the training stage is:

$$VRAM_{para}^{train} = 4 \times 2S_{model} = 8S_{model}.$$
 (2)

During inference, the only VRAM requirement is for loading the model itself, as no optimizer states or gradient storage are needed. Therefore, the VRAM required for inference is given by:

$$VRAM_{model}^{\text{infer}} = 2S_{model}.$$
 (3)

Following the VRAM computation from NVIDIA, the activation memory required for Transformer is given by:

$$VRAM_{activation-blocks} = \frac{sbdl}{t} \left(34 + 5\frac{as}{d}\right).$$
 (4)

In addition to activations within Transformer blocks, there are activation memory requirements before and after these blocks. The token and position embeddings before the first block require:

$$VRAM_{activation-embedding} = 4bsd.$$
 (5)

After passing through the Transformer blocks, the output tensors are typically stored in float32, even if the model was loaded at lower precision, as it often casts outputs to float32 by default (Smirnov, 2023). During training, probabilities that are the same size as the output tensor also need to be stored, contributing additional memory overhead. This results in the following VRAM usage:

$$VRAM_{activation-output} = \begin{cases} 8bsv, & \text{training} \\ 4bsv, & \text{inference} \end{cases}$$
(6)

	Model Size	VRAM _{para}	$VRAM_{activation}$			VRAM _{total}
			Embedding	Blocks	Output	i - ioiui
Training						
Qwen2-VL-2B	2B	14.9GB	0.3GB	61.3GB	50.9GB	127.4GB
Qwen2-VL-7B	7B	52.2GB	0.3GB	143.0GB	50.9GB	246.4GB
UniEDU-5B	5B	37.3GB	1.8MB	1.1GB	0.4GB	38.8GB
Inference						
Qwen2-VL-2B	2B	3.7GB	0.1GB	2.2GB	25.5GB	31.5GB
Qwen2-VL-7B	7B	13GB	0.3GB	5.1GB	25.5GB	43.9GB
UniEDU-5B	5B	9.3GB	1.8MB	25MB	0.2GB	9.5GB

Table 2: VRAM Usage Comparison Across Different Models. The results assume b = 1 and t = 1, with other parameters set according to their respective models. For UniEDU, s = 300 due to compression, while for the other models, s = 45,000, representing the maximum number of history interaction tokens. For clarity, token counts for candidate interactions and task instructions are omitted, resulting in slight discrepancies in real VRAM usage.

To further optimize VRAM consumption, we employ Flash Attention (Dao et al., 2022), which reduces attention memory complexity from quadratic to linear with respect to the sequence length. Given that the sequence length in our setting (up to 45K) is significantly larger than the number of attention heads a, the activation memory in the training stage can be approximated as:

$$VRAM_{activation} \approx 34 \frac{sbdl}{t} + (4d + 8v)bs.$$
 (7)

For inference, the activation memory cost depends on the maximum single activation memory in blocks (i.e., the activation memory of each layer), as intermediate parameters for updates are not stored. Therefore, the inference cost is:

$$VRAM_{activation} \approx 34 \frac{sbd}{t} + 4bsv.$$
 (8)

3.4 Efficiency Analysis

In Table 2, we present the VRAM requirements for Qwen2-VL-2B, Qwen2-VL-7B, and our UniEDU. Due to the long context required for recommendation tasks (up to 45K tokens in our dataset) and the large vocabulary size of modern LLMs, activation memory consumes a substantial amount of VRAM, leading to high computational costs during both training and inference. However, after compression, UniEDU significantly reduces VRAM usage compared to traditional models, achieving over a 3× reduction even relative to the smaller Qwen2-VL-2B in both training and inference stages. This substantial decrease in memory consumption offers a significant advantage for real-world deployment, enabling the model to process larger batches and handle more data within the same timeframe.

4 Experiments

4.1 Tasks

Knowledge Recommendation. This task aims to suggest relevant knowledge based on a user's interaction history. In an educational assistant context, the model identifies a student's weak areas and provides targeted recommendations, including both foundational knowledge to address weaknesses and advanced knowledge for further development. Specifically, we define the data format as a triplet (S, Y, C), where S represents the user's interaction history (as detailed in Section 3), Ydenotes the ground truth knowledge points that reflect the student's weak areas, with the number of knowledge points $M \in [1, 5]$. C includes candidate knowledge points, which consist of both the ground truth knowledge points Y and disturbance terms. For each knowledge point, we assign Kcandidates, where M is randomly selected from $\{5, 10, 25, 50\}$, including 1 golden truth and M-1distractors. The performance of this task is evaluated using accuracy@K, where K represents the total number of candidates. A prediction is considered accurate if the ground truth knowledge point is ranked first.

Knowledge Tracing. This task aims to predict whether a student can successfully complete a given question. The model must effectively capture the user's profile, identifying both strengths and weaknesses, to predict whether the student will answer the question correctly or incorrectly. Specifically, given a sequence of the user's interaction history S and a question Q, the model is expected to predict a binary outcome: [True] or

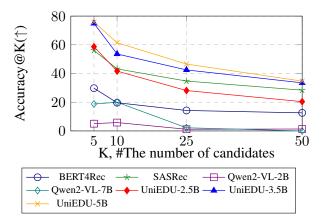


Figure 2: Performance comparison of seven models on the Knowledge Recommendation task.

[False], where the ground truth is derived from the student's actual answer. The performance of this task is evaluated based on accuracy.

Time Cost Prediction. This task aims to estimate the time a student will be required to complete a given question. The task requires the model to understand both the student's learning path and the inherent difficulty of the task. Specifically, similar to Knowledge Tracing, given a sequence of the user's interaction history S and a question Q, the model is expected to predict an integer value representing the time required, with the ground truth derived from the student's actual time spent. We evaluate the model's performance using Mean Absolute Error (MAE).

User Answer Prediction. The User Answer Prediction task aims to predict the user's possible answer to a given question based on their interaction history and learning profile. If the model thinks that the student can successfully answer the question, it needs to predict the correct answer (Liu et al., 2022). However, if the student is unlikely to succeed, the model needs to predict an answer that aligns with the student's profile, reflecting a potentially incorrect response. This task requires the model to capture the student's strengths, weaknesses, and learning paths to generate realistic answers. Specifically, given a sequence of the user's interaction history S and a question Q, the model predicts the most probable answer, with the ground truth being the student's actual response. We use exact match (EM) to evaluate the performance.

4.2 Implementation Details

Baselines. To assess the effectiveness of UniEDU, we compare it against two specific baseline methodologies for each task. Specifically, for knowledge recommendation, we evaluate two widely adopted models: SASRec (Kang and McAuley, 2018) and Bert4Rec (Sun et al., 2019). For the knowledge tracing task, we consider extraKT (Li et al., 2024) and reKT (Shen et al., 2024). For time cost prediction, we utilize N-BEATS (Oreshkin et al., 2020) and Prophet (Meta, 2023). For user answer prediction, a generative task requiring the model to produce responses in natural language, we employ Qwen2-VL-2B and Qwen2-VL-7B. Additionally, these two models, without fine-tuning, are included as baselines for the three aforementioned tasks.

All experiments are conducted using the same training and test sets. The maximum number of interaction history entries is 300, with a maximum token cost of 45,000, based on the Qwen tokenizer. For the baseline models requiring the indexing of specific users and items, we follow the official guidelines to complete this process.

Backbone models. We fine-tune UniEDU on the four tasks outlined in Section 4.1. We collect real student exercise data from a widely used e-learning platform. For more dataset details, please refer to Appendix A.1. For each task, we use 24,504 instances for training, with 5% of the data randomly selected as a validation set, and 2,784 instances for testing. For UniEDU, we fix the encoder model as Qwen2-VL-2B and vary the language model size by using Qwen2.5-0.5B, Qwen2.5-1.5B, and Qwen2.5-3B. These configurations form UniEDU-2.5B, UniEDU-3.5B, and UniEDU-5B, enabling us to assess the impact of model size on performance.

4.3 Results

We compare the performance of baselines and our different sizes of UniEDU on four tasks. We report the results in Figure 2 and Figure 3.

First, **UniEDU demonstrates strong performance across four tasks.** Except for knowledge tracing, UniEDU outperforms task-specific models in Knowledge Recommendation, Time Cost Prediction, and User Answer Prediction. Notably, it achieves performance gains of approximately 30% and 20% over the best baselines in knowledge recommendation and time cost prediction, respectively. While UniEDU performs competitively in knowledge tracing, it slightly lags behind specialized models like extraKT and reKT, which are better suited for simpler discriminative tasks. However, these models struggle with unseen items, whereas UniEDU handles them effectively through natural language descriptions.

Second, model size significantly affects gener-

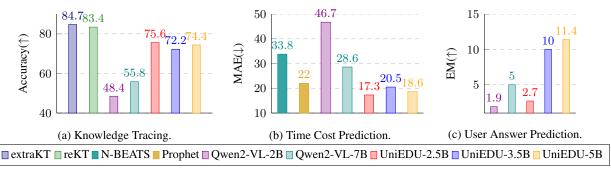


Figure 3: Performance comparison of UniEDU and baseline models on Knowledge Tracing, Time Cost Prediction, and User Answer Prediction.



Figure 4: Performance comparison of UniEDU-5B with varying number of compression tokens. The red dashed line represents the performance of Qwen2-VL-2B with full fine-tuning.

ative tasks but has limited impact on discriminative ones. For Knowledge Tracing and Time Cost Prediction, performance remains relatively stable across model sizes. In contrast, for Knowledge Recommendation and User Answer Prediction, larger models like UniEDU-5B show clear advantages over smaller variants. This suggests that tasks requiring longer or more complex generation benefit more from increased language model capacity.

4.4 Analysis

To evaluate the impact of compression ratio on performance, we vary the number of compression tokens (i.e., compression ratio m, as defined in Section 3.1) to 1, 2, 3, meaning each history interaction X_i is compressed into 1, 2, 3 hidden states. We conduct this analysis on UniEDU-5B and use Qwen2-VL-2B as an upper bound, excluding the 7B variant due to its high computational cost.

Results in Figure 4 show that increasing the number of compression tokens slightly degrades performance in Knowledge Recommendation and Knowledge Tracing, likely due to noise from excessive historical context. In contrast, User Answer Prediction benefits from additional context, as it requires modeling both historical interactions and candidate questions. Overall, our compression approach provides substantial efficiency gains with minimal performance loss, except in the more complex generative setting of User Answer Prediction. Furthermore, compared to the fully fine-tuned model, our compression technique achieves significant improvements in training and inference efficiency with minimal performance degradation, except for the User Answer Prediction task.

4.5 Deployment

Even though UniEDU is a pioneering attempt at applying LMMs to industrial education applications, we deploy it on a real-world e-learning platform, leveraging its capabilities in knowledge recommendation. We conducted a controlled A/B test with over 13,000 students, where UniEDU achieved a 57% hit rate, significantly outperforming the traditional recommendation system's 18% hit rate. The results demonstrate the strong potential of UniEDU for real-world deployment, highlighting their effectiveness in educational applications.

5 Conclusion

In this paper, we propose UniEDU, a unified generative model for education that effectively handles various multimodal tasks while being computationally efficient. Unlike task-specific models, UniEDU not only achieves better performance but also generalizes well across different educational challenges, making it suitable for real-world deployment. Extensive experiments validate its effectiveness, showing that compared to fully fine-tuned models, UniEDU reduces computation costs by approximately 300% while incurring minor performance drops. Overall, UniEDU represents a promising step toward integrating LMMs into industrial education applications, offering a scalable and efficient approach to personalized learning.

6 Broader Impact Statement

UniEDU has the potential to significantly improve personalized learning by providing targeted knowledge recommendations based on students' interaction histories. This can enhance student engagement, support educators in curriculum design, and scale AI-driven education to a wider audience. Furthermore, our computationally efficient design in UniEDU makes it accessible to institutions and companies with limited computational resources, while maintaining competitive performance with minimal trade-offs.

However, training large models on student data poses potential risks to student privacy. To mitigate these concerns, our dataset is constructed from real student interactions, but all personally identifiable information is strictly anonymized. Only interaction data relevant to learning behaviors is retained, while sensitive details such as names, user IDs, and other personal attributes are carefully masked to ensure privacy and compliance with ethical data usage standards.

References

- Hasan Abu-Rasheed, Mohamad Hussam Abdulsalam, Christian Weber, and Madjid Fathi. 2024. Supporting student decisions on learning recommendations: An Ilm-based chatbot with knowledge graph contextualization for conversational explainability and mentoring. *arXiv preprint arXiv:2401.08517*.
- Adebowale Jeremy Adetayo, Mariam Oyinda Aborisade, and Basheer Abiodun Sanni. 2024. Microsoft copilot and anthropic claude ai in education and library service. *Library Hi Tech News*.
- Sadia Ali, Yaser Hafeez, Mamoona Humayun, Nor Shahida Mohd Jamail, Muhammad Aqib, and Asif Nawaz. 2022. Enabling recommendation system architecture in virtualized environment for e-learning. *Egyptian Informatics Journal*, 23(1):33–45.
- Saptarshi Bhowmik, Luke West, Alex Barrett, Nuodi Zhang, Chih-Pu Dai, Zlatko Sokolikj, Sherry Southerland, Xin Yuan, and Fengfeng Ke. 2024. Evaluation of an llm-powered student agent for teacher training. In European Conference on Technology Enhanced Learning, pages 68–74. Springer.
- Celia Chen and Alex Leitch. 2024. Llms as academic reading companions: Extending hci through synthetic personae. *arXiv preprint arXiv:2403.19506*.
- Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. 2024. Internvl: Scaling up vision foundation models and aligning for

generic visual-linguistic tasks. In *Proceedings of* the *IEEE/CVF* conference on computer vision and pattern recognition, pages 24185–24198.

- Zhendong Chu, Shen Wang, Jian Xie, Tinghui Zhu, Yibo Yan, Jinheng Ye, Aoxiao Zhong, Xuming Hu, Jing Liang, Philip S Yu, et al. 2025. Llm agents for education: Advances and applications. *arXiv preprint arXiv:2503.11733*.
- Tri Dao, Dan Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. 2022. Flashattention: Fast and memory-efficient exact attention with io-awareness. *Advances in Neural Information Processing Systems*, 35:16344–16359.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. 2024. The Ilama 3 herd of models. *arXiv preprint arXiv:2407.21783*.
- Shuchen Guo, Ehsan Latif, Yifan Zhou, Xuan Huang, and Xiaoming Zhai. 2024. Using generative ai and multi-agents to provide automatic feedback. *arXiv preprint arXiv:2411.07407*.
- Wang-Cheng Kang and Julian McAuley. 2018. Selfattentive sequential recommendation. In 2018 IEEE international conference on data mining (ICDM), pages 197–206. IEEE.
- Vijay Anand Korthikanti, Jared Casper, Sangkug Lym, Lawrence McAfee, Michael Andersch, Mohammad Shoeybi, and Bryan Catanzaro. 2023. Reducing activation recomputation in large transformer models. *Proceedings of Machine Learning and Systems*, 5:341–353.
- Xueyi Li, Youheng Bai, Teng Guo, Ying Zheng, Mingliang Hou, Bojun Zhan, Yaying Huang, Zitao Liu, Boyu Gao, and Weiqi Luo. 2024. Extending context window of attention based knowledge tracing models via length extrapolation. In *ECAI 2024*, pages 1479–1486. IOS Press.
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. 2023a. Improved baselines with visual instruction tuning.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2023b. Visual instruction tuning. In *NeurIPS*.
- Naiming Liu, Zichao Wang, Richard Baraniuk, and Andrew Lan. 2022. Open-ended knowledge tracing for computer science education. In *Proceedings of the* 2022 Conference on Empirical Methods in Natural Language Processing.
- Zhengyuan Liu, Stella Xin Yin, Geyu Lin, and Nancy F. Chen. 2024. Personality-aware student simulation for conversational intelligent tutoring systems. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 626– 642, Miami, Florida, USA. Association for Computational Linguistics.

Meta. 2023. Prophet.

Mir Murtaza, Yamna Ahmed, Jawwad Ahmed Shamsi, Fahad Sherwani, and Mariam Usman. 2022. Aibased personalized e-learning systems: Issues, challenges, and solutions. *IEEE access*, 10:81323– 81342.

OpenAI. 2022. Chatgpt.

- OpenAI. 2023. Gpt-4 technical report. arXiv preprint arXiv:2303.08774.
- Boris N. Oreshkin, Dmitri Carpov, Nicolas Chapados, and Yoshua Bengio. 2020. N-beats: Neural basis expansion analysis for interpretable time series forecasting. In *International Conference on Learning Representations*.
- Minju Park, Sojung Kim, Seunghyun Lee, Soonwoo Kwon, and Kyuseok Kim. 2024. Empowering personalized learning through a conversation-based tutoring system with student modeling. In *Extended Abstracts of the CHI Conference on Human Factors in Computing Systems*, pages 1–10.
- Erasmo Purificato, Ludovico Boratto, and Ernesto William De Luca. 2024. User modeling and user profiling: A comprehensive survey. *arXiv preprint arXiv:2402.09660*.
- Nur W Rahayu, Ridi Ferdiana, and Sri S Kusumawardani. 2022. A systematic review of ontology use in e-learning recommender system. *Computers and Education: Artificial Intelligence*, 3:100047.
- Steffen Rendle and Li Zhang. 2023. On reducing user interaction data for personalization. *ACM Transactions on Recommender Systems*, 1(3):1–28.
- Alexander Scarlatos, Ryan S Baker, and Andrew Lan. 2025. Exploring knowledge tracing in tutor-student dialogues using llms. In *Proceedings of the 15th International Learning Analytics and Knowledge Conference*, pages 249–259.
- Xiaoxuan Shen, Fenghua Yu, Yaqi Liu, Ruxia Liang, Qian Wan, Kai Yang, and Jianwen Sun. 2024. Revisiting knowledge tracing: A simple and powerful model. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 263–272.
- Alex Smirnov. 2023. Breaking down gpu vram consumption.
- Fei Sun, Jun Liu, Jian Wu, Changhua Pei, Xiao Lin, Wenwu Ou, and Peng Jiang. 2019. Bert4rec: Sequential recommendation with bidirectional encoder representations from transformer. In Proceedings of the 28th ACM international conference on information and knowledge management, pages 1441–1450.
- Shen Wang, Tianlong Xu, Hang Li, Chaoli Zhang, Joleen Liang, Jiliang Tang, Philip S Yu, and Qingsong Wen. 2024. Large language models for education: A survey and outlook. *arXiv preprint arXiv:2403.18105*.

- Songlin Xu, Xinyu Zhang, and Lianhui Qin. 2024. Eduagent: Generative student agents in learning. *arXiv* preprint arXiv:2404.07963.
- An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, et al. 2024a. Qwen2 technical report. arXiv preprint arXiv:2407.10671.
- Kaiqi Yang, Yucheng Chu, Taylor Darwin, Ahreum Han, Hang Li, Hongzhi Wen, Yasemin Copur-Gencturk, Jiliang Tang, and Hui Liu. 2024b. Content knowledge identification with multi-agent large language models (llms). In *International Conference on Artificial Intelligence in Education*, pages 284–292. Springer.
- Osmar R Zaiane. 2002. Building a recommender agent for e-learning systems. In *International Conference on Computers in Education, 2002. Proceedings.*, pages 55–59. IEEE.
- Longwei Zheng, Fei Jiang, Xiaoqing Gu, Yuanyuan Li, Gong Wang, and Haomin Zhang. 2025. Teaching via Ilm-enhanced simulations: Authenticity and barriers to suspension of disbelief. *The Internet and Higher Education*, 65:100990.

A Appendix

A.1 Datasets

We collect our dataset from real student exercise data on an e-learning platform and construct the training data for each task as described in Section 4. The statistics of the dataset is shown in Table 3. Each student history exceeding 300 interactions is truncated into multiple segments. As a result, although we processed only 13,239 students, the total number of final instances exceeds this number.

Table 3: Data stati	stics.
---------------------	--------

# of students	13,239			
# of knowledge	8,247			
# of questions	235,687			
# of logs	3,892,084			

A.2 VRAM Calculation

In the NVIDIA paper (Korthikanti et al., 2023), the hidden size is increased to 4h and then reduced back to h across layers. This varies in models like Qwen2-VL-7B, where the hidden size is 1,576, and the intermediate size is 8,960. For consistency, we adopt the evaluation strategy provided by NVIDIA, which may introduce a minor discrepancy in the real memory costs for models with different configurations.