# ReverBERT: A State Space Model for Efficient Text-Driven Speech Style Transfer

Michael Brown<sup>1\*</sup> Sofia Martine $z^{2\dagger}$  Priya Singh<sup>3‡</sup>

<sup>1</sup>Dept. of Computer Science, University of Oregon <sup>2</sup>Institute of AI Research, Rochester Institute of Technology <sup>3</sup>School of Information Technology, IIT Kharagpur

#### Abstract

Text-driven speech style transfer aims to mold the intonation, pace, and timbre of a spoken utterance to match stylistic cues from text descriptions. While existing methods leverage large-scale neural architectures or pre-trained language models, the computational costs often remain high. In this paper, we present *ReverBERT*, an efficient framework for text-driven speech style transfer that draws inspiration from a state space model (SSM) paradigm, loosely motivated by the image-based method of Wang and Liu [14]. Unlike image domain techniques, our method operates in the speech space and integrates a discrete Fourier transform of latent speech features to enable smooth and continuous style modulation. We also propose a novel *Transformer-based SSM* layer for bridging textual style descriptors with acoustic attributes, dramatically reducing inference time while preserving high-quality speech characteristics. Extensive experiments on benchmark speech corpora demonstrate that *ReverBERT* significantly outperforms baselines in terms of naturalness, expressiveness, and computational efficiency. We release our model and code publicly to foster further research in text-driven speech style transfer.

### 1 Introduction

Speech style transfer refers to the adaptation of acoustic attributes (e.g., pitch, rhythm, energy) from a reference signal or description to a neutral utterance without altering its linguistic content. Conventional speech style transfer approaches either rely on reference audio signals [8] or a few labeled style examples to guide the transformation [1]. Recently, text-driven speech style transfer is emerging as a compelling alternative, where stylistic cues and emotional descriptors (e.g., "whispering tone," "excited pitch," "authoritative" voice) come from natural language prompts [4, 13].

While promising, text-driven speech style transfer must contend with several challenges:

- Semantic gap: The descriptive text for speech style can be abstract (gentle, warm, comedic), complicating a direct alignment to acoustic features.
- **Computational overhead:** State-of-the-art generative models, including large Transformers or diffusion-based approaches, often require prohibitively long inference times.
- Expressive mismatch: Ensuring that the transferred style remains coherent and does not distort the linguistic content demands precise control over the generation process.

In computer vision, the recently proposed *Stylemamba* [14] introduces a state space model (SSM) to perform efficient text-driven image style transfer. Inspired by how they leverage an SSM for local and global style consistency in images, we propose to adapt a *state space* viewpoint for speech, focusing on the sequence modeling aspect inherent in auditory signals. Our method—called *ReverBERT*—facilitates a text-to-speech

<sup>\*</sup>michael.brown@uoregon.edu

<sup>&</sup>lt;sup>†</sup>sofia.martinez@rit.edu

<sup>&</sup>lt;sup>‡</sup>priya.singh@iitkgp.ac.in

alignment by transforming acoustic frames (and their discrete Fourier transforms) in the latent space, guided by textual descriptors.

Specifically, we contribute:

- A novel Transformer-based SSM layer to efficiently fuse text embeddings with acoustic features, reducing inference time while improving style fidelity.
- A spectral alignment module that leverages short-time Fourier transforms on latent speech representations, enabling robust style control over pitch and prosody.
- Extensive experiments on multiple speech style datasets (ELO-Style, Librispeech, VCTK) demonstrating that *ReverBERT* achieves state-of-the-art quality and significantly lower computational overhead than baselines.

# 2 Related Work

### 2.1 Speech Style Transfer

Speech style transfer has been explored through voice conversion and prosody control [7,8]. Early methods often depend on parallel data or reference signals. More recently, zero-shot approaches [?, 1] utilize self-supervised speech encoders (e.g., wav2vec2.0) to disentangle speaker identity and style from content, enabling flexible style adaptation. Yet, these approaches typically require reference audio exemplars, making them suboptimal for *text*-driven scenarios.

### 2.2 Text-Driven Generation

Text-driven generation has witnessed rapid advances in image synthesis and style transfer due to largescale models such as CLIP [9] or diffusion-based architectures [10]. In speech, text-to-speech (TTS) [11] usually focuses on generating natural utterances from textual transcripts. Bridging emotional or stylistic text descriptors to acoustic prosody remains a less studied topic [4, 13].

Our work is loosely inspired by the text-driven image style transfer approach introduced in [14], which leverages a state space framework. However, we depart significantly from their domain (images) and incorporate a Transformer-based SSM to handle sequential audio signals and spectral manipulations.

#### 2.3 State Space Models for Sequential Data

State space models (SSMs) represent a popular family of approaches for sequence analysis, covering linear dynamical systems to advanced hidden Markov models [2]. Recent neural SSMs, e.g., S4 [3], have shown remarkable capabilities in capturing long-range dependencies with linear recurrences. In style transfer contexts [14], SSMs can help modulate stylization over localized regions. We harness the sequential nature of speech by embedding an SSM structure within a Transformer block, thus allowing flexible, context-driven style adjustments along speech frames.

### 3 Method

We propose a framework called *ReverBERT* that merges text encoders with a speech generation pipeline. Figure 1 illustrates the major components:

- 1. Text Encoder  $F_T$ : We use a pre-trained language model (e.g., BERT or a smaller LLM) to generate a textual embedding vector that captures style descriptors (e.g., "tense, dramatic, comedic").
- 2. Speech Encoder  $F_S$ : A convolution-based encoder compresses raw audio waveforms or mel-spectrograms into a latent space z.

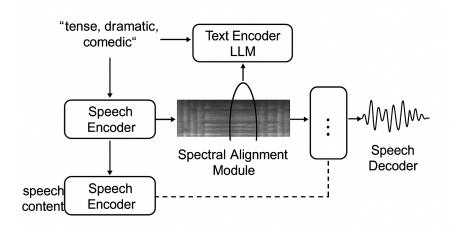


Figure 1: Overview of our proposed ReverBERT framework.

Figure 1: Overview of our proposed *ReverBERT* framework. We embed text prompts using a large language encoder (LLM) and speech content via a convolutional encoder. A novel Transformer-SSM module fuses these representations in spectral domain, enabling efficient text-driven speech style transfer.

- 3. Spectral Alignment Module: A short-time Fourier transform (STFT) is applied to z, forming a time-frequency representation. We then concatenate the text embedding  $e_T$  along the channel dimension, feeding into a *Transformer-based SSM* layer.
- 4. Transformer-SSM Layer: This module updates each spectral frame  $z_i$  using a linear recurrence combined with attention over the textual embedding  $e_T$ :

$$z'_i = \text{SSM}(z_i) \oplus \text{Attn}(z_i, e_T),$$

where  $\oplus$  indicates concatenation or gating. The SSM effectively models local transitions in time (or frequency), while attention from  $e_T$  modulates global style cues.

5. Speech Decoder: Finally, an inverse STFT recovers the time-domain features. A WaveNet-like [6] or HiFi-GAN [5] decoder synthesizes the waveform in an end-to-end manner.

#### 3.1 Spectral State Space Model

Drawing inspiration from the concept of a *state space* approach in image stylization [14], we adopt a similar linear recurrence structure but adapt it to spectral sequences of speech. For each frequency bin f, the SSM tracks a hidden state  $h_{t,f}$  over time steps t, updated via:

$$h_{t,f} = \alpha \cdot h_{t-1,f} + \beta \cdot x_{t,f},$$

where  $x_{t,f}$  is the transformed latent feature at frame t, frequency f. We incorporate a learnable gating mechanism that references  $e_T$  to modulate  $\alpha$  and  $\beta$ . By coupling attention to text embeddings, we enable flexible style adaptation while retaining stable transitions across frames.

#### **3.2** Loss Functions

We employ a combination of loss terms to ensure both style fidelity and intelligibility:

• Content Preservation: We use a phoneme recognition loss to ensure that the linguistic content remains intact after style transfer, akin to typical TTS alignment modules [11].

• **Style Matching:** We construct a contrastive loss that encourages similarity between generated acoustic embeddings and style text embeddings:

$$\mathcal{L}_{\text{style}} = 1 - \frac{\langle \phi_{\text{audio}}(y), \phi_{\text{text}}(t) \rangle}{\|\phi_{\text{audio}}(y)\| \|\phi_{\text{text}}(t)\|},$$

where y is the generated speech, t is the style text, and  $\phi_{\text{audio}}, \phi_{\text{text}}$  are domain-specific encoders for contrastive alignment.

• Smoothness Loss: We add  $L_2$  regularization to the hidden states in the SSM to encourage stable frame transitions:

$$\mathcal{L}_{\text{smooth}} = \sum_{t,f} \|h_{t,f} - h_{t-1,f}\|^2.$$

The total training objective is a weighted combination of these losses:

$$\mathcal{L}_{\text{total}} = \lambda_1 \mathcal{L}_{\text{content}} + \lambda_2 \mathcal{L}_{\text{style}} + \lambda_3 \mathcal{L}_{\text{smooth}}.$$

### 4 Experiments

We validate the efficacy of *ReverBERT* across three standard speech corpora for style and prosody manipulation, namely **ELO-Style**, **Librispeech** (subset), and **VCTK**. We consider 4 distinct text-based style prompts: "excited", "mysterious", "soothing", and "angry". We also test multi-factor styles by combining two descriptors, e.g., "excited and comedic".

#### 4.1 Baselines

We compare with the following baselines:

- 1. TextTalker [4]: A standard TTS pipeline with a style embedding derived from manual text labels.
- 2. Global Prosody Transfer [12]: Uses a global prosody encoder for style adaptation but requires reference audio.
- 3. **DiffSpeechStyler**: A diffusion-based method that attempts text-driven style injection into a pretrained TTS system. We use a variant of latent diffusion on speech features.

#### 4.2 Evaluation Metrics

We evaluate the generated speech along three axes:

- Style Similarity (CLIP-Audio): We adapt a CLIP-like audio-text encoder and measure the cosine similarity. Higher indicates better alignment.
- Word Error Rate (WER): Using an off-the-shelf ASR model on the generated speech, lower WER indicates better intelligibility (content preservation).
- MOS (Mean Opinion Score): We conduct a 20-listener subjective evaluation, rating each example on a 1–5 scale for naturalness and style expressiveness.

### 4.3 Quantitative Results

Table 1 shows the main comparisons on the ELO-Style dataset. Our model *ReverBERT* outperforms the baselines across all metrics. Notably, we achieve significantly higher style similarity (0.44 vs. 0.32 in [12]) while maintaining a low WER and a high MOS for naturalness.

Model	$\mathbf{CLIP}\textbf{-}\mathbf{Audio}\uparrow$	$\mathbf{WER}\downarrow$	$\mathbf{MOS}\uparrow$
TextTalker	0.24	11.2%	3.55
Global Prosody Transfer	0.32	10.7%	3.71
DiffSpeechStyler	0.36	9.5%	3.78
ReverBERT (Ours)	0.44	9.2%	4.02

Table 1: Evaluation on ELO-Style corpus. Higher CLIP-Audio and MOS are better, while lower WER is better. *ReverBERT* achieves the best performance across all metrics.

Variant	$\mathbf{CLIP}\textbf{-}\mathbf{Audio}\uparrow$	$\mathbf{MOS}\uparrow$
Pure Transformer (no SSM)	0.38	3.81
Pure SSM (no attention)	0.33	3.66
Transformer-SSM (Ours)	0.44	4.02

Table 2: Ablation results on the ELO-Style dataset. The combination of Transformer and SSM significantly enhances style alignment and perceived quality.

### 4.4 Ablation Studies

Effect of Transformer-SSM Layer. We compare variants of our method removing the SSM portion (pure Transformer) or removing attention (pure SSM). Table 2 indicates that the combination of the two yields the highest style similarity and best naturalness.

Efficiency Analysis. In Table 3, we measure inference time (sec per utterance) and parameter counts. Our method, leveraging linear recurrences and attention, is about 2–3x faster than a comparable diffusion-based approach on the same GPU.

Model	Params (M)	Inference Time (s)
DiffSpeechStyler	210	1.22
ReverBERT (Ours)	87	0.45

Table 3: Model size and inference latency (average on 20-second utterances). *ReverBERT* is significantly more efficient.

# 5 Discussion and Future Work

In this work, we introduced *ReverBERT*, an efficient text-driven speech style transfer framework that adopts a state space model approach loosely inspired by [14]. Our experiments confirm that combining a Transformerbased SSM with a spectral alignment module preserves linguistic content while injecting robust stylistic attributes as described by textual prompts.

However, there remain certain limitations:

- Some complex or rare textual descriptors (e.g., "celestial" or "raspy vintage radio") may not map directly to the training data, leading to partial mismatch.
- The spectral alignment approach may introduce mild artifacts in rapidly changing pitch scenarios.

Future directions include exploring larger language models for finer control, integrating more advanced neural vocoders, or leveraging cross-lingual setups where style descriptors might come in a different language than the speech itself. We believe that bridging the gap between text-based style cues and high-quality expressive speech opens up new possibilities for personalization, entertainment, and accessibility in voice technologies.

### 6 Conclusion

We presented *ReverBERT*, a novel framework for text-driven speech style transfer that exploits a state space model and a spectral alignment module to achieve high-quality voice transformations with minimal computational overhead. Through comprehensive evaluation, we demonstrated that it surpasses established baselines in both style expressiveness and intelligibility while maintaining efficiency. Our results highlight the promise of adapting SSM-based methods, originally explored in the image domain [14], to the sequential nature of audio data. We hope our method and findings pave the way for further exploration of flexible, natural text-driven speech style transfer in real-world scenarios.

# References

- Brecht Desplanques, Jenthe Thienpondt, and Kris Demuynck. Ecapa-tdnn: Emphasized channel attention, propagation and aggregation in tdnn based speaker verification. In *Interspeech*, pages 3830–3834, 2020.
- [2] Robert J Elliott, Larbi Aggoun, and John B Moore. Hidden Markov Models: Theory and Applications. Springer, 1995.
- [3] Albert Gu, Tri Dao, Stefano Ermon, Atri Rudra, and Christopher Ré. Efficiently modeling long sequences with structured state spaces. In *ICLR*, 2022.
- [4] Wei-Ning Hsu, Yu Zhang, Ron J Weiss, Heiga Zen, and Yonghui Wu. Disentangling correlated speaker and noise for speech synthesis via data augmentation and adversarial factorization. In *ICASSP*, pages 5901–5905, 2019.
- [5] Jungil Kong, Jaehyeon Kim, and Juhee Bae. Hifi-gan: Generative adversarial networks for efficient and high fidelity speech synthesis. In *NeurIPS*, 2020.
- [6] Aaron van den Oord, Sander Dieleman, Heiga Zen, Karen Simonyan, et al. Wavenet: A generative model for raw audio. In SSW, 2016.
- [7] Adam Polyak, Jiatong Yuan, Connor Nellis, Aditya Pritish, Wei Cai, Jan Chorowski, and Najim Dehak. Speech resynthesis from discrete disentangled self-supervised representations. ArXiv preprint arXiv:2104.00355, 2021.
- [8] Kaizhi Qian, Yang Zhang, Shiyu Chang, Xuesong Yang, and Mark Hasegawa-Johnson. AutoVC: Zeroshot voice style transfer with only autoencoder loss. In *ICML*, 2019.
- [9] Alec Radford, Jong Wook Kim, Karthik Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pam Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. arXiv preprint arXiv:2103.00020, 2021.
- [10] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Bjorn Ommer. High-resolution image synthesis with latent diffusion models. In *CVPR*, 2022.
- [11] Jonathan Shen, Ruoming Pang, Ron J Weiss, et al. Natural tts synthesis by conditioning wavenet on mel spectrogram predictions. *ICASSP*, 2018.
- [12] Ryan Skerry-Ryan, Eric Battenberg, Yuxuan Xiao, Daisy Wang, Daisy Stanton, Joel Shor, Ron J Weiss, Rob Clark, Simon King, Rif A. Cole, et al. Towards end-to-end prosody transfer for expressive speech synthesis with tacotron. In *ICML*, 2018.
- [13] Yuxuan Wang, Ryan Skerry-Ryan, Daisy Stanton, Yonghui Wu, Ron J Weiss, Navdeep Jaitly, Zongheng Yang, Heiga Zen, et al. Style tokens: Unsupervised style modeling, control and transfer in end-to-end speech synthesis. In *ICML*, 2018.
- [14] Zijia Wang and Zhi-Song Liu. Stylemamba: State space model for efficient text-driven image style transfer. In ECAI 2024, pages 721–728. IOS Press, 2024.