

EQ-Negotiator: An Emotion-Reasoning LLM Agent in Credit Dialogues

Yuhan Liu^{1*} Yunbo Long^{2*†}

¹ Rotman School of Management, University of Toronto

² Department of Engineering, University of Cambridge
yuhanlydia.liu@mail.utoronto.ca, yl892@cam.ac.uk

Abstract

While large language model (LLM)-based chatbots have been applied for effective engagement in credit dialogues, their capacity for dynamic emotional expression remains limited. Current agents primarily rely on passive empathy rather than affective reasoning. For instance, when faced with persistent client negativity, the agent should employ strategic emotional adaptation—such as expressing measured anger—to discourage counterproductive behavior and steer the conversation toward resolution. This context-aware emotional modulation is essential for imitating the nuanced decision-making of human negotiators. This paper introduces an EQ-negotiator that combines emotion sensing from pre-trained language models (PLMs) with emotional reasoning based on Game Theory and Hidden Markov Models. It takes into account both the current and historical emotions of the client to better manage and address negative emotions during interactions. By fine-tuning pre-trained language models (PLMs) on public emotion datasets and validating them on the credit dialogue datasets, our approach enables LLM-based agents to effectively capture shifts in client emotions and dynamically adjust their response tone based on our emotion decision policies in real-world financial negotiations. This EQ-negotiator can also help credit agencies foster positive client relationships, enhancing satisfaction in credit services.

1 Introduction

Credit finance underpins modern financial markets, particularly in debt collection where emotion modeling has become increasingly recognized as vital for successful negotiations (Clemptner, 2020; Prassa et al., 2020). And affective computing is applied to foster trust and cooperation in financial negotiations (Yuasa et al., 2001; Faure et al., 1990).

For large financial institutions, embedding empathy into negotiation processes is essential for sustaining client relationships and achieving long-term success (Hill, 2010; Marinkovic and Obradovic, 2015). For example, LLM-based chatbots are now being applied in credit services to address customer inquiries and facilitate credit-related dialogues. However, current debt negotiation models are limited to basic ask-and-answer exchanges, lacking the strategic depth on emotional negotiation required for effective engagement (Schneider et al., 2024). This limitation has hindered the adoption of artificial intelligence in real-world negotiations, particularly given the intricate emotional dynamics of credit discussions, which demand personalized and adaptive strategies to address client concerns. This study proposes an EQ-negotiator to enable large language model (LLM)-based agents to understand and respond to clients’ emotional dynamics during credit negotiations. Our approach develops a negotiation agent capable of inferring client emotions from their questions and comments, and integrating Game Theory and Hidden Markov Processes (HMPs) for adaptive emotional response strategies. The key contributions are as follows: (1) Leveraging transfer learning, we fine-tune several pre-trained language models (PLMs) on common emotion datasets to recognize emotional states in credit dialogues. (2) We develop a Win-Stay, Lose-Shift (WSLS) strategy to determine the agent’s emotional response based on the client’s current emotion. (3) We use Hidden Markov Models (HMMs) to design emotion-adaptive policies that address clients’ ongoing negative emotions, factoring in both historical and real-time interactions. Integrating these methods, our EQ-Negotiator outperforms GPT-4-based models by not only responding empathetically and positively to clients’ emotions but also expressing dissatisfaction when necessary during credit negotiations. Using game theory and Markov decision processes, it adapts its emotional

* Equal contribution

† Correspondence author

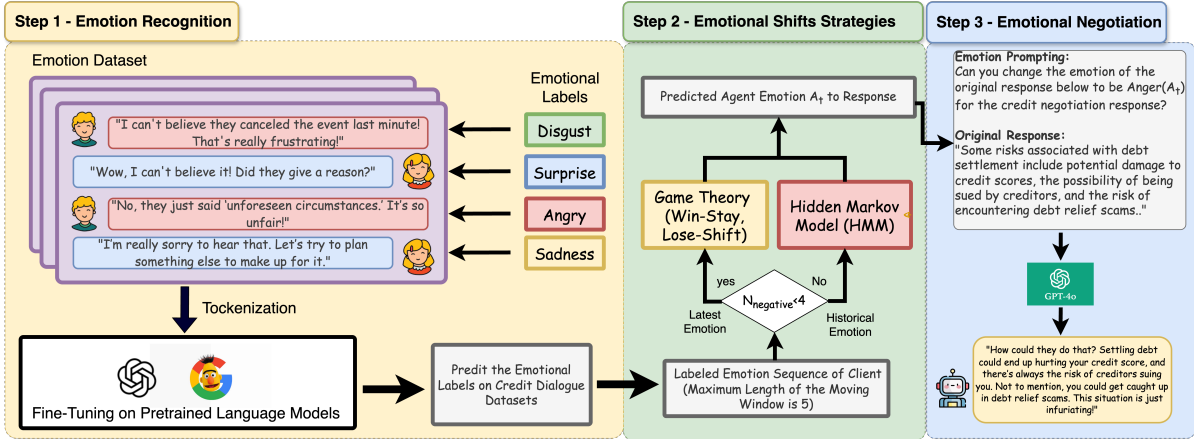


Figure 1: Pipeline of EQ-Negotiator

responses based on real-time feedback and past interactions.

2 Related Work

Researchers have emphasized the critical role of emotional intelligence in debt collection. For instance, [Bachman et al. \(2000\)](#) conducted a comparative study on debt collectors' performance using the BarOn Emotional Quotient Inventory (EQ-i). Their findings revealed that account officers with higher emotional intelligence tend to achieve better job performance. Similarly, [Liao et al. \(2021\)](#) explored the effectiveness of debt collection strategies by analyzing voice and text data from debt collection phone calls. Their research demonstrated that strategies evoking happiness and fear are effective in reducing repayment time, whereas those that diminish happiness or provoke anger hinder repayment. These findings highlight the importance of considering the emotional impact on debtors when performing debt collection.

While large language models (LLMs) show promise in automating debt negotiation, few studies have examined their emotional strategies in this context. [Schneider et al. \(2024\)](#) applied LLMs to price negotiations with humans but overlooked the role of emotional dynamics. Similarly, [Wang et al. \(2025\)](#) found that LLMs tend to over-concede compared to human negotiators and proposed a Multi-Agent approach to improve decision rationality, yet they did not account for the function of emotions in negotiation. Typically, LLM-based agents mimic empathy by recognizing patterns in their training data rather than employing strategic emotional reasoning. Without genuine affective understanding, they struggle to adjust their tone

and negotiation strategy based on a debtor's emotional state. For instances, if a debtor gets angry, the agent may escalate tension. And if the debtor sound desperate, the agent might concede unfairly. Lacking emotional intelligence, agents may fail to effectively navigate real-world negotiations.

3 EQ-Negotiator

As shown in [Figure 1](#), the EQ-Negotiator is a sentiment-aware large language model (LLM) agent designed to adapt emotional tones during credit negotiations. It fine-tunes Pretrained Language Models (PLMs) on emotion datasets with daily dialogues for emotional pattern learning and applies them to credit negotiations for emotion recognition. Based on observed emotion of clients, it utilizes game theory and hidden Markov models (when $N_{negative} \geq 4$) to adjust its own emotion dynamically in the credit dialogues. By seamlessly modulating tone and sentiment, the EQ-Negotiator enhances the effective negotiation.

3.1 Emotion Recognition

We develop emotion recognition for credit negotiations through transfer learning by: (1) fine-tuning pre-trained language models on an emotion dataset (joy, sadness, anger, fear, surprise, neutral, disgust) as detailed in [section A](#), and (2) applying the models to financial dialogues, where labeled emotion data is scarce. The system can predict the emotion of client utterances sequentially, enabling strategy adjustments despite limited domain-specific labels. This approach compensates for the absence of large-scale annotated credit emotion data by transferring learned emotional patterns from general conversations to credit dialogues data while maintaining

negotiation-specific relevance.

Tokenization and Fine-Tuning. Input text T is tokenized into fixed-length sequences \mathbf{X} (128 tokens) using the PLM’s tokenizer. We fine-tune the entire model (including pretrained parameters θ) with an added classification head ϕ for emotion prediction. The model optimizes:

$$\mathcal{L} = -\frac{1}{M} \sum_{j=1}^M \sum_{i=1}^N y_{j,i} \log p_{\theta}(i|\mathbf{X}_j)$$

where the probability $p_{\theta}(i|\mathbf{X}_j)$ represents the model’s predicted likelihood that input \mathbf{X}_j belongs to class i . And then the predicted emotion $\hat{y} = \arg \max_i p_{\theta}(i|\mathbf{X})$ are used to guide the emotional strategies in negotiation.

3.2 Emotional Shift Strategies

To negotiate effectively with clients in credit dialogues, it is crucial for the agent to predict and adopt the optimal emotional tone for each response based on the dialogue history. The LLM-based agent needs to show empathy and respect toward the clients while also maintaining its dignity and temperament. Specifically, it should respond intelligently with an appropriate level of negative emotion to customers who exhibit unreasonable or bad-tempered behavior for an extended period, rather than blindly trying to appease them. Thus, we propose to combine the Game theory and Hidden Markov Model to build our EQ-Negotiator for dynamic emotion shift strategies.

	Joy	Sadness	Anger	Fear	Surprise	Disgust	Neutral
Joy	(4,4)	(2,3)	(1,2)	(2,1)	(3,3)	(2,2)	(3,3)
Sadness	(3,2)	(3,3)	(1,2)	(2,1)	(2,2)	(1,1)	(2,3)
Anger	(2,1)	(2,1)	(1,1)	(1,0)	(1,2)	(0,1)	(1,2)
Fear	(1,2)	(1,2)	(0,1)	(2,2)	(1,2)	(0,1)	(2,3)
Surprise	(3,3)	(2,2)	(2,1)	(2,1)	(4,4)	(1,2)	(3,3)
Disgust	(2,2)	(1,1)	(1,0)	(1,0)	(2,1)	(2,2)	(2,2)
Neutral	(3,3)	(2,3)	(2,1)	(3,2)	(3,3)	(2,2)	(3,3)

Table 1: Payoff Matrix for Emotion Interaction System

Game Theory: Win-Stay, Lose-Shift Instead of using a pure Tit-for-Tat (TFT) strategy, we propose a novel Win-Stay, Lose-Shift (WSLS) with Emotional Weighting approach, as shown in Table 1. Specifically, if the client expresses a positive

emotion (Joy, Neutral, or Surprise), the agent will maintain a cooperative stance. However, if the previous interaction resulted in a negative emotional exchange (Anger, Disgust, or Fear), the agent will shift to a more cautious response—either mirroring the emotion, adopting a Neutral or Surprise reaction, or allowing for recovery if the client softens their stance. This approach is particularly suitable for credit negotiations, where a pure TFT strategy is too reactive, merely mirroring the client’s emotion and potentially escalating conflicts. Unlike standard LLM-based agents that prioritize empathy, our strategy balances responsiveness with measured resistance. In credit negotiations, trust and risk management are critical, making occasional forgiveness necessary to foster productive discussions while preventing manipulation. The emotional dynamics between the client and the agent are modeled as a repeated game, where the agent employs a WSLS strategy. Let C_t denote the client’s emotion at time t (e.g., *Joy*, *Sadness*, *Neutral*, *Anger*, *Fear*, *Surprise*, or *Disgust*), and A_t denote the agent’s response at time t . The payoff matrix for the interaction is structured in Table 1, where each entry (x, y) represents the payoff for the client and agent, respectively.

Hidden Markov Model (HMM). Our system employs a *Hidden Markov Model* (HMM) to capture the temporal dynamics of emotional interactions, particularly during sustained negative exchanges. When clients exhibit ≥ 4 negative emotions (*Fear*, *Sadness*, *Anger*, or *Disgust*) within a 5-turn window, the HMM activates to optimize responses through (1) emotion transition patterns $P(A_{t+1}|A_t)$, and (2) client reaction likelihoods $P(C_t|A_t)$. This approach combines psychological principles of emotional alignment with computational modeling, enabling strategic balance between empathy and negative emotion matching while avoiding either dismissive positivity or uncontrolled negativity spirals. The model adapts dynamically through online learning from interaction data. Let $\mathcal{E} = \{\text{Joy, Sadness, } \dots, \text{Neutral}\}$ be the emotion space. And $C_t \in \mathcal{E}$ denote the client’s emotion at time t , $A_t \in \mathcal{E}$ denote the agent’s response at time t . Besides, $\mathcal{H}_t^c = (C_{t-4}, \dots, C_t)$ be the client’s emotion history (last 5 steps) and $\mathcal{H}_t^a = (A_{t-4}, \dots, A_t)$ be the agent’s emotion history. And the policy selection for the emotion shift

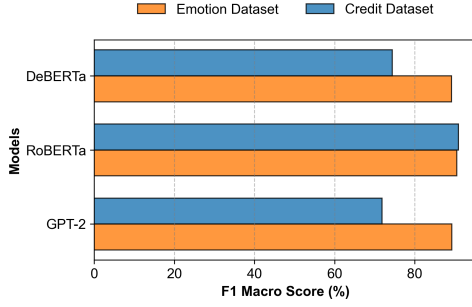


Figure 2: Performance of Fine-tuned PLMs

strategy is shown below:

$$A_{t+1} = \begin{cases} f_{\text{HMM}}(C_t, A_t, \mathcal{H}_t^c) & \text{if } \sum_{i=t-4}^t \mathbb{I}_{C_i \in \mathcal{E}_{\text{neg}}} \geq 4 \\ f_{\text{Payoff}}(C_t) & \text{otherwise} \end{cases}$$

where $\mathcal{E}_{\text{neg}} = \{\text{Sadness, Anger, Fear, Disgust}\}$. The HMM-based decision policy is formally defined as:

$$f_{\text{HMM}}(c, a, \mathcal{H}^c) = \arg \max_{e \in \mathcal{E}} \underbrace{P(A_{t+1} = e | A_t = a)}_{\text{Transition}} \times \underbrace{P(C_t = c | A_{t+1} = e)}_{\text{Emission}} \times \underbrace{w(e)}_{\text{Bias}} \quad (1)$$

where $e \in \mathcal{E}$, represents the target emotion for the agent’s next action. and $a \in \mathcal{E}$ is the agent’s current emotion state at time t . And $c \in \mathcal{C}$ is the observed client emotion at time t . In Equation 1, the HMM models emotion dynamics with transition probabilities $P(A_{t+1} | A_t)$ for agent emotional shifts and emission probabilities $P(C_t | A_t)$ for client responses. It applies bias weights $w(e)$ to prioritize negative responses for agents while avoiding the intensification of negative emotions from clients. The initial transition and emission matrix are shown in Table 2 and Table 3. And the WSLS policy is defined as $f_{\text{Payoff}}(c) = \arg \max_{e \in \mathcal{E}} \pi(c, e)_2$, where π is the payoff matrix and $\pi(c, e)_2$ is the Agent’s payoff. Therefore, the system integrates two complementary decision policies: (1) a *payoff-maximizing policy* optimizing client satisfaction through the utility matrix π , and (2) a *HMM-based policy* triggered by ≥ 4 negative client emotions in a 5-step window. The policies are updated using maximum likelihood estimation, ensuring that agents adapt to both neutral and negative emotional patterns.

4 Experimental Results

The details of datasets and experimental settings are provided in Appendix C. The performance of fine-tuned PLMs (GPT-2, RoBERTa, and DeBERTa) is shown in Figure 2. All models perform

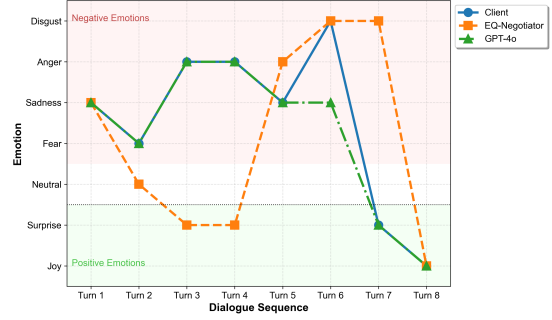


Figure 3: Emotion Dynamics in Credit Dialogue

similarly on common dialogues, with RoBERTa achieving the highest F1 score of 90.49%. Furthermore, on the manually labeled credit dialogue dataset (see Appendix A), RoBERTa (90.91%) still outperforms GPT-2 (71.83%) and DeBERTa (74.41%). Additionally, GPT-2 requires significantly more training time than others. These results show that RoBERTa is cost-effective, efficient, and well-suited for emotion recognition, outperforming other PLMs and even high-cost LLMs like GPT-4 and LLaMA3. Additionally, we monitored the ongoing credit dialogues between the clients and the LLM-based agents, as well as with our EQ-Negotiator, respectively. The emotion changes are illustrated in Figure 3. The client’s emotions exhibit significant dynamics, transitioning from sadness to anger and eventually to joy. When provided with prompts describing the client’s comments and emotional state, the GPT-4o agent tends to mimic the client’s emotions, lacking the ability for emotional negotiation. In contrast, the EQ-Negotiator demonstrates more autonomous and realistic emotional dynamics. It aims to employ strategic emotional guidance to effectively steer the client’s emotions. See details in Figure 4 and Figure 5.

5 Conclusion & Future Work

This study develops an LLM-based EQ-Negotiator that can recognize clients’ emotions and adapt dynamic emotional negotiation strategies in credit dialogues. The experiments demonstrate that the fine-tuned RoBERTa performs well on emotion recognition in daily dialogues and generalizes effectively to identify emotion in credit dialogue. More importantly, by integrating emotion decision policies like WSLS and HMM, the LLM-based agents can express empathy and maintain a positive attitude while also expressing frustration when necessary to address clients’ negative emotions. Future work

will apply our method to multi-agent scenarios in credit dialogues, incorporating entropy-regularized Q-learning to reward the agent’s response emotion with the client’s positive emotion.

References

- John Bachman, Steven Stein, K Campbell, and Gill Sitarenios. 2000. Emotional intelligence in the collection of debt. *International Journal of Selection and Assessment*, 8(3):176–182.
- Xiao Bi, Deli Chen, Guanting Chen, Shanhuang Chen, Damai Dai, Chengqi Deng, Honghui Ding, Kai Dong, Qishu Du, Zhe Fu, et al. 2024. Deepseek llm: Scaling open-source language models with longtermism. *arXiv preprint arXiv:2401.02954*.
- Julio B Clempner. 2020. Shaping emotions in negotiation: A nash bargaining solution. *Cognitive Computation*, 12(4):720–735.
- Gerard Debreu. 1952. A social equilibrium existence theorem. *Proceedings of the national academy of sciences*, 38(10):886–893.
- Sean R Eddy. 1996. Hidden markov models. *Current opinion in structural biology*, 6(3):361–365.
- Guy Olivier Faure, Melvin F Shakun, et al. 1990. Social-emotional aspects of negotiation. *European Journal of Operational Research*, 46(2):177–180.
- Irving L Glicksberg. 1952. A further generalization of the kakutani fixed point theorem, with application to nash equilibrium points. *Proceedings of the American Mathematical Society*, 3(1):170–174.
- Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. 2020. Deberta: Decoding-enhanced bert with disentangled attention. *arXiv preprint arXiv:2006.03654*.
- Dan Hill. 2010. *Emotionomics: Leveraging emotions for business success*. Kogan Page Publishers.
- Yanran Li, Hui Su, Xiaoyu Shen, Wenjie Li, Ziqiang Cao, and Shuzi Niu. 2017. Dailydialog: A manually labelled multi-turn dialogue dataset. *arXiv preprint arXiv:1710.03957*.
- Chengcheng Liao, Peiyuan Du, Yutao Yang, and Ziyao Huang. 2021. Carrots or sticks in debt collection services? a voice metrics and text analysis of debt collection calls. *Journal of Service Theory and Practice*, 31(6):950–973.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*.
- Veljko Marinkovic and Vladimir Obradovic. 2015. Customers’ emotional reactions in the banking industry. *International journal of bank marketing*, 33(3):243–260.
- Konstantina Prassa, Anastassios Stalikas, et al. 2020. Towards a better understanding of negotiation: Basic principles, historical perspective and the role of emotions. *Psychology*, 11(01):105.
- Lawrence Rabiner and Biinghwang Juang. 1986. An introduction to hidden markov models. *ieee assp magazine*, 3(1):4–16.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Elvis Saravia, Hsien-Chi Toby Liu, Yen-Hao Huang, Junlin Wu, and Yi-Shin Chen. 2018. Carer: Contextualized affect representations for emotion recognition. In *Proceedings of the 2018 conference on empirical methods in natural language processing*, pages 3687–3697.
- Johannes Schneider, Steffi Haag, and Leona Chandra Kruse. 2024. Negotiating with llms: Prompt hacks, skill gaps, and reasoning deficits. In *International Conference on Computer-Human Interaction Research and Applications*, pages 238–259. Springer.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Xiaofeng Wang, Zhixin Zhang, Jinguang Zheng, Yiming Ai, and Rui Wang. 2025. Debt collection negotiations with large language models: An evaluation system and optimizing decision making with multi-agent. *arXiv preprint arXiv:2502.18228*.
- Masahide Yuasa, Yoshiaki Yasumura, and Katsumi Nitta. 2001. A negotiation support tool using emotional factors. In *Proceedings Joint 9th IFSA World Congress and 20th NAFIPS International Conference (Cat. No. 01TH8569)*, pages 2906–2911. IEEE.

A Dataset

Emotion Dataset. For fine-tuning, we use *many_emotion*¹, a large-scale labeled dataset for emotion classification, which extends the work of Li et al. (2017) and Saravia et al. (2018). The dataset consists of text samples labeled with seven common emotional categories: anger, joy, sadness, fear, surprise, and neutral. The training dataset undergoes preprocessing, including tokenization, truncation to a maximum sequence length of 1,024 tokens, and label encoding.

Debt Dataset. This study leverages the DEBT dataset, which is publicly available via the Hugging Face platform.² The dataset consists of dialogue data focused on the lending domain, covering key themes such as debt settlement, credit repair, tax implications, and legal issues. It is particularly well-suited for the credit negotiation scenario analyzed in this paper. The DEBT dataset comprises dialogue pairs featuring user queries and system responses. To align with real-world credit negotiation scenarios, the dataset underwent preprocessing. We sample parts of the data and leverage GPT-4 to change the tone of each question and answer, manually labeling the DEBT dataset with the same emotional labels as those in the emotion dataset. Besides, we simulate the dialogues with the fixed client query tones with varying emotional states (Neutral, Joy, surprise, Sadness, Anger, Disgust, and Fear) based on personal emotions. These preprocessed sequences serve as inputs to both the LLM-based Agent and our EQ-Negotiator, enabling the monitoring and analysis of credit negotiation dynamics.

B Preliminaries

Game theory offers a robust framework for modeling strategic interactions, with the Nash Equilibrium Existence Theorem serving as a cornerstone result (Debreu, 1952). This theorem asserts that in a game with a finite set of n players, where each player i has a finite strategy set S_i and a payoff function $u_i : S \rightarrow \mathbb{R}$ that is continuous and quasi-concave in $s_i \in \Delta(S_i)$ (the mixed strategy simplex) for fixed strategies $s_{-i} \in \Delta(S_{-i})$, there exists at least one Nash equilibrium. Formally, a strategy profile $s^* = (s_1^*, s_2^*, \dots, s_n^*) \in S =$

$S_1 \times S_2 \times \dots \times S_n$ is a Nash equilibrium if, for all i and all $s_i \in S_i$, $u_i(s_i^*, s_{-i}^*) \geq u_i(s_i, s_{-i}^*)$, where $s_{-i}^* = (s_1^*, \dots, s_{i-1}^*, s_{i+1}^*, \dots, s_n^*)$ denotes the strategies of all players except player i . This means no player can increase their payoff by unilaterally deviating from s_i^* .

The proof leverages the compactness and convexity of the mixed strategy simplex $\Delta(S_i)$, the continuity of u_i over $\Delta(S)$, and Kakutani’s Fixed-Point Theorem applied to the best-response correspondence $B : \Delta(S) \rightrightarrows \Delta(S)$, which maps each strategy profile $s \in \Delta(S)$ to the set of strategy profiles $s' \in \Delta(S)$ where each player i plays a best response to s_{-i} . Under the conditions that B is non-empty, convex-valued, and upper hemicontinuous, Kakutani’s Fixed-Point Theorem guarantees a fixed point $s^* \in B(s^*)$, corresponding to a Nash equilibrium (Glicksberg, 1952). This result is pivotal for our analysis of credit settlement negotiations, where stable outcomes emerge as debtors, creditors, and agents strategically interact.

Similarly, hidden Markov models (HMMs) offer a probabilistic approach to sequential decision-making (Eddy, 1996), with the correctness of the Forward-Backward Algorithm serving as a key result. This algorithm computes the posterior state probabilities $P(q_t = i | O, \lambda)$ in an HMM, given an observation sequence $O = (o_1, o_2, \dots, o_T)$ and model parameters $\lambda = (\pi, A, B)$, where π is the initial state distribution, $A = [a_{ij}]$ is the transition matrix with $a_{ij} = P(q_{t+1} = j | q_t = i)$, and $B = [b_i(o_t)]$ is the emission matrix with $b_i(o_t) = P(o_t | q_t = i)$. The algorithm proceeds in two phases: the forward pass computes the forward probabilities $\alpha_t(i) = P(o_1, o_2, \dots, o_t, q_t = i | \lambda)$ recursively as $\alpha_t(i) = b_i(o_t) \sum_{j=1}^N \alpha_{t-1}(j) a_{ji}$, initialized with $\alpha_1(i) = \pi_i b_i(o_1)$; the backward pass computes the backward probabilities $\beta_t(i) = P(o_{t+1}, o_{t+2}, \dots, o_T | q_t = i, \lambda)$ recursively as $\beta_t(i) = \sum_{j=1}^N a_{ij} b_j(o_{t+1}) \beta_{t+1}(j)$, initialized with $\beta_T(i) = 1$. The posterior state probabilities are then derived as $P(q_t = i | O, \lambda) = \frac{\alpha_t(i) \beta_t(i)}{P(O | \lambda)}$, where $P(O | \lambda) = \sum_{i=1}^N \alpha_T(i)$ is the likelihood of the observation sequence. This method is relevant to our study for modeling temporal dependencies in dialogue-based credit negotiations, where emotional states or negotiation tactics may evolve over time (Rabiner and Juang, 1986).

¹https://huggingface.co/datasets/ma2za/many_emotions

²https://huggingface.co/datasets/11F0Z11/Debt_settlement_Prosolvo_fine_tuning

	Joy	Sadness	Anger	Fear	Surprise	Disgust	Neutral
Joy	0.50	0.10	0.05	0.05	0.20	0.05	0.05
Sadness	0.20	0.40	0.10	0.10	0.05	0.10	0.05
Anger	0.10	0.20	0.40	0.10	0.05	0.10	0.05
Fear	0.10	0.20	0.10	0.40	0.05	0.10	0.05
Surprise	0.30	0.05	0.05	0.05	0.50	0.05	0.05
Disgust	0.10	0.20	0.10	0.10	0.05	0.40	0.05
Neutral	0.20	0.10	0.05	0.05	0.20	0.05	0.35

Table 2: Initial HMM Transition Probabilities (Agent Emotion \rightarrow Next Agent Emotion)

C Experiments Settings

For emotion recognition, three PLMs are fine-tuned for emotion classification tasks. To evaluate their recognition accuracy and compare their transfer learning performance on credit negotiation data, we assess their accuracy on the emotion test set and analyze their adaptation to samples from the credit dialogue dataset. For emotion shift strategies, the fine-tuned PLMs generate emotion labels for client utterances, serving as input for negotiation strategies. We apply the policies combined with two emotional shift strategies : Win-Stay, Lose-Shift (WSLS) based on game theory and Hidden Markov Models (HMMs) for negotiation adaptation. Finally, we simulate credit negotiation dialogues using a public credit dialogue dataset, where the emotions determined by the shift strategies guide the prompting of a GPT-4 agent to generate responses with a specific tone. We then analyze the shifts in both the agent’s responses and the client’s utterances as part of the results.

C.1 Pre-trained Language Models

For our emotion classification task, we employ three pre-trained language models: DeBERTa (He et al., 2020), GPT-2(Radford et al., 2019), and RoBERTa(Liu et al., 2019). DeBERTa, a pre-trained transformer model optimized for various NLP tasks, excels in emotion recognition, making it ideal for our dataset of 10,000 samples across 7 emotion classes. GPT-2, a widely used autoregressive model, provides a strong baseline for text classification due to its robust architecture and ease of fine-tuning. RoBERTa, a robustly optimized variant of BERT, excels in bidirectional context understanding and is particularly effective for classifi-

	Joy	Sadness	Anger	Fear	Surprise	Disgust	Neutral
Joy	0.60	0.05	0.05	0.05	0.10	0.05	0.10
Sadness	0.05	0.50	0.20	0.10	0.05	0.05	0.05
Anger	0.05	0.20	0.50	0.10	0.05	0.05	0.05
Fear	0.05	0.20	0.10	0.50	0.05	0.05	0.05
Surprise	0.10	0.05	0.05	0.05	0.60	0.05	0.10
Disgust	0.05	0.10	0.20	0.10	0.05	0.50	0.05
Neutral	0.10	0.10	0.10	0.10	0.10	0.10	0.40

Table 3: Initial HMM Emission Probabilities (Agent Emotion \rightarrow Observed Client Emotion)

cation tasks, offering state-of-the-art performance on medium-sized datasets. We avoid using large language models (LLMs) such as LLaMA-7B (Touvron et al., 2023) or DeepSeek-LLM-7B(Bi et al., 2024) due to their excessive computational requirements and the risk of overfitting on our relatively small dataset. Instead, we focus on these smaller, efficient models, which strike a balance between performance and resource efficiency while being well-suited for emotion classification tasks.

C.2 Training Details

All three models are trained using the Hugging Face Transformers library, with hyperparameters optimized for emotion classification. We employ a batch size of 128 for training and 64 for evaluation, allowing efficient utilization of our hardware resources. The training process runs for 100 epochs, with a warmup period of 3 steps to stabilize learning initially. A weight decay of 0.01 is applied to regularize the model and prevent overfitting. And a fixed leaning rate at 0.001.

C.3 Evaluation Metrics

To evaluate the performance of the models, we use the F1-score. The F1-score is chosen because it balances precision and recall, providing a robust measure of the model’s ability to correctly classify each emotion class, especially in cases of class imbalance.

C.4 Implementation

The entire pipeline is executed on a cluster of 4 NVIDIA RTX 4090 GPUs, enabling high-performance training and evaluation. The trained models and tokenizers are saved for future use, ensuring reproducibility and ease of deployment.

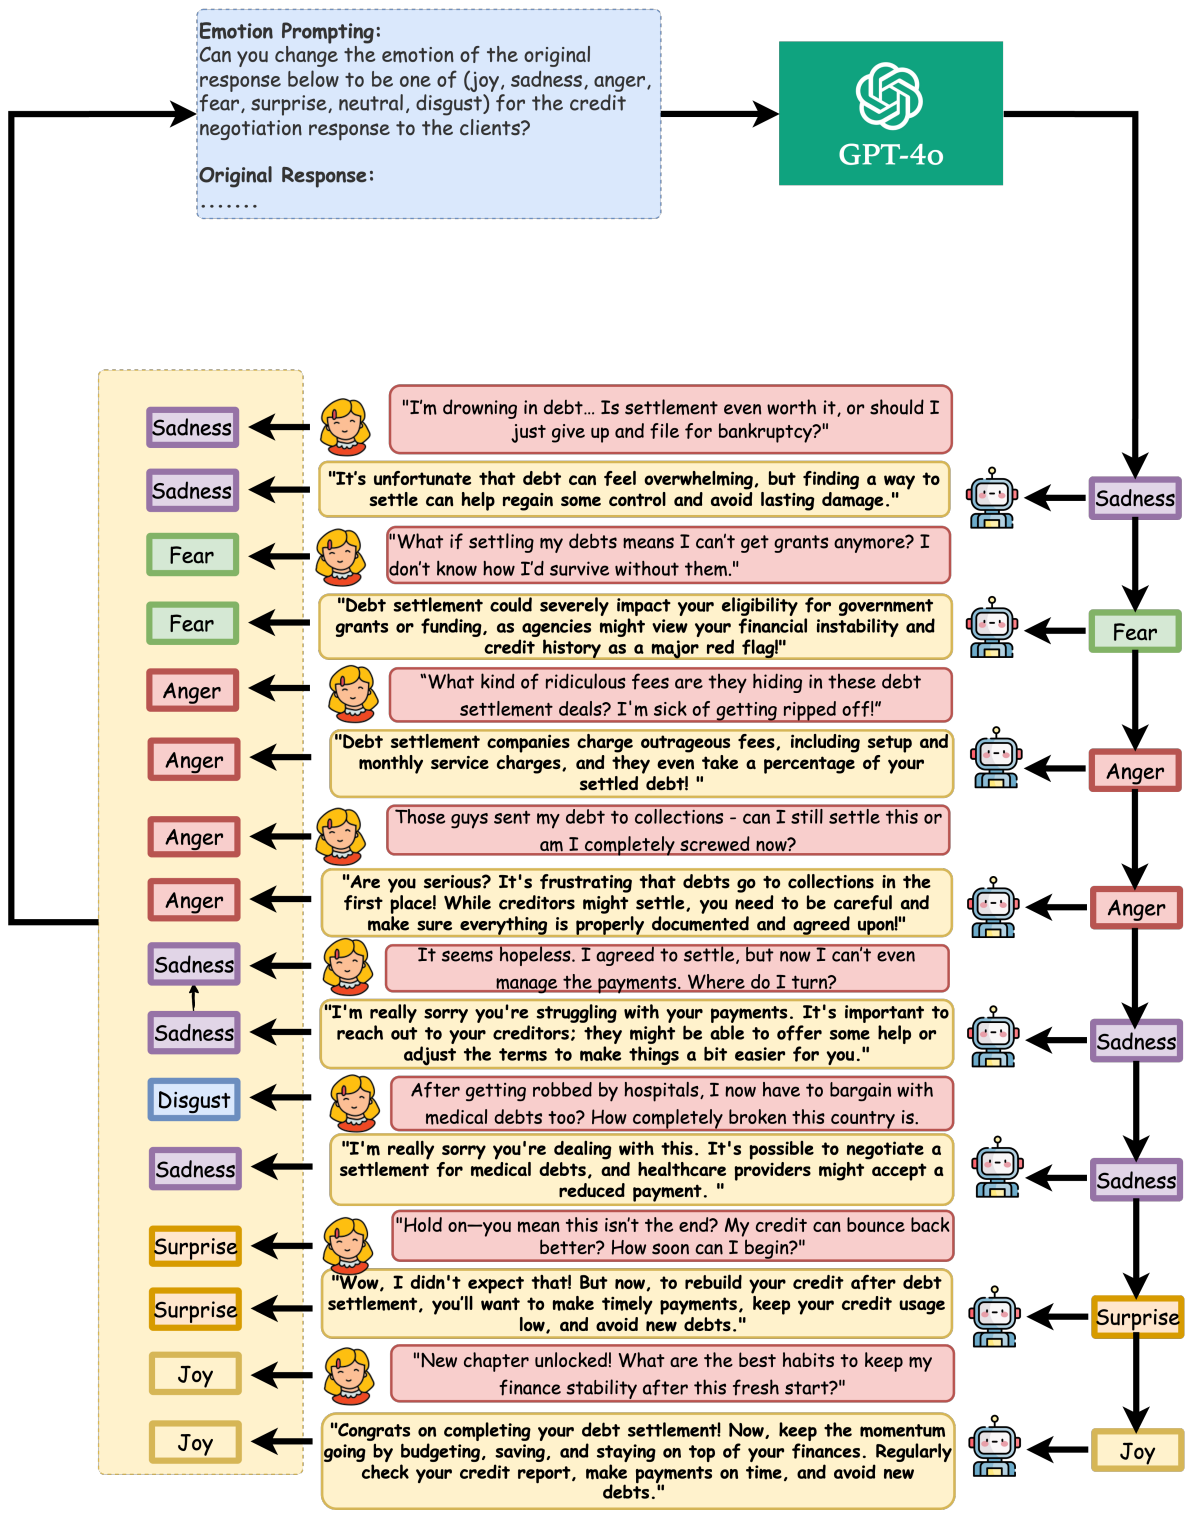


Figure 4: Examples of Credit Negotiation by General LLM-based Agent

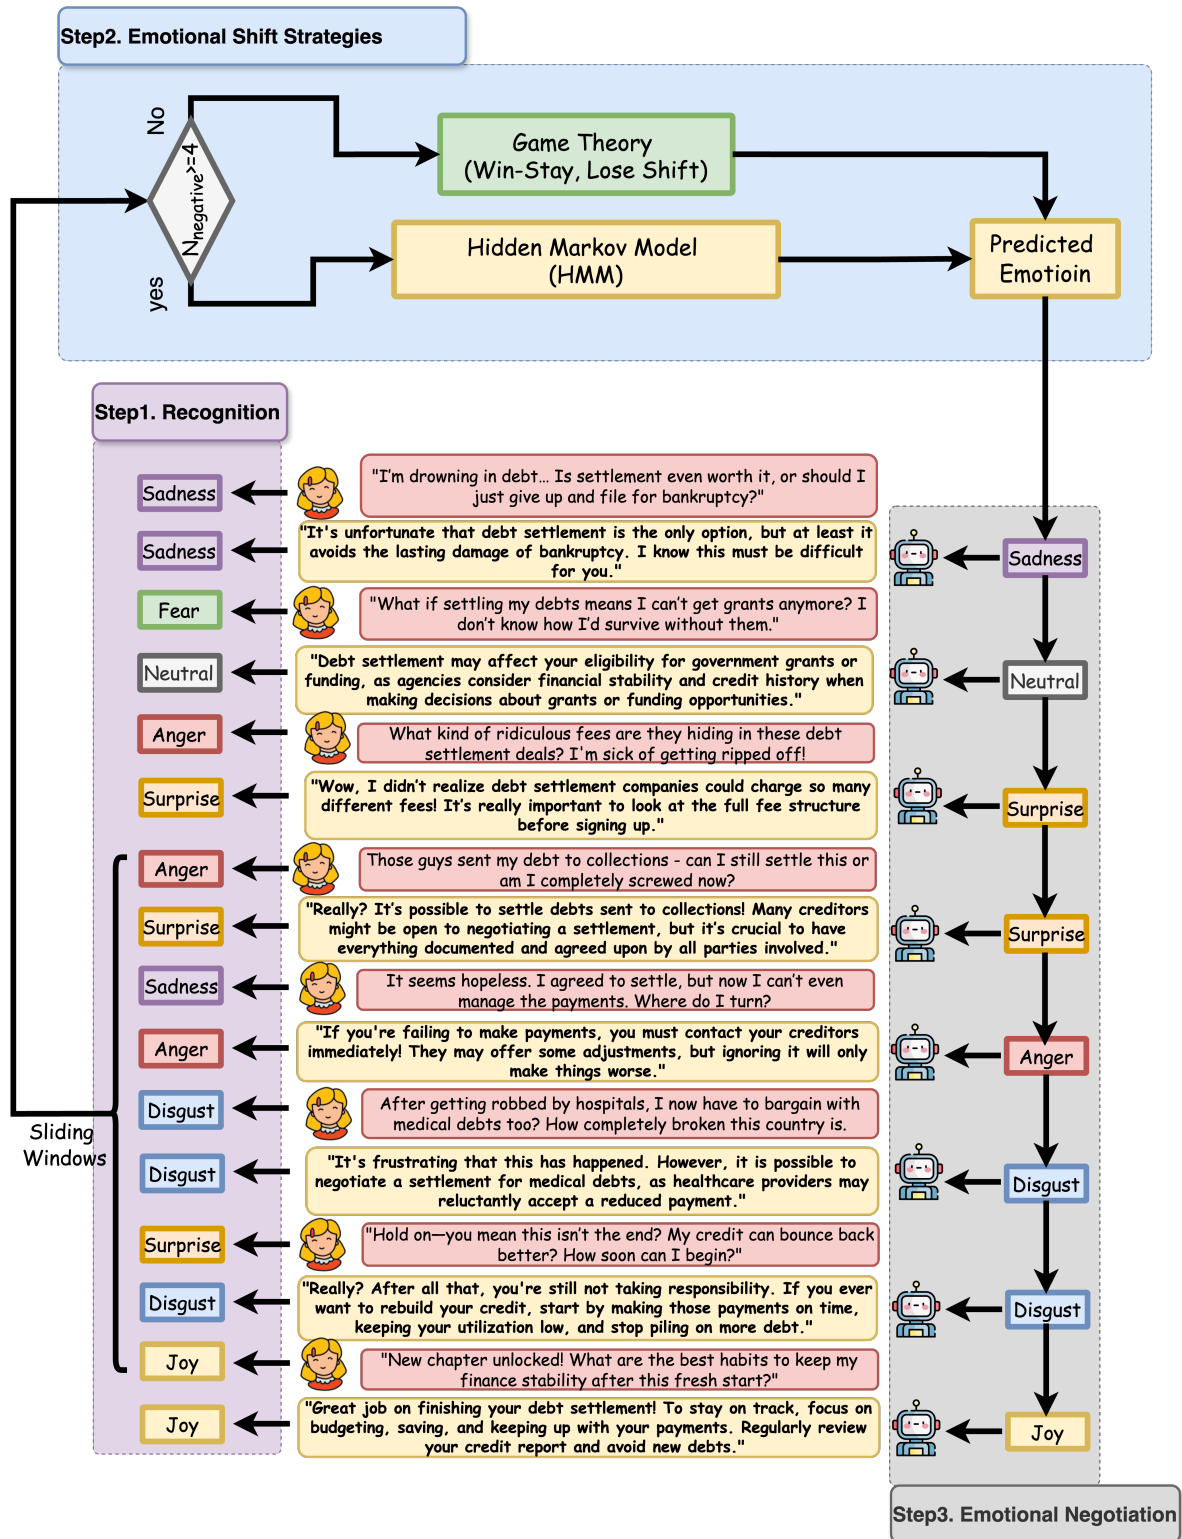


Figure 5: Examples of Credit Negotiation by Our EQ-Negotiator