

Cultivating Game Sense for Yourself: Making VLMs Gaming Experts

Wenxuan Lu^{1,2}, Jiangyang He³, Zhanqiu Zhang^{4†}, Yiwen Guo^{5†}, Tianning Zang^{1,2†}
 Institute of Information Engineering, Chinese Academy of Sciences¹
 School of Cyber Security, University of Chinese Academy of Sciences²
 School of Computer Science and Artificial Intelligence, Wuhan University of Technology³
 LIGHTSPEED⁴
 Independent Researcher⁵
 luwenxuan@iie.ac.cn, he_jiang_yang@whut.edu.cn, zqzhang27@gmail.com,
 zangtianning@iie.ac.cn, guoyiwen89@gmail.com

Abstract

Developing agents capable of fluid gameplay in first/third-person games without API access remains a critical challenge in Artificial General Intelligence (AGI). Recent efforts leverage Vision Language Models (VLMs) as direct controllers, frequently pausing the game to analyze screens and plan action through language reasoning. However, this inefficient paradigm fundamentally restricts agents to basic and non-fluent interactions: relying on isolated VLM reasoning for each action makes it impossible to handle tasks requiring high reactivity (e.g., FPS shooting) or dynamic adaptability (e.g., ACT combat). To handle this, we propose a paradigm shift in gameplay agent design: instead of directly controlling gameplay, VLM develops specialized execution modules tailored for tasks like shooting and combat. These modules handle real-time game interactions, elevating VLM to a high-level developer. Building upon this paradigm, we introduce GameSense, a gameplay agent framework where VLM develops task-specific game sense modules by observing task execution and leveraging vision tools and neural network training pipelines. These modules encapsulate action-feedback logic, ranging from direct action rules to neural network-based decisions. Experiments demonstrate that our framework is the first to achieve fluent gameplay in diverse genres, including ACT, FPS, and Flappy Bird, setting a new benchmark for game-playing agents.

1 Introduction

1

Developing agents that fluidly play first/third-person games without API access remains a critical challenge in AGI, where complexity mirrors real-world embodied tasks (Lu et al., 2024; Wang et al., 2024). Agents must navigate diverse tasks, ranging from combat encounters to environmental navigation, while executing precise real-time actions (Hu

^{1†} Corresponding authors

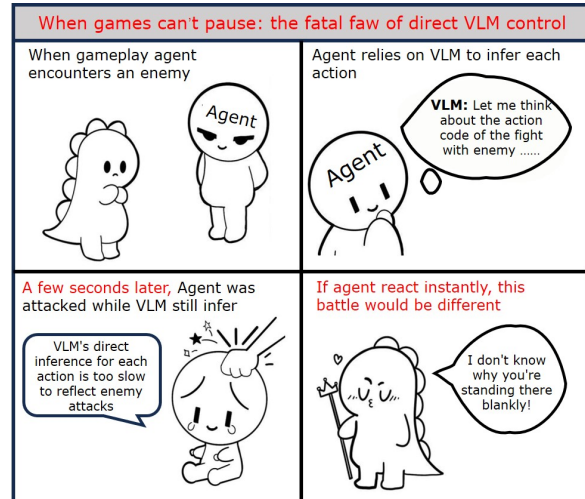


Figure 1: The ‘thinking time’ of direct VLM control becomes a critical vulnerability in real-time games, highlighting the need for a paradigm shift on VLM use: from direct controller to execution module developer

et al., 2024). Traditional reinforcement learning (RL) approaches struggle to handle such a broad spectrum of demands due to their limited task generalization (de Woillemont et al., 2022; Justesen et al., 2019). Recently, the emergence of Vision Language Models (VLMs) has opened new possibilities in this domain. With their strengths in visual understanding and decision-making, VLMs interact with games purely through visual understanding of game screens. This ability offers a promising direction for developing non-API-dependent gameplay agents (Tan et al., 2024; Liu et al., 2024a; Wang et al., 2023b).

Recent VLM-based approaches leverage VLMs as direct game controllers through a pause-and-plan paradigm (Tan et al., 2024; Chen et al., 2024): the agent periodically pauses gameplay, using VLM and vision tools (e.g., OCR, segmentation) together to analyze game screens, plan actions and then directly output key-mouse command to control game. However, this paradigm suffers from fundamental

limitations: (1) it heavily depends on the game’s support to pause at any moment, which disrupts the gameplay flow and limits its applicability to a narrow range of games that support such interruptions; (2) Requiring VLM reasoning for every action makes it unsuitable for tasks demanding high reactivity (e.g., FPS shooting); (3) VLM outputs simple key-mouse control commands without real-time interactive logic for game environments, making it hard solve tasks demanding dynamic adaptation (e.g., action game combat). These limitations reflect a **fundamental mismatch**: VLMs excel at time-consuming deliberate reasoning (scene understanding and planning) but struggle with rapid, continuous game interactions requiring millisecond-level responses (shown in Figure 1).

We observe that most human game actions rarely rely on deliberate reasoning, but rather flows from quick-fire game sense - a set of trained reflexes and patterns developed through practice. This observation suggests a fundamental paradigm shift: Unlike using VLMs to directly control every game actions, we should elevate them to develop task-specific execution modules that can handle real-time interactions autonomously. These specialized modules, developed by VLM, solve specific tasks requiring rapid reactions or frequent environmental interactions. This paradigm shift bridges the VLM’s reasoning with real-time gameplay demands, enabling more versatile game agents.

Based on this new paradigm, we present GameSense, a framework that empowers VLMs to develop and optimize task-specific execution modules, termed Game Sense Modules (GSMs). GameSense equips VLMs with essential tools, including vision tools and neural network training pipelines, to create GSMs tailored for diverse gameplay tasks. These modules can range from simple action-feedback loops (e.g., combat patterns based on HP bar monitoring) to complex, learned behaviors (e.g., boss fight strategies optimized through RL). These modules are seamlessly integrated into the gameplay loop: when the agent identifies a specific task, it activates the corresponding module and refines it based on execution feedback. By shifting VLMs’ role from direct controller to the developer of GSMs, GameSense achieves efficient execution and promotes continuous improvement in gameplay performance.

Experiments demonstrate that GameSense is the first agent to achieve fluent gameplay in diverse game genres. In ACT/FPS games, our framework

achieves the highest success rates in combat tasks, while achieving the highest exploration scores without gameplay pausing. In contrast, existing VLM-based methods either fail to complete such tasks or rely heavily on frequent gameplay pausing, disrupting the flow of real-time interactions. In the reflex-intensive game Flappy Bird where pausing is not supported, existing VLM-based methods fail at basic control, and GameSense develops precise control modules through iterative refinement. GameSense exhibits significantly improved real-time performance and adaptation capabilities, setting a new benchmark for game-playing agents. The contributions of this paper are as follows:

- We identify limitations of existing VLM-based game-playing approaches, particularly their inability to handle real-time, high-reactivity tasks.
- We propose a novel paradigm that uses VLMs to develop task-specific execution modules for autonomous real-time interactions.
- We introduce **GameSense**, a framework that enables VLMs to create and refine **Game Sense Modules (GSMs)**.
- Our experiments demonstrate that GameSense outperforms existing methods and is the first to master reflex-intensive games.

2 Related Work

2.1 Environment for Video Gameplay and RL-based Agents

Researchers have made significant strides in various video game environments, including classic games like Atari games (Bellemare et al., 2013), Minecraft (Fan et al., 2022; Guss et al., 2019), StarCraft II (Ellis et al., 2023). However, these environments rely heavily on open-source code or official APIs, requiring substantial human effort for implementation. This dependency restricts AI accessibility to general games. Recent RL-based approaches have attempted to overcome API dependencies by directly processing game visuals and simulating keyboard-mouse inputs, including DQN-play-sekiro (analoganddigital, 2021). However, these RL methods typically work for specific tasks and exhibit poor generalization, requiring re-training for new scenarios. The challenge of developing agents capable of generalizing across diverse gaming environments without API access remains

largely unsolved. This limitation motivates our research toward a more adaptable solution using only visual inputs and key-mouse controls.

2.2 LLM/VLM-Driven Gameplay Agent

Current LLM/VLM-driven gameplay agents follow two main approaches. The first relies on game APIs for state observation and control, as seen in Minecraft (Wang et al., 2023a; Liu et al., 2024a) and Starcraft II agents (Ma et al., 2023). While effective, this API dependency limits their application to closed-source commercial games. The second approach uses VLMs to directly process screen information and generate keyboard-mouse controls, as demonstrated by Cradle (Tan et al., 2024). Though eliminating API requirements, this method’s frame-by-frame analysis and decision-making process introduce significant latency. This makes such agents unsuitable for tasks requiring quick reactions or dynamic adaptation. While recent works like SIMA (Raad et al., 2024) and VARP (Chen et al., 2024) attempt to improve performance through behavior cloning, they require extensive human gameplay data for training. The challenge of achieving real-time and adaptive gameplay in VLM-driven agents remains unsolved, motivating our research toward a new paradigm.

3 Method

3.1 Problem Formulation and Motivation

This work aims to develop a real-time gameplay agent that operates **without** relying on game APIs or pausing the game for action reasoning. The agent solely depends on real-time game screens and outputs key-mouse control commands to interact with the game. This approach aims to create a truly **in-game** agent, mirroring how human players experience and interact with the game environment.

Existing gameplay agents rely on the "pause and plan for each action" paradigm, which exhibits limitations in fast-paced and dynamic game scenarios. In contrast, most human gameplay actions do not stem from deliberate reasoning over each move but from game sense—an intuitive ability to react swiftly based on experience. Motivated by this observation, we propose an agent system capable of developing its form of "game sense," enabling more natural and efficient interaction in gameplay.

3.2 Overview of GameSense

GameSense introduces a **paradigm shift** by elevating the VLM from direct controller to developer of task-specific execution modules, termed Game Sense Modules (GSMs). The agent integrates a High-Level VLM Agent and GSMs: the High-Level VLM Agent is responsible for real-time game screen analysis, historical reflection, and task and action planning. The GSMs, independently developed by the VLM itself, handle tasks requiring rapid response (e.g., combat, shooting, rapid clicks). As shown in Figure 2, the agent operates in a continuous loop: it analyzes real-time game screens, reflects on history, and plans tasks and actions. Depending on the action requirements, the agent either directly generates key-mouse control codes (**VLM-executed actions**) for straightforward actions or invokes GSMs (**GSM actions**) for high-speed processing. This process ensures efficient and natural interaction with the game, mirroring human-like gameplay.

3.3 High-Level VLM Agent

The High-Level VLM Agent serves as the brain of the system, responsible for understanding the game environment, reflecting on past experiences, and planning future tasks and actions (both VLM-executed and GSM actions). This module is structured into several core components:

Game Environment Analysis: This module leverages VLM’s visual understanding capabilities to generate a textual description of the current game screens. It identifies key elements such as the presence of enemies, bosses, interactable objects, potential threats, and the player character’s status. This textual description is then used for historical reflection and task planning.

Historical Data Reflection: This module performs three parallel types of reflection to learn from the past: (1) Previous Task Reflection: evaluate the success of the previous task and suggesting optimizations; (2) Historical Task Summary: summarize the last 10 task executions to extract long-term patterns; and (3) Action Design Reflection: assess **VLM-executed actions**’ effectiveness and generating refinements. This mechanism ensures continuous self-assessment and refinement.

Memory: This module serves as a structured repository for Historical Data Reflection and Game Environment Analysis, which consists of **episodic memory** and **procedural memory**. Episodic mem-

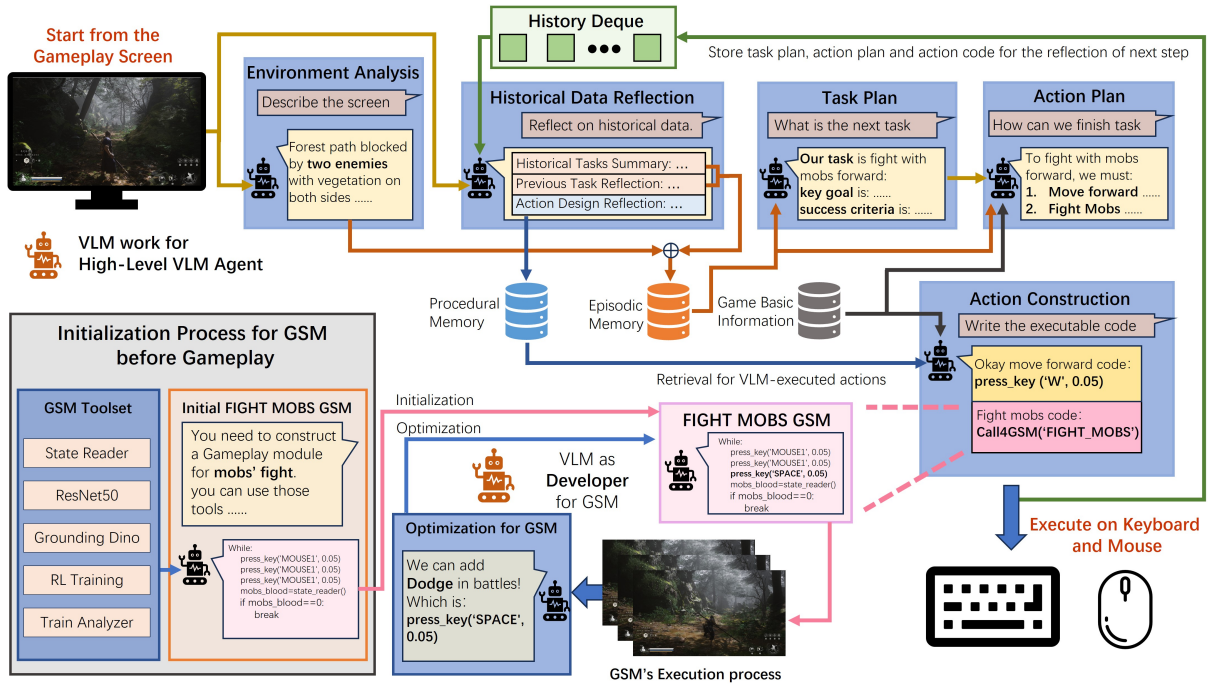


Figure 2: The overall architecture of GameSense. The main loop is governed by the VLM, which analyzes the game environment, reflects on history, plans tasks and actions, and constructs the code for each action (both VLM-executed and GSM actions). The VLM acts as a developer to refine GSMs through analysis GSM’s execution process.

ory stores the Game Environment Analysis, Previous Task Reflection and Historical Task Summary, providing a temporal context for the agent’s understanding of game progression and task outcomes. This memory **directly** passed to the Task and Action Plan module, enabling the VLM to make context-aware decisions. Procedural memory, implemented as a RAG database, specializes in storing and retrieving action implementation experiences for **VLM-executed actions**. It stores action names, the corresponding action code, and the associated reflection results from Action Design Reflection. When planning a new VLM-executed action, the agent queries the procedural memory using the action name as the key, retrieving relevant historical data to guide action construction.

Task Plan: Based on the Episodic Memory, this module determines the next task the agent should undertake. It considers the overall current situation and past experiences to generate a high-level **task description**, including the key goal, success criteria, and locations (if needed).

Action Plan: Given the task description and the Episodic Memory, this module plans a sequence of action names required to complete the task. This planning is grounded in a predefined action mapping table that provides a comprehensive and conflict-free set of actions, including both **VLM-**

executed actions (single key-mouse operation, e.g., "move forward": "use [key] to move") and **GSM actions** (calls to specialized GSMs, e.g., "Fight mobs": "invoke [Fight GSM] to fight mobs"). Each action in the table is accompanied by a clear textual description, enabling the VLM to leverage its language understanding capabilities to connect the task’s semantic meaning with appropriate actions. For instance, when tasked with "engage the mobs ahead," the VLM references the mapping table to retrieve possible actions. By analyzing the action descriptions, the VLM constructs an ordered sequence of action names such as ["move forward" (VLM-executed), "Fight mobs" (GSM action)].

Action Construction: This module translates the planned action names into executable code, referencing the action mapping table and procedural memory. For VLM-executed actions, the VLM generates the key-mouse code (including both the specific key and its duration), leveraging the procedural memory for guidance. For GSM actions, this module simply outputs the code to call the appropriate GSM.

The High-Level VLM Agent operates in a closed-loop process. It begins by analyzing the game screen to understand the current state. Then, it reflects on past experiences through the three reflection mechanisms. Based on the current state

and reflections, it plans the next task and the sequence of actions. Finally, it constructs the code for each action (both VLM-executed and GSM actions). This process is driven by the VLM’s reasoning and code-generation capabilities, with each cycle potentially contributing to improving future decision-making through memory and reflection. Further details are available in Appendix A.

3.4 Game Sense Modules (GSMs)

3.4.1 Motivation and Design Philosophy

Our goal is to achieve a “game sense” similar to that of human players—the ability to respond to gameplay dynamically, which is key to a successful real-time gaming experience. Specifically, we reposition VLM from a direct controller to a developer and optimizer, creating and continuously optimizing Game Sense Modules (GSMs). We require VLM design to follow a “from start to finish” design, which means each GSM is designed as a complete execution equipped with adaptive execution loops and termination criteria, rather than a mere sequence of actions. This design ensures both real-time performance and dynamic adaptability.

3.4.2 GSM Types and Application Scope

Our approach categorizes GSM into two types: (1) **RL-based GSM**, which is designed for scenarios requiring high dynamic adaptability where task patterns are difficult to model with fixed rules (e.g., boss fights and Flappy Bird control); (2) **Rule-based GSM** targets tasks with well-defined rules that demand rapid, efficient responses (e.g., mob fights and shooting in FPS games).

In each game, the tasks handled by GSMs are predefined during Agent initialization. In ACT games, GSMs handle mob fights and boss fights. In FPS games, GSMs manage shooting. In Flappy Bird, GSMs control the bird’s flight. This design is based on the following reasons: (1) **Limited Game Sense Requirements**: For a specific type of game, a limited number of game sense modules are sufficient to support smooth gameplay (e.g., fight for ACT, shoot for FPS). (2) **Experimental Validation**: Experiments 4.5.3 have shown that allowing the VLM to autonomously generate GSM modules is counterproductive. Excessive autonomy can lead to frequent and redundant GSM creation and low reusability of GSM, increasing computational overhead and management complexity.

3.4.3 GSM Toolset

GSM relies on the following general-purpose tools for task execution. We argue that the use of such tools is well-justified: (1) it mimics humans’ direct understanding of game visuals; (2) existing methods (Tan et al., 2024; Liu et al., 2024a) commonly depend on general-purpose visual tools.

The key tools include: (1) **State Reader**: An OpenCV-based game frame analyzer for extracting game states (e.g., HP bars, death status). (2) **Vision Processors**: Including ResNet50 (He et al., 2016) or CNN for feature extraction and Grounding Dino (Liu et al., 2024b) for object detection. These are standard computer vision models. (3) **RL Training Parent Class**: A standard RL training parent class implementation for building RL-based GSMs, which requires VLM to instantiate it. (4) **Training Analyzer**: For analyzing training process data, including reward curves and behavior statistics, providing optimization insights for VLM. Further details of toolset and case presentation are available in Appendix B.1.

These tools are standard components in computer vision and RL. The key innovation of GSM innovation lies in how VLM develops GSMs rather than the tools themselves.

3.4.4 RL-based and Rule-based GSMs

RL-based GSM designed for tasks requiring dynamic adaptation (e.g., boss fights, Flappy Bird). VLM firstly designs the state space (by selecting relevant states from the output of **State Reader**, like HP state of character/boss), action space (by selecting task-relevant controls from key-mouse mappings) and constructs initial reward functions based on task objectives. Based on the above, **RL Training Parent Class** is instantiated, and then RL training is initiated. As training begins, VLM optimizes reward function through **Training Analyzer**. This process establishes a “train-analyze-optimize” loop, enabling GSM to progressively master complex task execution strategies.

Rule-based GSM focuses on tasks with clear logic but demanding quick reactions (e.g., FPS shooting, mob fights). During creation, VLM first analyzes task objectives and selects necessary visual processing tools (e.g., Grounding Dino for shooting), then designs a complete control loop with execution logic and end conditions. During execution, VLM optimizes the execution logic through screen analysis, such as adjusting the Grounding Dino label list for more precise shooting

target detection. This "execute-analyze-optimize" loop ensures GSM maintains continuously improved execution precision.

Both GSM approaches have a "from start to finish" design. And we suggest setting the max optimization iterations of GSMs to 3 (Show in 4.5.2). Further details are available in Appendix B.2.

3.5 System Integration

Before the agent begins gameplay, the system is initialized with the following components: (1) Game Mechanics and Objectives: A detailed description of the game mechanics, including rules, objectives, and success criteria; (2) Predefined action mapping table: serves as the foundation for agent-game interaction, containing both basic key-mouse control mappings and predefined GSM action, each with detailed functional descriptions; (3) GSM Module Initialization: initialization based on the predefined GSM actions' description and tool instructions. RL-based GSM initializes action space, state space, and reward function. Rule-based GSM initializes execution logic and end conditions. Then the agent operates in a continuous loop (High-Level VLM Agent) and the GSM module continuously optimizes its performance in a parallel process.

4 Experiment

4.1 Implementation Details

To ensure reproducibility, we adopt an open-source VLM with Qwen 2.5 VL as the backbone. All games are run on a single Windows machine equipped with an NVIDIA 4060 GPU. This setup guarantees that the experimental results can be reliably reproduced and provides a clear reference for the hardware environment used in our evaluations.

4.2 Evaluation Methods

Our evaluation focuses on two aspects: (1) **Single-Task Performance:** We select important tasks within each game to assess the agent's task completion rate. For instance, in the ACT game (e.g., combat with minor monsters and boss battles), in the FPS game (e.g., shooting and movement), we evaluate how effectively the agent handles these critical tasks that demand high real-time responsiveness. (2) **Complete Game Flow Evaluation:** We let all agents independently engage with and adapt to the game using a fixed initial scenario. The evaluation metrics include max exploration scores (how comprehensively the agent navigates the envi-

ronment) and the average exploration scores, which validate the agent's overall gameplay capabilities.

4.3 Baselines

We compare our approach, GameSense, with Cradle—the only general game agent specifically designed for video games (Tan et al., 2024). For a comprehensive comparison, we evaluate both the standard Cradle and its variant without the stop mechanism (Cradle without stop). It is important to note that GameSense **does not require any pausing**, thereby offering significant advantages in real-time performance and seamless gameplay.

4.4 Result of Single-Task

In our experiments on the ACT game "Black Myth: Wukong", the following tasks were defined: (1) **UI Operation:** Using the in-game UI to restore blood volume. (2) **Map Escape:** Resolving issues where the character gets stuck at the map boundary, by adjusting the camera view. (3) **Approach to Item Interaction:** Moving close to the shrine for interaction. (4) **Normal Mob Battle:** A combat task where a monster can be defeated with three hits. (5) **Harder Mob Battle:** A more challenging combat task requiring six or seven hits. (6) **Boss Battle:** A high-difficulty combat task. In our experiments on the FPS game "DOOM", the following tasks were defined: (1) **UI Operation:** Using the UI to enter the game. (2) **Map Escape:** Make the character turn correctly at the right angle of the road, by adjusting the camera view. (3) **Interact with Door:** Moving close to the interactive door and open it. (4) **Normal Mob Battle:** A shot task where the monster has slow movement speed. (5) **Harder Mob Battle:** A more challenging shot task where the monster has fast movement speed. The experiment for each task was repeated 20 times.

Note on Pause Mechanism: Black Myth: Wukong does not support an immediate pause during combat or under attack. To run Cradle, we had to implement a mechanism where a pause is attempted up to 5 times; if pausing still fails, the system abandons the pause. This increases the risk of the character being attacked during the VLM's reasoning, highlighting a significant compatibility issue with Cradle. DOOM supports pausing at any moment, which enables Cradle to run normally.

Table 1 summarizes the success rates for each task. In non-real-time tasks, all three methods demonstrated similar performance (typically ranging from 50% to 95%). However, Cradle (with-

| Black Myth: Wukong (not support an immediate pause during combat or under attack) | | | | | | |
|--|--------------|------------|------------------|-------------------|-------------------|-------------|
| | UI Operation | Map Escape | Item Interaction | Normal Mob Battle | Harder Mob Battle | Boss Battle |
| Cradle | 95% | 55% | 75% | 25% | 10% | 0% |
| Cradle w/o stop | 95% | 50% | 70% | 0% | 0% | 0% |
| GameSense | 100% | 60% | 70% | 95% | 70% | 60% |

| DOOM (supports pausing at any moment) | | | | | |
|--|--------------|------------|--------------------|-----------------|-----------------|
| | UI Operation | Map Escape | Interact with Door | Normal Mob Shot | Harder Mob Shot |
| Cradle | 95% | 45% | 35% | 10% | 5% |
| Cradle w/o stop | 100% | 30% | 35% | 0% | 0% |
| GameSense | 95% | 50% | 40% | 85% | 65% |

Table 1: Single-task experiment on Black Myth: Wukong and DOOM. Before testing, we let Cradle run 10 steps in specific scenarios to adapt to the situation. For GameSense, we run 10 steps in specific scenarios and optimize the GSM through three iterations. For GSMs, Mob battle/shot corresponds to rule-based GSMs and Boss battle corresponds to RL-based GSMs.

out stop) showed a significant decrease to 30% in DOOM’s map escape task due to potential unexpected monster encounters, where its inferior reaction capability renders it completely ineffective. In combat scenarios, GameSense demonstrated overwhelming superiority, achieving success rates of 60%-95% in Black Myth: Wukong and 65%-85% in DOOM, while other methods were practically unusable in combat situations (with success rates of only 0-25%). These results convincingly demonstrate the exceptional capabilities of the GameSense framework in handling complex real-time interaction scenarios.

4.4.1 Result of Complete Game Flow

Map of "Black Myth: Wukong" and "DOOM", as shown in Figure 3. To evaluate the complete game flow, we use the exploration progress in games as a performance metric, with different criteria defined for each game. For "Black Myth: Wukong," considering its open-world map, we score based on the consecutive tasks completed by the Agent: defeating a normal mob scores 1 point, successfully navigating a junction scores 1 point, defeating a harder mob scores 2 points, and successful interaction with items (such as collecting herbs or treasures) scores 1 point. For "DOOM," given its linear map, we have marked key points on the map, including turning, shooting enemies, and interacting with doors, with each key point passed scoring 1 point. For "Flappy Bird," we measure how many pipes the bird passes, with each pipe scoring 1 point. For all games, we calculate the total score from the starting point to the character’s death. In our experimental setup, each game was run 20 times from a fixed initial position, and two primary metrics were

recorded: the average number of explored scores and the maximum score achieved by the agent.

As shown in figure 3, the experimental results clearly demonstrate the superior performance of GameSense in-game exploration tasks: in the open-world ACT game "Black Myth: Wukong," it achieved an average exploration score of 4.5 and a maximum score of 6.0; in the linear level game "DOOM," it reached an average score of 3.5 and a maximum score of 5.0; and in the continuous reaction game "Flappy Bird," it impressively scored an average of 28.3 and a maximum of 35. In contrast, Cradle performed poorly or failed to effectively play the games at all, strongly validating GameSense’s significant advantages in achieving authentic gameplay experiences and its versatility across different game genres.

4.5 Ablation Study

4.5.1 RL-based GSM

Although our RL-based GSM utilizes a general-purpose RL Training Parent Class rather than one specifically tailored for individual game scenarios, the stringent requirements for training RL models still make it challenging to establish complete training protocols across all gaming environments. This raised concerns about whether Rule-based GSM alone could enhance agent capabilities, when RL training is prohibited. Therefore, we conducted experiments in boss battle scenarios, where VLM solely develop Rule-based GSM. As shown in Table2, Rule-based GSM still managed to reduce the boss’s health to 34.6% and achieve a success rate of 10%. These results indicate that rule-based GSM also significantly enhance the Agent’s combat capabilities. Furthermore, this indicates that

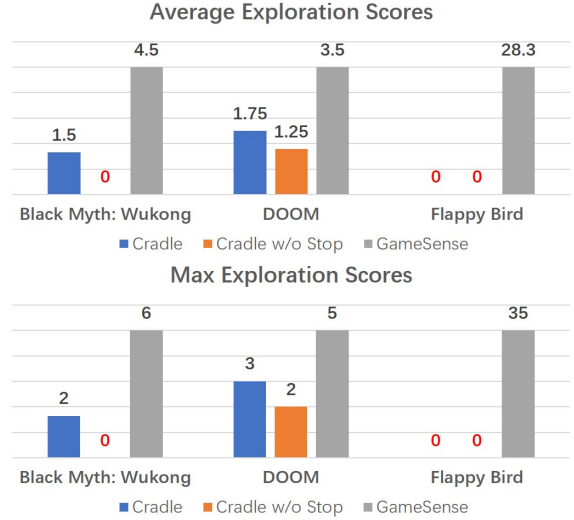
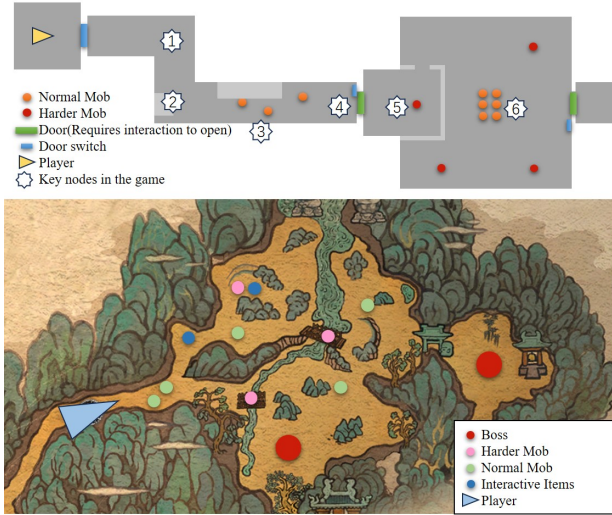


Figure 3: Complete game flow performance on Black Myth: Wukong, DOOM, and Flappy Bird.

our **paradigm shift**, which transforms VLM from a direct controller to a GSM observer, is the **key** to enhancing agent capabilities. Detailed analysis and experiment setting can be seen in appendix C.1.

| GSM Type | Success Rate | Avg Blood |
|-----------------|--------------|-----------|
| RL-based | 60% | 12.3% |
| Rule-based | 15% | 34.6% |
| Cradle | 0% | 90.2% |
| Cradle w/o Stop | 0% | 95.8% |

Table 2: Avg Blood means the average remaining health of the boss, which also represents the combat ability of different agents.

| Opt Num | Battle Tasks in ACT Game | | Flappy Bird |
|---------|--------------------------|---------------------|--------------|
| | Success Rate (Mobs) | Success Rate (Boss) | Pipes Passed |
| 0 | 70% | 10% | 18.3 |
| 1 | 90% | 40% | 28.1 |
| 2 | 100% | 50% | 27.3 |
| 3 | 90% | 60% | 28.2 |

Table 3: Impact of GSM optimization iterations on gaming tasks. The first two columns show task success rates as percentages, while the last column indicates the average number of pipes passed in Flappy Bird.

4.5.2 Optimization Iterations of GSM

We investigated the impact of GSM optimization iterations on its performance by extracting multiple iterative versions of GSM and testing their performance. As shown in table3, while one to two optimization iterations are sufficient for simpler tasks, more complex challenges like boss battles benefit from additional optimization cycles, highlighting the importance of iterative refinement in GSM’s

performance. Detailed analysis and experiment setting can be seen in appendix C.2.

Additionally, we found that there is a certain probability of degradation occurring when the number of GSM optimizations is too high. This is due to the accumulation during the optimization process, with more bad cases and optimization case-by-case analysis as shown in the appendixC.4. So we suggest setting the maximum number of iterations for optimization to 3.

4.5.3 Unfixed GSM

Although we have emphasized that the fixed GSMs are sufficient for specific gaming scenarios, we remain concerned about whether allowing the VLM to autonomously develop GSMs could broaden their applicability. Therefore, we integrated an additional step in the high-level VLM agent, permitting the VLM to independently reason about and design GSMs. Unfortunately, we observed that the GSMs autonomously generated by the VLM were often repetitive, with the VLM designing duplicate GSMs for each encountered mob. This frequent construction of GSMs not only places extra operational demands on the Agent but also necessitates prolonged decision-making times, compelling us to pause the game frequently, contrary to our initial objectives. Appendix C shows more details.

5 Conclusion

In this paper, we first identify a common issue with existing VLM-based gameplay agents: the VLM infers each action individually, resulting in significant "thinking delays", which limits their capabil-

ity to handle real-time and dynamically adaptive tasks. To address this issue, we propose a paradigm shift, transforming the VLM’s role from a direct controller to a developer of game action execution modules. Furthermore, we developed the GameSense, which is the first agent capable of performing tasks such as shooting in FPS games and boss fights in ACT games without game’s pause function. This provides a new paradigm for construct VLM-based gameplay agents.

6 Limitation

This paper introduces a paradigm shift in the design of VLM gameplay agents: transforming VLMs from direct action controllers to developers of Game Sense Modules (GSMs). Although our experiments have proven the effectiveness of this approach, there remains an issue. For each game, the types and functions of GSMs are fixed. While we have discussed that this fixed nature is sufficient for gameplay and that complete autonomy in design by the VLM would introduce catastrophic delays, exploring how to enable VLMs to autonomously recognize and reuse GSMs is still worthwhile, as it could broaden the applicability of Gameplay Agents.

References

analoganddigital. 2021. [Dqn play sekiro](#). GitHub repository.

Marc G Bellemare, Yavar Naddaf, Joel Veness, and Michael Bowling. 2013. The arcade learning environment: An evaluation platform for general agents. *Journal of Artificial Intelligence Research*, 47:253–279.

Peng Chen, Pi Bu, Jun Song, Yuan Gao, and Bo Zheng. 2024. Can vlms play action role-playing games? take black myth wukong as a study case. *arXiv preprint arXiv:2409.12889*.

Pierre Le Pelletier de Woillemont, Rémi Labory, and Vincent Corruble. 2022. Automated play-testing through rl based human-like play-styles generation. In *Proceedings of the AAAI Conference on Artificial Intelligence and Interactive Digital Entertainment*, volume 18, pages 146–154.

Benjamin Ellis, Jonathan Cook, Skander Moalla, Mikayel Samvelyan, Mingfei Sun, Anuj Mahajan, Jakob Foerster, and Shimon Whiteson. 2023. Smacv2: An improved benchmark for cooperative multi-agent reinforcement learning. *Advances in Neural Information Processing Systems*, 36:37567–37593.

Linxi Fan, Guanzhi Wang, Yunfan Jiang, Ajay Mandlekar, Yuncong Yang, Haoyi Zhu, Andrew Tang, De-An Huang, Yuke Zhu, and Anima Anandkumar. 2022. Minedojo: Building open-ended embodied agents with internet-scale knowledge. *Advances in Neural Information Processing Systems*, 35:18343–18362.

William H Guss, Brandon Houghton, Nicholay Topin, Phillip Wang, Cayden Codel, Manuela Veloso, and Ruslan Salakhutdinov. 2019. Minerl: A large-scale dataset of minecraft demonstrations. *arXiv preprint arXiv:1907.13440*.

Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. 2016. [Deep residual learning for image recognition](#). In *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 770–778.

Sihao Hu, Tiansheng Huang, Fatih Ilhan, Selim Tekin, Gaowen Liu, Ramana Kompella, and Ling Liu. 2024. A survey on large language model-based game agents. *arXiv preprint arXiv:2404.02039*.

Niels Justesen, Philip Bontrager, Julian Togelius, and Sebastian Risi. 2019. Deep learning for video game playing. *IEEE Transactions on Games*, 12(1):1–20.

Shaoteng Liu, Haoqi Yuan, Minda Hu, Yanwei Li, Yukang Chen, Shu Liu, Zongqing Lu, and Jiaya Jia. 2024a. [RL-gpt: Integrating reinforcement learning and code-as-policy](#). *arXiv preprint arXiv:2402.19299*.

Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Qing Jiang, Chunyuan Li, Jianwei Yang, Hang Su, et al. 2024b. [Grounding dino: Marrying dino with grounded pre-training for open-set object detection](#). In *European Conference on Computer Vision*, pages 38–55. Springer.

Pan Lu, Baolin Peng, Hao Cheng, Michel Galley, Kai-Wei Chang, Ying Nian Wu, Song-Chun Zhu, and Jianfeng Gao. 2024. [Chameleon: Plug-and-play compositional reasoning with large language models](#). *Advances in Neural Information Processing Systems*, 36.

Weiyu Ma, Qirui Mi, Yongcheng Zeng, Xue Yan, Yuqiao Wu, Runji Lin, Haifeng Zhang, and Jun Wang. 2023. [Large language models play starcraft ii: Benchmarks and a chain of summarization approach](#). *arXiv preprint arXiv:2312.11865*.

Maria Abi Raad, Arun Ahuja, Catarina Barros, Frederic Besse, Andrew Bolt, Adrian Bolton, Bethanie Brownfield, Gavin Buttimore, Max Cant, Sarah Chakera, et al. 2024. [Scaling instructable agents across many simulated worlds](#). *arXiv preprint arXiv:2404.10179*.

Weihao Tan, Wentao Zhang, Xinrun Xu, Haochong Xia, Gang Ding, Boyu Li, Bohan Zhou, Junpeng Yue, Jiechuan Jiang, Yewen Li, et al. 2024. [Cradle: Empowering foundation agents towards general computer control](#). In *NeurIPS 2024 Workshop on Open-World Agents*.

Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. 2023a. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*.

Lei Wang, Chen Ma, Xueyang Feng, Zeyu Zhang, Hao Yang, Jingsen Zhang, Zhiyuan Chen, Jiakai Tang, Xu Chen, Yankai Lin, et al. 2024. A survey on large language model based autonomous agents. *Frontiers of Computer Science*, 18(6):186345.

Zihao Wang, Shaofei Cai, Guanzhou Chen, Anji Liu, Xiaojian Ma, and Yitao Liang. 2023b. Describe, explain, plan and select: Interactive planning with large language models enables open-world multi-task agents. *arXiv preprint arXiv:2302.01560*.

A Detail for High-Level VLM Agent

A.1 Detailed Input/Output for Each Module

1. Game Environment Analysis

- **Input:** Real-time game screen images captured directly from the game.
- **Output:** A detailed textual description that identifies key elements in the scene—such as enemies, bosses, interactable objects, potential threats, and the current state of the player.

2.1 Previous Task Reflection (Historical Data Reflection)

- **Input:** Data from the most recent task execution (screenshots), description of the previous task, and action design. description.
- **Output:** A detailed evaluation of the latest task’s performance that highlights immediate strengths, weaknesses, and suggestions for the next task design.

2.2 Historical Task Summary (Historical Data Reflection)

- **Input:** Aggregated data from a sliding window of recent tasks (e.g., the last 10 tasks), including task description, logs, and task reflection.
- **Output:** A synthesized summary that identifies long-term trends, and recurring patterns, providing broader context for decision-making.

2.3 Action Design Reflection (Historical Data Reflection)

- **Input:** Data related to VLM-generated action executions including screenshots, design of task and action.
- **Output:** A detailed evaluation of the action design of the latest task that highlights immediate strengths, weaknesses, and suggestions for optimization.

3. Memory:

- **Input:** Reflection outputs from the Historical Data Reflection module.
- **Output:** Two types of stored memory:

- **Episodic Memory:** Time-indexed records of past task outcomes (both Previous Task Reflection and Historical Task Summary).
- **Procedural Memory:** A RAG database mapping action names to their corresponding key-mouse control codes and associated reflection data.

4. Task Planning:

- **Input:** The textual description from Game Environment Analysis along with contextual insights from Episodic Memory.
- **Output:** A high-level task description that specifies the core objective, success criteria, and any relevant spatial or situational details for the current game scenario.

5. Action Planning:

- **Input:** The high-level task description generated by Task Planning.
- **Output:** An ordered list of action names derived from a predefined action mapping table.

6. Action Construction:

- **Input:** The ordered list of action names from Action Planning, along with reference data from Procedural Memory and the action mapping table.
- **Output:** Executable control codes that translate into either detailed key-mouse commands (for VLM-executed actions) or invocation instructions that trigger the corresponding Game Sense Modules (for GSM actions), enabling real-time game control.

A.2 Implementation Details of FPS Game

FPS games have a unique mechanism where attacks are primarily executed through shooting. This means that players can open fire as soon as they spot an enemy, and similarly, enemies will shoot upon detecting the player. To cater to the game’s demand for shooting at any moment, we have automated the invocation of the Shooting GSM after each module in the high-level VLM agent for FPS games, significantly reducing the risk of the agent being attacked by enemies. During the design process of the GSMs by the VLM, termination and exit mechanisms were also considered. For instance, if

the Grounding Dino fails to detect enemies multiple times, it will exit the Shooting GSM, ensuring that this mechanism does not interfere with other processes of the high-level VLM agent. Additionally, the Action Planning module is still allowed to invoke the Shooting GSM to handle a variety of game scenarios.

B Detail for Game Sense Modules

B.1 Detailed Introduce for Part of Tool Set

The RL Training Parent Class is a universal RL training class that defines a complete RL training workflow skeleton. At its core is the QNetwork neural architecture, which employs a triple-branch parallel processing design: a vision model (normal CNN for Flappy Bird, Resnet50 for ACT Boss Battle) branch for visual feature processing, a state branch for state information processing, and an action history branch using LSTM for processing historical action sequences. These three branches ultimately merge their features for decision-making, making it particularly suitable for handling complex state spaces and action sequences in video games.

The parent class includes the DoubleDQN Training Module, which implements core DoubleDQN algorithm functionalities, featuring experience replay memory, exploration strategy, and soft target network updates. The parent class also provides interfaces for model saving and loading, supporting training interruption and resumption. The training process is uniformly managed by the **train()** method, supporting multiple training episodes, with each episode executing standard operations such as environment interaction, experience collection, parameter updates, and training log recording.

To utilize this training parent class, specific scene subclasses need to be instantiated through VLM, primarily customizing **state space, action space, and reward functions**. Once the subclass is instantiated, training can be initiated directly using the parent class's **train()** method. During training, the framework automatically manages model checkpoint saving and training log recording. Through VLMs overriding of the reward function method, reward strategies can be flexibly adjusted. This design pattern allows VLM to focus on strategy optimization for specific games while reusing standard training workflows, making it applicable to various video games requiring visual input and

continuous action decision-making.

Training Analyzer analyzes the training record data generated during the RL training process. Its purpose is to analyze and compile training statistics, which are then submitted to the VLM to assess whether the RL training meets expectations and optimize the reward accordingly. The module analyzes character state data (including health, mana, stamina, etc.) and action data, calculates key metrics such as total training steps, average rewards, and action usage frequency, and generates visualization charts including cumulative reward curves and state variable trends. These comprehensive statistical results enable the VLM to evaluate the model's training effectiveness and optimize the reward design accordingly. Based on these comprehensive statistical results, VLM can evaluate whether the RL model has learned to use various actions reasonably, whether the training process is stable, whether it has achieved the expected game goals (such as reducing Boss health), and whether the reward design is reasonable.

B.2 Detailed Pipeline for RL-base GSM

B.2.1 Overview

The RL Training Parent Class can be instantiated by VLM through a systematic process tailored to different game environments. The implementation consists of several key components and processes.

The RL Training Parent Class can be instantiated by VLM through a systematic process tailored to different game environments. First, we provide an RL training environment restart functionality to VLM. For ACT games, we leverage in-game teleportation cheats to enable precise character repositioning after respawn. For Flappy Bird, where revival requires a simple click, we implement a game-over detection module.

In instantiating the RL Training Parent Class, VLM employs the state reader to design the state space (e.g., character/boss status) and action space. Based on task objectives, VLM constructs an initial reward function. For example, in ACT games, the state space might include character health, boss health percentage, and relative positions, while in Flappy Bird, it might track bird height and scores achieved.

As training commences, VLM utilizes its Training Analyzer to optimize the reward function. This creates a "train-analyze-optimize" loop where VLM: (1) Monitors agent performance through

training logs; (2) Adjusts reward signals to encourage desired behaviors; (3) Updates the reward function implementation.

This iterative process enables GSM to progressively master complex task execution strategies, adapting to different game scenarios while maintaining the fundamental training structure defined in the parent class. The flexibility of this approach allows for continuous refinement of the training process while ensuring consistency in the underlying RL framework.

B.2.2 Details of Initialization

For the state space, we provide the VLM game task description (e.g. your task is to defeat the boss in the scene) and the **State Reader**. VLM selects task-related states to form a state space. This state space would be used to design the reward function.

Example of State Space Design

Boss Blood (idx: 0)
 Player Blood (idx: 1)
 Potion Percentage (idx: 2)

For the action space, we provide the VLM game task description and the game's action and key mode mapping table. VLM selects task-related actions from the mapping table to form an action space.

Example of Action Space Design

- Move Forward (idx: 0)
Basic movement action, no resource consumption or attack behavior involved.
- Move Backward (idx: 1)
Basic movement action, no resource consumption or attack behavior involved.
- Move Left (idx: 2)
Basic movement action, no resource consumption or attack behavior involved.
- Move Right (idx: 3)
Basic movement action, no resource consumption or attack behavior involved
- Light Attack (idx: 4)

Light attack deals damage to the Boss but consumes some stamina.

- Heavy Attack (idx: 5)
Heavy attack requires charging time and can be interrupted, but deals higher damage. Best used when opportunity arises.
- Dodge (idx: 6)
Dodge is used to avoid attacks, preventing HP loss when successful, but consumes stamina.
- Drink Health Potion (idx: 7)
Drinking potion recovers HP but consumes potion stock. Suitable to use when HP is low.
- Cast Body Fixing (idx: 8)
Casting immobilization spell requires mana, can control the Boss for a period of time, creating opportunity for damage output.

For the initial reward function, we provide the VLM game task description, the state space, the action space, and Reward Function Template (standardizes input and output to ensure correct invocation by RL training classes, providing basic design ideas). Then, VLM independently designed reward function.

Reward Function Template:

```

1 def reward_function(prev_state,
2   next_state, action_idx, done,
3   action_history, action_state_changes
4   , episode_start_time, step_time,
5   step):
6   # Initialize reward
7   reward = 0.0
8
9   # Game over logic
10  if done:
11    # Reward based on boss health
12    # reduction
13    boss_health_reduction = 1-
14    prev_state["boss_percentage"]
15    ]
16    # Design your reward logic
17    .....
18    return reward
19
20 # Boss health change reward; Suggest
21 # giving linear rewards
22 boss_health_change = prev_state["
23   boss_percentage"] - next_state["
24   boss_percentage"]
25 # Design your reward logic
26 .....

```

```

17     reward+ = .....
18
19     # Player health change reward;
20     Suggest giving linear rewards
21     player_health_change = next_state["
22     blood_percentage"] - prev_state[
23     "blood_percentage"]
24     # Design your reward logic
25     reward -= .....
26
27     # Dodge-specific reward
28     action = action_state_changes[
29     action_idx]
30     if action["action_name"] == "Dodge":
31         # Design your reward logic
32         .....
33         reward+ = .....
34
35     # Combo rewards/penalties
36     def calculate_combo_reward(
37     action_history):
38         combo_reward = 0
39         # Reward for consecutive light
40         attacks
41
42         if action_history[-4:] ==
43             .....:
44             # Design your reward logic
45             combo_reward += .....
46         # Penalty for excessive dodging
47         if action_history.count(6)
48             .....:
49             # Design your reward logic
50             combo_reward += .....
51         # Penalty for excessive potion
52         use
53         if action_history.count(7)
54             .....:
55             # Design your reward logic
56             combo_reward += .....
57         return combo_reward
58
59     reward += calculate_combo_reward(
60     action_history)
61
62     return reward

```

Example of reward function designed by VLM

```


1 def reward_function(prev_state,
2 next_state, action_idx, done,
3 action_history, action_state_changes
4 , episode_start_time, step_time,
5 step):
6     # Initialize reward
7     reward = 0.0
8
9     # Game over logic
10    if done:
11        # Reward based on boss health
12        reduction
13        boss_health_reduction = 1-
14        prev_state["boss_percentage"
15        ]
16        if boss_health_reduction >= 0.5:
17            reward += 150 # Major
18            reduction bonus
19        elif boss_health_reduction >=
20            0.2:
21            reward += 75 # Medium
22            reduction bonus
23        elif boss_health_reduction >=
24            0.1:
25            reward += 30 # Minor
26            reduction bonus
27        else:
28            reward -= 5 # Penalty for
29            insignificant reduction
30        return reward
31
32    # Boss health change reward
33    boss_health_change = prev_state["
34    boss_percentage"] - next_state["
35    boss_percentage"]
36    if boss_health_change > 0.02:
37        reward += 100 *
38        boss_health_change
39    else:
40        reward -= 2
41
42    # Player health change reward
43    player_health_change = next_state["
44    blood_percentage"] - prev_state[
45    "blood_percentage"]
46    reward += 10 *
47    player_health_change
48
49    # Dodge-specific reward
50    action = action_state_changes[
51    action_idx]
52    if action["action_name"] == "Dodge":
53        if player_health_change == 0:
54            reward += 2
55        else:
56            reward -= 0.5
57
58    # Combo rewards/penalties
59    def calculate_combo_reward(
60    action_history):
61        combo_reward = 0
62        # Reward for 4 consecutive light
63        attacks
64        if action_history[-4:] == [4, 4,
65        4, 4]:
66            combo_reward += 5
67        # Penalty for excessive dodging
68        if action_history.count(6) > 15:
69            combo_reward -= 5
70        # Penalty for excessive potion
71        use
72        if action_history.count(7) > 3:
73            combo_reward -= 5
74        return combo_reward
75
76    reward += calculate_combo_reward(
77    action_history)
78
79    return reward

```

C Detail of Ablation Study

C.1 RL-based GSM

Both Rule-based and RL-based GSM underwent three iterations of optimization and the experiment for each GSM was **repeated 20 times**. Rule-based



The targets appear to be humanoid figures. Aiming for the head or torso would likely cause greater damage.



Recognize Target

Recognize Label List: ["people", "hand"]
Shot Label List: ["people"]



New Recognize Target

Recognize Label List: ["people", "hand", "head", "torso"]
Shot Label List: ["head", "people"]

Figure 4: Case analysis for GSM's Optimization.

GSM still managed to reduce the boss's health to 34.6% and achieve a success rate of 10%. In contrast, Cradle completely failed to achieve any victories (zero success rate) and could barely inflict meaningful damage to the boss (remaining health at 90.2% and 95.8% respectively). These results indicate that rule-based GSM also significantly enhance the Agent's combat capabilities.

C.2 Optimization Iterations of GSM

Each GSM version was tested 10 times. The experimental results are shown in table 3. Starting from the unoptimized version (0 iterations), each optimization step generally improved performance until reaching optimal levels. These results indicate that while one to two optimization iterations are sufficient for simpler tasks like normal mob battles, more complex challenges like boss battles benefit from additional optimization cycles, highlighting the importance of iterative refinement in GSM's performance.

C.3 Unfixed GSM

We incorporated an additional step in the high-level VLM agent, enabling it to independently conceptualize and develop GSMs. However, we observed that the GSMs spontaneously created by the VLM exhibited significant repetition, often designing duplicate GSMs for each encountered mob. This redundancy severely undermines the reusability of the GSMs, leading to the production of numerous low-quality, unoptimized GSMs. Table 4 has shown this phenomenon.

| | Num of GSM | Avg Opt |
|-------------|------------|---------|
| Unfixed GSM | 12 | 0.17 |
| fixed GSM | 2 | 3(Max) |

Table 4: Avg Opt means average optimization iterations of GSM. We set the max optimization iterations to 3.

C.4 Case-by-case Analysis for GSM's Optimization

The figure 4 demonstrates how the VLM optimizes the shooting GSM. The shooting GSM is designed based on the target detection capabilities of Grounding Dino, and thus the labels input by Grounding Dino directly impact performance. Initially, the VLM could only generate broad labels such as "people" and "hand." However, after observing the images detected during the execution process, the VLM enriched the list of labels, leading to performance optimization.

The following code example shows a reward optimization case. VLM found through analysis of training data that the proportion of dodge usage is too high, which is due to the excessive reward value for dodge behavior. This will cause the player to frequently dodge without attacking, so VLM has lowered the reward for dodging behavior and lowered the threshold for frequent dodging punishment.

Code before optimization

```

1 .....
2 # Dodge-specific reward
3 action = action_state_changes[
4     action_idx]
5 if action["action_name"] == "Dodge":

```

```

5     if player_health_change == 0:
6         reward += 2
7     else:
8         reward -= 0.5
9     .....
10    # Combo rewards/penalties
11    def calculate_combo_reward(
12        action_history):
13        .....
14        # Penalty for excessive dodging
15        if action_history.count(6) > 15:
16            combo_reward -= 5
17        .....
18        return combo_reward
19
20    reward += calculate_combo_reward(
21        action_history)
22
23    return reward

```

Code after optimization

```

1     .....
2     # Dodge-specific reward
3     action = action_state_changes[
4         action_idx]
5     if action["action_name"] == "Dodge":
6         if player_health_change == 0:
7             reward += 0.5
8         else:
9             reward -= 0.1
10    .....
11    # Combo rewards/penalties
12    def calculate_combo_reward(
13        action_history):
14        .....
15        # Penalty for excessive dodging
16        if action_history.count(6) > 10:
17            combo_reward -= 5
18        .....
19        return combo_reward
20
21    reward += calculate_combo_reward(
22        action_history)
23
24    return reward

```

We also found that VLM does not always optimize the reward logic. There is also a low probability of misunderstanding, such as making a mistake in the calculation logic of boss health during the optimization process, as shown in the following example:

```

1     .....
2     # Boss health change reward
3     boss_health_reduction = 1-prev_state
4     ["boss_percentage"]
5     if boss_health_change > 0.02:
6         reward +=
7     .....

```

D Prompts We Used

Game Environment Analysis

```
1 env_sys_prompt = '''
```

```

2 You are a specialized game environment
3 analyzer with expertise in
4 processing and interpreting video
5 game screenshots.
6 Your core capabilities include:
7 1. Precise scene classification between
8 UI and gameplay environments
9 2. Detailed visual element extraction
10 and spatial relationship analysis
11 3. Gameplay situation assessment
12
13 Your analysis must be accurate, concise,
14 and focus on actionable information
15 that would be relevant for game AI
16 decision-making.'''

```

```

17 def generate_prompt(game_info):
18     prompt = f"""
19 You are a game AI assistant responsible
20 for analyzing in-game screenshots.
21 Your task is to identify the type of
22 the current screenshot and
23 summarize the key information within
24 it.

```

```

25 There are two types of screenshots:
26 1. **UI Screen**: Refers to screenshots
27 displaying menus or user interfaces.
28 2. **Gameplay Screen**: Refers to actual
29 gameplay screenshots, showing
30 characters, enemies, items, and
31 other scene elements.

```

```

32 You need to follow these steps:
33 1. Determine the screenshot type: Is it
34 a "UI Screen" or a "Gameplay Screen
35 "?
36 2. If it's a **UI Screen**,
37 - extract and summarize the text
38 from the UI, such as options,
39 buttons, etc.
40 3. If it's a **Gameplay Screen**
41 - First assess the Camera View
42 state: Check if view is too high
43 (excessive sky/trees visible);
44 too low (excessive ground
45 visible); left/right (incomplete
46 road visibility) and road
47 features are clearly visible
48 - extract the key information based
49 on the following elements: {
50     game_info.get('Frame_attention')
51 }
52 - For enemy detection, use EXACTLY
53 one of these formats:
54 * If enemies present: "Enemy
55 detected: [number] enemies
56 at [position]"
57 * If no enemies: "No enemy
58 detected"
59 - summarize the environment or Point
60 out potential dangers or
61 opportunities

```

```

62 Output a your result in the following
63 format:
64 screen type is: "<UI Screen or
65 Gameplay Screen>",
66 observation is: "<Summary of the
67 content>"

```



```

33
34 Example output for Gameplay Screen:
35 screen type is: "Gameplay Screen",
36 observation is: "
37     1. camera view state is: (1) View
        angle slightly too high - excess
        sky visible; (2) Road
        visibility partially blocked on
        right side
38     2. Path details is: Main path
        heading north through forest
39     3. Enemy detected: 2 enemies at
        front
40     4. environment summarize is: Forest
        path blocked by two enemies with
        dense vegetation on both sides"
41
42 "
43 """
44     return prompt

```

Historical Task Summary

```

1 history_summary_sys_prompt = '''
2 You are an expert game historian. Your
  role is to synthesize gameplay
  history into a concise, informative
  narrative paragraph that captures
  key events, strategies, and insights
  relevant for future decision-making
3 ...
4 def history_summary_prompt(history_logs)
  :
5   base_prompt = f"""
6 Based on the following game history logs
  , generate a single coherent
  paragraph (approximately 150 words)
  that:
7 - Summarizes the key events
  chronologically
8 - Highlights critical decisions and
  their outcomes
9 - Identifies important patterns or
  strategies
10 - Notes any significant environmental
  changes
11 - Includes relevant insights for future
  tasks
12
13 Game History Logs:
14 {history_logs}
15
16 Your summary should be clear, concise,
  and focused on information that will
  be most valuable for future task
  reasoning.
17 """
18     return base_prompt

```

Previous Task Reflection

```

1 task_sys_prompt = '''
2 'You are an expert game analyst
  specializing in task reflection and
  evaluation. Your role is to:
3 1. Analyze all gameplay screenshots and
  state changes to understand what
  happened during task execution
4 2. Evaluate task completion status with
  concrete evidence

```

```

5 3. Identify and analyze issues at task
  design, action planning, and
  execution levels
6 4. Provide specific recommendations when
  needed
7
8 Always provide detailed, objective
  analysis following the exact format
  requested in the prompt.'''
9
10 def generate_task_level_prompt(
  pass_task_info, pass_env_info,
  current_env_info, pass_action_code):
11     base_prompt = f"""Analyze the
        previous task execution using
        the following information:
12
13     1. Task Information:
        {pass_task_info}
14
15     2. Environment States:
        - Before task execution: {
16           pass_env_info}
        - After task execution: {
17           current_env_info}
18
19     3. Action Design:
        - Planned action list and Execution
        code:
20     {pass_action_code}
21
22 Please conduct your analysis in
  these sequential steps and
  provide a detailed response in
  the following format:
23
24     1. VISUAL ANALYSIS
  Provide a clear description of:
25     - What happened during the task
  execution based on all the
  gameplay screenshots
26     - Key UI changes (if in UI screens),
  character movements,
  interactions observed, and
  Notable changes in environment
  states
27     {" - Changes between initial and
  final maps (The last two
  pictures)" if has_map else ""}
28
29     2. TASK COMPLETION EVALUATION
  State clearly:
30     - Whether the task was successfully
  completed
31     - Specific evidence from screenshots
  or state changes supporting
  your conclusion
32
33     3. ISSUE ANALYSIS (if any problems
  occurred)
34
35 Analyze at three levels:
36 a) Task Design Level
37     - Any issues with task design
  given the game state
38     - Problems with task objectives
  or prerequisites
39
40 b) Action Planning Level
41     - Issues with the planned action
  sequence
42
43
44

```

```

45         - Problems with action strategy
46           or logic
47     c) Action Execution Level
48         - Problems with specific control
49           inputs
50         - **Issues with duration of
51           actions**
52
53     4. NEXT STEP RECOMMENDATION
54     If task failed:
55     - Specific suggestions to complete
56       the task in the **CURRENT**
57       state
58
59     If task succeeded:
60     - Simply state that the task was
61       completed successfully and no
62       modifications are needed
63
64     Please provide your analysis in the
65     following format:
66
67     VISUAL ANALYSIS:
68     <Describe the sequence of events
69     observed in gameplay screenshots,
70     including UI changes (if in UI
71     screens), character actions, and any
72     significant state changes>
73     {" <Describe any relevant changes
74     observed between initial and final
75     maps>" if has_map else ""}
76
77     TASK COMPLETION EVALUATION:
78     Status: <SUCCESS/FAILURE>
79     Evidence: <List specific observations
80     from screenshots or state changes
81     that support your status
82     determination>
83
84     ISSUE ANALYSIS:
85     Task Design Level:
86     <Evaluate if there are any issues with
87     how the task was designed and
88     specified. If no issues, explicitly
89     state that>
90
91     Action Planning Level:
92     <Analyze if the planned sequence of
93     actions was appropriate and complete
94     . Identify any logical gaps or
95     problems>
96
97     Action Execution Level:
98     <Assess if there were any issues with
99     the specific implementation of
100    actions, such as timing or input
101    problems>
102
103    NEXT STEP RECOMMENDATION:
104    <If task failed: Provide specific
105    suggestions for task completion
106    given the current state>
107
108    <If task succeeded: Simply state that
109    the task was completed successfully
110    and no modifications are needed>
111
112    """
113
114    return base_prompt

```

Action Design Reflection

```

1  action_sys_prompt=''
2  You are an expert game action analyst
3  specializing in analyzing and
4  improving game control
5  implementations. Your role is to:
6  1. Analyze gameplay screenshots to
7  understand the execution effects of
8  each action
9  2. Evaluate action code design and
10 implementation quality
11 3. Provide reusable insights for similar
12 actions in the future
13 4. Suggest specific improvements for
14 action code design
15
16 Always provide detailed, objective
17 analysis following the exact format
18 requested in the prompt.
19
20 ...
21
22 def generate_action_level_prompt(
23     pass_task_info, pass_action_code):
24     base_prompt = f"""Analyze the
25     previous action execution using
26     the following information:
27
28     1. Screenshot Sequence Rules:
29     - For WASD movement actions lasting
30     over 2 seconds:
31         * Screenshots are captured every
32         2 seconds during the
33         movement
34     - For all other key/mouse actions:
35         * Only two screenshots are
36         captured: one before and one
37         after the action
38     This helps track continuous
39     movements and precise action
40     effects.
41
42     2. Task Context:
43     {pass_task_info}
44
45     3. Action plan and code list:
46     {pass_action_code}
47
48     Please conduct your analysis in
49     these sequential steps and
50     provide a detailed response in
51     the following format:
52
53     1. ACTION EXECUTION ANALYSIS
54     For each action in the sequence,
55     analyze:
56     - Initial state and final state from
57     screenshots
58     - Whether the action achieved its
59     intended effect
60     - Timing and smoothness of execution
61     - Any unexpected behaviors or side
62     effects
63
64     2. ACTION CODE EVALUATION
65     For each action implementation,
66     evaluate:
67     - Appropriateness of key/mouse
68     mapping choices
69     - Timing duration settings

```

```

40     - Action sequence coordination                                analysis of what
41     - Code efficiency and reliability                            worked/didn't work
42                                                                 >",
43     3. SUCCESS/FAILURE ANALYSIS                                83     "reusability": {{
44     For each action, determine:                                84     "
45     - Whether it succeeded or failed                            applicable_scenarios
46     - Root causes of any failures:                            ": "<list of
47         a) Input mapping issues                                potential reuse
48         b) Timing problems                                    cases>",
49         c) Sequence coordination issues                        85     "prerequisites": "<
50         d) Environmental factors                                required
51                                                                 conditions>",
52     4. REUSABILITY ANALYSIS                                    86     "limitations": "<
53     Analyze each action's potential for                        known
54     reuse:                                                    constraints>"
55     - Common scenarios where this action                        87     }},
56     pattern could apply                                        88     "improvements": "<
57     - Required prerequisites and                               specific suggestions
58     conditions                                                for implementation
59     - Potential adaptations needed for                          improvements>"
60     different contexts                                        89     }}
61     - Limitations and constraints                              90     }},
62                                                                 # ... repeat for each action
63     5. IMPROVEMENT RECOMMENDATIONS                            91     ]
64     Provide specific suggestions for:                            92     """
65     - Better key/mouse mapping choices                        93     """
66     - Optimal timing parameters                               94     Ensure your response ends with this
67     - Enhanced sequence coordination                           95     structured list for easy parsing
68     - More robust implementation                               96     . Format it exactly as shown
69     patterns                                                  above.
70                                                                 """
71     Note that:                                                97     return base_prompt
72
73     1. output will be directly evaluated
74     using Python eval(), so it must be a
75     valid Python list of dicts
76
77     2. No additional text or explanation
78     should be added between or after
79     these sections
80     After completing your analysis,
81     output a list of dictionaries in
82     the following format:
83
84     ```python
85     [
86         {{
87             "action_name_description":
88                 "<original action
89                 description from
90                 action_name_description
91                 >",
92             "action_code": "<
93                 corresponding action
94                 code tuple from
95                 action_code>",
96             "reflection": {{
97                 "execution_analysis": "<
98                 summary of execution
99                 analysis>",
100                "code_evaluation": {{
101                    "status": "<SUCCESS/
102                    PARTIAL SUCCESS/
103                    FAILURE>",
104                    "quality_analysis":
105                        "<implementation
106                        quality summary
107                        >"
108                }},
109            "
110                success_failure_analysis
111                ": "<detailed

```

Task Planning

```

1 task_planner_sys='''You are an
2 intelligent game AI assistant
3 specializing in strategic task
4 planning and execution.
5
6 Key Responsibilities:
7 1. Analyze game situations
8 comprehensively considering:
9 - Current state and environment
10 - Historical context and past
11 experiences
12 - Game objectives and constraints
13
14 2. For ALL tasks (not just movement),
15 provide:
16 - Clear, specific, and actionable
17 objectives
18 - Precise success criteria
19 - Required resources or conditions
20 - Risk assessment and mitigation
21 strategies
22
23 3. For movement-related tasks, MUST
24 provide precise location
25 descriptions using:
26 - Relative position to character (
27 using character height as scale)
28 - Directional instructions (up/down/
29 left/right or compass directions)
30 - Safe path recommendations
31 considering terrain
32
33 4. Special Considerations:
34 - Prioritize agent safety and
35 objective completion

```

```

22     - Balance exploration with risk
      management
23     - Adapt strategy based on previous
      task outcomes
24     - Consider resource management and
      efficiency
25
26 Your task is to make informed decisions
      that progress game objectives while
      maintaining agent safety and
      efficiency.
27 '''
28
29 def construct_task_prompt(current_frame,
      pass_task_history_summary,
      pass_task_reflection, env_info,
      game_info, step):
30
31     base_prompt = f"""
32 Analyze the current situation and plan
      the most appropriate next task
      considering:
33
34 1. Game Objectives:
35 {game_info.get('Global_task')}
36 2. Additional Task Context: {game_info.
      get('additional_task_info4_task_plan
      ')}
37
38 Your design task should be broken down
      into the following specific
      Available Controls:
39 {game_info.get('control_info')}
40
41 Required Analysis Steps:
42 1. Evaluate current environment and
      state
43 2. Consider historical context and
      lessons learned
44 3. Assess risks and opportunities
45 4. Determine priority actions"""
46
47     current_state = f"""
48 Current Environment Status:
49 {env_info}"""
50
51     if step == 1:
52         analysis_prompt = f"""{
53             base_prompt}
54 {current_state}
55
56 This is the initial step. Focus on
      understanding the current situation
      and establishing a safe starting
      point."""
57
58     else:
59         history_context = f"""
60 Historical Context:
61 Task History Summary: {
62     pass_task_history_summary}
63 Previous Task Reflection: {
64     pass_task_reflection}"""
65         analysis_prompt = f"""{
66             base_prompt}
67 {current_state}
68 {history_context}

```

```

68 Consider:
69 1. Previous task outcomes and lessons
      learned
70 2. Current environmental constraints
71 3. Progress toward game objectives
72 4. Safety and risk management"""
73
74     output_format = """
75 Based on your analysis, provide your
      response in the following format:
76
77 reasoning process:
78     1. Current State Analysis: "<analyze
      current environment and
      immediate situation>"
79     2. Historical Context: "<analyze
      relevant history and reflections
      >"
80     3. Strategic Evaluation: "<evaluate
      opportunities, risks, and
      priorities>"
81
82 task details:
83     goal: "<specific, actionable
      objective>"
84
85     location details:
86         - screen_position: "<describe
      target position. Example: '3
      meters to the right'>"
87     key_requirements: "<essential
      conditions or resources needed>"
88     success_criteria: "<main condition
      that must be met>"
89
90 Note:
91 - The direction of camera adjustment **
      MUST** be consistent, and there
      should be no angle that switches
      left and then right, or up and then
      down
92 - For movement-related tasks, always
      specify both screen-relative
      positions (using character height as
      scale). For non-movement tasks,
      mark position fields as 'N/A' if not
      relevant."""
93
94     return analysis_prompt +
95         output_format

```

Action Planning

```

1 action_prompt = f"""Based on the task
      you just planned, break it down into
      specific executable actions.
2 Please list the specific actions needed
      to complete this task.
3
4 Available Controls:
5 {game_info.get('control_info')}
6
7 Note that:
8 1. output will be directly evaluated
      using Python eval(), so it must be a
      valid Python list
9 2. No additional text or explanation
      should be added between or after
      these sections
10 3. Ignore actions such as ' wait 'and'

```



```

    observe' that cannot be associated with available controls
11 4. Action list is *no longer than 5!!*.
12
13 Output Format MUST be exactly as follows
14 :
15 ["Action1: <action name> - <detailed description including precise
16 measurements and requirements>","
    Action2: <action name> - <detailed description including precise
    measurements and requirements>","
    ...]
17 """
18
19 Action Construction
20
21 action_sys_prompt = '''
22 You are an expert game AI action planner specializing in converting high-
23 level tasks into precise, executable action sequences.
24
25 Key Responsibilities:
26 1. Convert task descriptions into specific control sequences
27 2. Ensure accurate timing and duration for each action
28 3. Maintain action safety and efficiency
29 4. Generate properly formatted action code that can be directly executed
30
31 Important Guidelines:
32 1. All outputs must be in valid Python dictionary list format
33 2. Each action must include both description and corresponding control code
34 3. Control codes must use only valid game controls
35 4. All durations must be reasonable and safe
36 ...
37
38 def generate_action_prompt(game_info, reason_task, action_plan):
39     prompt = f"""
40     You are an expert game AI action planner specializing in converting high-
41     level action into precise, executable action sequences.
42
43     Your current task:
44     {reason_task}
45
46     The action plan for task:
47     {action_plan}
48
49     Available Controls:
50     {game_info.get('control_info')}
51
52     Additional Action Information:
53     {game_info.get('additional_action_info')}
54     }
55
56     Requirements:
57     1. Convert each action into specific control sequences
58     2. Provide both action description and control code
59
60     3. Ensure precise timing for each control input
61     4. Consider safety in all actions
62
63     Output Format MUST be exactly as follows
64     :
65     [
66     {{
67         "action_name_description": "<original action description>",
68         "action_code": [("<key>", <duration>), ...]
69     }},
70     ...
71     ]
72
73 Example Output:
74 [
75     {{
76         "action_name_description": "Move Forward - Move 3 meters forward",
77         "action_code": [("W", 3.0)]
78     }},
79     {{
80         "action_name_description": "Jump and Interact - Jump over obstacle and press button",
81         "action_code": [("SPACE", 0.1), ("E", 0.1)]
82     }}
83 ]
84
85 Note:
86 1. Output will be evaluated using Python ast.literal_eval()
87 2. Use only valid control keys: {list(game_info.get('Mapping_info', {}).keys())}
88 3. All durations must be positive numbers
89 4. Maintain exact format with no additional text
90 """
91     return prompt

```