Iterative VCG-based Mechanism Fosters Cooperation in Multi-Regional Network Design

Mingjia He¹, Yannik Werner¹, Andrea Censi¹, Emilio Frazzoli¹, and Gioele Zardini²

Abstract—Transportation network design often involves multiple stakeholders with diverse priorities. We consider a system with a hierarchical multi-agent structure, featuring selfoptimized subnetwork operators at the lower level and a central organization at the upper level. Independent regional planning can lead to inefficiencies due to the lack of coordination, hindering interregional travel and cross-border infrastructure development, while centralized methods may struggle to align local interests and can be impractical to implement. To support decision making for such a system, we introduce an iterative VCG-based mechanism for multi-regional network design that fosters cooperation among subnetwork operators. By leveraging the Vickery-Clarke-Groves (VCG) mechanism, the framework determines collective investment decisions and the necessary payments from both operators and the central organization to achieve efficient outcomes. A case study on the European Railway System validates the effectiveness of the proposed method, demonstrating significant improvements in overall network performance through enhanced cross-region cooperation.

I. INTRODUCTION

Rail infrastructure serves as a cornerstone of transportation systems, enabling efficient, low-carbon passenger and freight mobility while driving economic growth and supporting global sustainability. As the most emissions-efficient transport mode, rail accounts for only 1% of global transport emissions while facilitating 7% of passenger travel and 6% of freight transport [1]. The global rail infrastructure market, valued at \$51.5 billion in 2024, is projected to expand to \$71.01 billion by 2030, with an annual growth rate of 5.5% [2]. However, despite this growth, rail transport has substantial potential to increase its market share relative to air and road transportation. Eurostat data from 2022 [3] highlights this potential, noting Switzerland's leading rail share of 17% among EU and EFTA countries, commpared to 65% for road transport. Austria follows with a 12% rail share, which is significantly lower compared to air travel (by 13%) and road transport (by 49%).

A key challenge in rail transport is the lack of coordination between regions [4]. Due to the interconnected nature of railway systems, inefficiencies in one region can negatively impact overall network performance. Addressing this challenge requires robust central authorities, such as governments and stakeholder associations, which play essential regulatory and financial roles. These organizations spearhead initiatives and provide financial assistance to strengthen regional and national infrastructure. For example, the European Commission introduced the Trans-European Transport Network




Fig. 1: In the iterative VCG-based mechanism, the central organization selects infrastructure projects, determines payment plans, and allocates subsidies to foster cross-region cooperation. Selfinterested regional operators evaluate projects based on local social welfare. This iterative process supports long-term infrastructure planning.

(TEN-T) [5], a policy to guide the planning of the EU's transport network and establish infrastructure requirements in multiple modes of transportation, including railways, waterways, roads and airports. Similar strategic efforts include China's Belt and Road Initiative (BRI) [6], the Infrastructure Investment and Jobs Act (IIJA) [7], and the Trans-Asian Railway (TAR) Network [8].

In this work, we consider a multi-regional network design problem characterized by a hierarchical stakeholder structure, consisting of regional operators at the lower level and a central organization at the upper level. Regional stakeholders, such as local governments or transport agencies, allocate resources based on regional priorities, whereas the central organization strategically subsidizes infrastructure projects to incentivize cooperative investments aimed at maximizing overall social welfare. This arrangement facilitates regional collaboration by attracting both local and external investment, creating opportunities for stronger interregional partnerships. In cases where collective regional investment falls short of meeting project costs, central government subsidies become instrumental in enabling critical infrastructure projects and promoting regional cooperation. Key considerations in this multi-level framework include determining the specific infrastructure projects to undertake, defining the financial contributions of each regional operator, and allocating central subsidies effectively.

To address these issues, we propose an iterative Vickrey-Clarke-Groves (VCG)-based resource allocation framework

This work was supported by the ETH Zürich Mobility Initiative (MI-03-22) and ETH Zürich Foundation (2022-HS-213).

¹Institute for Dynamic Systems and Control, ETH Zürich, 8092 Zürich, ZH, Switzerland (e-mail: minghe@ethz.ch; ywerner@student.ethz.ch; acensi@ethz.ch; emilio.frazzoli@idsc.mavt.ethz.ch).

²Laboratory for Information and Decision Systems, Massachusetts Institute of Technology, Cambridge, MA, USA. (e-mail: gzardini@mit.edu).

(illustrated in Fig. 1) as a decision-making tool. The VCG mechanism, known for its auction-based incentive compatibility in game theory, is widely employed in sectors such as energy markets and digital advertising [9], [10]. In our framework, the central organization acts as the coordinating entity, with regional stakeholders participating as bidders, thereby enabling efficient, transparent, and cooperative resource allocation. We extend the traditional VCG mechanism [11] by integrating the central organization's willingness to invest and incorporating budget constraints of regional operators. Payment responsibilities of operators are determined by assessing the pivotal role of their participation. Furthermore, the central organization identifies infrastructure projects lacking adequate regional investment despite fair contributions. Finally, we evaluate the effectiveness of our approach through numerical experiments based on the European Rail Network.

A. Related Research

Transportation systems involve multiple interdependent subsystems with self-interested decision-makers. Designing each subsystem independently often leads to suboptimal outcomes due to a lack of coordination and the neglect of the broader impact on the entire system [4]. Recent studies explored integrated design approaches by expanding the geographical scope and incorporating multiple transportation modes to optimize overall network performance. Grolle et al. [12] investigated the centralized design of the European high-speed rail network. The results revealed strong network integration through key corridors linking multiple countries, highlighting the importance of cross-border cooperation. Luo et al. [13] developed a joint pricing and network design problem for multimodal mobility, aiming to enhance the seamless integration of conventional transit services with emerging Mobility-on-Demand (MoD) services. In recent research, game-theory-based methods have gained increasing attention due to their ability to account for individual rationality in network design problems. He et al. [14] proposed a co-investment and payoff-sharing mechanism for the multiregional network design problem, aiming to align the interests of local decision makers and ensure a fair distribution of the overall payoff.

Mobility stakeholders operate within a hierarchical structure, where the central organization can influence operators' decision making through regulations, policies, and mechanism design. Zardini et al. [15], [16] applied a Stackelberg game framework to model interactions between municipalities and mobility operators, demonstrating how tax policies influence operator strategies and shape future mobility scenarios. Nie et al. [17] examined the electrification process of the bus industry using evolutionary game theory, and analyzed how carbon trading subsidies influence bus operators' decisions regarding the purchase of electrified buses.

In the VCG mechanism, the central organization employs the selection and payment rules to allocate resources among participants. It has been implemented across various engineering fields, and the properties are analyzed in specific application cases due to its desired theoretical properties [9], [18]–[20]. Phuong [20] introduced budget constraints by using a truncation VCG mechanism and shows Pareto optimality and generic incentive compatibility for multi-good auctions in the case of single-minded participants. Karaca et al. [9] focused on reverse auctions for continuous goods and used coalitional game theory to investigate the conditions required for coalition-proof outcomes. They applied this framework to the 14-Bus Test System and the Swiss reserve procurement auction based on data from electricity markets. Ren et al. [21] applied the VCG mechanism to the task offloading problem in vehicular networks, modeling the trading relationships between vehicles and edge nodes to determine optimal task offloading and pricing strategies. For the multi-regional network design problem, the central organization can enhance collaboration among local operators by organizing the selection of projects for joint investment and efficiently allocating subsidies. The VCG mechanism provides a promising framework for efficient resource allocation; however, there are still gaps in adapting it to realworld multi-regional network design problems. Specifically, it remains unclear how to incorporate the budget constraints of both operators and the central organization, as well as how to account for the central organization's preferences in project selection.

B. Statement of Contribution

The contributions of this work include i) developing an iterative VCG-based resource allocation framework for the multi-regional network design problem, enabling the central government to select public projects and allocate payments from both operators and the organization itself. Additionally, we ii) analyze the theoretical properties of the proposed framework with budget constraints and the central organization's preferences, and iii) conduct a European railway case study to validate its effectiveness.

The paper is organized as follows. The key concepts in the multi-regional network design problem are introduced in Section II and an iterative VCG-based investment allocation framework is proposed in Section III. Numerical experiments are conducted in Section IV and conclusions are drawn in Section V.

II. MULTI-REGIONAL MOBILITY SYSTEM

A. Mobility Network

We model a mobility network involving multiple countries, each managed by a local operator $i \in \mathcal{I} = \{1, 2, \dots, I\}$ and multiple transportation modes $m \in \mathcal{M} = \{R, A, C\}$. Specifically, we focus on rail, airplane, and car in this study. The network can be modeled as a labeled undirected graph $\mathcal{G} = (\mathcal{U}, \mathcal{E}, \mathcal{L}_u, \mathcal{L}_e)$, where \mathcal{U} is the set of vertices $u \in \mathcal{U}$ representing cities, $\mathcal{E} \subseteq \mathcal{U} \times \mathcal{U}$ is the set of edges between cities, $\mathcal{L}_u: \mathcal{U} \to \mathcal{Z}_u$ is the labeling function from the set of vertices onto the set of vertex labels \mathcal{Z}_u , and $\mathcal{L}_e: \mathcal{E} \to \mathcal{Z}_e$ is the labeling function from the set of edges onto the set of edge labels. Specifically, a vertex label $z_u \in \mathcal{Z}_u$ is defined as $z_u = (r_u, d_u^m, s_u) \in \mathcal{Z}_u = \mathcal{I} \times \mathbb{R}^3 \times \mathbb{R}_+,$ where r_u denotes the country to which the city belongs, d_{u}^{m} represents the access/egress travel distance for mode m, i.e., the travel distance between the city center and the nearest service stations, which depends on the transportation mode (i.e., an airport for air travel, a train station for rail, highway entrances for car). If there are no service stations for mode m in the city, then d_u^m is set to infinity. Furthermore, s_u represents the population of the city. An

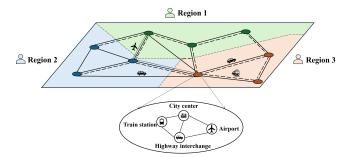


Fig. 2: Multi-regional multi-modal mobility network.

edge label $z_e \in \mathcal{Z}_e$ is defined by $z_e = (i_e, t_e^{\text{con}}, l_e, v_e, c_e) \in \mathcal{Z}_e = \{0, 1, 2\} \times \mathbb{N}_+ \times \mathbb{R}_+ \times \mathbb{R}_+$, where $i_e = 0$ means the edge is not implemented and can not provide service, $i_e = 1$ means the edge is implemented and $i_e = 2$ means the edge is under construction, t_e^{con} is the time horizon remaining for construction, v_e is the travel speed, l_e is the edge length, and c_e is the implementation cost. The edge set of transport mode m is denoted as $(\mathcal{E}_m)_{m \in \mathcal{M}} \subseteq \mathcal{U} \times \mathcal{U}$, where $\bigcup_{m \in \mathcal{M}} \mathcal{E}_m = \mathcal{E}$. The railway network can be divided among countries. The set of vertices is divided into disjoint subsets \mathcal{U}^i , ensuring $\bigcup_{i \in \mathcal{I}} \mathcal{U}^i = \mathcal{U}$. Rail edges consist of intra-regional edges $\mathcal{E}_R^{ij} = \{(o, d) \mid o, d \in \mathcal{U}^i\}$ and crossborder edges $\mathcal{E}_R^{ij} = \{(o, d) \mid o \in \mathcal{U}^i, d \in \mathcal{U}^j, i \neq j\}$, forming the complete rail graph $\bigcup_{i \in \mathcal{I}} \mathcal{E}_R^i \cup \bigcup_{i,j \in \mathcal{I}, i \neq j} \mathcal{E}_R^{ij} = \mathcal{E}_R$.

B. Travel Demand

We consider the intercity trip request $r_{ij} = (i, j, q_{ij}) \in \mathcal{R} = \mathcal{U} \times \mathcal{U} \times \mathbb{R}_{\geq 0}$, where i, j are the origin and destination cities $(i \neq j)$, respectively, and q_{ij} represents the number of travel requests. Let \mathcal{P}_{ij}^m and \hat{P}_{ij}^m denote the set of paths and the shortest path from city i to city j for mode m, respectively. Plane paths may only include direct flights and dual-trips between a car drive and a flight. The travel distance d_{ij}^m when using mode m between cities i and j can be calculated by:

$$d_{ij}^{m} = \begin{cases} \operatorname{argmin}_{\hat{P}_{ij}^{m} \in \mathcal{P}_{ij}^{m}} \sum_{e \in \hat{P}_{ij}^{m}} l_{e}, & \text{if } \mathcal{P}_{ij}^{m} \neq \emptyset, \\ \infty, & \text{otherwise.} \end{cases}$$
(1)

The travel time for the intercity trips $t_{ij}^m \in \mathbb{R}_{\geq 0}$ includes the components: access and egress time to the city center by car using an urban driving speed v^u , the travel time between cities based on the travel distance d_{ij}^m and mode-specific incurred waiting time along the way t_w^m . The travel time is transformed into monetary value based on component-specific Value-of-Time parameters, $\gamma_w, \gamma_m, \gamma_a$.

$$t_{ij}^{m} = \frac{d_i^{m} + d_j^{m}}{v^{u}} + \frac{d_{ij}^{m}}{v^{m}} + t_{w}$$
(2)

$$c_{ij}^{m} = \gamma_{a} \cdot \frac{d_{i}^{m} + d_{j}^{m}}{v^{u}} + \gamma_{m} \cdot \frac{d_{ij}^{m}}{v^{m}} + \gamma_{w} \cdot t_{w}, \qquad (3)$$

The proportion of trips $p_{ij}^m \in [0, 1]$ served by transport mode m can be calculated via:

$$p_{ij}^{m} = \frac{e^{-\beta_c \cdot c_{ij}^{m}}}{\sum_{m \in \mathcal{M}} e^{-\beta_c \cdot c_{ij}^{m}}}.$$
(4)

where β_c corresponds to the sensitivity of travel cost on mode selection [22]. The travel demand model is responsive to

changes in network design, meaning that modifications to the rail network can impact travel costs and, in turn, influence travelers' choice of transportation modes.

C. Mobility Stakeholders

Mobility stakeholders include the regional operators $i \in \mathcal{I}$, and a central organization, denoted by i = 0. Each stakeholder $i \in \mathcal{I} \cup \{0\}$ is characterized by a tuple (B_i, u_i) , where $B_i \in \mathbb{R}_+$ represents the budget, and $u_i : \mathcal{X} \to \mathbb{R}$ is a quasilinear utility function, mapping from the project set \mathcal{X} to a utility value:

$$u_i(x) = b_i(x) - p_i^x,\tag{5}$$

where $x \in \mathcal{X} = \{x_0, x_1, \dots, x_K\}$ represent an infrastructure project, $p_i^x \in \mathbb{R}_+$ denotes the investment required for project x, and $b_i : \mathcal{X} \to \mathbb{R}$ is the true benefit function of operator i, which is private knowledge.

$$b_i(x) = \operatorname{Rev}(\mathcal{E}_B^{\operatorname{imp}} \cup \{x\}) - \operatorname{Rev}(\mathcal{E}_B^{\operatorname{imp}}), \tag{6}$$

$$\operatorname{Rev}_{i}(\mathcal{E}_{R}^{\operatorname{imp}}) = \sum_{j \in \mathcal{I}} \sum_{k \in \mathcal{I}} \tau_{jk}^{i} d_{jk}^{R} \gamma_{p}^{R} D_{jk}^{R}.$$
 (7)

Specifically, the operators assess the true benefit of a project by comparing the revenue from the current implemented rail edges $\mathcal{E}_{R}^{\text{imp}}$ to the revenue from the new layout $\mathcal{E}_{R}^{\text{imp}} \cup \{x\}$. Let τ_{jk}^{i} denote the proportion of travel distance in city i along the shortest rail route between cities j and k. The revenue is calculated based on the travel distance $\tau^i_{ik} d^R_{ik}$, the service price γ_p^R , and the rail travel demand, given by $D_{jk}^R = D_{jk} p_{jk}^R$. We assume that operators can invest in projects across the entire network, as the benefit of the operator i from local railway network G_i^R is interdependent with the rest of the network $G_i^R (i \neq j)$, due to cross-border travel requests. It is noted that the construction of a new link may not have positive impacts on all the local benefits, as it depends on the shortest paths and travelers' mode choice. The central organization's utility function is assumed to align with social welfare, i.e., $u_0 = W(X_s)$. The social welfare function $W:\mathcal{X}_s
ightarrow\mathbb{R}_+$ maps the selected project set \mathcal{X}_s to social welfare, which is defined as the sum of the true benefits of the operators:

$$W(X_s) = \sum_{i \in \mathcal{I}} b_i(X_s).$$
(8)

Considering the investment strategies of the central organization, a common approach is to allocate resources primarily to projects offering the highest social welfare. However, this method tends to overlook the value of operator's contributions, especially their potential to foster interregional collaboration. In this work, we investigate strategies for leveraging the central organization's investment resources to actively improve cooperation among regional operators. Specifically, we examine scenarios where collective contributions from operators fall short of project costs, indicating that regional collaboration alone is insufficient. In such cases, targeted financial incentives from the central organization become necessary to bridge funding gaps, ensuring critical infrastructure projects can be realized effectively.

III. ITERATIVE VCG-BASED NETWORK DESIGN

The mobility system consists of self-interested local operators, each responsible for managing individual regions, and a central organization that aims to maximize social welfare. To facilitate decision-making in the network design process, we propose an iterative VCG-based framework in this section.

A. Model Overview

Let $M = (\mathcal{T}, \mathcal{X}, V, F, P)$ denote the iterative VCG-based mechanism (IVCG), where the planning horizon is indexed by $t \in \mathcal{T} = \{0, 1, 2, \dots, T\}$, and \mathcal{X} is the set of candidate projects. Let $V = (v_i)_{i \in \mathcal{I}}$ denote the valuation functions for all operators, where each operator i has a private valuation function $v_i : \mathcal{X} \to \mathbb{R}_{\geq 0}$. For each year t, the operators report their valuations of projects to the central organization. Based on the submitted valuations, the central organization then selects projects for joint investment using the project selection function $F: \mathcal{V} \to \mathcal{X}$ (see Section III-B.1). The subsidized payment function $P: \mathcal{V} \times \mathcal{X} \to \mathbb{R}^{I+1}$ maps from the valuation set to the payment set to determine the payments for both the operators and the central organization (see Section III-B.2). The mechanism runs in multiple rounds each year, selecting one project for implementation per round. The process continues until either no beneficial projects remain or the central organization uses up its budget. After each year's implementation, local operators can allocate their remaining budget to local projects.

1) Variables: The decision variables are $(X^t, p^t, p_0^t, h_i^t) \in \mathcal{X} \times \mathbb{R}_{\geq 0}^{\mathcal{I}} \times \mathbb{R} \times \mathbb{R}_{\geq 0}^{\mathcal{I}}$, where $X^t = (X_s^t, X_l^t)$ represents the joint invested projects and local designed projects. Furthermore, $p^t = (p_i^t)_{i \in I}$ denotes the payments from operators to the selected projects, p_0^t represents the subsidy provided by the central organization, and h_i^t is the budget used in local design in year t. The system state is given by $(\mathcal{E}_R^{t,\mathrm{imp}}, B^t, B_0^t) \in \mathcal{E}_R \times \mathbb{R}_{\geq 0}^I \times \mathbb{R}_{\geq 0}$, where $\mathcal{E}_R^{t,\mathrm{imp}}$ denotes the implemented railway edges, $B^t = (B_i^t)_{i \in \mathcal{I}}$ represents the available budget for operators at year t, and B_0^t is the available budget of the central organization. The state variables are updated according to the following relations, where for all $i \in \mathcal{I}$ and $t \in \mathcal{T} \setminus \{0\}$:

$$B_{i}^{t} = \delta B_{i}^{t-1} - p_{i}^{t} - h_{i}^{t} + a_{i}^{t}, \qquad (9)$$

$$B_0^t = \delta B_0^{t-1} - p_0^t + a_0^t, \tag{10}$$

$$\mathcal{E}_{\mathcal{D}}^{t,\mathrm{imp}} = \mathcal{E}_{\mathcal{D}}^{t-1,\mathrm{imp}} \cup X^{t}.$$
(11)

For each year, the available budget is updated with a discount factor δ and an additional budget increase a_i^t . This iterative process is repeated until the mechanism selects the null project or the central organization runs out of budget, i.e., no project is profitable with the available funds.

2) Performance Metrics: To evaluate the performance of the system, we define three metrics: Local Benefit assesses the benefit individual operators receive from the mechanism. System Social Welfare measures the total social welfare derived from all selected projects; Subsidy Efficiency represents how effectively the subsidies are used across all planning horizons.

- Local Benefit: $LB = \sum_t b_i(X_s^t)$,
- System Social Welfare: $SSW = \sum_t W(X_s^t)$,

• Subsidy Efficiency:
$$SE = \frac{\sum_{t} W(X_s^t)}{\sum_{t} p_0^t}$$
.

B. VCG-based Investment Allocation with Subsidy

For every year of investment, the modified VCG mechanism $M' = (\mathcal{X}, V, F, P)$ is applied to determine the invested projects and the distribution of payments. For clarity, the horizon index t is not included in this demonstration.

1) Project Selection for Social Welfare Maximization: The goal of project selection is to choose the project that maximizes social welfare. The set of candidate projects, denoted by \bar{X} , must meet the condition that the total reported valuations are greater than the project cost. The project selection rule F = f(v) selects the project with the highest total valuation from all operators:

$$\bar{X} = \{ x \in \mathcal{X} | \sum_{i \in \mathcal{I}} v_i(x) > c_x \},$$
(12)

$$f(v) = \begin{cases} \operatorname*{argmax}_{x \in \bar{X}} \sum_{i \in \mathcal{I}} v_i(x), & \text{if } \bar{X} \neq \emptyset, \\ 0, & \text{otherwise.} \end{cases}$$
(13)

2) Subsidized Payment Function: The modified VCG mechanism determines the payments made by both the participants and the central organization. For the payment distribution among operators, we adopt the concept of participation externality, which differs from the following two traditional perspectives: 1) the project can only be invested by local operators, or 2) the payment is based solely on the operator's own benefit. We argue that if the presence of the operator *i* changes the project chosen for collective investment, the operator should compensate for the welfare loss experienced by other regions. Based on this consideration, the payment function for operator $i \in \mathcal{I}$ with reported valuations $v \in \mathcal{V}$ are given according to the Clarke Pivot Rule [11]:

$$p_i(v, f(v)) = \begin{cases} \sum_{j \neq i} v_j(f(v_{-i})) - \sum_{j \neq i} v_j(f(v)) & \text{if } \bar{X} \neq \emptyset, \\ 0, & \text{otherwise.} \end{cases}$$
(14)

Specifically, the payment to the operator *i* can be interpreted as the difference between the total valuations of all other operators when operator *i* is excluded $(\sum_{j\neq i} v_j(f(v_{-i})))$ and the total valuations of all other operators when operator *i* is included $(\sum_{j\neq i} v_j(f(v)))$.

However, the payments from participants may not always be sufficient to cover the full construction cost of the project. In such cases, an additional payment from the central organization is necessary to ensure the implementation of the chosen project. We utilize the resources of the central organization to bridge the gap between the total cost and the operators' contributions. The payment from the central organization, denoted by p_0 , can be determined by:

$$p_0(v, f(v)) = \max\left(c_{f(v)} - \sum_i p_i(v, f(v)), 0\right).$$
 (15)

3) Admissibility Check (AC): We note that the payment rule in VCG is not designed to benefit the central organization, as they may end up paying a substantial amount depending on the project's cost and the total payments collected [23]. In practice, however, the central organization has its own willingness to pay. We then introduce the investment

ratio $\alpha \in [0,1]$ for the project admissibility check. The decision to implement a project will only be admissible if the required subsidy does not exceed a specified α of the project's cost (in Eq. (16)):

$$p_0(v, f(v)) \le \alpha c_{f(v)}.$$
(16)

If this condition is not met, the project f(v) will be excluded from this cycle, and the selection process will continue.

As operators have limited budgets, projects and payments can be infeasible if an operator is unable to pay their share. Considering the budget constraints, let η_i denote the available budget of the operator *i*. We then introduce admissible preference profiles, which ensure that operators can afford their contribution irrespective of other operators' valuations.

Definition 1 (Admissible Preference Profiles). A preference profile $v_i \in V_i$ is *admissible* if for all $v_{-i} \in V_{-i}$ with $v = (v_i, v_{-i})$, it holds that:

$$p_i(v, f(v)) \le \eta_i.$$

We further investigate the effects on the operators' payments.

Lemma 1. Under the mechanism $M' = (\mathcal{X}, V, F, P)$ with AC, for each operator $i \in \mathcal{I}$, the payments satisfy:

$$0 \le p_i(v, f(v)) \le v_i(f(v)) \tag{17}$$

Proof. Given the reported valuations $v \in V$ and the chosen investment a = f(v), the following holds:

$$v_{i}(a) - p_{i}(v, a) = v_{i}(a) + \sum_{j \neq i} v_{j}(a) - \sum_{j \neq i} v_{j}(f(v_{-i}))$$
$$= \sum_{j \in \mathcal{I}} v_{j}(a) - \sum_{j \neq i} v_{j}(f(v_{-i})).$$
(18)

As $\sum_{j \in \mathcal{I}} v_j(a)$ represents the maximal social welfare generated by the candidate projects and the environment exhibits no-negative externalities, (18) is non-negative. It is worth noting that the admissibility check does not influence this non-negativity, as it does not alter the social welfare ranking of the projects. Finally, in the case where no project is selected $(\bar{X} = \emptyset)$, it can be observed that by design $v_i(a) =$ $p_i(v, a) = 0$.

We introduce the strategy *Budget-Constrained Truthful Reporting* (BTR), which enforces a constraint on operators' reported valuations:

$$v_i(x) = \max\left(0, \min(b_i(x), \eta_i)\right), \quad \forall x \in \bar{X}, \tag{19}$$

Based on Lemma 1, with BTR, the payments of an operator i will not exceed their valuation for projects and their available budget. Therefore, BTR is an admissible preference profile.

4) *Properties:* We note that the utility from nonparticipation is not zero in this setting, as the selected project can impact the revenue of non-participants. We then analyze whether it is still beneficial for operators to participate in the mechanism, given that they may still derive benefits as a non-participant.

Lemma 2. Under the mechanism $M' = (\mathcal{X}, V, F, P)$ with AC, for operator *i*, the valuation $v_i \in V_i$ outperforms non-participation, i.e.,

$$u_i(v,a) \ge u_i(v',a'),$$

where $v = (v_i, v_{-i})$, $v' = (\mathbf{0}_{|\bar{X}|}, v_{-i})$, a = f(v) and a' = f(v'), if the following conditions hold (referred to as the discrepancy and admissibility conditions, respectively):

1) if
$$b_i(x) \ge b_i(x') \Rightarrow b_i(x) - v_i(x) \ge b_i(x') - v_i(x') \quad \forall x, x' \in \overline{X},$$

2) if $\alpha < 1 \Rightarrow p_0(v, a) \le \alpha c_a$

Proof. The utility of non-participation is given by:

$$u_i(v',a') = b_i(a')$$

Assume $v_i \in \mathcal{V}$ satisfies the discrepancy constraint, then:

$$b_i(a) - b_i(a') \ge v_i(a) - v_i(a').$$

Subtracting the two utilities gives:

$$u_{i}(v,a) - u_{i}(v',a') = b_{i}(a) - b_{i}(a') - \sum_{j \neq i} v_{j}(a') + \sum_{j \neq i} v_{j}(a)$$

$$\geq v_{i}(a) - v_{i}(a') - \sum_{j \neq i} v_{j}(a') + \sum_{j \neq i} v_{j}(a)$$

$$= \sum_{j} v_{j}(a) - \sum_{j} v_{j}(a').$$

Due to $\sum_{j} v_j(a)$ being the highest social welfare, it follows that $u_i(v, a) \ge u_i(v', a')$. According to the admissibility condition, the participation of *i* does not hinder the admissibility of the project with the highest social welfare.

Then, we investigate the conditions when BTR is a partially admissible dominant strategy, i.e. an admissible strategy that dominates all other admissible strategies.

Definition 2 (Partially Dominant Strategy). A preference profile $v_i \in V_i^a$ is a *partially dominant* strategy if it satisfies the following conditions:

- 1) It is dominant if $v_i \in Int(V_i^a)$;
- 2) It outperforms non-participation if $v_i \in \partial(V_i^a)$.

where V_i^a denotes the set of admissible preference profiles.

Theorem 3. With the Subsidized Payment Rule P, for each operator i, Budget-Constrained Truthful Reporting (v_i^B) is a partially dominant strategy with $\alpha = 1$.

Proof. Based on Lemma 1, BTR strategy is admissible $(v_i^B \in V_i^a)$, i.e.,

$$p_i(v,a) \leq v_i^B(a) \leq \eta_i.$$

where $v = (v_i^B, v_{-i})$. Next, we prove that the BTR strategy is partially admissible dominant. Let a = f(v) and a' = f(v'), with $v \neq v'$. Suppose $v_i^B \in \text{Int}(V_i^a)$, the utility difference between using BTR and any other strategy for operator *i* is given by:

$$u_{i}(v,a) - u_{i}(v',a') = b_{i}(a) + \sum_{j \neq i} v_{j}(a) - b_{i}(a') - \sum_{j \neq i} v_{j}(a')$$

$$\geq \max_{x \in X} \sum_{j} v_{j}(x) - b_{i}(a') - \sum_{j \neq i} v_{j}(a').$$

The project *a* is the one that maximizes social welfare, i.e., $\max_{x \in \bar{X}} \sum_{j} v_j(x)$. With $\alpha = 1$, the project will be implemented. Therefore, the maximum social welfare exceeds the other two terms, implying that the BTR strategy is dominant when it is in the interior of the admissible set. Next, consider

the case where $v_i^B \in \partial(V_i^a)$, i.e. there exists at least one $a' \in \bar{X}$ such that $v_i(a') = \eta_i$. This implies that $b_i(a') \ge \eta_i$. In this case, it is possible for a' to satisfy the following inequalities:

$$b_{i}(a') + \sum_{j \neq i} v_{j}(a') \ge b_{i}(a) + \sum_{j \neq i} v_{j}(a),$$

$$v_{i}(a') + \sum_{j \neq i} v_{j}(a') \le b_{i}(a) + \sum_{j \neq i} v_{j}(a),$$

which indicates that the strategy is not dominant on the boundary of the admissible set. Finally, as the BTR strategy satisfies the discrepancy conditions, by Lemma 2, it holds that BTR strategy outperforms non-participation. \Box

5) Discussion on strategic behaviors: It is important to note that the subsidy provided by the central organization is integrated in a way that preserves the inherent properties of the VCG mechanism. Specifically, even though the central organization covers the difference between the raised payment and the project cost, there is no incentive to underbid. This is because the subsidy does not alter the payment rule for the operators. For the multi-regional network design problem, the proposed mechanism incorperates the operators' budget constraints and the central organization's admissibility check. While it is possible that the project that maximizes social welfare is not selected, which requires additional conditions for budget-constrained truthful bidding to be a dominant strategy (in Theorem 3). As a result, operators may report valuations strategically, deviating from truthful bidding. We propose two potential reporting strategies apart from the BTR.

Minmax Reporting Strategy: In this strategy, the operator becomes single-minded, prioritizing only the most beneficial project. Specifically, the operator tends to truthfully report their valuations for the project that offers the highest benefit while assigning zero valuation to all other projects and subject to budget constraints.

$$v_i^x = \begin{cases} \max(B_i, b_i^x), & \text{if } x = \arg\max_{x \in \bar{X}} b_i^x \\ 0, & \text{otherwise.} \end{cases}$$

Proportional Reporting Strategy: In this strategy, the operator tends to prioritize the higher-valued project for selection while maintaining the preference order. The valuations are adjusted so that the relative differences between valuations remain the same, by dividing by the highest valuation and multiplying by their budget.

$$v_i^x = \max(0, \frac{b_i^x}{b_i^{x'}}B_i), \text{ where } b_i^{x'} = \max_{x \in \bar{X}} b_i^x.$$

Those strategies are integrated into the experiments and compared with BTR. We note that there can be more complex interactions, especially when multiple operators are involved, making the prediction of strategic behaviors non-trivial. We present those strategies as the initial step toward exploring bidding strategies and enhancing the mechanism.

C. Baseline

The status quo in infrastructure design can be characterized by the local design model (LD), where each operator invests within their own territory and establishes cross-border




Fig. 3: The European railway networks.

collaborations with neighboring countries. To ensure a fair comparison with the proposed IVCG mechanism, the available resources for each region should be equal in both cases. Specifically, the subsidy allocated to the region should also be available in LD. For each design horizon, the optimization problem for local design can be expressed as:

$$\max_{X_i^t \in \mathcal{X}_i} b_i(X_i^t) \quad \text{s.t.} \quad \sum_{a \in X_i^t} c_a \le B_i^t + B_{0i}^t,$$

where X_i represents the set of projects that can be invested by operator *i*, and B_{0i}^t is the subsidy allocated to operator *i*. By employing this baseline, we could examine the efficiency of our mechanism in fostering collaboration among operators, as the performance differences will stem from how projects are selected, rather than the subsidy amount.

IV. NUMERICAL EXPERIMENTS

The numerical experiments are based on the European Railway Network, including seven countries: Germany, Austria, Luxembourg, Italy, Switzerland, France, and Belgium. Based on population statistics, 69 major cities are selected, and travel demand is generated accordingly. The primary railway connections are extracted from OpenStreetMap, along with the locations of city centers, the closest train stations, and highway junctions. Airport locations and air travel connectivity data are from OpenFlights. Given a budget of 32.5 B€ from the central organization with $\alpha = 1$, Figure 3 shows the designed European railway network. Green connections represent connections designed in both models, while red connections indicate those implemented by the mechanism but not in the local design. It is evident that the proposed mechanism strategically allocates subsidies to improve crossborder links and reinforce key regional connections. Figure 4 presents the comparative improvements in social welfare under the proposed mechanism versus the local design with various investment ratios ($\alpha \in \{0.6, 0.8, 1.0\}$). The overall social welfare is improved by 49.7% across these scenarios. The results also indicate that, under varying levels of willingness to subsidize, the participating countries tend to achieve greater benefits through the proposed IVCG mechanism. In terms of absolute social welfare improvements. Italy demonstrates the highest average gain, followed by France. When considering the relative percentage improvements in social welfare compared to LD, Switzerland has the most substantial increase, with its improvement exceeding four




Fig. 4: Improvements of the Local Benefits.




Fig. 5: Social welfare improvement and subsidy efficiency.

times that of LD. This is likely due to its geographic position, being surrounded by neighboring countries, then cross-border projects become more impactful in local social welfare.

The improvements in social welfare and subsidy efficiency across different budget levels and investment ratios are illustrated in Figure 5. An increased budget from the central organization generally enhances the system's social welfare compared to the local design scenario. Additionally, with a low-level budget, stricter admissibility checks could outperform. For example, under $B_0 = 10 \text{ B} \in$, an investment ratio of 0.6 results in the highest improvement in social welfare of 40%. This suggests that a more conservative approach could be beneficial for the central organization under budget constraints. In contrast, a higher investment ratio facilitates the optimal utilization of larger budgets. For instance, when the budget exceeds 20 B€, the social welfare remains unchanged with investment ratios less than 1. Figure 6 shows that when the central organization imposes investment restrictions ($\alpha = \{0.6, 0.8\}$), deviations from the BTR by certain countries do not necessarily reduce social welfare. Instead, operators can strategically make the highest social welfare selected by becoming more pivotal and contributing more payment. However, when the central organization has a higher acceptance of proposals, the minmax strategy can negatively impact system performance, as it fails to reveal the true order of projects.

V. CONCLUSION

Coordination among subsystems is critical to the performance of network-based systems. However, cooperative decisions may be infeasible due to insufficient input, even




Fig. 6: Social welfare under various bidding strategies.

when the interests of self-interested network designers align. In this work, we explore how an upper-level decision-maker can efficiently allocate subsidies to foster cooperation and enhance overall social welfare. Specifically, we propose an iterative VCG-based mechanism that incorporates the central organization's preferences and operators' budget constraints, enabling iterative decision-making for multi-year infrastructure investments. The European railway system experiment demonstrates the efficiency of the proposed mechanism in stimulating cooperation and compares it with local design cases. The results show that the total budget of the central organization and the expected investment efficiency significantly impact social welfare improvements. In addition, it is crucial for the central organization to obtain the true order of the projects from the operators in terms of local social welfare.

To improve the current framework, we identify some potential directions for future research. First, the investment cycle can be improved by considering the central organization's funding source and the redistribution of collected payments that exceed the actual cost of the project. In addition, advancing mechanism design can be explored to improve properties (for example incentive compatibility) under budget constraints of operators and the willingness of the central organization to contribute. Lastly, stable longterm cooperation requires developing robust strategies that consider investment risks, population changes, and the emergence of new transportation modes.

REFERENCES

- International Energy Agency (IEA), "Tracking rail," July 11 2023, accessed: 2025-02. [Online]. Available: https://www.iea.org/ energy-system/transport/rail#tracking
 Market Research, "Rail infrastructure market forecasts to 2030,"
- [2] Market Research, "Rail infrastructure market forecasts to 2030," November 2024, accessed: 2025-02. [Online]. Available: https://www. marketresearch.com/Stratistics-Market-Research-Consulting-v4058/ Rail-Infrastructure-Forecasts-Global-Type-38950268/
- [3] Eurostat, "Modal split of air, sea and inland passenger transport," July 2024, accessed: 2025-02. Available: https://ec.europa.eu/eurostat/ databrowser/view/tran_hv_ms_psmod/default/table?lang=en.
- [4] O. Cats, "The long journey towards a shift to rail in the european long-distance passenger transport market," *npj Sustainable Mobility and Transport*, vol. 2, no. 1, p. 7, 2025.
 [5] European Commission, "Trans-European Transport Network (TEN-
- [5] European Commission, "Trans-European Transport Network (TEN-T)," 2024, accessed: 2025-02. [Online]. Available: https://transport. ec.europa.eu/transport-themes/infrastructure-and-investment/ trans-european-transport-network-ten-t_en
- [6] World Bank Group, "Belt and Road Initiative," 2018, accessed: 2025-02. [Online]. Available: https://www.worldbank.org/en/topic/ regional-integration/brief/belt-and-road-initiative

- [7] Library of Congress, "H.R.3684 117th Congress (2021-2022): Infrastructure Investment and Jobs Act," https://www.congress.gov/bill/ 117th-congress/house-bill/3684, November 15 2021.
- [8] Economic and Socal Commission for Asia and Pacific, "Trans-Asian Railway Network," accessed: 2025-02. [Online]. Available: https://www.unescap.org/ourwork/transport/ regional-land-transport/trans-asian-railway-network
- [9] O. Karaca, P. G. Sessa, N. Walton, and M. Kamgarpour, "Designing coalition-proof reverse auctions over continuous goods," *IEEE Transactions on Automatic Control*, vol. 64, no. 11, pp. 4803–4810, 2019.
- [10] Y. Deng, J. Mao, V. Mirrokni, and S. Zuo, "Towards efficient auctions in an auto-bidding world," in *Proceedings of the Web Conference 2021*, 2021, pp. 3965–3973.
- [11] J. R. Green, *Incentives in public decision-making*, ser. Studies in public economics. North-Holland Pub. Co., 1978.
- [12] J. Grolle, B. Donners, J. A. Annema, M. Duinkerken, and O. Cats, "Service design and frequency setting for the european high-speed rail network," *Transportation Research Part A: Policy and Practice*, vol. 179, p. 103906, 2024.
- [13] Q. Luo, S. Samaranayake, and S. Banerjee, "Multimodal mobility systems: joint optimization of transit network design and pricing," in *Proceedings of the ACM/IEEE 12th International Conference on Cyber-Physical Systems*, 2021, pp. 121–131.
- [14] M. He, A. Censi, E. Frazzoli, and G. Zardini, "Co-investment with payoff sharing benefit operators and users in network design," in 2025 *American Control Conference (ACC)*, 2025.
- [15] G. Zardini, N. Lanzetti, L. Guerrini, E. Frazzoli, and F. Dörfler, "Game theory to study interactions between mobility stakeholders," in 2021 *IEEE International Intelligent Transportation Systems Conference (ITSC)*. IEEE, 2021, pp. 2054–2061.
 [16] G. Zardini, N. Lanzetti, G. Belgioioso, C. Hartnik, S. Bolognani,
- [16] G. Zardini, N. Lanzetti, G. Belgioioso, C. Hartnik, S. Bolognani, F. Dörfler, and E. Frazzoli, "Strategic interactions in multi-modal mobility systems: A game-theoretic perspective," in 2023 IEEE 26th International Conference on Intelligent Transportation Systems (ITSC). IEEE, 2023, pp. 5452–5459.
- [17] Q. Nie, L. Zhang, Z. Tong, and K. Hubacek, "Strategies for applying carbon trading to the new energy vehicle market in china: An improved evolutionary game analysis for the bus industry," *Energy*, vol. 259, p. 124904, 2022.
- [18] P. G. Sessa, N. Walton, and M. Kamgarpour, "Exploring the vickrey-clarke-groves mechanism for electricity markets," *IFAC-PapersOnLine*, vol. 50, no. 1, pp. 189–194, 2017.
- [19] X. Ding, Q. Qi, S. Jian, and H. Yang, "Mechanism design for mobility-as-a-service platform considering travelers' strategic behavior and multidimensional requirements," *Transportation Research Part B: Methodological*, vol. 173, pp. 1–30, 2023.
- [20] P. Le, "Pareto optimal budgeted combinatorial auctions," *Theoretical Economics*, vol. 13, no. 2, pp. 831–868, 2018.
 [21] H. Ren, K. Liu, G. Yan, C. Liu, Y. Li, C. Li, and W. Wu, "Truthful
- [21] H. Ren, K. Liu, G. Yan, C. Liu, Y. Li, C. Li, and W. Wu, "Truthful auction mechanisms for dependent task offloading in vehicular edge computing," *IEEE Transactions on Mobile Computing*, 2024.
- [22] F. S. Koppelman and C.-H. Wen, "The paired combinatorial logit model: properties, estimation and application," *Transportation Re*search Part B: Methodological, vol. 34, no. 2, pp. 75–89, 2000.
- [23] L. M. Ausubel and P. Milgrom, "The Lovely but Lonely Vickrey Auction," in *Combinatorial Auctions*, P. Cramton, Y. Shoham, and R. Steinberg, Eds. The MIT Press, Dec. 2005, pp. 17–40. [Online]. Available: https://academic.oup.com/mit-press-scholarship-online/book/29406/chapter/244776729
- [24] M. Wardman, V. P. K. Chintakayala, and G. de Jong, "Values of travel time in europe: Review and meta-analysis," *Transportation Research Part A: Policy and Practice*, vol. 94, pp. 93–111, 2016.
- [25] S. Landau, G. D. Gosling, K. Small, and T. Adler, "Measuring air carrier passengers' values of time by trip component," *Transportation Research Record*, vol. 2569, no. 1, pp. 24–31, 2016.
- [26] European Court of Auditors, "A European high-speed rail network: not a reality but an ineffective patchwork," 2018. [Online]. Available: https://www.eca.europa.eu/en/Pages/DocItem.aspx?did=47211
- [27] CINEA . (2024) Transport Infrastructure under the Connecting Europe Facility (CEF). Accessed: 2025-03-24. [Online]. Available: https://cinea.ec.europa.eu/programmes/ connecting-europe-facility/transport-infrastructure_en
- [28] Deutsche Bahn, "Bilanzpressekonferenz 2024," 2024, accessed: 2025-03-23. [Online]. Available: https://www.deutschebahn.com/de/presse/ suche_Medienpakete/Bilanzpressekonferenz-2024-12718954
- [29] SNCF Group, "SNCF Group Annual Results 2023," 2024. [Online]. Available: https://www.groupe-sncf.com/medias-publics/ 2024-03/presentation-sncf-group-2023-results.pdf
- [30] FS Group, "2025–2029 strategic plan," 2024. [Online]. Available: https://www.fsitaliane.it/content/fsitaliane/en/media/ press-releases/2024/12/12/fs-group-2025-2029-strategic-plan.html

- [31] RTL Today. (2024) CFL to invest €7 billion over 15 years in rail infrastructure. [Online]. Available: https://today.rtl.lu/news/ luxembourg/a/2047688.html
- [32] SBB, "Facts and figures finance," 2024, accessed: 2025-03-23. [Online]. Available: https://reporting.sbb.ch/en/finance?highlighted= 1fbcf55f8e27556eb094357d9d5b7370&years=1,4,5,6,7&scroll=1836
- [33] Infrabel, "Annual report 2023," 2024. [Online]. Available: https://infrabel.be/sites/default/files/generated/files/report/ Annual%20Report%202023.pdf
- [34] ÖBB-Infrastruktur AG, "Zahlen, daten, fakten 2024," 2024. [Online]. Available: https://infrastruktur. oebb.at/dam/jcr:03a3177a-b9a6-41aa-91cb-43d8e289b11f/ zahlen-daten-fakten-folder-2024-oebb.pdf
- [35] Neue Zürcher Zeitung. (2011) Schienenunterhalt soll besser werden. Accessed: 2025-03-23. [Online]. Available: https://www.nzz.ch/ schweiz/schienenunterhalt-soll-besser-werden-ld.94834
- [36] Macrotrends. (2024) European union inflation rate 1999–2023. Accessed: 2025-03-24. [Online]. Available: https://www.macrotrends. net/global-metrics/countries/EUU/european-union/inflation-rate-cpi

APPENDIX I

MODEL PARAMETERS AND EXPERIMENTAL SETUP

Table I presents parameters for multi-regional network design model and experiment scenarios.

TABLE I: Parameters

Variable	Definition	Value	Reference
Travel Demand			
γ_R	VoT train	29.75 €/h	[24]
γ_C	VoT car	20.35 €/h	[24]
γ_P	VoT plane	46.76 €/h	[25]
γ_a	VoT access/egress	17.05 €/h	[25]
γ_w	VoT waiting time	25 €/h	[25]
β_{c}	travel cost sensitivity	0.0461	[22]
v^u	average car speed (urban)	38 km/h	-
v^m	average car speed (motorway)	116.5 km/h	-
v^p	plane speed	880 km/h	-
v^R	train speed	148.727 km/h	[26]
$t_{ m w}$	plane waiting time	1.5 h	-
p_h	ticket price per hour	50.4 €/h	[26]
Network Design			
T	Planning horizon	7 year	-
a_{EU}	EU budget	5285 M€	[27]
a_G	Germany budget	2600 M€	[28]
a_F	France budget	5500M€	[29]
a_I	Italy budget	5000 M€	[30]
a_L	Luxembourg budget	466.7 M€	[31]
a_S	Switzerland budget	2210 M€	[32]
a_B	Belgium budget	1100 M€	[33]
a_A^-	Austria budget	1750 M€	[34]
c_{km}	cost per km construction	15.7 M€/km	[26]
T_R	rail lifetime	33 yrs.	[35]
δ	discount factor	0.976	[36]