

PromptDistill: Query-based Selective Token Retention in Intermediate Layers for Efficient Large Language Model Inference

Weisheng Jin, Maojia Song, Tej Deep Pala, Yew Ken Chia

Singapore University of Technology and Design

{weisheng_jin, maojia_song, tej_deep, yewken_chia}@mymail.sutd.edu.sg

Amir Zadeh, Chuan Li

Lambda Labs

{amir, c}@lambdalabs.com

Soujanya Poria

Singapore University of Technology and Design

sporia@sutd.edu.sg

Abstract

As large language models (LLMs) tackle increasingly complex tasks and longer documents, their computational and memory costs during inference become a major bottleneck. To address this, we propose PromptDistill, a novel, training-free method that improves inference efficiency while preserving generation quality. PromptDistill identifies and retains the most informative tokens by leveraging attention interactions in early layers, preserving their hidden states while reducing the computational burden in later layers. This allows the model to focus on essential contextual information without fully processing all tokens. Unlike previous methods such as H2O and SnapKV, which perform compression only after processing the entire input, or GemFilter, which selects a fixed portion of the initial prompt without considering contextual dependencies, PromptDistill dynamically allocates computational resources to the most relevant tokens while maintaining a global awareness of the input. Experiments using our method and baseline approaches with base models such as LLaMA 3.1 8B Instruct, Phi 3.5 Mini Instruct, and Qwen2 7B Instruct on benchmarks including LongBench, InfBench, and Needle in a Haystack demonstrate that PromptDistill significantly improves efficiency while having minimal impact on output quality compared to the original models. With a single-stage selection strategy, PromptDistill effectively balances performance and efficiency, outperforming prior methods like GemFilter, H2O, and SnapKV due to its superior ability to retain essential information. Specifically, compared to GemFilter, PromptDistill achieves an overall 1% to 5% performance improvement while also offering better time efficiency. Additionally, we explore multi-stage selection, which further improves efficiency while maintaining strong generation performance. These results demonstrate the adaptability of LLM hidden representations and provide valuable insights into optimizing inference for long-context scenarios. We have made our implementations publicly available ¹.

1 Introduction

Large language models (LLMs), such as GPT, LLaMA, Gemini, Mistral, and Claude (Brown et al., 2020; Grattafiori et al., 2024; Team et al., 2024; Jiang et al., 2023; Anthropic, 2024) have achieved remarkable success across various natural language processing (NLP) tasks, demonstrating strong generalization and reasoning abilities. However, their widespread deployment is often hindered by the high computational and memory costs, particularly during inference with long context. As context lengths continue to grow in modern LLM

¹<https://github.com/declare-lab/PromptDistill>

applications, efficiently handling extended inputs while preserving generation quality has become a critical challenge.

Some approaches, such as MCSD and Mamba (Yang et al., 2024b; Gu & Dao, 2024), attempt to mitigate this issue by compressing internal states into a single vector. While these methods reduce processing complexity from quadratic to linear, they often suffer from performance degradation and scalability challenges, as their designs sacrifice key Transformer advantages. Other methods modify existing architectures to optimize inference efficiency, requiring extensive retraining to adapt model parameters to the new structure (Wang et al., 2024; Gao et al., 2024). However, such approaches incur high training costs and risk compromising the original model’s capabilities.

Methods like H2O and Snap (Zhang et al., 2023; Li et al., 2024b) require no extra training and can be directly applied to existing models for long-context compression. However, they still process all prompt tokens through all model layers once before compression, resulting in significant computational overhead. GemFilter (Shi et al., 2024), which also requires no extra training, mitigates this issue by processing only part of the layers for all prompt tokens before selecting the most important ones. It then re-runs the model using only the selected tokens for full-layer processing. While this reduces computational cost and GPU memory usage, it also discards all unselected tokens’ hidden representations, retaining only token IDs after early-layer processing. This may lead to information loss, disrupt context structures, and ultimately impact performance, especially when the selection process is imperfect or the number of retained tokens is limited.

We propose PromptDistill, a training-free method to address these limitations, achieving high efficiency while maintaining performance. First, we process a few layers for all tokens as in traditional transformers. Then, we select the most important prompt tokens based on the dot product between the query of the last prompt token and the key of each token. This selection criterion is similar to GemFilter, but instead of reprocessing the selected tokens from the first layer, we retain their hidden states after the selection layer and continue processing them through the remaining layers. The selected tokens’ hidden states already capture context information from earlier layers’ self-attention, allowing us to preserve more comprehensive context and the model’s original structure without additional computation.

A potential efficiency issue is that during generation, each new token attends to all prompt tokens in the initial layers, leading to high time and memory costs. To mitigate this, we introduce cache truncation, clearing the keys and values of unselected tokens in the key-value cache for layers before selection. This improves both time and memory efficiency while maintaining performance (as shown in section 2.3 and section 3.3). Our method thus achieves slightly better computational efficiency than GemFilter since we avoid recomputing the selected tokens in the first few layers.

Unlike GemFilter, which can select important tokens only once in a specific layer, PromptDistill allows for multi-stage selection across layers. Early layers struggle to select tokens effectively (Voita et al., 2019), but selecting more tokens in these layers can still enhance efficiency without sacrificing performance. A combination of selecting many tokens in the early layers and fewer in later layers strikes a balance between efficiency and effectiveness.

In our experiments, we apply PromptDistill to LLMs such as LLaMA-3.1, Qwen2, and Phi3 (Grattafiori et al., 2024; Yang et al., 2024a; Abdin et al., 2024) and evaluate on reliable benchmarks like Longbench, Infbench, and Needle in a Haystack (Bai et al., 2024; Zhang et al., 2024a; Nelson et al., 2024). These extensive experiments clearly show that our method outperforms baseline methods, including full attention, GemFilter, SnapKV, and H2O (Shi et al., 2024; Li et al., 2024b; Zhang et al., 2023). In particular, compared to GemFilter, our method improves time efficiency and achieves better performance.

Additionally, we provide a comprehensive analysis of other aspects of our method, demonstrating how multi-stage selection improves efficiency while preserving performance.

Our contributions are summarized as:

- We propose PromptDistill, a training-free, generic modification for LLMs that significantly boosts efficiency while maintaining comparable performance to full

attention. It selects key tokens and retains their hidden states in intermediate layers to create an informative compression of the entire prompt.

- We conduct extensive zero-shot experiments with single-stage selection to evaluate PromptDistill’s ability to balance effectiveness and efficiency compared to several well-designed baselines.
- With multi-stage selection, PromptDistill further reduces computational costs without sacrificing performance. The experiments also provide insights into token representativeness across different layers.

2 Method

2.1 Background

To provide a clear background for our approach, PromptDistill, discussed in section 2.2, we first define the relevant preliminaries and introduce the token selection method used in our approach. For a typical LLM, let n represent the input token sequence length, m the attended token sequence length, d the hidden feature dimension, and i the index of a layer. For layer i , the query matrix is $Q^{(i)} \in \mathbb{R}^{n \times d}$, the key matrix is $K^{(i)} \in \mathbb{R}^{m \times d}$, and the value matrix is $V^{(i)} \in \mathbb{R}^{n \times d}$. The standard self-attention operation for each token is:

$$\text{Self-Attn}(Q^{(i)}, K^{(i)}, V^{(i)}) = \text{Softmax}\left(\frac{Q^{(i)}K^{(i)\top}}{\sqrt{d}}\right) \cdot V^{(i)},$$

where $Q^{(i)}K^{(i)\top}$ computes pairwise interactions among tokens, indicating the relative importance of each token within layer i . These pairwise scores are key for identifying salient segments in the input sequence.

Given the input prompt $\mathbf{X} = (x_1, x_2, \dots, x_n)$ (embedded in \mathbb{R}^d per token) for the LLM, our objective is to efficiently process it and generate high-quality responses. The GemFilter method illustrates that the LLMs can identify important tokens in early layers by attention matrices (Shi et al., 2024). Based on this knowledge, the token selection method plays an important role in enabling our approach, PromptDistill, to achieve its objective.

Specifically, the token selection method identifies the top k important tokens for a given layer r using the queries and keys defined above:

$$\text{Select}(Q_n^{(r)}, K^{(r)}, k) = \text{Top}_k \text{Argmax}_j Q_n^{(r)} K_j^{(r)\top}$$

2.2 PromptDistill

In section 2.2.1, we introduce the basic design of PromptDistill with single-stage selection, excluding cache truncation. This design has efficiency limitations, which are addressed by the cache truncation process described in section 2.2.2. The combination of both forms our proposed method. We present comprehensive experiments comparing it to multiple baselines, with results in section 3.2. In section 2.2.3, we extend our method to multi-stage selections, with corresponding results in section 3.3.

2.2.1 Basic design

We outline the basic design of PromptDistill in algorithm 3 (included in appendix A.3) and algorithm 1. algorithm 1 shows the overall process from receiving the prompt to generating the output, while algorithm 3 focuses on the core prompt processing and compression.

In algorithm 1, after receiving the embedded prompt, algorithm 3 processes it. We run several layers and collect the key-value cache as usual. After the r th layer, the token selection method in section 2.1 selects the top k tokens. Unlike GemFilter, we retain the hidden states of selected tokens after the r th layer and process the

remaining layers for these tokens. This way, even unselected tokens’ information is roughly captured in the selected tokens’ hidden states due to prior self-attention. After algorithm 3, the first generated token and previous cache are fed into the normal LLM forward process to generate the remaining tokens. Our approach differs from typical LLMs in that the key-value cache is smaller, as only selected tokens are processed in layers after the r th layer.

2.2.2 Cache truncation

Although our basic design is significantly more efficient than typical LLMs, which process all tokens across all layers and retain the full key-value cache for generation, it still has efficiency limitations. Specifically, each newly generated token continues to attend to all prompt tokens in the initial layers, leading to unnecessary computational overhead (further discussed in section 2.3). To address this, we introduce a cache truncation mechanism to further reduce computation costs.

The forward function of PromptDistill with cache truncation is detailed in algorithm 2. Compared to the basic design, after selecting important tokens and discarding the hidden states of unselected ones, we further prune the key-value cache by keeping only entries corresponding to the selected tokens across all processed layers. This significantly reduces both computation time and GPU memory usage, making our method even more time-efficient than GemFilter.

Crucially, our experiments show that cache truncation does not degrade performance (see section 3.3). Therefore, we adopt PromptDistill with cache truncation as our proposed method.

2.2.3 Multi-stage selection

Unlike GemFilter, which can only select tokens at a single layer, our approach allows multiple selection stages. The key insight behind multi-stage selection is that LLMs have limited ability to identify and compress important tokens in very early layers. A single selection in a mid-layer with a small number of tokens requires processing all tokens in many layers before selection, leading to high computational and memory costs. Instead, selecting a large number of tokens in early layers and refining the selection in later layers provides a better balance between efficiency and effectiveness.

Algorithm 4 (included in appendix A.3) integrates multi-stage selection with cache truncation. Here the selection layer r becomes a list of layers, and k corresponds to the number of selected tokens at each stage. Unlike single-stage selection, where the cache is truncated to match the final selection size, multi-stage selection in-

Algorithm 1 PromptDistill

Input: LLM M , embedded input prompt X , selection layer(s) r , number(s) of selected tokens k , max generated token length T , (optional) truncation times tt
 # for single-stage selection, r, k will be integers
 # for multi-stage selection, r, k will be lists of integers with the same length
 Generation $\leftarrow []$
 new_token, Cache \leftarrow LLM-forward-PromptDistill(M, X, r, k , (optional) tt)
 Generation₀ \leftarrow new_token
for $t \leftarrow 1 \dots T - 1$ **do**
 new_token, Cache \leftarrow LLM-forward(M , new_token, Cache)
 Generation _{t} \leftarrow new_token
end for
 return Generation

Algorithm 2 LLM-forward-PromptDistill (with cache truncation)

Input: LLM $M_{0:R}$, embedded input prompt X , selection layer r , number of selected tokens k
 Cache $\leftarrow []$
for $i \leftarrow 0 \dots R$ **do**
 $X, Q_n^{(i)}, K^{(i)}, V^{(i)} \leftarrow M_i(X)$
 Cache _{i} $\leftarrow K^{(i)}, V^{(i)}$
 if i equals r **then**
 indices \leftarrow Select($Q_n^{(i)}, K^{(i)}, k$)
 $X \leftarrow X_{\text{indices}}$
 for $j \leftarrow 0 \dots i$ **do**
 $K^{(j)}, V^{(j)} \leftarrow$ Cache _{j}
 $K^{(j)} \leftarrow K_{\text{indices}}^{(j)}$
 $V^{(j)} \leftarrow V_{\text{indices}}^{(j)}$
 Cache _{j} $\leftarrow K^{(j)}, V^{(j)}$
 end for
 end if
end for
 return generate(X), Cache

Table 1: Complexity Analysis. Here m is the total layer number of LLM, h is the number of attention heads, n is prompt token length, d is the hidden dimension of each head, r is the index of layer for token selection in GemFilter and PromptDistill, k is the number of selected tokens (for GemFilter and PromptDistill) and the cache size for generation (for SnapKV, H2O, GemFilter and PromptDistill), t is the number of generated tokens, w is the GPU memory used for model parameters in each layer, $n \geq \max\{d, k, t\}$

Stage		AllKV	SnapKV and H2O	GemFilter	PromptDistill (proposed)	PromptDistill (no truncation)
Time	Prompt	$\Theta(mhn^2d)$	$\Theta(mhn^2d)$	$\Theta(rhn^2d)$	$\Theta(rhn^2d)$	$\Theta(rhn^2d)$
	Generation	$\Theta(mh(nt+t^2)d)$	$\Theta(mh(kt+t^2)d)$	$\Theta(mh(k^2+t^2)d)$	$\Theta(mh(k^2+t^2)d - rhk^2d)$	$\Theta(mh(k^2+t^2)d + rh(nt-kt-k^2)d)$
GPU	Prompt	$mw + 2mhd$	$mw + 2hnd + 2mhkd$	$rw + 2hnd$	$rw + 2rhnd$	$rw + 2rhnd$
	Generation	$mw + 2mh(n+t)d$	$mw + 2mh(k+t)d$	$mw + 2mh(k+t)d$	$mw + 2mh(k+t)d$	$mw + 2mh(k+t)d + 2rh(n-k)d$

roduces a user-defined parameter tt , representing the number of truncation steps. This ensures that the final cache size matches $k[tt - 1]$.

The model processes layers normally until reaching a selection layer, where it retains only the selected tokens' hidden states. If this is the p -th selection step (p starting from 0) and $p < tt$, truncation is applied to remove unselected tokens from all completed layers. The process repeats until all layers are completed, allowing for flexible cache structuring for further token generation.

To maintain consistency in baseline comparisons, we primarily evaluate the single-stage version of PromptDistill. However, we showcase the effectiveness of multi-stage selection in our analysis.

2.3 Theoretical Analysis

In table 1, we provide a theoretical comparison of computation time and GPU memory usage between our method and various baselines. Variable definitions are provided in the table caption. To ensure consistency, we analyze PromptDistill with single-stage selection and cache truncation. "AllKV" refers to the original LLM using full attention. Baseline values are taken from GemFilter's paper (Shi et al., 2024), with our method's values added for comparison.

Inference efficiency is analyzed in two parts: prompt computation and token generation. For GemFilter, all n tokens are processed for r layers to select k important tokens, which are then used for rerunning the full m layers to generate tokens. They put the part of processing all tokens in r layers in the prompt computation stage and the remaining, including processing the selected prompt, in the generation stage. Following this structure, we also place our computation for the first r layers in the prompt computation stage, while the subsequent processing of selected tokens and token generation falls under the generation stage.

For the time cost, in the first stage, both PromptDistill and GemFilter only need to run r layers for all tokens, while other methods run all layers for all tokens. This gives PromptDistill and GemFilter the same time cost in this stage, both better than other methods. In the second stage, while GemFilter runs selected prompt tokens for $\Theta(mhk^2d)$, PromptDistill only processes the remaining $m - r$ layers for the selected tokens' hidden states, requiring $\Theta((m - r)hk^2d)$. Both methods then generate t tokens with a key-value cache size of k , taking $\Theta(mh(kt + t^2)d)$. Thus, GemFilter's total time cost in the second stage is $\Theta(mhk^2d + mh(kt + t^2)d) = \Theta(mh(k^2 + t^2)d)$, while PromptDistill's is $\Theta((m - r)hk^2d + mh(kt + t^2)d) = \Theta(mh(k^2 + t^2)d - rhk^2d)$. Since GemFilter is already more efficient than AllKV, SnapKV, and H2O as shown in its paper, and PromptDistill further improves generation time efficiency over GemFilter, PromptDistill achieves the best overall time efficiency.

For GPU memory usage, in the first stage, we require only r layers of model weights, which is rw , the same as GemFilter. Since all keys and values must be stored before selecting tokens, memory usage is $2rhnd$, proportional to the number of layers before selection. In the second stage, we retain the full model weights and store up to $k + t$ tokens' keys and values for all layers, the same as GemFilter, SnapKV, and H2O.

The efficiency of the basic design without cache truncation is also shown in table 1 for comparison. In stage one, the time cost is the same as our proposed method since cache truncation occurs after selection. In stage two, while the basic design also requires $\Theta((m-r)hk^2d)$ for processing selected tokens, it differs in key-value cache handling. Since all prompt tokens’ keys and values are kept in the first r layers, the generation step takes $\Theta(rh((n+t)t)d + (m-r)h((k+t)t)d) = \Theta(rh(nt+t^2)d + (m-r)h(kt+t^2)d) = \Theta(rh((n-k)t)d + mh(kt+t^2)d)$. The total time cost then becomes $\Theta((m-r)hk^2d + rh((n-k)t)d + mh(kt+t^2)d) = \Theta(mh(k^2+t^2)d + rh((n-k)t)d - rhk^2d) = \Theta(mh(k^2+t^2)d + rh(nt-kt-k^2)d)$. For GPU memory in stage two, since the cache in the first r layers is not truncated, memory usage is $mw + 2rh(n+t)d + 2(m-r)h(k+t)d = mw + 2mh(k+t)d + 2rh(n-k)d$. This confirms that cache truncation is essential for efficiency.

For multi-stage selection, different configurations are possible. As an example, consider selecting k' tokens at layer r' and then k tokens at layer r with $r > r', k' > k$, finally truncating the cache to k tokens. The time cost in stage one is $\Theta(r'hn^2d + (r-r')hk'^2d)$. Since a first truncation occurs after the initial selection, GPU memory usage in stage one is $\max\{r'w + 2r'hnd, rw + 2rhk'd\}$. After stage one, the cache size is the same as in single-stage selection, so stage two has identical time and memory costs. This shows that multi-stage selection can significantly improve efficiency with well-chosen selection layers and token counts.

3 Experiments

3.1 Experimental Setup

For our main experiments, we use PromptDistill with single-stage selection and cache truncation. Since compression methods primarily improve efficiency for long inputs, we evaluate on three authoritative long-context benchmarks: LongBench, InfBench, and Needle in a Haystack (Bai et al., 2024; Zhang et al., 2024a; Nelson et al., 2024).

For base models, we select Llama 3.1 8B Instruct (supporting 128000 input length), Phi 3.5 Mini Instruct (supporting 128000 input length), and Qwen2 7B Instruct (supporting 32768 input length) (Grattafiori et al., 2024; Abdin et al., 2024; Yang et al., 2024a). Baseline methods include full attention (original model), SnapKV, H2O, and GemFilter (Li et al., 2024b; Zhang et al., 2023; Shi et al., 2024). For both PromptDistill and GemFilter (Shi et al., 2024), a selection layer must be specified. We use layer 13 (out of 32) for Llama 3.1, layer 19 (out of 32) for Phi 3.5, and layer 16 (out of 28) for Qwen2. The choices for Llama 3.1 and Phi 3.5 follow GemFilter’s settings for consistency, while Qwen2’s selection layer is chosen based on GemFilter’s performance across layers, which will be further discussed in section 3.3. In section 3.3, we conduct ablation studies and further exploration, testing various PromptDistill settings, including multi-stage selection and cache truncation removal.

3.2 Main Results

3.2.1 Long Bench

We first apply our method, along with all baseline approaches, to three base models on LongBench, a benchmark comprising various long-context tasks well-suited for evaluating compression methods (Bai et al., 2024). To ensure fair comparisons, we follow the experimental settings of (Shi et al., 2024). Under these settings, we evaluate All KV (the full-attention original model), H2O with a KV cache size of 4096, SnapKV, GemFilter, and PromptDistill, using selected tokens or KV cache sizes of 1024, 2048, and 4096. We conduct preliminary tests on the baseline methods and find that our results closely match those reported in the GemFilter paper. Therefore, we directly use their reported results for baselines and integrate our findings into the table.

In table 2, we present all results, highlighting our differences compared to GemFilter. The results show that while PromptDistill is significantly more efficient than full attention, it achieves performance close to full attention in general and even surpasses it when using

Table 2: Evaluation Results for Longbench (PromptDistill’s difference from GemFilter is labeled)

Method	NrtvQA	qasper	MF-en	hotpotqa	2wikimqa	musique	gov_report	qmsum	multi_news	trec	triviaqa	samsun	PCount	PRe	Mean
LLama 3.1 8B Instruct															
All KV	32.02	13.04	27.34	16.23	16.05	11.22	34.52	23.41	26.89	73.0	91.64	43.8	7.16	97.73	36.72
H2O-4096	22.94	12.61	26.48	16.63	15.81	10.14	33.51	23.47	26.81	69.0	91.15	43.97	6.66	71.67	33.63
SnapKV-1024	31.98	11.17	25.33	14.81	15.73	10.69	26.95	22.89	25.86	67.5	91.89	42.85	7.67	98.16	35.25
GemFilter-1024	20.71	11.0	29.28	19.12	17.01	13.01	30.37	21.75	25.17	63.0	90.7	42.5	7.15	92.22	34.50
PromptDistill-1024	24.24	11.36	28.01	16.59	14.92	11.7	29.68	22.29	25.77	73.5	91.65	43.61	5.87	95.8	35.36(+0.86)
SnapKV-2048	31.45	11.94	26.24	15.73	16.03	11.66	29.64	23.24	26.44	69.5	91.48	42.68	7.21	98.03	35.80
GemFilter-2048	24.36	12.63	25.39	19.58	17.03	14.11	33.15	22.31	26.49	69.5	91.59	42.64	4.61	98.75	35.87
PromptDistill-2048	28.24	12.86	26.75	17.47	15.88	12.46	32.06	23	26.86	73.5	91.54	43.22	5.62	97.79	36.23(+0.36)
SnapKV-4096	32.13	13.12	27.38	16.11	16.08	11.6	32.39	23.47	26.76	71.5	91.64	43.46	7.33	97.24	36.44
GemFilter-4096	25.66	12.95	27.38	17.76	15.6	12.02	34.17	23.25	26.87	70.0	92.36	43.34	5.96	98.0	36.09
PromptDistill-4096	30.2	13.24	26.91	16.41	16.12	11.6	34.2	23.08	26.86	72.5	91.47	44.17	5.24	97.22	36.37(+0.28)
Phi 3.5 Mini 3.8B Instruct															
All KV	27.51	17.23	35.63	21.7	25.7	11.68	34.14	23.17	24.95	71.5	87.37	13.08	7.17	83.85	34.62
H2O-4096	19.74	16.23	34.17	21.02	23.05	10.49	33.42	21.95	24.95	67.5	86.13	16.71	1.55	47.46	30.31
SnapKV-1024	24.31	16.03	34.93	20.72	26.02	13.74	28.27	22.03	24.02	67.5	87.71	14.57	6.08	85.6	33.68
GemFilter-1024	16.57	18.29	35.91	24.22	26.1	9.7	30.29	18.96	23.64	64.5	85.85	23.02	0.2	81.12	32.74
PromptDistill-1024	23.42	21.79	33.69	23.46	24.07	12.87	30.39	22.07	24.14	68.5	87.51	13.56	3.28	83.58	33.74(+1)
SnapKV-2048	26.41	16.59	36.99	21.8	26.07	12.57	30.88	22.37	24.51	69.5	87.54	13.13	6.57	83.92	34.20
GemFilter-2048	19.63	14.84	35.99	21.38	19.72	10.13	32.39	21.24	24.71	65.0	86.49	20.47	2.17	69.5	31.69
PromptDistill-2048	23.85	17.81	35.98	21.57	24.78	11.13	32.79	22.22	24.7	69.5	87.42	13.5	4.43	82.75	33.75(+2.06)
SnapKV-4096	27.25	17.42	36.9	21.37	25.42	12.55	32.9	22.6	24.87	70.5	87.45	13.28	6.81	84.04	34.53
GemFilter-4096	20.95	19.98	35.22	28.82	28.21	13.98	34.2	22.45	25.08	64.5	85.86	18.68	3.43	65.56	33.35
PromptDistill-4096	24.67	16.5	35.88	20.54	25.58	12.47	34	22.51	24.97	71	87.37	13.57	5.8	82.97	34.13(+0.78)
Qwen2 7B Instruct															
All KV	24.59	44.4	45.25	12.99	12.68	8.9	37.64	24.68	27.32	78.5	88.77	46.57	6	74.5	38.06
H2O-4096	8.98	15.89	16.64	21.38	22.42	8.81	0.02	0.02	0	19	39.8	0	8	56.62	15.54
SnapKV-1024	24.48	42.66	45.41	12.76	12.33	8.46	28.97	24.23	26.43	71	88.47	45.89	6.67	73.17	36.50
GemFilter-1024	22.8	38.78	43.34	12.8	14.49	9.81	27.85	21.03	26.04	74.5	88.55	43.21	6.88	46.17	34.02
PromptDistill-1024	24.35	38.54	43.36	13.33	13.3	9.06	29.25	21.54	26.35	74.5	89.44	44.36	11	71.62	36.43(+2.41)
SnapKV-2048	24.44	44.69	45.05	13.06	12.16	8.72	32.45	24.35	27.1	76	88.77	46.06	6.67	74.83	37.45
GemFilter-2048	24.01	43.68	44.27	11.77	13.44	10.03	31.49	22.3	27.14	78.5	88.43	43.58	5.88	55.7	35.73
PromptDistill-2048	25.65	41.99	44.73	13.07	13.53	8.01	33.11	22.47	27.28	77.5	88.99	46.55	8.67	73.67	37.52(+1.79)
SnapKV-4096	24.87	44.36	44.14	13.32	12.39	8.67	35.06	24.83	27.3	77.5	88.77	46.45	6.75	75.17	37.83
GemFilter-4096	25.49	46.62	43.38	12.09	13.09	9.03	33.85	23.28	27.51	79	89.49	44.85	4.92	64.75	36.95
PromptDistill-4096	25.76	44.99	44.98	12.95	12.92	8.66	35.65	23.56	27.43	77.5	89.07	46.24	7.33	76.04	38.08(+1.13)

Table 3: Evaluation Results for Infbench (PromptDistill’s difference from GemFilter is labeled)

Method	paskey	N_string	kv_retr	Lbook_sum_eng	Lbook_choice_eng	Lbook_qa_eng	Lbook_qa_chn	Ldia_qa_eng	math_find	code_run	code_debug	Mean
LLama 3.1 8B Instruct												
All KV	81.36	81.36	66.6	18.86	67.25	14.85	12.35	15.0	33.14	1.0	1.27	35.73
H2O-4096	6.78	6.1	2.0	18.86	47.16	8.79	10.32	7.0	34.0	0.0	18.53	14.5
SnapKV-1024	81.36	71.36	0.4	15.45	67.69	11.72	11.89	12.0	34.0	1.0	1.27	28.01
GemFilter-1024	81.36	81.36	1.8	15.66	36.68	12.08	13.11	14.0	34.29	0.0	19.29	28.15
PromptDistill-1024	81.36	78.98	2.0	16.02	65.5	12.04	12.39	9.5	32.57	1.25	1.27	28.44(+0.29)
SnapKV-2048	81.36	77.12	1.2	16.78	67.69	13.41	11.86	10.5	34.0	1.0	1.02	28.72
GemFilter-2048	81.36	81.36	4.4	17.02	43.23	11.77	12.91	17.5	31.71	0.0	19.04	29.12
PromptDistill-2048	81.36	79.49	4.0	16.94	66.38	14.28	12.2	13.0	32.57	1.25	1.02	29.32(+0.2)
SnapKV-4096	81.36	78.98	3.6	16.44	67.69	14.12	12.21	15.5	34.0	0.75	1.02	29.61
GemFilter-4096	81.36	81.36	13.0	18.05	44.54	11.81	13.93	11.5	35.14	0.0	14.97	29.61
PromptDistill-4096	81.36	80.34	9.2	18.26	66.81	14.71	12.48	14.5	32.86	0.25	0.76	30.14(+0.53)
Phi 3.5 Mini 3.8B Instruct												
All KV	40.68	40.68	26.8	17.61	48.03	9.1	12.88	10.0	24.57	1.0	19.29	22.79
H2O-4096	6.78	6.78	0.4	16.71	35.37	6.84	9.78	6.5	29.14	0.75	5.58	11.33
SnapKV-1024	62.54	15.25	0.2	13.87	56.33	8.62	12.71	11.5	14.29	0.0	17.51	19.35
GemFilter-1024	40.68	40.68	0.6	13.53	45.41	7.01	11.48	7.0	15.14	1.5	10.41	17.59
PromptDistill-1024	40.68	40.68	1.0	15.18	46.72	7.92	12.88	11.5	22.29	1.0	17.01	19.71(+2.12)
SnapKV-2048	40.51	15.93	0.2	15.18	44.54	8.19	12.95	12.5	26.86	1.25	20.05	18.01
GemFilter-2048	40.68	40.51	2.0	14.42	45.85	7.33	11.69	7.5	19.43	2.0	16.75	18.92
PromptDistill-2048	40.68	40.68	2.0	16.0	45.85	8.13	12.53	9.0	23.71	2.0	18.02	19.87(+0.95)
SnapKV-4096	40.68	17.29	1.4	15.83	44.54	8.33	13.2	12.0	26.29	1.75	20.05	18.31
GemFilter-4096	0.0	0.0	0.0	1.53	27.51	5.17	1.38	0.5	1.71	0.0	0.0	3.44
PromptDistill-4096	40.68	40.68	6.0	16.17	46.72	8.25	12.7	10.0	24.57	1.75	18.02	20.5(+17.06)
Qwen2 7B Instruct												
All KV	27.12	27.12	13.8	16.42	54.59	6.23	10.0	7.0	28.57	0.0	26.14	19.73
H2O-4096	0.85	3.05	0.0	0.0	47.6	1.41	2.11	1.0	24.29	0.0	0.0	7.3
SnapKV-1024	24.75	5.25	0.4	13.92	55.02	5.91	9.93	8.0	29.14	0.0	26.9	16.29
GemFilter-1024	27.12	27.12	0.2	13.43	43.67	8.17	18.22	12.0	10.0	0.0	28.43	17.12
PromptDistill-1024	27.12	27.12	0.2	13.72	54.59	5.66	9.67	11.5	27.14	0.0	28.93	18.7(+1.58)
SnapKV-2048	25.25	6.78	0.6	14.51	55.02	6.11	9.93	8.5	28.29	0.25	26.65	16.54
GemFilter-2048	27.12	27.12	0.2	14.45	44.54	9.17	18.01	14.0	10.86	0.0	28.17	17.6
PromptDistill-2048	27.12	27.12	0.2	15.01	55.9	5.97	9.61	12.0	28.29	0.0	28.43	19.06(+1.46)
SnapKV-4096	26.44	9.66	1.2	15.18	55.02	6.21	9.91	9.0	29.14	0.25	26.9	17.17
GemFilter-4096	27.12	27.12	0.8	15.4	44.54	7.56	12.81	16.0	12.0	0.0	28.68	17.46
PromptDistill-4096	27.12	27.12	0.6	15.74	56.33	6.09	9.59	11.0	28.29	0.0	28.68	19.14(+1.68)

the Qwen2 model with 4096 selected tokens. Compared to H2O, which is less efficient than our method, PromptDistill demonstrates a clear performance advantage. Similarly, while SnapKV is also less efficient than our method, our results remain comparable overall. Finally, compared to GemFilter, which requires slightly more computation time but is more memory-efficient on GPUs, PromptDistill consistently achieves better results across all cases.

3.2.2 InfBench

For InfBench, a benchmark consisting of long-context tasks with even longer prompts (average data length exceeding 100K tokens), including both synthetic and real-world tasks

across diverse domains(Zhang et al., 2024a), we adopt the same method settings as in LongBench, although baseline results for InfBench from GemFilter’s report are not available. The results are presented in table 3. Compared to H2O and GemFilter, PromptDistill once again demonstrates a clear performance advantage, as observed in LongBench evaluations. More importantly, this time PromptDistill achieves a complete performance advantage over SnapKV. The extremely poor performance of the Phi-3.5 model with GemFilter at 4096 selected tokens is explained in appendix A.2.

3.2.3 Needle in a Haystack

We also evaluate the methods on Needle in a Haystack, which tests an LLM’s ability to retrieve accurate information from a specific sentence hidden within a large document (Nelson et al., 2024). While GemFilter (Shi et al., 2024) only evaluates selected tokens or KV cache sizes of 1024, we conduct a more comprehensive evaluation using settings similar to those in LongBench and InfBench.

Table 4: Evaluation Results for Needle in a Haystack (PromptDistill’s difference from GemFilter is labeled). Instruct versions of the models are used.

Method	LLama 3.1 8B	Phi 3.5 Mini 3.8B	Qwen2 7B
All KV	85.2	91.7	91.2
SnapKV-1024	64.0	91.7	90.5
GemFilter-1024	81.8	91.7	69.7
PromptDistill-1024	82.6(+0.8)	91.7(+0)	71.6(+1.9)
SnapKV-2048	71.7	91.7	90.8
GemFilter-2048	84.7	91.7	81.8
PromptDistill-2048	84.3(-0.4)	91.7(+0)	82.2(+0.4)
SnapKV-4096	77.1	91.7	91.0
GemFilter-4096	83.3	5.1	89.3
PromptDistill-4096	84.6(+1.3)	91.7(+0)	90.2(+0.9)

Since our results differ from those in GemFilter’s report—likely due to differences in hardware, Python, or CUDA versions—we do not use their results as baselines for fair comparison.

For maximum input length, we set 120K for LLaMA 3.1 8B Instruct (following GemFilter’s work (Shi et al., 2024)), 86K for Phi-3.5 Mini 3.8B Instruct (due to GPU memory limitations for the full attention method), and 32.2K for Qwen2 7B Instruct (due to its input length limit). The results are presented in table 4, with additional detailed figures in appendix A.6. For Phi-3.5, all method settings yield the same results except GemFilter-4096, which encounters the same issue discussed in section 3.2.2 and in appendix A.2. Overall, PromptDistill outperforms GemFilter in most cases and surpasses SnapKV in half of the evaluations.

Table 5: Top-5 multi-stage selection performance on LongBench (LLama 3.1 8B Instruct), with k and r denoting the token numbers and stages for selection, respectively (space-separated for multiple stages). Here, Δ_1 is the difference in mean score from PromptDistill-13-1024, and Δ_2 from GemFilter-13-1024.

k	r	Mean Score	Δ_1	Δ_2
1024	13	35.36	0	0.86
8192 1024	8 13	35.39	0.03	0.89
16384 8192 1024	7 8 13	35.42	0.06	0.92
16384 8192 1024	5 8 13	35.53	0.17	1.03
16384 8192 1024	3 8 13	35.42	0.06	0.92
16384 8192 1024	1 8 13	35.32	-0.04	0.82

3.3 Analysis

We empirically determine the selection layer for Qwen2 7B Instruct in our main evaluations by assessing GemFilter across different layers on LongBench. We select the layer where GemFilter performs well while ensuring it is as early as possible for efficiency. This approach ensures a fair comparison, as choosing a layer where GemFilter performs well highlights its selection ability. Further details on this selection process are provided in appendix A.5.

In the remainder of this section, we present an ablation study on different settings of PromptDistill.

3.3.1 Multi-stage Selection Analysis

For PromptDistill with multi-stage selection, various configurations can be chosen. To explore its effectiveness, we design a simple evaluation method using LongBench. As a baseline, we apply PromptDistill with a single selection of 1024 tokens at layer 13, and for all trials, the KV cache is truncated to 1024 tokens. We present a set of well-performing configurations in appendix A.4 (table 6), and display a brief subset with the highest performance here in table 5.

Our exploration begins by introducing an additional selection layer that selects 2048 tokens before layer 13. If certain layers yield good performance, we add them to the baseline set and continue exploring layers capable of selecting 4096 tokens. We find that selecting 2048 tokens in earlier layers leads to noticeable performance degradation, so we focus on identifying layers for 4096 tokens. Layer 10 performs well in this regard, prompting us to test 8192 tokens—first on top of 1024 tokens at layer 13, then on top of 4096 tokens at layer 10, followed by 1024 tokens at layer 13. This process yields four optimal configurations, shown in the third to sixth rows of table 6. Further exploration of 16384-token selection layers provides the remaining results. Both the two tables clearly highlight differences between each setting and GemFilter/PromptDistill with single-stage selection. Some multi-stage configurations achieve comparable performance to single-stage PromptDistill, while others trade off some accuracy for higher efficiency yet still outperform GemFilter. The theoretical analysis in section 2.3 demonstrates the efficiency gains of multi-stage selection. Here, empirical results further confirm that many configurations can maintain performance, indicating that multi-stage selection has strong potential to reduce the memory efficiency gap between PromptDistill and GemFilter while significantly improving time efficiency over GemFilter, all while preserving performance advantages.

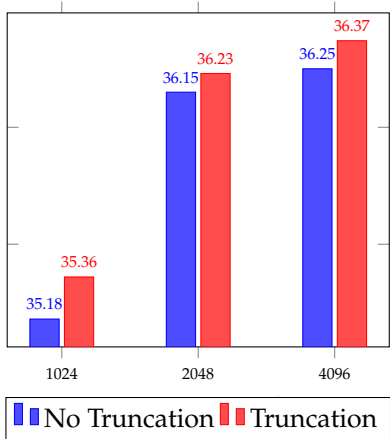


Figure 1: The effect of cache truncation.

3.3.2 Cache Truncation Analysis

Here, we present fig. 1, a bar chart comparing PromptDistill with and without cache truncation on LongBench using Llama 3.1 8B Instruct (selection layer 13, selected token counts 1024, 2048, 4096). The results clearly show that performance does not decrease and even improves in these cases. Since PromptDistill with cache truncation is significantly more efficient than the basic design without truncation (discussed in section 2.3) while maintaining performance, we confidently adopt cache truncation for both higher efficiency and stable performance.

4 Conclusion

PromptDistill is a novel, training-free approach to improving the inference efficiency of large language models while maintaining output quality. By selecting and retaining the hidden states of the most informative tokens in intermediate layers, our method achieves effective compression without discarding critical contextual information. Compared to prior works like GemFilter, SnapKV, and H2O, PromptDistill balances efficiency and performance more effectively, reducing computation and memory costs with minimal degradation. Additionally, our exploration of multi-stage selection further enhances efficiency while

preserving model effectiveness. Through extensive experiments across multiple LLMs and diverse evaluation datasets, we demonstrate the superiority and generalizability of PromptDistill, highlighting its effectiveness in optimizing LLM inference for long-context scenarios.

References

- Marah Abdin, Jyoti Aneja, Hany Awadalla, Ahmed Awadallah, Ammar Ahmad Awan, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Jianmin Bao, Harkirat Behl, Alon Benhaim, Misha Bilenko, Johan Bjorck, Sébastien Bubeck, Martin Cai, Qin Cai, Vishrav Chaudhary, Dong Chen, Dongdong Chen, Weizhu Chen, Yen-Chun Chen, Yi-Ling Chen, Hao Cheng, Parul Chopra, Xiyang Dai, Matthew Dixon, Ronen Eldan, Victor Fragoso, Jianfeng Gao, Mei Gao, Min Gao, Amit Garg, Allie Del Giorno, Abhishek Goswami, Suriya Gunasekar, Emman Haider, Junheng Hao, Russell J. Hewett, Wenxiang Hu, Jamie Huynh, Dan Iter, Sam Ade Jacobs, Mojan Javaheripi, Xin Jin, Nikos Karampatziakis, Piero Kauffmann, Mahoud Khademi, Dongwoo Kim, Young Jin Kim, Lev Kurilenko, James R. Lee, Yin Tat Lee, Yuanzhi Li, Yunsheng Li, Chen Liang, Lars Liden, Xihui Lin, Zeqi Lin, Ce Liu, Liyuan Liu, Mengchen Liu, Weishung Liu, Xiaodong Liu, Chong Luo, Piyush Madan, Ali Mahmoudzadeh, David Majercak, Matt Mazzola, Caio César Teodoro Mendes, Arindam Mitra, Hardik Modi, Anh Nguyen, Brandon Norick, Barun Patra, Daniel Perez-Becker, Thomas Portet, Reid Pryzant, Heyang Qin, Marko Radmilac, Liliang Ren, Gustavo de Rosa, Corby Rosset, Sambudha Roy, Olatunji Ruwase, Olli Saarikivi, Amin Saied, Adil Salim, Michael Santacrose, Shital Shah, Ning Shang, Hiteshi Sharma, Yelong Shen, Swadheen Shukla, Xia Song, Masahiro Tanaka, Andrea Tupini, Praneetha Vaddamanu, Chunyu Wang, Guanhua Wang, Lijuan Wang, Shuohang Wang, Xin Wang, Yu Wang, Rachel Ward, Wen Wen, Philipp Witte, Haiping Wu, Xiaoxia Wu, Michael Wyatt, Bin Xiao, Can Xu, Jiahang Xu, Weijian Xu, Jilong Xue, Sonali Yadav, Fan Yang, Jianwei Yang, Yifan Yang, Ziyi Yang, Donghan Yu, Lu Yuan, Chenruidong Zhang, Cyril Zhang, Jianwen Zhang, Li Lyna Zhang, Yi Zhang, Yue Zhang, Yunan Zhang, and Xiren Zhou. Phi-3 technical report: A highly capable language model locally on your phone, 2024. URL <https://arxiv.org/abs/2404.14219>.
- Anthropic. The claude 3 model family: Opus, sonnet, haiku, 2024. URL https://www-cdn.anthropic.com/de8ba9b01c9ab7cbabf5c33b80b7bbc618857627/Model_Card_Claude_3.pdf.
- Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. Longbench: A bilingual, multitask benchmark for long context understanding, 2024. URL <https://arxiv.org/abs/2308.14508>.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020. URL <https://arxiv.org/abs/2005.14165>.
- Guanzheng Chen, Qilong Feng, Jinjie Ni, Xin Li, and Michael Qizhe Shieh. Long-context inference with retrieval-augmented speculative decoding, 2025. URL <https://arxiv.org/abs/2502.20330>.
- Tianyu Gao, Alexander Wettig, Howard Yen, and Danqi Chen. How to train long-context language models (effectively), 2024. URL <https://arxiv.org/abs/2410.02660>.
- Suyu Ge, Yunan Zhang, Liyuan Liu, Minjia Zhang, Jiawei Han, and Jianfeng Gao. Model tells you what to discard: Adaptive kv cache compression for llms. *arXiv preprint arXiv:2310.01801*, 2023.
- Suyu Ge, Xihui Lin, Yunan Zhang, Jiawei Han, and Hao Peng. A little goes a long way: Efficient long context training and inference with partial contexts, 2024. URL <https://arxiv.org/abs/2410.01485>.

Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, Danny Wyatt, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Francisco Guzmán, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Govind Thattai, Graeme Nail, Gregoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan Misra, Ivan Evtimov, Jack Zhang, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Karthik Prasad, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Kushal Lakhotia, Lauren Rantala-Yearly, Laurens van der Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo, Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar Paluri, Marcin Kardas, Maria Tsimpoukelli, Mathew Oldham, Mathieu Rita, Maya Pavlova, Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal, Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Ning Zhang, Olivier Duchenne, Onur Çelebi, Patrick Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajjwal Bhargava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj Ganapathy, Ramon Calderer, Ricardo Silveira Cabral, Robert Stojnic, Roberta Raileanu, Rohan Maheswari, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa, Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang, Sharath R-parthy, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende, Soumya Batra, Spencer Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney Borodinsky, Tamar Herman, Tara Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom, Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh Ramanathan, Viktor Kerkez, Vincent Gonguet, Virginie Do, Vish Vogeti, Vítor Albiero, Vladan Petrovic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang, Xiaofang Wang, Xiaoqing Ellen Tan, Xide Xia, Xinfeng Xie, Xuchao Jia, Xuwei Wang, Yaelle Goldschlag, Yashesh Gaur, Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre Coudert, Zheng Yan, Zhengxing Chen, Zoe Papakipos, Aaditya Singh, Aayushi Srivastava, Abha Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay Menon, Ajay Sharma, Alex Boesenberg, Alexei Baevski, Allie Feinstein, Amanda Kallet, Amit Sangani, Amos Teo, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Dong, Annie Franco, Anuj Goyal, Aparajita Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh Yazdan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Brandon Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina Mejia, Ce Liu, Changhan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai, Chris Tindal, Christoph Feichtenhofer, Cynthia Gao, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana Liskovich, Didem Foss, Dingkan Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil, Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Eric-Tuan Le, Erik Brinkman, Esteban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Filippos Kokkinos, Firat Ozgenel, Francesco Caggioni, Frank Kanayet, Frank Seide,

Gabriela Medina Florez, Gabriella Schwarz, Gada Badeer, Georgia Swee, Gil Halpern, Grant Herman, Grigory Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hakan Inan, Hamid Shojanazeri, Han Zou, Hannah Wang, Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Goldman, Hongyuan Zhan, Ibrahim Damlaj, Igor Molybog, Igor Tufanov, Ilias Leontiadis, Irina-Elena Veliche, Itai Gat, Jake Weissman, James Geboski, James Kohli, Janice Lam, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie Wang, Kai Wu, Kam Hou U, Karan Saxena, Kartikay Khandelwal, Katayoun Zand, Kathy Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kiran Jagadeesh, Kun Huang, Kunal Chawla, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva, Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian Khabza, Manav Avalani, Manish Bhatt, Martynas Mankus, Matan Hasson, Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim Naumov, Maya Lathi, Meghan Keneally, Miao Liu, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mohammad Rastegari, Munish Bansal, Nandhini Santhanam, Natascha Parks, Natasha White, Navyata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikhil Mehta, Nikolay Pavlovich Laptev, Ning Dong, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux, Piotr Dollar, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Rangaprabhu Parthasarathy, Raymond Li, Rebekkah Hogan, Robin Battey, Rocky Wang, Russ Howes, Ruty Rinott, Sachin Mehta, Sachin Siby, Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Satadru Pan, Saurabh Mahajan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Shaun Lindsay, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shishir Patil, Shiva Shankar, Shuqiang Zhang, Shuqiang Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Summer Deng, Sungmin Cho, Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser, Tamara Best, Thilo Koehler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Timothy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan, Vinay Satish Kumar, Vishal Mangla, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu Mihalescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Constable, Xiaocheng Tang, Xiaojian Wu, Xiaolan Wang, Xilun Wu, Xinbo Gao, Yaniv Kleinman, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi, Youngjin Nam, Yu, Wang, Yu Zhao, Yuchen Hao, Yundi Qian, Yunlu Li, Yuzi He, Zach Rait, Zachary DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang, Zhiwei Zhao, and Zhiyu Ma. The llama 3 herd of models, 2024. URL <https://arxiv.org/abs/2407.21783>.

Albert Gu and Tri Dao. Mamba: Linear-time sequence modeling with selective state spaces, 2024. URL <https://arxiv.org/abs/2312.00752>.

Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L elio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth ee Lacroix, and William El Sayed. Mistral 7b, 2023. URL <https://arxiv.org/abs/2310.06825>.

Huiqiang Jiang, Yucheng Li, Chengruidong Zhang, Qianhui Wu, Xufang Luo, Surin Ahn, Zhenhua Han, Amir H. Abdi, Dongsheng Li, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. Minference 1.0: Accelerating pre-filling for long-context llms via dynamic sparse attention, 2024. URL <https://arxiv.org/abs/2407.02490>.

Jingyao Li, Han Shi, Xin Jiang, Zhenguo Li, Hong Xu, and Jiaya Jia. Quickllama: Query-aware inference acceleration for large language models, 2024a. URL <https://arxiv.org/abs/2406.07528>.

- Yucheng Li, Bo Dong, Chenghua Lin, and Frank Guerin. Compressing context to enhance inference efficiency of large language models, 2023. URL <https://arxiv.org/abs/2310.06201>.
- Yuhong Li, Yingbing Huang, Bowen Yang, Bharat Venkitesh, Acyr Locatelli, Hanchen Ye, Tianle Cai, Patrick Lewis, and Deming Chen. Snapkv: Llm knows what you are looking for before generation, 2024b. URL <https://arxiv.org/abs/2404.14469>.
- Di Liu, Meng Chen, Baotong Lu, Huiqiang Jiang, Zhenhua Han, Qianxi Zhang, Qi Chen, Chengruidong Zhang, Bailu Ding, Kai Zhang, Chen Chen, Fan Yang, Yuqing Yang, and Lili Qiu. Retrievalattention: Accelerating long-context llm inference via vector retrieval, 2024a. URL <https://arxiv.org/abs/2409.10516>.
- Zichang Liu, Aditya Desai, Fangshuo Liao, Weitao Wang, Victor Xie, Zhaozhuo Xu, Anastasios Kyrillidis, and Anshumali Shrivastava. Scissorhands: Exploiting the persistence of importance hypothesis for llm kv cache compression at test time, 2023a. URL <https://arxiv.org/abs/2305.17118>.
- Zichang Liu, Jue Wang, Tri Dao, Tianyi Zhou, Binhang Yuan, Zhao Song, Anshumali Shrivastava, Ce Zhang, Yuandong Tian, Christopher Re, and Beidi Chen. Deja vu: Contextual sparsity for efficient LLMs at inference time. In Andreas Krause, Emma Brunskill, Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett (eds.), *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 22137–22176. PMLR, 23–29 Jul 2023b. URL <https://proceedings.mlr.press/v202/liu23am.html>.
- Zirui Liu, Jiayi Yuan, Hongye Jin, Shaochen Zhong, Zhaozhuo Xu, Vladimir Braverman, Beidi Chen, and Xia Hu. Kivi: A tuning-free asymmetric 2bit quantization for kv cache. *arXiv preprint arXiv:2402.02750*, 2024b.
- Elliot Nelson, Georgios Kollias, Payel Das, Subhajit Chaudhury, and Soham Dan. Needle in the haystack for memory based large language models, 2024. URL <https://arxiv.org/abs/2407.01437>.
- Zhenmei Shi, Yifei Ming, Xuan-Phi Nguyen, Yingyu Liang, and Shafiq Joty. Discovering the gems in early layers: Accelerating long-context llms with 1000x input token reduction, 2024. URL <https://arxiv.org/abs/2409.17422>.
- Gemini Team, Petko Georgiev, Ving Ian Lei, Ryan Burnell, Libin Bai, Anmol Gulati, Garrett Tanzer, Damien Vincent, Zhufeng Pan, Shibo Wang, Soroosh Mariooryad, Yifan Ding, Xinyang Geng, Fred Alcober, Roy Frostig, Mark Omernick, Lexi Walker, Cosmin Paduraru, Christina Sorokin, Andrea Tacchetti, Colin Gaffney, Samira Daruki, Olcan Sercinoglu, Zach Gleicher, Juliette Love, Paul Voigtlaender, Rohan Jain, Gabriela Surita, Kareem Mohamed, Rory Blevins, Junwhan Ahn, Tao Zhu, Kornraphop Kawintiranon, Orhan Firat, Yiming Gu, Yujing Zhang, Matthew Rahtz, Manaal Faruqui, Natalie Clay, Justin Gilmer, JD Co-Reyes, Ivo Penchev, Rui Zhu, Nobuyuki Morioka, Kevin Hui, Krishna Haridasan, Victor Campos, Mahdis Mahdieh, Mandy Guo, Samer Hassan, Kevin Kilgour, Arpi Vezer, Heng-Tze Cheng, Raoul de Liedekerke, Siddharth Goyal, Paul Barham, DJ Strouse, Seb Noury, Jonas Adler, Mukund Sundararajan, Sharad Vikram, Dmitry Lepikhin, Michela Paganini, Xavier Garcia, Fan Yang, Dasha Valter, Maja Trebacz, Kiran Vodrahalli, Chulayuth Asawaroengchai, Roman Ring, Norbert Kalb, Livio Baldini Soares, Siddhartha Brahma, David Steiner, Tianhe Yu, Fabian Mentzer, Antoine He, Lucas Gonzalez, Bibo Xu, Raphael Lopez Kaufman, Laurent El Shafey, Junhyuk Oh, Tom Hennigan, George van den Driessche, Seth Odoom, Mario Lucic, Becca Roelofs, Sid Lall, Amit Marathe, Betty Chan, Santiago Ontanon, Luheng He, Denis Teplyashin, Jonathan Lai, Phil Crone, Bogdan Damoc, Lewis Ho, Sebastian Riedel, Karel Lenc, Chih-Kuan Yeh, Aakanksha Chowdhery, Yang Xu, Mehran Kazemi, Ehsan Amid, Anastasia Petrushkina, Kevin Swersky, Ali Khodaei, Gowoon Chen, Chris Larkin, Mario Pinto, Geng Yan, Adria Puigdomenech Badia, Piyush Patil, Steven Hansen, Dave Orr, Sebastien M. R. Arnold, Jordan Grimstad, Andrew Dai, Sholto Douglas, Rishika Sinha, Vikas Yadav, Xi Chen, Elena Gribovskaya, Jacob Austin, Jeffrey Zhao, Kaushal Patel, Paul Komarek, Sophia Austin,

Sebastian Borgeaud, Linda Friso, Abhimanyu Goyal, Ben Caine, Kris Cao, Da-Woon Chung, Matthew Lamm, Gabe Barth-Maron, Thais Kagohara, Kate Olszewska, Mia Chen, Kaushik Shivakumar, Rishabh Agarwal, Harshal Godhia, Ravi Rajwar, Javier Snaider, Xerxes Dotiwalla, Yuan Liu, Aditya Barua, Victor Ungureanu, Yuan Zhang, Bat-Orgil Batsaikhan, Mateo Wirth, James Qin, Ivo Danihelka, Tulsee Doshi, Martin Chadwick, Jilin Chen, Sanil Jain, Quoc Le, Arjun Kar, Madhu Gurumurthy, Cheng Li, Ruoxin Sang, Fangyu Liu, Lampros Lamprou, Rich Munoz, Nathan Lintz, Harsh Mehta, Heidi Howard, Malcolm Reynolds, Lora Aroyo, Quan Wang, Lorenzo Blanco, Albin Cassirer, Jordan Griffith, Dipanjan Das, Stephan Lee, Jakub Sygnowski, Zach Fisher, James Besley, Richard Powell, Zafarali Ahmed, Dominik Paulus, David Reitter, Zalan Borsos, Rishabh Joshi, Aedan Pope, Steven Hand, Vittorio Selo, Vihan Jain, Nikhil Sethi, Megha Goel, Takaki Makino, Rhys May, Zhen Yang, Johan Schalkwyk, Christina Butterfield, Anja Hauth, Alex Goldin, Will Hawkins, Evan Senter, Sergey Brin, Oliver Woodman, Marvin Ritter, Eric Noland, Minh Giang, Vijay Bolina, Lisa Lee, Tim Blyth, Ian Mackinnon, Machel Reid, Obaid Sarvana, David Silver, Alexander Chen, Lily Wang, Loren Maggiore, Oscar Chang, Nithya Attaluri, Gregory Thornton, Chung-Cheng Chiu, Oskar Bunyan, Nir Levine, Timothy Chung, Evgenii Eltyshev, Xiance Si, Timothy Lillicrap, Demetra Brady, Vaibhav Aggarwal, Boxi Wu, Yuanzhong Xu, Ross McIlroy, Kartikeya Badola, Paramjit Sandhu, Erica Moreira, Wojciech Stokowiec, Ross Hemsley, Dong Li, Alex Tudor, Pranav Shyam, Elahe Rahimtoroghi, Salem Haykal, Pablo Sprechmann, Xiang Zhou, Diana Mincu, Yujia Li, Ravi Addanki, Kalpesh Krishna, Xiao Wu, Alexandre Frechette, Matan Eyal, Allan Dafoe, Dave Lacey, Jay Whang, Thi Avrahami, Ye Zhang, Emanuel Taropa, Hanzhao Lin, Daniel Toyama, Eliza Rutherford, Motoki Sano, HyunJeong Choe, Alex Tomala, Chalence Safranek-Shrader, Nora Kassner, Mantas Pajarskas, Matt Harvey, Sean Sechrist, Meire Fortunato, Christina Lyu, Gamaleldin Elsayed, Chenkai Kuang, James Lottes, Eric Chu, Chao Jia, Chih-Wei Chen, Peter Humphreys, Kate Baumli, Connie Tao, Rajkumar Samuel, Cicero Nogueira dos Santos, Anders Andreassen, Nemanja Rakićević, Dominik Grewe, Aviral Kumar, Stephanie Winkler, Jonathan Caton, Andrew Brock, Sid Dalmia, Hannah Sheahan, Iain Barr, Yingjie Miao, Paul Natsev, Jacob Devlin, Feryal Behbahani, Flavian Prost, Yanhua Sun, Artiom Myaskovsky, Thanumalayan Sankaranarayanan Pillai, Dan Hurt, Angeliki Lazaridou, Xi Xiong, Ce Zheng, Fabio Pardo, Xiaowei Li, Dan Horgan, Joe Stanton, Moran Ambar, Fei Xia, Alejandro Lince, Mingqiu Wang, Basil Mustafa, Albert Webson, Hyo Lee, Rohan Anil, Martin Wicke, Timothy Dozat, Abhishek Sinha, Enrique Piqueras, Elahe Dabir, Shyam Upadhyay, Anudhyan Boral, Lisa Anne Hendricks, Corey Fry, Josip Djolonga, Yi Su, Jake Walker, Jane Labanowski, Ronny Huang, Vedant Misra, Jeremy Chen, RJ Skerry-Ryan, Avi Singh, Shruti Rijhwani, Dian Yu, Alex Castro-Ros, Beer Changpinyo, Romina Datta, Sumit Bagri, Arnar Mar Hrafnkelsson, Marcello Maggioni, Daniel Zheng, Yury Sulsky, Shaobo Hou, Tom Le Paine, Antoine Yang, Jason Riesa, Dominika Rogozinska, Dror Marcus, Dalia El Badawy, Qiao Zhang, Luyu Wang, Helen Miller, Jeremy Greer, Lars Lowe Sjos, Azade Nova, Heiga Zen, Rahma Chaabouni, Michaela Rosca, Jiepu Jiang, Charlie Chen, Ruibo Liu, Tara Sainath, Maxim Krikun, Alex Polozov, Jean-Baptiste Lespiau, Josh Newlan, Zeyncep Cankara, Soo Kwak, Yunhan Xu, Phil Chen, Andy Coenen, Clemens Meyer, Katerina Tsihlias, Ada Ma, Juraj Gottweis, Jinwei Xing, Chenjie Gu, Jin Miao, Christian Frank, Zeynep Cankara, Sanjay Ganapathy, Ishita Dasgupta, Steph Hughes-Fitt, Heng Chen, David Reid, Keran Rong, Hongmin Fan, Joost van Amersfoort, Vincent Zhuang, Aaron Cohen, Shixiang Shane Gu, Anhad Mohananey, Anastasija Ilic, Taylor Tobin, John Wieting, Anna Bortsova, Phoebe Thacker, Emma Wang, Emily Caveness, Justin Chiu, Eren Sezener, Alex Kaskasoli, Steven Baker, Katie Millican, Mohamed Elhawaty, Kostas Aisopos, Carl Lebsack, Nathan Byrd, Hanjun Dai, Wenhao Jia, Matthew Wiethoff, Elnaz Davoodi, Albert Weston, Lakshman Yagati, Arun Ahuja, Isabel Gao, Golan Pundak, Susan Zhang, Michael Azzam, Khe Chai Sim, Sergi Caelles, James Keeling, Abhanshu Sharma, Andy Swing, YaGuang Li, Chenxi Liu, Carrie Grimes Bostock, Yamini Bansal, Zachary Nado, Ankesh Anand, Josh Lipschultz, Abhijit Karmarkar, Lev Prolev, Abe Ittycheriah, Soheil Hassas Yeganeh, George Polovets, Aleksandra Faust, Jiao Sun, Alban Rrustemi, Pen Li, Rakesh Shivanna, Jeremiah Liu, Chris Welty, Federico Lebron, Anirudh Baddepudi, Sebastian Krause, Emilio Parisotto, Radu Soricut, Zheng Xu, Dawn Bloxwich, Melvin Johnson, Behnam Neyshabur, Justin Mao-Jones, Renshen Wang, Vinay Ramasesh, Zaheer Abbas, Arthur Guez, Constant Segal, Duc Dung Nguyen, James Svensson, Le Hou, Sarah York, Kieran Milan, Sophie Bridgers,

Wiktor Gworek, Marco Tagliasacchi, James Lee-Thorp, Michael Chang, Alexey Guseynov, Ale Jakse Hartman, Michael Kwong, Ruizhe Zhao, Sheleem Kashem, Elizabeth Cole, Antoine Miech, Richard Tanburn, Mary Phuong, Filip Pavetic, Sebastien Cevey, Ramona Comanescu, Richard Ives, Sherry Yang, Cosmo Du, Bo Li, Zizhao Zhang, Mariko Iinuma, Clara Huiyi Hu, Aurko Roy, Shaan Bijwadia, Zhenkai Zhu, Danilo Martins, Rachel Saputro, Anita Gergely, Steven Zheng, Dawei Jia, Ioannis Antonoglou, Adam Sadovsky, Shane Gu, Yingying Bi, Alek Andreev, Sina Samangooei, Mina Khan, Tomas Kocisky, Angelos Filos, Chintu Kumar, Colton Bishop, Adams Yu, Sarah Hodgkinson, Sid Mittal, Premal Shah, Alexandre Moufarek, Yong Cheng, Adam Bloniarz, Jaehoon Lee, Pedram Pejman, Paul Michel, Stephen Spencer, Vladimir Feinberg, Xuehan Xiong, Nikolay Savinov, Charlotte Smith, Siamak Shakeri, Dustin Tran, Mary Chesus, Bernd Bohnet, George Tucker, Tamara von Glehn, Carrie Muir, Yiran Mao, Hideto Kazawa, Ambrose Slone, Kedar Soparkar, Disha Shrivastava, James Cobon-Kerr, Michael Sharman, Jay Pavagadhi, Carlos Araya, Karolis Misiunas, Nimesh Ghelani, Michael Laskin, David Barker, Qiuqia Li, Anton Briukhov, Neil Houlsby, Mia Glaese, Balaji Lakshminarayanan, Nathan Schucher, Yunhao Tang, Eli Collins, Hyeontaek Lim, Fangxiaoyu Feng, Adria Recasens, Guangda Lai, Alberto Magni, Nicola De Cao, Aditya Siddhant, Zoe Ashwood, Jordi Orbay, Mostafa Dehghani, Jenny Brennan, Yifan He, Kelvin Xu, Yang Gao, Carl Saroufim, James Molloy, Xinyi Wu, Seb Arnold, Solomon Chang, Julian Schrittwieser, Elena Buchatskaya, Soroush Radpou, Martin Polacek, Skye Giordano, Ankur Bapna, Simon Tokumine, Vincent Helendoorn, Thibault Sottiaux, Sarah Cogan, Aliaksei Severyn, Mohammad Saleh, Shantanu Thakoor, Laurent Shefey, Siyuan Qiao, Meenu Gaba, Shuo yiin Chang, Craig Swanson, Biao Zhang, Benjamin Lee, Paul Kishan Rubenstein, Gan Song, Tom Kwiatkowski, Anna Koop, Ajay Kannan, David Kao, Parker Schuh, Axel Stjerngren, Golnaz Ghiasi, Gena Gibson, Luke Vilnis, Ye Yuan, Felipe Tiengo Ferreira, Aishwarya Kamath, Ted Klimenko, Ken Franko, Kefan Xiao, Indro Bhattacharya, Miteyan Patel, Rui Wang, Alex Morris, Robin Strudel, Vivek Sharma, Peter Choy, Sayed Hadi Hashemi, Jessica Landon, Mara Finkelstein, Priya Jhakra, Justin Frye, Megan Barnes, Matthew Mauger, Dennis Daun, Khuslen Baatarsukh, Matthew Tung, Wael Farhan, Henryk Michalewski, Fabio Viola, Felix de Chaumont Quitry, Charline Le Lan, Tom Hudson, Qingze Wang, Felix Fischer, Ivy Zheng, Elspeth White, Anca Dragan, Jean baptiste Alayrac, Eric Ni, Alexander Pritzel, Adam Iwanicki, Michael Isard, Anna Bulanova, Lukas Zilka, Ethan Dyer, Devendra Sachan, Srivatsan Srinivasan, Hannah Muckenhirn, Honglong Cai, Amol Mandhane, Mukarram Tariq, Jack W. Rae, Gary Wang, Kareem Ayoub, Nicholas FitzGerald, Yao Zhao, Woohyun Han, Chris Alberti, Dan Garrette, Kashyap Krishnakumar, Mai Gimenez, Anselm Levskaya, Daniel Sohn, Josip Matak, Inaki Iturrate, Michael B. Chang, Jackie Xiang, Yuan Cao, Nishant Ranka, Geoff Brown, Adrian Hutter, Vahab Mirrokni, Nanxin Chen, Kaisheng Yao, Zoltan Egyed, Francois Galilee, Tyler Liechty, Praveen Kallakuri, Evan Palmer, Sanjay Ghemawat, Jasmine Liu, David Tao, Chloe Thornton, Tim Green, Mimi Jasarevic, Sharon Lin, Victor Cotruta, Yi-Xuan Tan, Noah Fiedel, Hongkun Yu, Ed Chi, Alexander Neitz, Jens Heitkaemper, Anu Sinha, Denny Zhou, Yi Sun, Charbel Kaed, Brice Hulse, Swaroop Mishra, Maria Georgaki, Sneha Kudugunta, Clement Faret, Izhak Shafran, Daniel Vlasic, Anton Tsitsulin, Rajagopal Ananthanarayanan, Alen Carin, Guolong Su, Pei Sun, Shashank V, Gabriel Carvajal, Josef Broder, Iulia Comsa, Alena Repina, William Wong, Warren Weilun Chen, Peter Hawkins, Egor Filonov, Lucia Loher, Christoph Hirsenschall, Weiyi Wang, Jingchen Ye, Andrea Burns, Hardie Cate, Diana Gage Wright, Federico Piccinini, Lei Zhang, Chu-Cheng Lin, Ionel Gog, Yana Kulizhskaya, Ashwin Sreevatsa, Shuang Song, Luis C. Cobo, Anand Iyer, Chetan Tekur, Guillermo Garrido, Zhuyun Xiao, Rupert Kemp, Huaixiu Steven Zheng, Hui Li, Ananth Agarwal, Christel Ngani, Kati Goshvadi, Rebeca Santamaria-Fernandez, Wojciech Fica, Xinyun Chen, Chris Gorgolewski, Sean Sun, Roopal Garg, Xinyu Ye, S. M. Ali Eslami, Nan Hua, Jon Simon, Pratik Joshi, Yelin Kim, Ian Tenney, Sahitya Potluri, Lam Nguyen Thiet, Quan Yuan, Florian Luisier, Alexandra Chronopoulou, Salvatore Scellato, Praveen Srinivasan, Minmin Chen, Vinod Koverkathu, Valentin Dalibard, Yaming Xu, Brennan Saeta, Keith Anderson, Thibault Sellam, Nick Fernando, Fantine Huot, Junehyuk Jung, Mani Varadarajan, Michael Quinn, Amit Raul, Maigo Le, Ruslan Habalov, Jon Clark, Komal Jalan, Kalesha Bullard, Achintya Singhal, Thang Luong, Boyu Wang, Sujeewan Rajayogam, Julian Eisenschlos, Johnson Jia, Daniel Finchelstein, Alex Yakubovich, Daniel Balle, Michael Fink, Sameer Agarwal, Jing Li, Dj Dvijotham, Shalini Pal, Kai Kang, Jaclyn

Konzelmann, Jennifer Beattie, Olivier Dousse, Diane Wu, Remi Crocker, Chen Elkind, Siddhartha Reddy Jonnalagadda, Jong Lee, Dan Holtmann-Rice, Krystal Kallarackal, Rosanne Liu, Denis Vnukov, Neera Vats, Luca Invernizzi, Mohsen Jafari, Huanjie Zhou, Lilly Taylor, Jennifer Prendki, Marcus Wu, Tom Eccles, Tianqi Liu, Kavya Kopparapu, Francoise Beaufays, Christof Angermueller, Andreea Marzoca, Shourya Sarcar, Hilal Dib, Jeff Stanway, Frank Perbet, Nejc Trdin, Rachel Sterneck, Andrey Khorlin, Dinghua Li, Xihui Wu, Sonam Goenka, David Madras, Sasha Goldshtein, Willi Gierke, Tong Zhou, Yaxin Liu, Yannie Liang, Anaïs White, Yunjie Li, Shreya Singh, Sanaz Bahargam, Mark Epstein, Sujoy Basu, Li Lao, Adnan Ozturel, Carl Crous, Alex Zhai, Han Lu, Zora Tung, Neeraj Gaur, Alanna Walton, Lucas Dixon, Ming Zhang, Amir Globerson, Grant Uy, Andrew Bolt, Olivia Wiles, Milad Nasr, Iliia Shumailov, Marco Selvi, Francesco Piccinno, Ricardo Aguilar, Sara McCarthy, Misha Khalman, Mrinal Shukla, Vlado Galic, John Carpenter, Kevin Vellela, Haibin Zhang, Harry Richardson, James Martens, Matko Bosnjak, Shreyas Rammohan Belle, Jeff Seibert, Mahmoud Alnahlawi, Brian McWilliams, Sankalp Singh, Annie Louis, Wen Ding, Dan Popovici, Lenin Simicich, Laura Knight, Pulkit Mehta, Nishesh Gupta, Chongyang Shi, Saaber Fatehi, Jovana Mitrovic, Alex Grills, Joseph Pagadora, Tsendsuren Munkhdalai, Dessie Petrova, Danielle Eisenbud, Zhishuai Zhang, Damion Yates, Bhavishya Mittal, Nilesh Tripuraneni, Yannis Assael, Thomas Brovelli, Prateek Jain, Mihajlo Velimirovic, Canfer Akbulut, Jiaqi Mu, Wolfgang Macherey, Ravin Kumar, Jun Xu, Haroon Qureshi, Gheorghe Comanici, Jeremy Wiesner, Zhitao Gong, Anton Ruddock, Matthias Bauer, Nick Felt, Anirudh GP, Anurag Arnab, Dustin Zelle, Jonas Rothfuss, Bill Rosgen, Ashish Shenoy, Bryan Seybold, Xinjian Li, Jayaram Mudigonda, Goker Erdogan, Jiawei Xia, Jiri Simsa, Andrea Michi, Yi Yao, Christopher Yew, Steven Kan, Isaac Caswell, Carey Radebaugh, Andre Elisseeff, Pedro Valenzuela, Kay McKinney, Kim Paterson, Albert Cui, Eri Latorre-Chimoto, Solomon Kim, William Zeng, Ken Durden, Priya Ponnappalli, Tiberiu Sosea, Christopher A. Choquette-Choo, James Manyika, Brona Robenek, Harsha Vashisht, Sebastien Pereira, Hoi Lam, Marko Velic, Denese Owusu-Afriyie, Katherine Lee, Tolga Bolukbasi, Alicia Parrish, Shawn Lu, Jane Park, Balaji Venkatraman, Alice Talbert, Lambert Rosique, Yuchung Cheng, Andrei Sozanschi, Adam Paszke, Praveen Kumar, Jessica Austin, Lu Li, Khalid Salama, Bartek Perz, Wooyeol Kim, Nandita Dukkipati, Anthony Baryshnikov, Christos Kaplanis, Xiang-Hai Sheng, Yuri Chervonyi, Caglar Unlu, Diego de Las Casas, Harry Askham, Kathryn Tunyasuvunakool, Felix Gimeno, Siim Poder, Chester Kwak, Matt Miecnikowski, Vahab Mirrokni, Alek Dimitriev, Aaron Parisi, Dangyi Liu, Tomy Tsai, Toby Shevlane, Christina Kouridi, Drew Garmon, Adrian Goedeckemeyer, Adam R. Brown, Anitha Vijayakumar, Ali Elqursh, Sadegh Jazayeri, Jin Huang, Sara Mc Carthy, Jay Hoover, Lucy Kim, Sandeep Kumar, Wei Chen, Courtney Biles, Garrett Bingham, Evan Rosen, Lisa Wang, Qijun Tan, David Engel, Francesco Pongetti, Dario de Cesare, Dongseong Hwang, Lily Yu, Jennifer Pullman, Srini Narayanan, Kyle Levin, Siddharth Gopal, Megan Li, Asaf Aharoni, Trieu Trinh, Jessica Lo, Norman Casagrande, Roopali Vij, Loic Matthey, Bramandia Ramadhana, Austin Matthews, CJ Carey, Matthew Johnson, Kremena Goranova, Rohin Shah, Shereen Ashraf, Kingshuk Dasgupta, Rasmus Larsen, Yicheng Wang, Manish Reddy Vuyyuru, Chong Jiang, Joana Ijazi, Kazuki Osawa, Celine Smith, Ramya Sree Boppana, Taylan Bilal, Yuma Koizumi, Ying Xu, Yasemin Altun, Nir Shabat, Ben Bariach, Alex Korchemniy, Kiam Choo, Olaf Ronneberger, Chimezie Iwuanyanwu, Shubin Zhao, David Soergel, Cho-Jui Hsieh, Irene Cai, Shariq Iqbal, Martin Sundermeyer, Zhe Chen, Elie Bursztein, Chaitanya Malaviya, Fadi Biadsy, Prakash Shroff, Inderjit Dhillon, Tejasi Latkar, Chris Dyer, Hannah Forbes, Massimo Nicosia, Vitaly Nikolaev, Somer Greene, Marin Georgiev, Pidong Wang, Nina Martin, Hanie Sedghi, John Zhang, Praseem Banzal, Doug Fritz, Vikram Rao, Xuezhi Wang, Jiageng Zhang, Viorica Patraucean, Dayou Du, Igor Mordatch, Ivan Jurin, Lewis Liu, Ayush Dubey, Abhi Mohan, Janek Nowakowski, Vlad-Doru Ion, Nan Wei, Reiko Tojo, Maria Abi Raad, Drew A. Hudson, Vaishakh Keshava, Shubham Agrawal, Kevin Ramirez, Zhichun Wu, Hoang Nguyen, Ji Liu, Madhavi Sewak, Bryce Petrini, DongHyun Choi, Ivan Philips, Ziyue Wang, Ioana Bica, Ankush Garg, Jarek Wilkiewicz, Priyanka Agrawal, Xiaowei Li, Danhao Guo, Emily Xue, Naseer Shaik, Andrew Leach, Sadh MNM Khan, Julia Wiesinger, Sammy Jerome, Abhishek Chakladar, Alek Wenjiao Wang, Tina Ornduff, Folake Abu, Alireza Ghaffarkhah, Marcus Wainwright, Mario Cortes, Frederick Liu, Joshua Maynez, Andreas Terzis, Pouya Samangouei, Riham Mansour, Tomasz Kepa, François-Xavier Aubet, Anton Algymer, Dan Banica, Agoston Weisz, Andras Orban,

- Alexandre Senges, Ewa Andrejczuk, Mark Geller, Niccolo Dal Santo, Valentin Anklin, Majd Al Merey, Martin Baeuml, Trevor Strohman, Junwen Bai, Slav Petrov, Yonghui Wu, Demis Hassabis, Koray Kavukcuoglu, Jeff Dean, and Oriol Vinyals. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context, 2024. URL <https://arxiv.org/abs/2403.05530>.
- Elena Voita, Rico Sennrich, and Ivan Titov. The bottom-up evolution of representations in the transformer: A study with machine translation and language modeling objectives. In Kentaro Inui, Jing Jiang, Vincent Ng, and Xiaojun Wan (eds.), *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 4396–4406, Hong Kong, China, November 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-1448. URL <https://aclanthology.org/D19-1448/>.
- Xindi Wang, Mahsa Salmani, Parsa Omidi, Xiangyu Ren, Mehdi Rezagholizadeh, and Armaghan Eshaghi. Beyond the limits: A survey of techniques to extend the context length in large language models. In Kate Larson (ed.), *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24*, pp. 8299–8307. International Joint Conferences on Artificial Intelligence Organization, 8 2024. doi: 10.24963/ijcai.2024/917. URL <https://doi.org/10.24963/ijcai.2024/917>. Survey Track.
- Guangxuan Xiao, Yuandong Tian, Beidi Chen, Song Han, and Mike Lewis. Efficient streaming language models with attention sinks. *arXiv preprint arXiv:2309.17453*, 2023.
- Fangyuan Xu, Weijia Shi, and Eunsol Choi. Recomp: Improving retrieval-augmented lms with compression and selective augmentation, 2023. URL <https://arxiv.org/abs/2310.04408>.
- Fangyuan Xu, Tanya Goyal, and Eunsol Choi. Refreshkv: Updating small kv cache during long-form generation, 2025a. URL <https://arxiv.org/abs/2411.05787>.
- Yuhui Xu, Zhanming Jie, Hanze Dong, Lei Wang, Xudong Lu, Aojun Zhou, Amrita Saha, Caiming Xiong, and Doyen Sahoo. Think: Thinner key cache by query-driven pruning, 2025b. URL <https://arxiv.org/abs/2407.21018>.
- An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang, Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jianxin Yang, Jin Xu, Jingren Zhou, Jinze Bai, Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Keqin Chen, Kexin Yang, Mei Li, Mingfeng Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Xuejing Liu, Yang Fan, Yang Yao, Yichang Zhang, Yu Wan, Yunfei Chu, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, Zhifang Guo, and Zhihao Fan. Qwen2 technical report, 2024a. URL <https://arxiv.org/abs/2407.10671>.
- Hua Yang, Duohai Li, and Shiman Li. Mcsd: An efficient language model with diverse fusion. *arXiv preprint, June 2024b*. URL <https://arxiv.org/abs/2406.12230>.
- Xinrong Zhang, Yingfa Chen, Shengding Hu, Zihang Xu, Junhao Chen, Moo Khai Hao, Xu Han, Zhen Leng Thai, Shuo Wang, Zhiyuan Liu, and Maosong Sun. ∞ bench: Extending long context evaluation beyond 100k tokens, 2024a. URL <https://arxiv.org/abs/2402.13718>.
- Xuechen Zhang, Xiangyu Chang, Mingchen Li, Amit Roy-Chowdhury, Jiasi Chen, and Samet Oymak. Selective attention: Enhancing transformer through principled context control. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang (eds.), *Advances in Neural Information Processing Systems*, volume 37, pp. 11061–11086. Curran Associates, Inc., 2024b. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/14fc4a68da97a3d31eb11c642b0b10fc-Paper-Conference.pdf.
- Yuwei Zhang, Jayanth Srinivasa, Gaowen Liu, and Jingbo Shang. Attention reveals more than tokens: Training-free long-context reasoning with attention-guided retrieval, 2025.

Zhenyu Zhang, Ying Sheng, Tianyi Zhou, Tianlong Chen, Lianmin Zheng, Ruisi Cai, Zhao Song, Yuandong Tian, Christopher Ré, Clark Barrett, Zhangyang Wang, and Beidi Chen. H₂O: Heavy-hitter oracle for efficient generative inference of large language models, 2023. URL <https://arxiv.org/abs/2306.14048>.

A Appendix

A.1 Related Work

A.1.1 Acceleration of Long-Context LLM Inference

As large language models (LLMs) are increasingly applied to long-context tasks, the computational and memory overhead during inference has become a critical bottleneck. FastGen (Ge et al., 2023) adaptively selects one of five KV cache compression methods based on attention head profiling, reducing generation overhead. StreamingLLM (Xiao et al., 2023) mitigates the “attention sink” issue by introducing placeholder tokens and a local attention mechanism. MInference (Jiang et al., 2024) leverages sparse computation patterns like A-shape, Vertical-Slash, and Block-Sparse to reduce latency in the prefilling stage. ThinK (Xu et al., 2025b) prunes redundant attention channels by observing imbalances in the key cache’s channel dimension. SnapKV (Li et al., 2024b) clusters KV positions to focus on key prompt features. Mistral (Jiang et al., 2023) employs a sliding window strategy for efficient long-text inference, while KIVI (Liu et al., 2024b) applies 2-bit KV cache quantization to reduce memory and computation costs. LongGen (Ge et al., 2024) combines sparse attention patterns with lightweight training strategies, while RefreshKV (Xu et al., 2025a) dynamically switches between full-context and partial token attention to improve efficiency. However, our work builds upon these strategies by focusing on identifying informative prompt tokens in intermediate layers. This approach enables efficient token selection without additional training, achieving minimal performance degradation. Furthermore, by leveraging this structure during tuning, we demonstrate improved adaptability of the model under extreme compression scenarios.

A.1.2 Prompt Selection for Computation Reduction

Minimizing the number of prompt tokens processed during computation is a straightforward yet powerful method for enhancing efficiency. QLLM (Li et al., 2024a) partitions text into blocks and selects relevant ones using query tokens. H2O (Zhang et al., 2023) retains only influential tokens, while Scissorhands (Liu et al., 2023a) discards less relevant tokens based on the “importance persistence hypothesis.” Retrieval-augmented speculative Decoding (Chen et al., 2025) incorporates a retrieval-augmented generation (RAG) strategy, where a draft LLM generates content based on a simplified context. RetrievalAttention (Liu et al., 2024a) indexes and searches KV cache vectors to selectively retain only information relevant to the current generation. RECOMP (Xu et al., 2023) integrates extraction and summarization techniques to preprocess the original context before feeding it as a prompt, effectively condensing the information. Deja Vu (Liu et al., 2023b) trains a lightweight algorithm to predict context sparsity at each layer, providing guidance for token selection in subsequent steps. Selective Context (Li et al., 2023) leverages self-information calculations to prune redundant lexical units directly. Meanwhile, Selective Attention (Zhang et al., 2024b) introduces targeted modulation within the self-attention mechanism, allowing the model to adjust its attention distribution dynamically based on context importance. AT-TRIEVAL (Zhang et al., 2025) employs attention mechanisms to better capture implicit facts, ensuring minimal information loss while reducing token counts. Unlike these approaches, which mainly reduce input context tokens, our method targets effective token selection across intermediate layers, achieving greater resource efficiency while maintaining strong performance in constrained environments.

A.2 Case of extreme performance for GemFilter

We observe that in InfBench and Needle in a Haystack, the Phi-3.5 model with GemFilter performs exceptionally poorly when the selected token count is 4096. After further investigation, we find that on our machines, Phi-3.5 fails to generate meaningful responses when the input length is exactly 4096, whereas inputs of 4000 or 4100 tokens still yield high-quality outputs. This issue may stem from factors such as the specific hardware used, CUDA version differences, or the fine-tuning process of the Phi-3.5 model. Since GemFilter selects important tokens and reruns them, the 4096-token prompt length disrupts its performance.

A.3 More Algorithms

Two of the algorithms described in section 2.2 are presented here.

Algorithm 3 LLM-forward-PromptDistill (single-stage selection, without cache truncation)

```

Input: LLM  $M_{0:R}$ , embedded input prompt  $X$ , selection layer  $r$ , number of selected tokens  $k$ 
#  $M$  has  $R + 1$  layers in total
#  $X$  has token length =  $n$ 
Cache  $\leftarrow []$ 
for  $i \leftarrow 0 \dots R$  do
   $X, Q_n^{(i)}, K^{(i)}, V^{(i)} \leftarrow M_i(X)$ 
  Cache $_i \leftarrow K^{(i)}, V^{(i)}$ 
  if  $i$  equals  $r$  then
    indices  $\leftarrow \text{Select}(Q_n^{(i)}, K^{(i)}, k)$ 
     $X \leftarrow X_{\text{indices}}$ 
  end if
end for
return generate( $X$ ), Cache

```

A.4 Multi-stage selection performance

Here in table 6, we present the complete table of Multi-stage Selection performance. For the Qwen2-7B Instruct model, which consists of 28 layers, we need to select a layer where GemFilter performs well - demonstrating a strong ability to identify important tokens — while also ensuring efficiency by avoiding layers that are too late in the sequence. As shown in fig. 2, GemFilter achieves a sudden performance boost at layer 16, reaching a score of 34.02, significantly higher than neighboring layers. Although higher scores are observed at layer 21 (35.15) and layer 23 (34.87), these layers are too late in the model, leading to reduced efficiency. Since layer 16 achieves a performance close to the best-performing layers while maintaining better efficiency, we select it as the final selection layer.

A.5 Layer choice experiments

A.6 Figures for Needle in a Haystack

Here, we present all figures illustrating the detailed Needle in a Haystack performance, corresponding to the scores shown in table 4. Each graph corresponds to a base model with a specific compression method setting. The grids in the graphs display scores for different context sizes, depth percentages (needle locations within the context).

Algorithm 4 LLM-forward-PromptDistill (multi-stage selection, with cache truncation)

Input: LLM $M_{0:R}$, embedded input prompt X , selection layers r , numbers of selected tokens k , truncation times tt
r, k are lists with indices $0 : m - 1$
n always refer to the end index of X
Cache $\leftarrow []$
for $i \leftarrow 0 \dots R$ **do**
 $X, Q_n^{(i)}, K^{(i)}, V^{(i)} \leftarrow M_i(X)$
 Cache $_i \leftarrow K^{(i)}, V^{(i)}$
 if i equals r_p for any p **then**
 indices $\leftarrow \text{Select}(Q_n^{(i)}, K^{(i)}, k_p)$
 $X \leftarrow X_{\text{indices}}$
 if $p < tt$ **then**
 for $j \leftarrow 0 \dots i$ **do**
 $K^{(j)}, V^{(j)} \leftarrow \text{Cache}_j$
 $K^{(j)} \leftarrow K_{\text{indices}}^{(j)}$
 $V^{(j)} \leftarrow V_{\text{indices}}^{(j)}$
 Cache $_j \leftarrow K^{(j)}, V^{(j)}$
 end for
 end if
 end if
end for
return generate(X), Cache

Table 6: Multi-stage selection performance on LongBench (LLama 3.1 8B Instruct)

Selection token nums	Selection stages	Mean Score	Delta from PromptDistill-13-1024	Delta from GemFilter-13-1024
1024	13	35.36	0	0.86
4096 1024	10 13	35.00	-0.36	0.5
8192 1024	8 13	35.39	0.03	0.89
8192 1024	5 13	34.78	-0.58	0.28
8192 1024	4 13	34.67	-0.69	0.17
8192 4096 1024	8 10 13	35.03	-0.33	0.53
16384 8192 1024	7 8 13	35.42	0.06	0.92
16384 8192 1024	6 8 13	35.38	0.02	0.88
16384 8192 1024	5 8 13	35.53	0.17	1.03
16384 8192 1024	4 8 13	35.32	-0.04	0.82
16384 8192 1024	3 8 13	35.42	0.06	0.92
16384 8192 1024	2 8 13	35.29	-0.07	0.79
16384 8192 1024	1 8 13	35.32	0.04	0.82
16384 8192 1024	0 8 13	35.30	-0.06	0.8
16384 8192 1024	1 5 13	34.94	-0.42	0.44
16384 8192 1024	0 5 13	34.81	-0.55	0.31
16384 8192 1024	3 4 13	34.81	-0.55	0.31
16384 8192 1024	2 4 13	34.67	-0.69	0.17
16384 8192 1024	1 4 13	34.64	-0.72	0.14
16384 8192 1024	0 4 13	34.57	-0.79	0.07
16384 8192 4096 1024	5 8 10 13	35.00	-0.36	0.5
16384 8192 4096 1024	4 8 10 13	34.95	-0.41	0.45
16384 8192 4096 1024	3 8 10 13	34.92	-0.44	0.42
16384 8192 4096 1024	2 8 10 13	34.85	-0.51	0.35
16384 8192 4096 1024	1 8 10 13	34.90	-0.46	0.4
16384 8192 4096 1024	0 8 10 13	34.80	-0.56	0.3



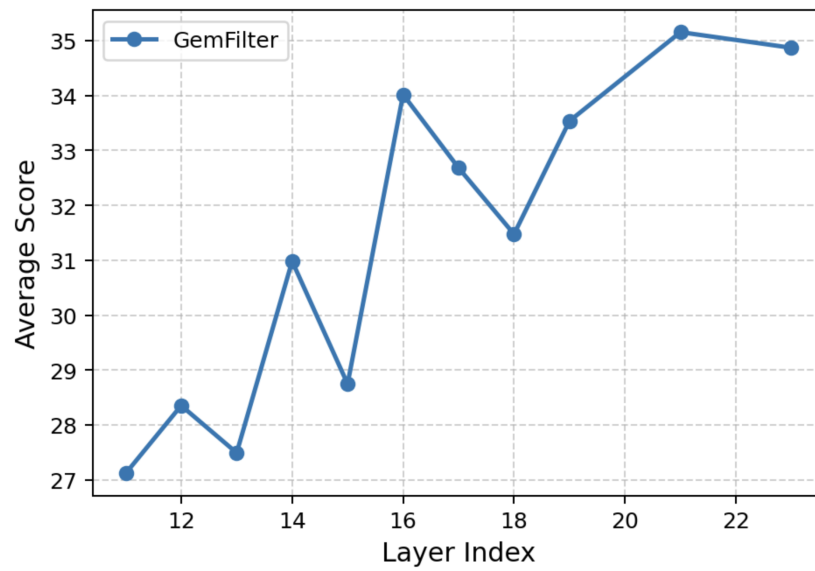



Figure 2: Performance of GemFilter + Qwen2 7B Instruct on LongBench with different selection layers.

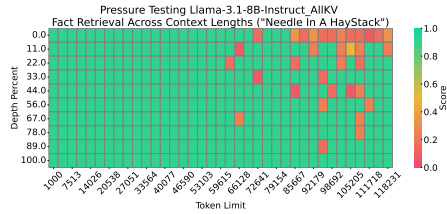


(a) Llama 3.1 8B Instruct + All KV: Score = 85.2

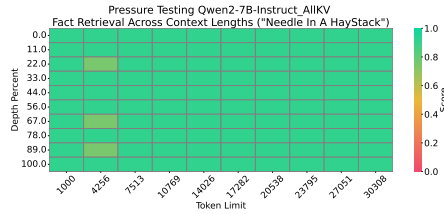


(b) Qwen2 7B Instruct + All KV: Score = 91.2

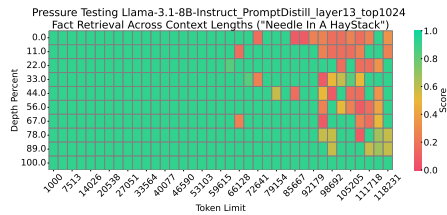


(c) Llama 3.1 8B Instruct + PromptDistill-1024: Score = 82.6

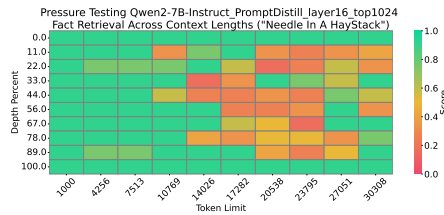


(d) Qwen2 7B Instruct + PromptDistill-1024: Score = 71.6




(e) Llama 3.1 8B Instruct + GemFilter-1024: Score = 81.8



(f) Qwen2 7B Instruct + GemFilter-1024: Score = 69.7




(g) Llama 3.1 8B Instruct + SnapKV-1024: Score = 64.0




(h) Qwen2 7B Instruct + SnapKV-1024: Score = 90.5


Figure 3: Evaluation Results for Needle in a Haystack: LLaMA 3.1 8B Instruct’s and Qwen2 7B Instruct’s scores in all test cases with model settings AllKV, PromptDistill-1024, GemFilter-1024, SnapKV-1024. (The x-axis represents the length of the input tokens, while the y-axis shows the position depth percentage of the ‘needle’ information)

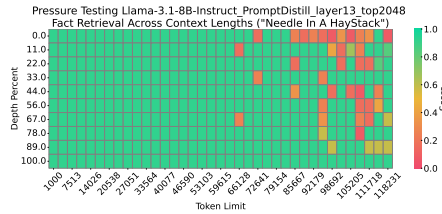


(a) LLaMA 3.1 8B Instruct + PromptDistill-2048: Score = 84.3




(b) Qwen2 7B Instruct + PromptDistill-2048: Score = 82.2

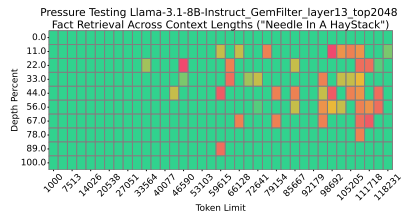


(c) LLaMA 3.1 8B Instruct + GemFilter-2048: Score = 84.7

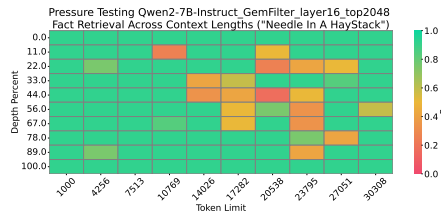

(d) Qwen2 7B Instruct + GemFilter-2048: Score = 81.8

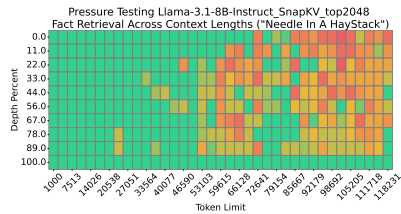


(e) LLaMA 3.1 8B Instruct + SnapKV-2048: Score = 71.7




(f) Qwen2 7B Instruct + SnapKV-2048: Score = 90.8


Figure 4: Evaluation Results for Needle in a Haystack: LLaMA 3.1 8B Instruct’s and Qwen2 7B Instruct’s scores in all test cases with model settings PromptDistill-2048, GemFilter-2048, SnapKV-2048. (The x-axis represents the length of the input tokens, while the y-axis shows the position depth percentage of the ‘needle’ information)




(a) LLaMA 3.1 8B Instruct + PromptDistill-4096: Score = 84.6

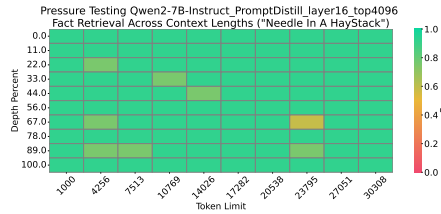


(b) Qwen2 7B Instruct + PromptDistill-4096: Score = 90.2

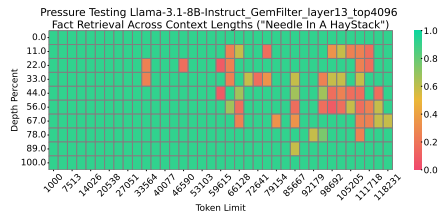


(c) LLaMA 3.1 8B Instruct + GemFilter-4096: Score = 83.3

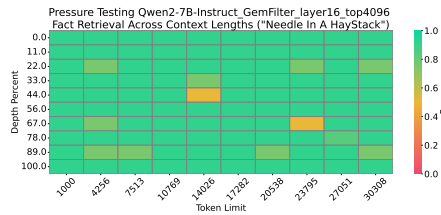

(d) Qwen2 7B Instruct + GemFilter-4096: Score = 89.3

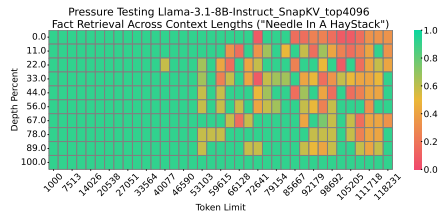


(e) LLaMA 3.1 8B Instruct + SnapKV-4096: Score = 77.1

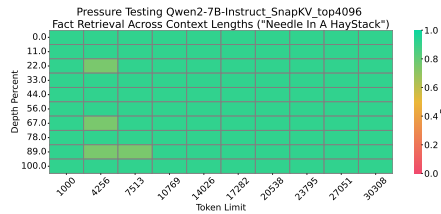


(f) Qwen2 7B Instruct + SnapKV-4096: Score = 91.0


Figure 5: Evaluation Results for Needle in a Haystack: LLaMA 3.1 8B Instruct’s and Qwen2 7B Instruct’s scores in all test cases with model settings PromptDistill-4096, GemFilter-4096, SnapKV-4096. (The x-axis represents the length of the input tokens, while the y-axis shows the position depth percentage of the ‘needle’ information)

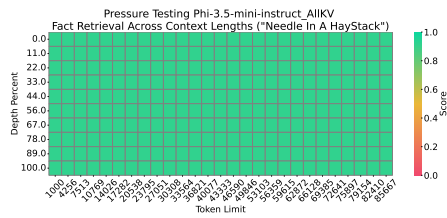


(a) Phi 3.5 Mini 3.8B Instruct + All KV: Score = 91.7

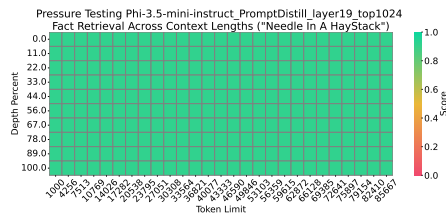


(b) Phi 3.5 Mini 3.8B Instruct + PromptDistill-1024: Score = 91.7

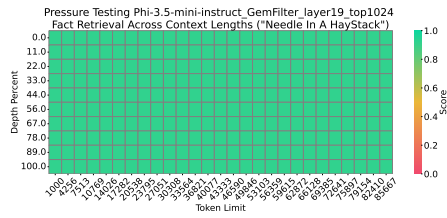


(c) Phi 3.5 Mini 3.8B Instruct + GemFilter-1024: Score = 91.7

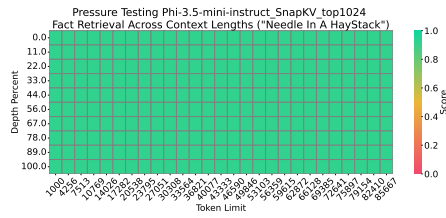


(d) Phi 3.5 Mini 3.8B Instruct + SnapKV-1024: Score = 91.7

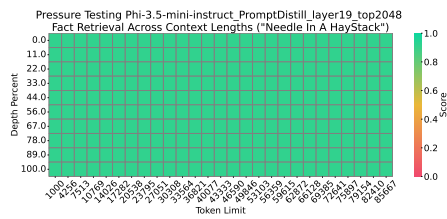


(e) Phi 3.5 Mini 3.8B Instruct + PromptDistill-2048: Score = 91.7

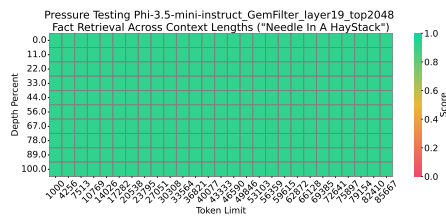


(f) Phi 3.5 Mini 3.8B Instruct + GemFilter-2048: Score = 91.7

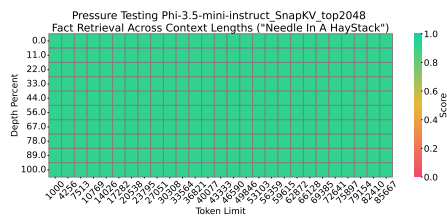


(g) Phi 3.5 Mini 3.8B Instruct + SnapKV-2048: Score = 91.7

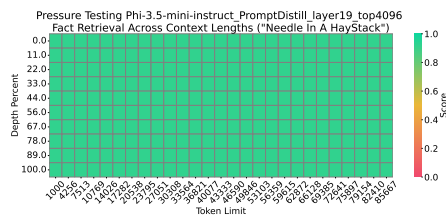

(h) Phi 3.5 Mini 3.8B Instruct + PromptDistill-4096: Score = 91.7

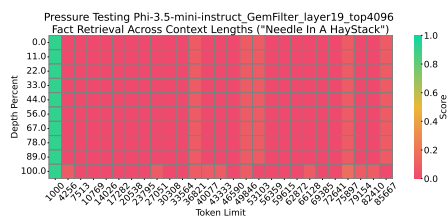

(i) Phi 3.5 Mini 3.8B Instruct + GemFilter-4096: Score = 5.1

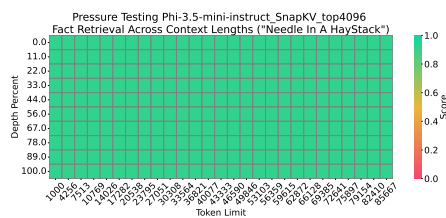

(j) Phi 3.5 Mini 3.8B Instruct + SnapKV-4096: Score = 91.7

Figure 6: Evaluation Results for Needle in a Haystack: Phi 3.5 Mini 3.8B Instruct’s scores in all test cases with all model settings. (The x-axis represents the length of the input tokens, while the y-axis shows the position depth percentage of the ‘needle’ information)